

R2 Series VRF

Standard Efficiency (50-63kW)

Simultaneous Heating and Cooling with Heat Recovery Outdoor Unit

CITY MULTI

Throughout the year, many buildings require cooling in some areas and heating in others - even in adjacent rooms. The outstanding City Multi R2 system meets these requirements by distributing surplus heat from cooling operations (and vice versa) to rooms where it is needed. This efficiency can result in energy savings up to 30% over conventional systems.

Key Features & Benefits:

- High efficiency heat recovery system
- Delivers the highest levels of comfort, both thermally and acoustically
- Flexible design, installation and maintenance



Air Conditioning Product Information


R2 Series VRF

Standard Efficiency (50-63kW)
Simultaneous Heating and Cooling with Heat Recovery Outdoor Unit



OUTDOOR UNITS		PURY-P450YNW-A1	PURY-P450YSNW-A1	PURY-P500YNW-A1	PURY-P500YSNW-A1	PURY-P550YNW-A1	PURY-P550YSNW-A1	
CAPACITY (kW)	Heating (nominal)	56.0	56.0	63.0	63.0	69.0	69.0	
	Cooling (nominal)	50.0	50.0	56.0	56.0	63.0	63.0	
	High Performance Heating (UK)	50.4	56.0	56.7	63.0	62.1	65.6	
	COP Priority Heating (UK)	48.2	51.0	54.2	57.3	59.3	62.8	
	Cooling (UK)	44.8	44.8	50.1	50.1	56.4	56.4	
POWER INPUT (kW)	Heating (nominal)	15.42	12.93	17.50	15.32	20.29	17.42	
	Cooling (nominal)	14.83	12.72	18.54	14.97	22.18	17.11	
	High Performance Heating (UK)	17.42	16.55	19.78	19.61	22.93	23.17	
	COP Priority Heating (UK)	14.96	12.93	16.98	15.32	19.68	17.42	
	Cooling (UK)	9.49	7.38	11.87	8.68	14.20	9.92	
COP / EER (nominal)	3.63 / 3.37		4.33 / 3.93		4.11 / 3.74		3.40 / 2.84	
MAX NO. OF CONNECTABLE INDOOR UNITS		45		50		50		
MAX CONNECTABLE CAPACITY		50-150% OU Capacity		50-150% OU Capacity		50-150% OU Capacity		
AIRFLOW (m³/min)	High	315	170 / 185	295	185 / 185	410	185 / 240	
PIPE SIZE mm (in)	Gas	28.58 (1-1/8")	28.58 (1-1/8")	28.58 (1-1/8")	28.58 (1-1/8")	28.58 (1-1/8")	28.58 (1-1/8")	
	Liquid	22.2 (7/8")	22.2 (7/8")	22.2 (7/8")	22.2 (7/8")	22.2 (7/8") / 28.58 (1-1/8")*1	22.2 (7/8") / 28.58 (1-1/8")*1	
SOUND PRESSURE LEVEL (dBA) @ 1m	Heating / Cooling	70.0 / 65.5	63.5 / 63.0	64.5 / 63.5	64.0 / 63.5	70.0 / 66.0	68.0 / 64.0	
	Heating / Cooling	89.0 / 83.0	83.0 / 81.0	84.0 / 82.0	83.0 / 81.0	89.0 / 83.0	87.0 / 83.0	
SOUND POWER LEVEL (dBA) @ 100% CAPACITY	Heating / Cooling	83.0 / 78.5	78.5 / 75.5	81.0 / 76.5	79.0 / 76.5	82.5 / 78.0	81.5 / 77.0	
	Heating / Cooling	76.5 / 74.0	76.5 / 71.5	77.5 / 73.5	75.5 / 72.5	78.5 / 74.5	77.5 / 73.0	
WEIGHT (kg)		289	214 + 214	335	223 + 223	335	223 + 225	
	Width	1240	920 + 920	1750	920 + 920	1750	920 + 920	
	Depth	740	740	740	740	740	740	
DIMENSIONS (mm)	Height	1858	1858	1858	1858	1858	1858	
	(1798mm without legs)							
	ELECTRICAL SUPPLY*2							
PHASE*2		Three		Three		Three		
STARTING CURRENT (A)*2		8		8		8		
NOMINAL SYSTEM RUNNING CURRENT (A)*2		Heating / Cooling [MAX] 24.7 / 23.7 [37.1]		20.7 / 20.3 [16.1 + 17.8]		28.0 / 29.7 [43.2]		
GUARANTEED OPERATING RANGE (°C)		Heating / Cooling -20~-15.5 / -5~-52		-20~-15.5 / -5~-52		-20~-15.5 / -5~-52		
FUSE RATING (MCB sizes BS EN 60947-2) - (A)*2		1 x 40		1 x 20 / 1 x 20		1 x 50		
MAINS CABLE No. Cores*2		4 + earth		4 + earth / 4 + earth		4 + earth		
CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (T) R410A (GWP 2088)		10.8 / 22.5		10.4 / 21.7		10.8 / 22.6		
MAX ADDITIONAL REFRIGERANT (kg) / CO ₂ EQUIVALENT (T) R410A (GWP 2088)		44.5 / 92.9		60.6 / 126.5		45.2 / 94.4		

Notes: *SEER/SCOP available separately in the 'City Multi VRF Seasonal Efficiency' document. Based on Ecodesign Lot 21/6 to EN14825 standard.
*1 If distance from OU to BC controller is greater than 65m. *2 A separate power supply is required for each module. Where more than one figure is quoted there are multiple modules.

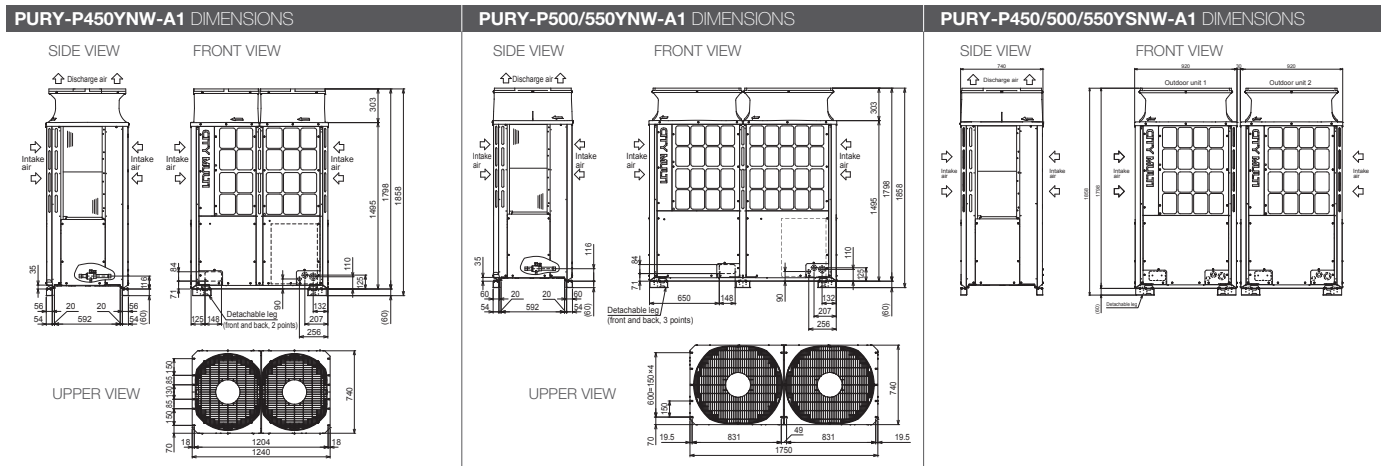

Telephone: 01707 282880
email: air.conditioning@meuk.mee.com
les.mitsubishielectric.co.uk



Mitsubishi Electric Living Environmental Systems UK



Mitsubishi Electric Cooling and Heating UK



[mitsubishielectricuk_les](https://www.instagram.com/mitsubishielectricuk_les)



Mitsubishi Electric Living Environmental Systems UK



thehub.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880 Fax: 01707 278881
IRELAND Mitsubishi Electric Europe, Westgate Business Park, Ballymount, Dublin 24, Ireland. Telephone: (01) 419 8800 Fax: (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2020. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R1234ze (GWP:7) or R1234yf (GWP:4). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP:1975), R32 (GWP:550), R407C (GWP:1650) or R134a (GWP:1300).

Effective as of May 2020

