

Heating

Product Information

EHST20(D)(C)-MHCW

FTC5 Cylinders for Ecodan Split Units

Making a
World of
Difference



Space heating
and domestic hot
water cylinder for
use with Ecodan
split air source
heat pumps

The split cylinders offer a highly adaptable heating solution for retrofit or new build.

Designed specifically by Mitsubishi Electric to operate with the Ecodan split air source heat pump range, the split cylinder provides improved performance and faster heat up times through the use of plate heat exchanger technology. Fast commissioning via an SD card and energy monitoring functions are now included.

Key Features

- No hydrobox required
- Simple graphical control
- Optional 2-zone energy efficient space heating control
- Sleek modern design
- Compatible with Mitsubishi Electric wireless room controllers
- Pre-plumbed and wired for faster installation
- Hybrid function for use with conventional boilers
- SD card commissioning
- Cascade function for multiple unit control
- Energy monitoring as standard



Air Conditioning | Heating
Ventilation | Controls



ADVANCED CONTROLLER – WITH ENERGY MONITORING



Mitsubishi Electric's fifth generation controller (FTC5) includes intelligent room temperature control as standard. This together with advanced weather compensation ensures the system delivers efficient, comfortable heating regardless of the season. FTC5 now also includes energy monitoring showing consumed and produced energy.




CYLINDER		EHST20D-MHCW	EHST20C-MHCW
NOMINAL HOT WATER VOLUME (LITRES)		200	200
APPLICABLE OUTDOOR UNIT		PUHZ-SW50VKA(-BS)	PUHZ-SW75VHA(-BS) / PUHZ-SW120VHA(-BS)
HEAT PUMP SPACE HEATER - 55°C	ErP Rating	A++	A++ / A++
HEAT PUMP SPACE HEATER - 35°C	ErP Rating	A++	A++ / A++
HEAT PUMP COMBINATION HEATER - Large Profile	ErP Rating	A	A / A
OPERATING AMBIENT TEMPERATURE (°C DB)		0 ~ +35°C (RH<80%)	0 ~ +35°C (RH<80%)
SOUND PRESSURE LEVEL AT 1M (dBA)		28	28
WATER DATA			
	Flow Rate (l/min)	11.8 (SW50)	22.9 (SW75) / 45.9 (SW120)
	Primary Pump	Grundfos UPM2 15 70 - 130	Grundfos UPM2 15 70 - 130
	Sanitary Hot Water Pump	Grundfos UPSO 15-60 130 CIL2	Grundfos UPSO 15-60 130 CIL2
	Connection Size (mm) Heating / DHW	28 / 22	28 / 22
	Primary Expansion Vessel (Litres)	12	12
	Charge Pressure (MPa (Bar))	0.1 (1)	0.1 (1)
WATER SAFETY DEVICES	Water Circuit	Control Thermistor (°C)	1 - 80
		Pressure Relief Valve (MPa (Bar))	0.3 (3)
DHW Cylinder	Flow Sensor (minimum flow 5L/min)	Supplied	Supplied
	Control Thermistor (°C)	40-70	40-70
	Temp and Pressure Relief Valve (°C) / (MPa (Bar))	90 / 0.7 (7)	90 / 0.7 (7)
DIMENSIONS (mm)			
	Width	595	595
	Depth	680	680
	Height	1600	1600
WEIGHT EMPTY / FULL (kg)		103 / 312	110 / 320
REFRIGERANT			
	Type	R410A	R410A
	Connection Size - Gas Liquid (mm)(in)	12.7 (1/2") / 6.35 (1/4")	15.88 (5/8") / 9.52 (3/8")
	Connection Type	Flared	Flared
ELECTRICAL DATA	Control Board - optionally powered by outdoor unit	Electrical Supply	220-240v, 50Hz
		Phase	Single
Immersion Heater	Electrical Supply	220-240v, 50Hz	220-240v, 50Hz
	Phase	Single	Single
	Capacity (kW)	3	3
	Max Running Current (A)	13	13
	Fuse Rating - MCB Sizes (A) ¹	16	16
MECHANICAL ZONES		DHW and 1 Heating Zone ²	DHW and 1 Heating Zone ²
OPTIONAL SIMPLIFIED WIRELESS ROOM THERMOSTAT AND WIRELESS RECEIVER		PAR-WT50-E Controller and PAR-WR51-E Receiver	

Cylinder includes: Flow Temperature Controller (FTC5) with Main Controller and Temperature Sensors, Pumps & Valves for Zone 1 and DHW use, Flow Sensor, Plate Heat Exchanger, Scale Trap, 3kW Immersion Heater and Expansion Vessel.

¹ MCB Sizes BS EN60898-2 & BS EN60947-2 ² Optional 2 zone accessory pack available

DIMENSIONS

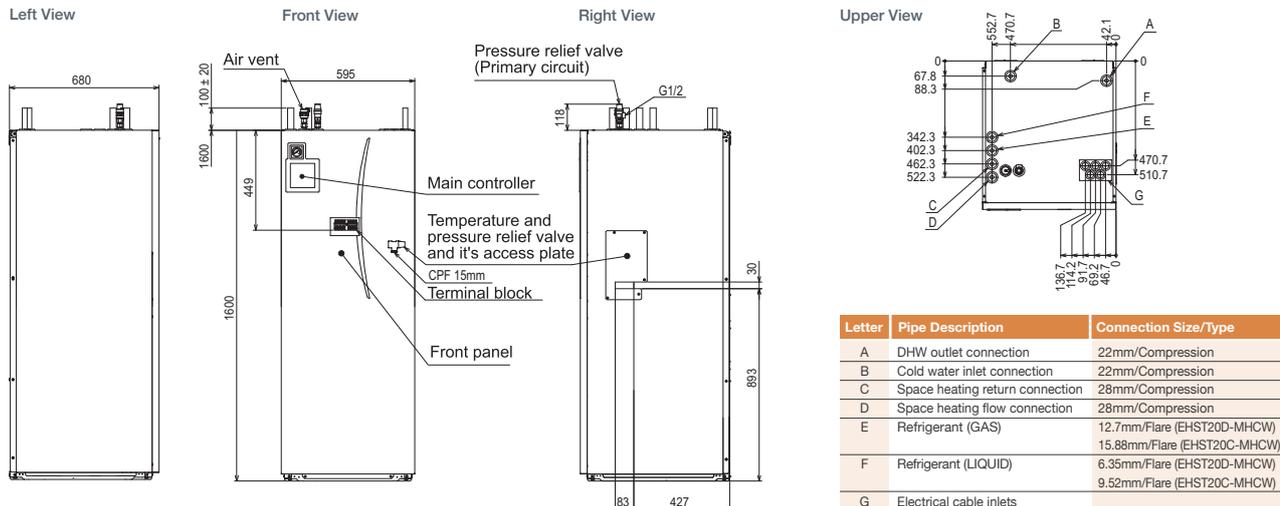

Telephone: 01707 282880

email: heating@meuk.mee.com web: heating.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environmental Systems Division
Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881

IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland
Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)

Country of origin: United Kingdom – Japan – Thailand – Malaysia. ©Mitsubishi Electric Europe 2015. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.



www.greengateway.mitsubishielectric.co.uk

Mitsubishi Electric UK's commitment to the environment

Follow us @meuk_les
Follow us @green_gateway

Mitsubishi Electric
Living Environmental Systems UK

youtube.com/mitsubishielectric2