

Air Conditioning

Product Information

PLFY-P32VCM-E
600 x 600 4-Way Blow Ceiling
Cassette Indoor Unit

Making a
World of
Difference


CITY MULTI



The compact size of this unit is ideal for 600x600mm ceilings and with a depth of 208mm, this lightweight unit makes installation a breeze. This unit also comes complete with a long life filter that will last for approximately 2,500 hours.

Key Features

- Compact size for handy installation and easy maintenance
- Only 208mm high
- Fresh air duct facility
- Fits inside a standard ceiling grid



Air Conditioning | Heating
Ventilation | Controls

Air Conditioning

Product Information

Making a World of Difference




PLFY-P32VCM-E

600 x 600 4-Way Blow Ceiling Cassette Indoor Unit

PLFY-P - INDOOR UNIT		PLFY-P32VCM-E
CAPACITY (kW)	Heating (nominal)	4.0
	Cooling (nominal)	3.6
	UK Heating	4.0
	UK Total Cooling - Hi (Sensible)	3.20 (2.50)
	UK Total Cooling - Mi1	3.12
	UK Total Cooling - Lo	2.99
	UK Total Cooling - Hi (Sensible) (Raised Evaporation Temperature*)	2.7 (2.3)
POWER INPUT (kW)	Heating (nominal)	0.06
	Cooling (nominal)	0.06
AIRFLOW (l/s)	Lo-Mi1-Hi	133-150-167
SOUND PRESSURE LEVEL (dBA)	Lo-Mi1-Hi	29-33-38
WEIGHT (kg)	(Grille)	17(3)
DIMENSIONS (mm)	Width (Grille)	570 (650)
	Depth (Grille)	570 (650)
	Height (Grille)	235 (20)
ELECTRICAL SUPPLY		220-240v, 50Hz
PHASE		Single
RUNNING CURRENT (A)	Heating	0.28
	Cooling	0.28
FUSE RATING (BS88) - HRC (A)		6
MAINS CABLE No. Cores		3
GRILLE MODEL REFERENCE		SLP-2AAW

Note: * Figures shown using 9°C Raised Evaporation Temperature. PUHY-(E)P YKB/YLM and PURY-(E)P YLM models have an option for 6°C and 14°C Evaporation Temperature. Please consult with your sales office for application of this feature.

DIMENSIONS

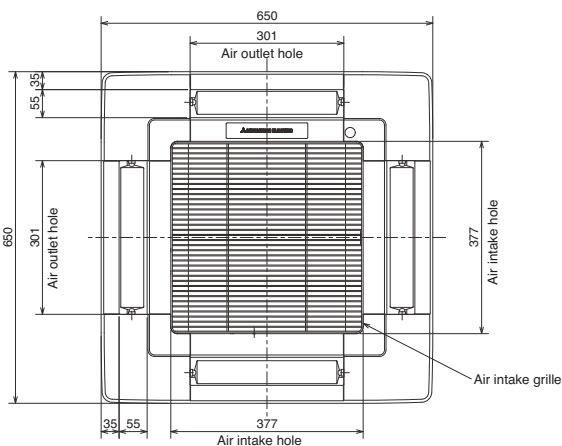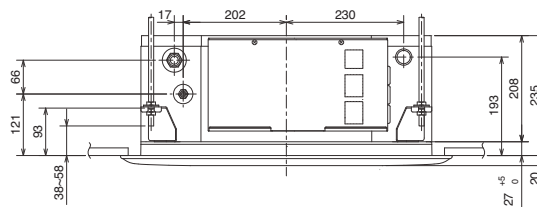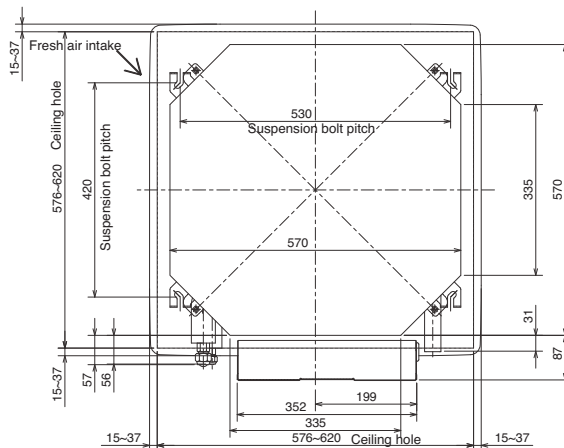

Telephone: 01707 282880

email: air.conditioning@meuk.mee.com web: www.airconditioning.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environmental Systems Division
Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881

IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland
Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)

Country of origin: United Kingdom – Japan – Taiwan – Malaysia. © Mitsubishi Electric Europe 2015. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.



Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning and heat pump systems contain fluorinated greenhouse gases R410A, R407C and R134a.



www.greengateway.mitsubishielectric.co.uk

Mitsubishi Electric UK's commitment
to the environment



Mitsubishi Electric
Living Environmental Systems UK



Effective as of April 2015