



EC Type Examination Certificate Number: **0120/ SGS0046**

Elster Metering Systems

Tollgate Business Park
Beaconside
Stafford
ST16 3HS

Instrument Identification:
A100C

Single Phase, Direct Connected, Credit, Import/Export, Active, Electricity Meter

Instrument Traceable Number
0120/ SGS0046

has been assessed and certified as meeting the requirements of

EC Directive 2004/22/EC on Measuring Instruments Annex B

It is certified that the manufacturer's technical design and specimen for the above instrument has been examined and, based on the evidence submitted, it is considered that the instrument conforms to the requirements of MI-003 of EC Directive 2004/22/EC

This certificate must be used in conjunction with a certificate covering the product verification as required in Annex D or Annex F.

This certificate is valid for 10 years from 30th October 2009 until 29th October
2019
Issue 5

Certification is based on report number(s)
Report 129970 dated 22nd October 2009
Report 137550 dated 24th September 2010
Report 150370 dated 17th August 2011

Authorised Signature

Jan Saunders

SGS United Kingdom Limited, Notified Body 0120
Unit 202B Worle Parkway, Weston-super-Mare, BS22 6WA UK
t +44 (0)1934 522917 f +44 (0)1934 522137 www.sgs.com

Contact Address
SGS United Kingdom Ltd, Unit 10, South Industrial Estate, Bowburn, Durham, DH6 5AD UK
t +44 (0)191 377 2000 f +44 (0)191 377 2020 www.sgs.com


SGS	EC-Type Examination Certificate Number: 0120/ SGS0046	
	Issue Number: 5	Dated: 17 th May 2012

1. Technical Data

Manufacturer	Elster Metering Systems
Meter Type	A100C
Voltage Rating (Un)	220-250V
Current Rating (Imin – Iref (Imax))	<u>DIN Terminal Variant</u> 0,25-5(85)A 0,5-10(85)A (Any value Iref ≥ 5, up to Imax) <u>BS Terminal Variant</u> 0,25-5(100)A (Any value Iref ≥ 5, up to Imax)
Frequency (Fn)	50Hz
Active Accuracy Class (kWh)	A or B (kWh)
Type of circuit	1p2w
Temperature Range	DIN Variant -40°C to +60°C BS Variant -25°C to +55°C
Software/ Firmware Version No Identification Location	2-01167-F Nameplate
Bill Of Materials Number	JG0519 Sheets 2,3,4,4a,5,6,7,8,9
IP Rating	IP51
Insulation Protective Class	Class II
LED Pulse Constant	1000 imp/ kWh
Impulse Voltage Rating	6kV
AC Voltage Rating	4kV
Main Cover Sealing Type	Sealed for life
Integrity of meter	Inaccessible without breaking seals
Intended Location of the Meter	Indoor
Type of Register	LCD
Terminal Arrangement(s)	BS or DIN

SGS	EC-Type Examination Certificate Number:	
0120/ SGS0046		
Issue Number: 5		Dated: 17 th May 2012

2. Photograph of Meter and Sealing Plan

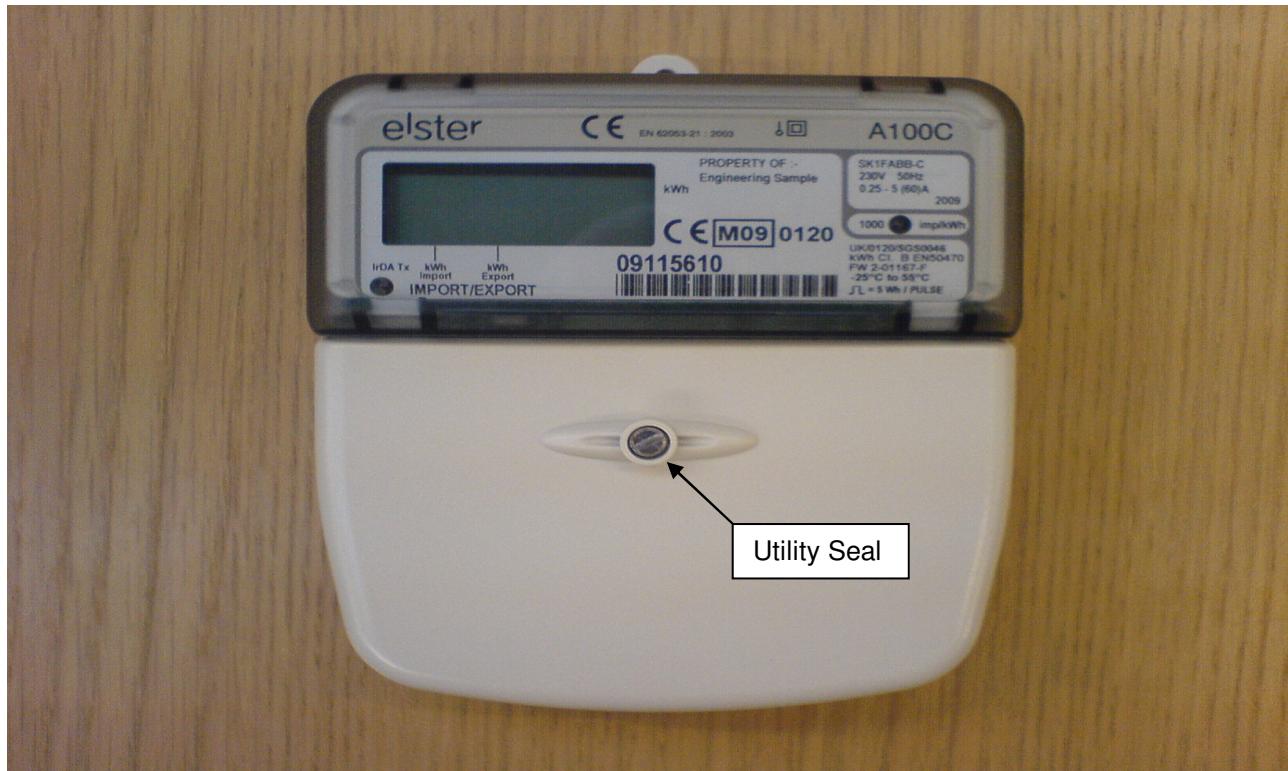

SGS	EC-Type Examination Certificate Number: 0120/ SGS0046		
	Issue Number: 5		Dated: 17 th May 2012

3. Calculation of the composite error/ MPE

In addition to the accuracy requirements the composite error e_c of the meter is shown below

The composite error at a certain load is calculated from the following formula:

$$e_c = \sqrt{e^2(I.\cos\theta) + e^2(T.I.\cos\theta) + e^2(U.I.\cos\theta) + e^2(f.I.\cos\theta)}$$

where

$e^2(I.\cos\theta)$	=	Intrinsic error of meter at a certain load
$e^2(T.I.\cos\theta)$	=	Additional error due to variation of the temperature at the same load
$e^2(U.I.\cos\theta)$	=	Additional error due to variation of the voltage at the same load
$e^2(f.I.\cos\theta)$	=	Additional error due to variation of the frequency at the same load

Ambient Temperature Range 5 to 30 Degrees C						
Current	PF Cos	e(Icos)	e(TIcos)	e(UCos)	e(ficos)	%MPE
Imin	1.0	-0.10	0.33	0.13	0.05	0.37
Itr	1.0	-0.05	0.29	0.16	0.11	0.35
10ltr	1.0	0.14	0.19	-0.26	-0.29	0.46
Imax	1.0	0.14	0.34	-0.12	-0.09	0.40
Itr	0.5ind	-0.12	0.27	0.14	0.24	0.41
10ltr	0.5ind	0.16	0.19	-0.34	-0.27	0.50
Imax	0.5ind	0.11	-0.17	-0.20	-0.11	0.31
Itr	0.8cap	-0.17	-0.31	0.17	0.16	0.42
10ltr	0.8cap	0.17	0.32	-0.35	-0.29	0.58
Imax	0.8cap	0.01	0.19	-0.19	-0.13	0.30

Ambient Temperature Range -10 to 40 Degrees C						
Current	PF Cos	e(Icos)	e(TIcos)	e(UCos)	e(ficos)	%MPE
Imin	1.0	-0.10	0.67	0.13	0.05	0.69
Itr	1.0	-0.05	0.49	0.16	0.11	0.53
10ltr	1.0	0.14	0.52	-0.26	-0.29	0.66
Imax	1.0	0.14	-0.14	-0.12	-0.09	0.25
Itr	0.5ind	-0.12	0.66	0.14	0.24	0.73
10ltr	0.5ind	0.16	0.52	-0.34	-0.27	0.70
Imax	0.5ind	0.11	0.46	-0.20	-0.11	0.53
Itr	0.8cap	-0.17	0.53	0.17	0.16	0.60
10ltr	0.8cap	0.17	0.61	-0.35	-0.29	0.78
Imax	0.8cap	0.01	0.34	-0.19	-0.13	0.41

SGS	EC-Type Examination Certificate Number:					
	0120/ SGS0046					
	Issue Number: 5				Dated: 17 th May 2012	

Ambient Temperature Range -25 to 55 Degrees C						
Current	PF Cos	e(Icos)	e(TIcos)	e(UIcos)	e(fIcos)	%MPE
Imin	1.0	-0.10	0.86	0.13	0.05	0.88
Itr	1.0	-0.05	0.90	0.16	0.11	0.92
10ltr	1.0	0.14	0.82	-0.26	-0.29	0.92
Imax	1.0	0.14	-0.30	-0.12	-0.09	0.36
Itr	0.5ind	-0.12	0.78	0.14	0.24	0.84
10ltr	0.5ind	0.16	0.83	-0.34	-0.27	0.95
Imax	0.5ind	0.11	-1.00	-0.20	-0.11	1.03
Itr	0.8cap	-0.17	0.64	0.17	0.16	0.70
10ltr	0.8cap	0.17	0.90	-0.35	-0.29	1.02
Imax	0.8cap	0.01	-0.47	-0.19	-0.13	0.52

Ambient Temperature Range -40 to 70 Degrees C (OUTDOOR ONLY)						
Current	PF Cos	e(Icos)	e(TIcos)	e(UIcos)	e(fIcos)	%MPE
Imin	1.0	-0.10	1.24	0.13	0.05	1.25
Itr	1.0	-0.05	1.09	0.16	0.11	1.11
10ltr	1.0	0.14	1.14	-0.26	-0.29	1.21
Imax	1.0	0.14	-2.29	-0.12	-0.09	2.30
Itr	0.5ind	-0.12	0.85	0.14	0.24	0.90
10ltr	0.5ind	0.16	0.99	-0.34	-0.27	1.09
Imax	0.5ind	0.11	-1.98	-0.20	-0.11	2.00
Itr	0.8cap	-0.17	1.18	0.17	0.16	1.21
10ltr	0.8cap	0.17	1.05	-0.35	-0.29	1.16
Imax	0.8cap	0.01	-1.62	-0.19	-0.13	1.64

Results taken from DIN variant 5-85A Report 137550 dated 24th September 2010

SGS	EC-Type Examination Certificate Number: 0120/ SGS0046		
	Issue Number: 5		Dated: 17 th May 2012

In addition to the accuracy requirements the composite error e_c of the meter is shown below

The composite error at a certain load is calculated from the following formula:

$$e_c = \sqrt{e^2(I.\cos\theta) + e^2(T.I.\cos\theta) + e^2(U.I.\cos\theta) + e^2(f.I.\cos\theta)}$$

where

$e^2(I.\cos\theta)$	=	Intrinsic error of meter at a certain load
$e^2(T.I.\cos\theta)$	=	Additional error due to variation of the temperature at the same load
$e^2(U.I.\cos\theta)$	=	Additional error due to variation of the voltage at the same load
$e^2(f.I.\cos\theta)$	=	Additional error due to variation of the frequency at the same load

Ambient Temperature Range 5 to 30 Degrees C						
Current	PF Cos	e(Icos)	e(TIcos)	e(Uicos)	e(ficos)	%MPE
Imin	1.0	0.07	0.68	-0.09	0.07	0.69
Itr	1.0	0.31	0.81	0.08	0.09	0.88
10ltr	1.0	0.45	0.71	0.17	0.10	0.86
Imax	1.0	0.41	0.78	0.11	-0.09	0.89
Itr	0.5ind	0.24	0.67	0.08	-0.06	0.72
10ltr	0.5ind	0.45	0.72	-0.19	-0.09	0.87
Imax	0.5ind	0.43	0.65	-0.21	-0.10	0.81
Itr	0.8cap	0.23	0.71	0.03	0.02	0.75
10ltr	0.8cap	0.41	0.87	0.13	0.17	0.99
Imax	0.8cap	0.44	0.81	0.20	0.07	0.95

Ambient Temperature Range -10 to 40 Degrees C						
Current	PF Cos	e(Icos)	e(TIcos)	e(Uicos)	e(ficos)	%MPE
Imin	1.0	0.07	1.09	-0.09	0.07	1.10
Itr	1.0	0.31	1.06	0.08	0.09	1.11
10ltr	1.0	0.45	1.00	0.17	0.10	1.11
Imax	1.0	0.41	0.95	0.11	-0.09	1.04
Itr	0.5ind	0.24	1.07	0.08	-0.06	1.10
10ltr	0.5ind	0.45	0.82	-0.19	-0.09	0.96
Imax	0.5ind	0.43	0.96	-0.21	-0.10	1.08
Itr	0.8cap	0.23	1.03	0.03	0.02	1.06
10ltr	0.8cap	0.41	1.03	0.13	0.17	1.13
Imax	0.8cap	0.44	1.00	0.20	0.07	1.11

SGS	EC-Type Examination Certificate Number:					
	0120/ SGS0046					
	Issue Number: 5				Dated: 17 th May 2012	

Ambient Temperature Range -25 to 55 Degrees C						
Current	PF Cos	e(Icos)	e(TIcos)	e(Uicos)	e(fIcos)	%MPE
Imin	1.0	0.07	1.24	-0.09	0.07	1.25
Itr	1.0	0.31	1.29	0.08	0.09	1.33
10ltr	1.0	0.45	1.31	0.17	0.10	1.40
Imax	1.0	0.41	1.26	0.11	-0.09	1.33
Itr	0.5ind	0.24	1.19	0.08	-0.06	1.22
10ltr	0.5ind	0.45	1.12	-0.19	-0.09	1.23
Imax	0.5ind	0.43	1.12	-0.21	-0.10	1.22
Itr	0.8cap	0.23	1.31	0.03	0.02	1.33
10ltr	0.8cap	0.41	1.31	0.13	0.17	1.39
Imax	0.8cap	0.44	1.30	0.20	0.07	1.39

Results taken from BS variant 5-100A Report 150370 dated 17th August 2011137550

	EC-Type Examination Certificate Number: 0120/ SGS0046	
Issue Number: 5		Dated: 17 th May 2012

4. Annex of Variants

Product Variant Identification Details:

Type Designation	Description of meter															
U_n	I_b	I_{max}	SINGLE PHASE (A100C) MODEL CODE													
			TYPE													
PRODUCT/TERMINATION	S	J	1	L	A	B	E	S	S	G	N	S	J	-	C	F
Single Phase, BS terminal arrangement (L-N-N-L)	S	J	1	L	A	B	E	S	S	G	N	S	J	-	C	F
Single Phase, DIN terminal arrangement (L-L-N-N)	S	K														
SERVICE TYPE																
1-phase 2-wire																
CURRENT RANGE																
10-60A DIN or BS (Imax any integral of Ib up to 60A, or 65A)																
5-60A DIN or BS (Imax any integral of Ib up to 60A, or 65A)																
20-100A BS only (Imax any integral of Ib up to 100A)																
10-100A BS only (Imax any integral of Ib up to 100A)																
5-100A BS only (Imax any integral of Ib up to 100A)																
5-85A DIN only (Imax any integral of Ib up to 85A)																
VOLTAGE																
220 - 250V																
FREQUENCY, ACCURACY CLASS																
50 Hz, Class 1 kWh (IEC62053-21) – see note 1, Cl.B kWh,(EN 50470-3)																
50 Hz, Class 2 kWh (IEC62053-21) – see note 1 Cl.A kWh,(EN 50470-3)																
TARIFF & HARDWARE CONFIGURATION																
Single Rate, kWh registration																
Two-rate, kWh registration, switched to neutral																
DISPLAY CONFIGURATION																
Customer specified display configuration																
DISPLAY CYCLE, REGISTER SOURCES																
Customer specified display sequence and register sources																
TEST INDICATOR(S) (see important note 3)																
Non-modulated 40ms pulses																
PULSING/ABSOLUTE OUTPUT(see important note 3 overleaf)																
No pulse or serial data output																
SO pulse output, tied to neutral, one auxiliary terminal (2-rate only)																
SO pulse output, floating, two auxiliary terminals (1-rate only)																
Absolute serial data output - tied to neutral, one auxiliary terminal (2-rate only, not with 1107)																
Absolute serial data output - floating, two auxiliary terminals (1-rate only, not with 1107)																
COMMUNICATIONS																
IrDA optical port, data rate set at time of manufacture																
OTHER OPTIONS																
Extended BS terminal cover, with cut-out for cables, slotted brass main terminal screws																
Extended BS terminal cover no cut-out for cables, "Israel" sealing boss, slotted brass main terminal screws																
DIN: extended terminal cover no cut-out for cables. BS: non-extended terminal cover																
DIN: short terminal cover. BS: extended terminal cover, no cut-out for cables																
Extended DIN terminal cover, with cut-out for cables																
Extended BS terminal cover, with cut-out for cables																
Clear short non-removing BS terminal cover, slotted brass large head main terminal screws																
Clear short DIN terminal cover, slotted brass large head main terminal screws																
Supplied without terminal cover																
VERSION																
IrDA																
SPECIAL ADDITIONS																
Firmware 2-01167-F (IrDA) – BS version and DIN version IEC and MID approved																

SGS	EC-Type Examination Certificate Number:	
	0120/ SGS0046	
	Issue Number: 5	Dated: 17 th May 2012

Modifications to the meter(s) described according to approval No.**0120/ SGS0046** must be notified to the issuing body to confirm the meter(s) continuing compliance to the relevant pattern approval standard(s).

5. Document Revision History

Issue	Date	Comments
1	30/10/2009	Initial Issue
2	24/09/2010	Additional approval of DIN Terminal only 0,25-5(85)A Current Range
3	17/08/2011	Additional approval of BS Terminal 0,25-5(100)A Current Range
4	31/08/2011	Corrected product variant annex
5	17/05/2012	Migration to new MID certificate template