

## Product Information

PCA-RP-HAQ R410A Power Inverter  
Heat Pump (Single Phase)  
Stainless Steel Ceiling Suspended System

Making a  
World of  
Difference

Mr.SUM.



Our Power Inverter Heat Pump offers customers high seasonal efficiency, advanced control options and quiet operation, whilst providing greater flexibility and ease of installation. The **PCA-RP-HAQ** series is a ceiling suspended unit ideal for use in kitchen environments. The external casing is made of durable stainless steel that is resistant to oil and smoke, ensuring that the unit can be easily cleaned at all times.

### Key Features

- High performance oil mist filter
- Easy maintenance - fan casing can be separated into different sections allowing easy cleaning and the drain pan can also be cleaned easily on-site as the pipe connector can be quickly removed
- Optional decoration covers
- Durable stainless steel casing



Cooling | Heating | Ventilation | Controls



# Air Conditioning

## Product Information

**PCA-RP-HAQ R410A Power Inverter Heat Pump (Single Phase)**  
Stainless Steel Ceiling Suspended System

Making a World of Difference




PCA-RP-HAQ - INDOOR UNIT		PCA-RP71HAQ
CAPACITY (kW)	Heating (nominal) Cooling (nominal) Heating (UK) Cooling (UK)	7.6 (3.5-10.2) 7.1 (3.3-8.1) 6.45 (3.0-8.65) 6.55 (3.05-7.45)
SHF (nominal)		0.74
COP / EER (nominal)		3.23 / 3.27
SCOP / SEER		3.8 / 5.6
ENERGY EFFICIENCY CLASS	Heating/Cooling	A / A+
AIRFLOW (l/s)	Lo-Hi	283-317
PIPE SIZE mm (in)	Gas/Liquid	15.88 (5/8") / 9.52 (3/8")
SOUND PRESSURE LEVEL (dBA)	Lo-Hi	34-38
SOUND POWER LEVEL (dBA)		56
DIMENSIONS (mm)	Width x Depth x Height	1136 x 650 x 280
WEIGHT (kg)		41
ELECTRICAL SUPPLY		Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)		6
INTERCONNECTING CABLE No. Cores		4
WIRED REMOTE CONTROLLER REFERENCE		PAR-33MAA
WIRELESS REMOTE CONTROLLER REFERENCE		PAR-SL94B

PUHZ-ZRP - OUTDOOR UNIT		PUHZ-ZRP71VHA2
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling	48 / 47
SOUND POWER LEVEL (dBA)	Cooling	67
WEIGHT (kg)		67
DIMENSIONS (mm)	Width x Depth x Height	950 x 330 + 30 x 943
ELECTRICAL SUPPLY		220-240v, 50Hz
PHASE		Single
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal) Heating/Cooling (UK)	2.35 / 2.17 1.97 / 1.84
STARTING CURRENT (A)		6.0
SYSTEM RUNNING CURRENT (A)	Heating/Cooling [MAX]	8.82 / 7.79 [19.4]
FUSE RATING (BS88) - HRC (A)		25
MAINS CABLE No. Cores		3
MAX PIPE LENGTH (m)		50
MAX HEIGHT DIFFERENCE (m)		30
CHARGE REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t)		
R410A (GWP 2088) - 30m		3.50 / 7.31
MAX ADDITIONAL REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t)		
R410A (GWP 2088)		1.20 / 2.51

### PRODUCT DIMENSIONS

### PCA-RP71HAQ

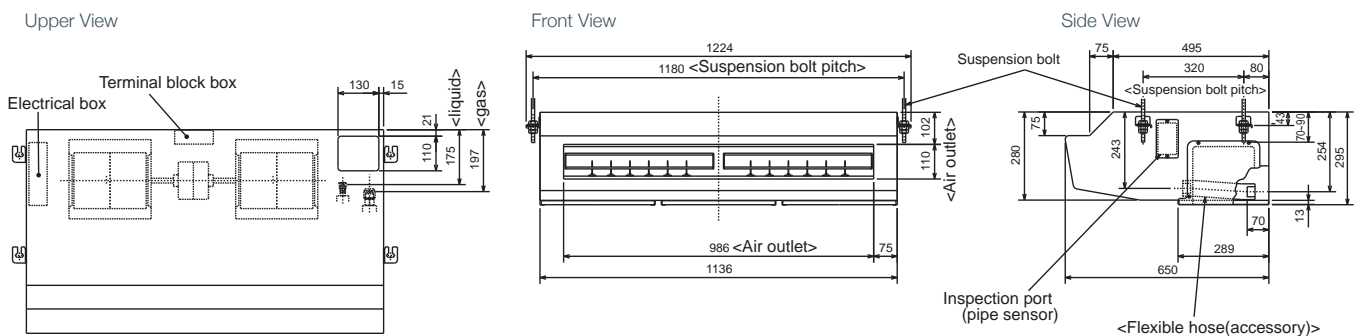

Telephone: 01707 282880  
email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com)  
web: [airconditioning.mitsubishielectric.co.uk](http://airconditioning.mitsubishielectric.co.uk)

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division  
Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881

IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland  
Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)

Country of origin: United Kingdom – Japan – Thailand – Malaysia. ©Mitsubishi Electric Europe 2017. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774) or R134a (GWP:1430). \*These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows: R410A (GWP:1975), R32 (GWP: 550), R407C (GWP:1650) or R134a (GWP:1300).



[www.greengateway.mitsubishielectric.co.uk](http://www.greengateway.mitsubishielectric.co.uk)  
Mitsubishi Electric UK's commitment to the environment

Follow us @meuk\_Jes  
Follow us @green\_gateway

Mitsubishi Electric  
Living Environmental Systems UK

mitsubishielectric2

thehub.mitsubishielectric.co.uk

Effective as of September 2017