

WY Series

(22.4-56kW)

Heat Pump, Water Cooled Condensing Unit

CITY MULTI

The City Multi **WY** Series Heat Pump VRF system is ideal where a water loop is available and outdoor space is limited.

These models utilise water, instead of air, as the energy transfer medium, and benefit from all of the same technology and flexibility as air sourced VRF systems. City Multi WY systems provide the ultimate solution for a breadth of applications requiring heating or cooling at a given time, such as open-plan spaces in offices, call centres and leisure facilities.



Key Features & Benefits:

- High efficiency, modular systems, with ability to recover energy on the refrigerant circuit and between units on the water circuit, in either a closed or open loop building, or ground source application
- Benefits from a wide indoor unit range and advanced control options
- Very low impact footprint and service space requirements, ideal for internal location
- Provides continuous heating in winter, without the need for defrost operation






CONDENSING UNITS		PQHY-P200YLM-A1	PQHY-P250YLM-A1	PQHY-P300YLM-A1	PQHY-P350YLM-A1	PQHY-P400YLM-A1	PQHY-P400YSLM-A1	PQHY-P450YLM-A1	PQHY-P450YSLM-A1	PQHY-P500YLM-A1	PQHY-P500YSLM-A1
CAPACITY (kW)	Heating (nominal)	25.0	31.5	37.5	45.0	50.0	50.0	56.0	56.0	63.0	63.0
	Cooling (nominal)	22.4	28.0	33.5	40.0	45.0	45.0	50.0	50.0	56.0	56.0
POWER INPUT (kW)	Heating (nominal)	3.97	5.08	6.25	7.53	8.37	7.94	9.79	6.24	11.43	10.16
	Cooling (nominal)	3.71	4.90	6.04	7.14	8.03	7.70	9.29	5.69	11.17	10.12
OPERATING WATER VOLUME (m³/h)		3.0 ~ 7.2	3.0 ~ 7.2	3.0 ~ 7.2	4.5 ~ 11.6	4.5 ~ 11.6	3.0+3.0 ~ 7.2+7.2	4.5 ~ 11.6	3.0+3.0 ~ 7.2+7.2	4.5 ~ 11.6	3.0+3.0 ~ 7.2+7.2
GUARANTEED OPERATING RANGE (°C)	Heating / Cooling	-5~45 / -5~45	-5~45 / -5~45	-5~45 / -5~45	-5~45 / -5~45	-5~45 / -5~45	-5~45 / -5~45	-5~45 / -5~45	-5~45 / -5~45	-5~45 / -5~45	-5~45 / -5~45
	COP / EER (nominal)	6.29 / 6.03	6.20 / 5.71	6.25 / 5.54	5.97 / 5.60	5.97 / 5.60	6.29 / 5.84	5.72 / 5.38	6.24 / 5.69	5.51 / 5.01	6.20 / 5.53
MAX NO. OF CONNECTABLE INDOOR UNITS		17	21	26	30	34	36	39	39	43	43
MAX CONNECTABLE CAPACITY		50 ~ 130%	50 ~ 130%	50 ~ 130%	50 ~ 130%	50 ~ 130%	50 ~ 130%	50 ~ 130%	50 ~ 130%	50 ~ 130%	50 ~ 130%
PIPE SIZE mm (in)	Gas	19.05 (3/4")	22.2 (7/8")	22.2 (7/8")	28.58 (1 1/8")	28.58 (1 1/8")	28.58 (1 1/8")	28.58 (1 1/8")	28.58 (1 1/8")	28.58 (1 1/8")	28.58 (1 1/8")
	Liquid	9.52 (3/8")	9.52 (3/8")**	9.52 (3/8")**	12.7 (1/2")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")
SOUND PRESSURE LEVEL (dBA)		46	48	54	52	52	49	54	50	54	51
SOUND POWER LEVEL (dBA)		60	62	68	66	66	63	70	64	70.5	65
WEIGHT (kg)		170	170	170	214	214	170+170	214	170+170	214	170+170
DIMENSIONS (mm)	Width	880	880	880	880	880	880+880	880	880+880	880	880+880
	Depth	550	550	550	550	550	550	550	550	550	550
	Height	1100	1100	1100	1450	1450	1100	1450	1100	1450	1100
ELECTRICAL SUPPLY ¹		380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz
PHASE ¹		Three	Three	Three	Three	Three	Three	Three	Three	Three	Three
STARTING CURRENT (A)		8	8	8	8	8	8/8	8	8/8	8	8/8
NOMINAL SYSTEM RUNNING CURRENT (A) ¹ Heating / Cooling (MAX)		6.3/5.9 [16.1]	8.1/7.8 [16.1]	10.0/9.6 [18.6]	12.0/11.4 [23.1]	13.4/12.8 [27.6]	12.7/12.3 [16.1+16.1]	15.7/14.8 [32.9]	14.3/14.0 [16.1+16.1]	18.3/17.9 [39.2]	16.2/16.2 [16.1+16.1]
FUSE RATING (BS88) - HRC (A) ¹		1 x 20	1 x 20	1 x 20	1 x 25	1 x 32	1 x 20 / 1 x 20	1 x 40	1 x 20 / 1 x 20	1 x 40	1 x 20 / 1 x 20
MAINS CABLE No. Cores ¹		4 + earth	4 + earth	4 + earth	4 + earth	4 + earth	4 + earth	4 + earth	4 + earth	4 + earth	4 + earth
CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (T) R410A (GWP 2088)		5.0 / 10.4	5.0 / 10.4	5.0 / 10.4	6.0 / 12.5	6.0 / 12.5	10.0 / 20.9	6.0 / 12.5	10.0 / 20.9	6.0 / 12.5	10.0 / 20.9
MAX ADDITIONAL REFRIGERANT (KG) / CO ₂ EQUIVALENT (T) R410A (GWP 2088)		21.0 / 43.8	28.0 / 58.5	29.5 / 61.6	41.5 / 86.7	50.0 / 104.4	50.0 / 104.4	51.5 / 107.5	51.5 / 107.5	53.5 / 111.7	53.5 / 111.7

Notes: *SEER/SCOP available separately in the 'City Multi VRF Seasonal Efficiency' document. Based on Ecodesign Lot 21/6 to EN14825 standard. ¹A separate power supply is required for each module. Where more than one figure is quoted there are multiple modules. These products are made to order, please consult your local sales office for delivery schedule. PQRY-P200/250/300 are stock items.

PIPING RESTRICTIONS	PQHY-P200-500Y(S)LM-A1
TOTAL PIPING LENGTH	300m max for sizes 200-300 / 500m for sizes 350-900
FURTHEST PIPING LENGTH	165m max
FURTHEST PIPING LENGTH AFTER 1st BRANCH	40m max
BETWEEN INDOOR AND OUTDOOR UNITS - HEIGHT	50m max (40m max if outdoor installed below)
BETWEEN INDOOR AND INDOOR UNITS - HEIGHT	15m max

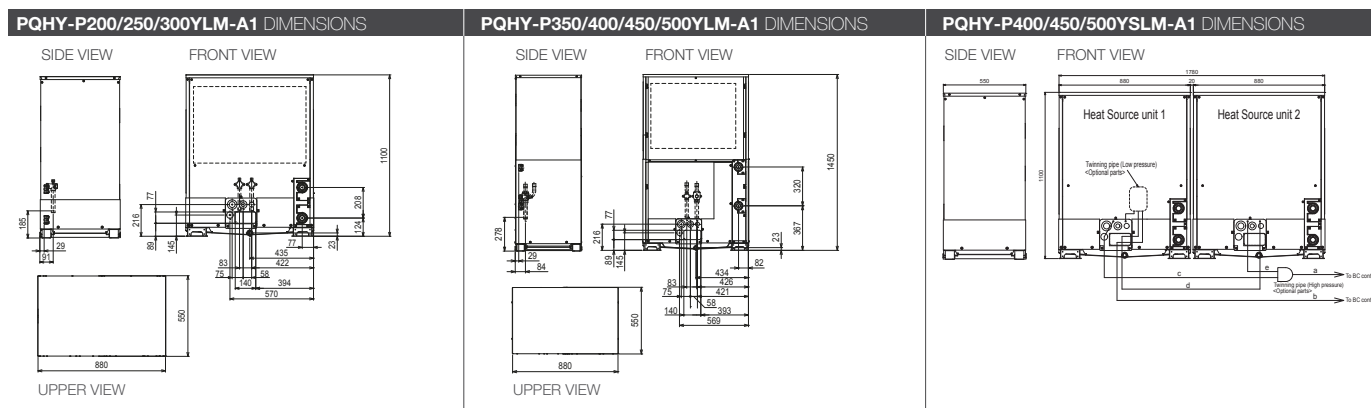

Telephone: 01707 282880
email: air.conditioning@meuk.mee.com
les.mitsubishielectric.co.uk



UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880 Fax: 01707 278881
IRELAND Mitsubishi Electric Europe, Westgate Business Park, Ballymount, Dublin 24, Ireland. Telephone: (01) 419 8800 Fax: (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Italy - Turkey - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2023. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: Refer to 'Installation Manual' and 'Instruction Book' for further 'Technical Information'. The fuse rating is for guidance only and please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R1234ze (GWP:7) or R1234yf (GWP:4). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP:1975), R32 (GWP:550), R407C (GWP:1650) or R134a (GWP:1300).

Effective as of April 2023

