



NEXT

GENERATION VRF

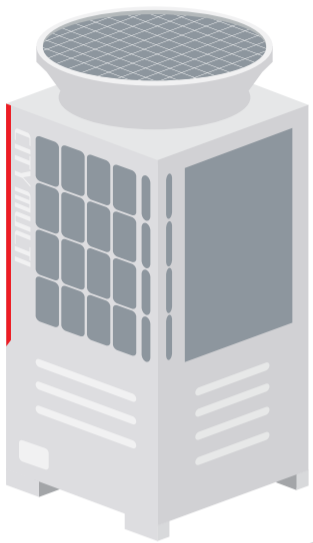


REDUCED FOOTPRINT

MULTIPLE EXTERNAL STATIC PRESSURE SETTINGS EXTENDING UP TO



80 PA

80 PA

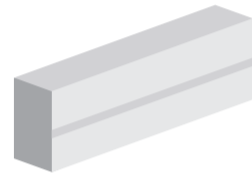

WILL HELP WITH LONG OR NARROW DUCTING REQUIREMENTS

City Multi YNW
NEW MODELS AVAILABLE IN CAPACITIES FROM

22-150


← KILOWATTS →

- Achieved by new 4 sided heat exchanger
- 51kW of cooling capacity can be delivered per square meter
- 28% more than previous models



ULTRA QUIET NOISE LEVELS

City Multi YNW has incremental capacity steps to vary noise output:

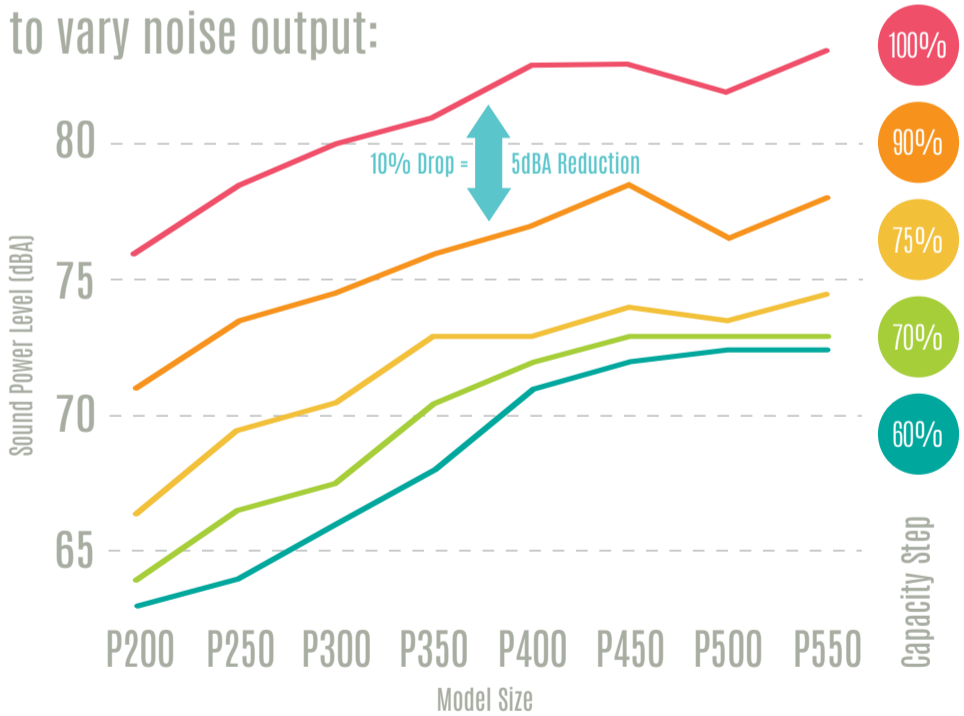

NIGHT TIME OPERATION:

- ▼ Demand is generally lower
- ▲ Noise sensitivity is increased
- ✓ Select step to meet needs



ACOUSTIC ENCLOSURES:


Costs can be saved by reducing the amount of attenuation required

REDUCED INSTALLATION & MAINTENANCE TIME

is possible thanks to a new piping layout for the BC boxes.



UP TO 11 SUB BCs CONNECTABLE

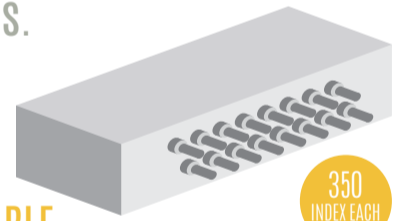

14% REDUCTION IN HEIGHT

20% overall reduction on system refrigerant volume

HIGHEST EVER LEVELS OF EFFICIENCY

