



IT Cooling

Highly efficient and reliable cooling solutions



les.mitsubishielectric.co.uk


A new generation of IT Cooling technology

We are all becoming more and more reliant on technology. Most businesses depend on their IT systems to provide the data they need, 24/7, year after year, as even the shortest outages can cause significant disruption and loss of revenue.

It is imperative that these vital IT servers and equipment are always kept in optimal conditions, with effective cooling being paramount. The new range of Computer Room Air Conditioning (CRAC) and Computer Room Air Handling (CRAH) systems from Mitsubishi Electric combine the latest in DX Technology with the RC brand's expertise in IT cooling. These innovative, energy efficient systems can effectively deliver robust solutions to IT environments with ease.

DX Computer Room Air Conditioning solutions from Mitsubishi Electric offer a range of high sensible systems, specifically designed to provide close control of temperature and humidity; perfectly suited for small to medium sized enterprise data centres.

Mitsubishi Electric purchased the RC Group in 2015, enhancing our product line up and marking our full scale entry into the IT cooling market.

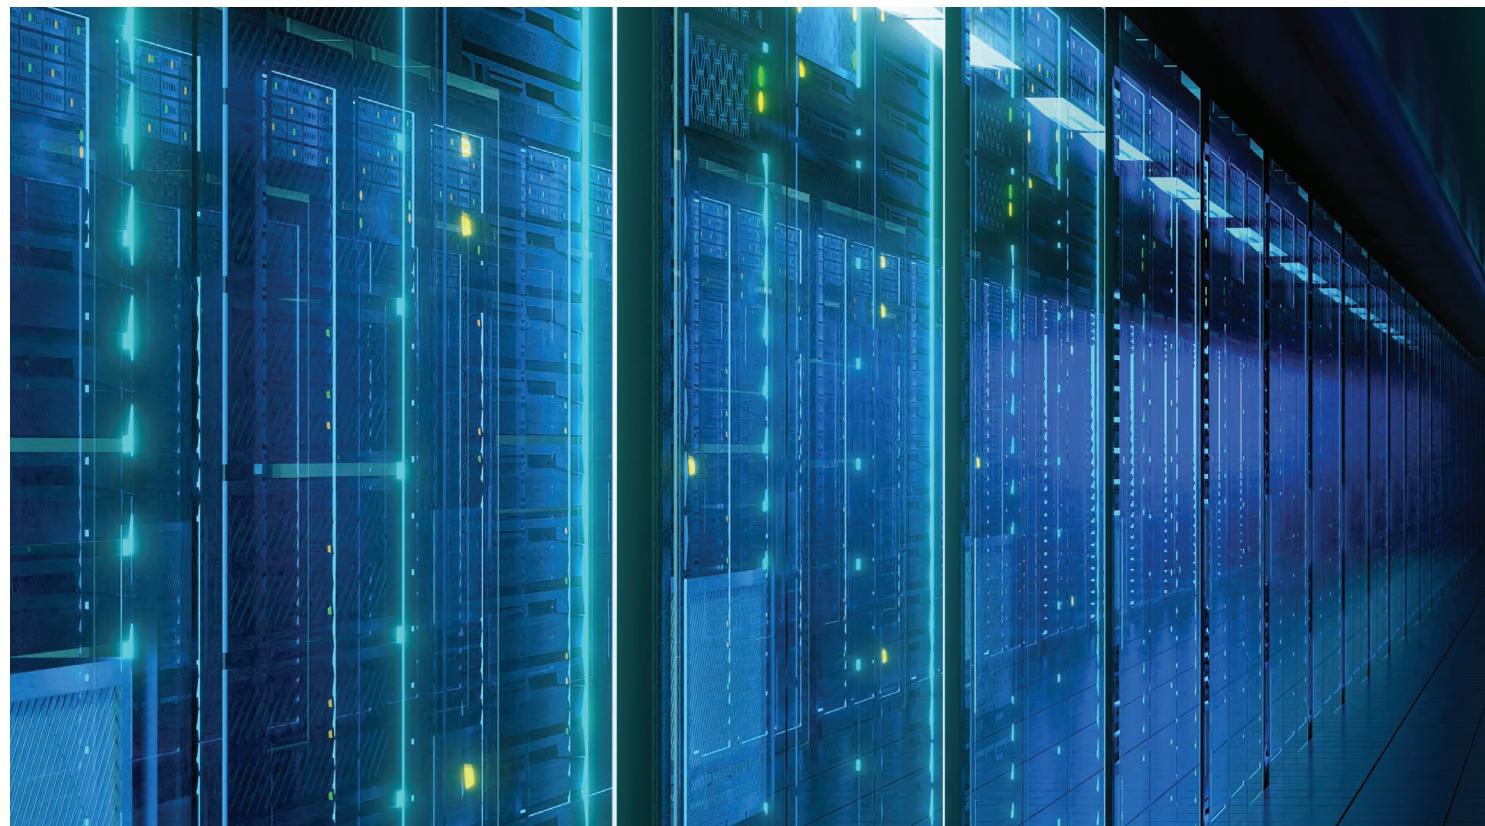



RC is a strong European brand supported by 50 years of customer trust and high quality production, and its range of energy-saving, low-noise and innovative IT cooling technology further expands our application and customisation capabilities.


Mitsubishi Electric is the first name for **comfort and efficiency**

Founded in 1921, Mitsubishi Electric is now a global, market leading environmental technologies manufacturer. In the UK, the Living Environment Systems Division provides pioneering solutions that heat, cool, ventilate and control our buildings in some of the most energy efficient ways possible.

Through our technical expertise, long experience and innovative product range, we enable building operators everywhere to significantly improve energy efficiency, reduce running costs and adhere to increasingly tough legislation. We believe that global climate challenges need local solutions.

Our aim is to help individuals and businesses reduce the energy consumption of their buildings and their running costs.

At Mitsubishi Electric, we offer advanced technology that really can **make a world of difference**.

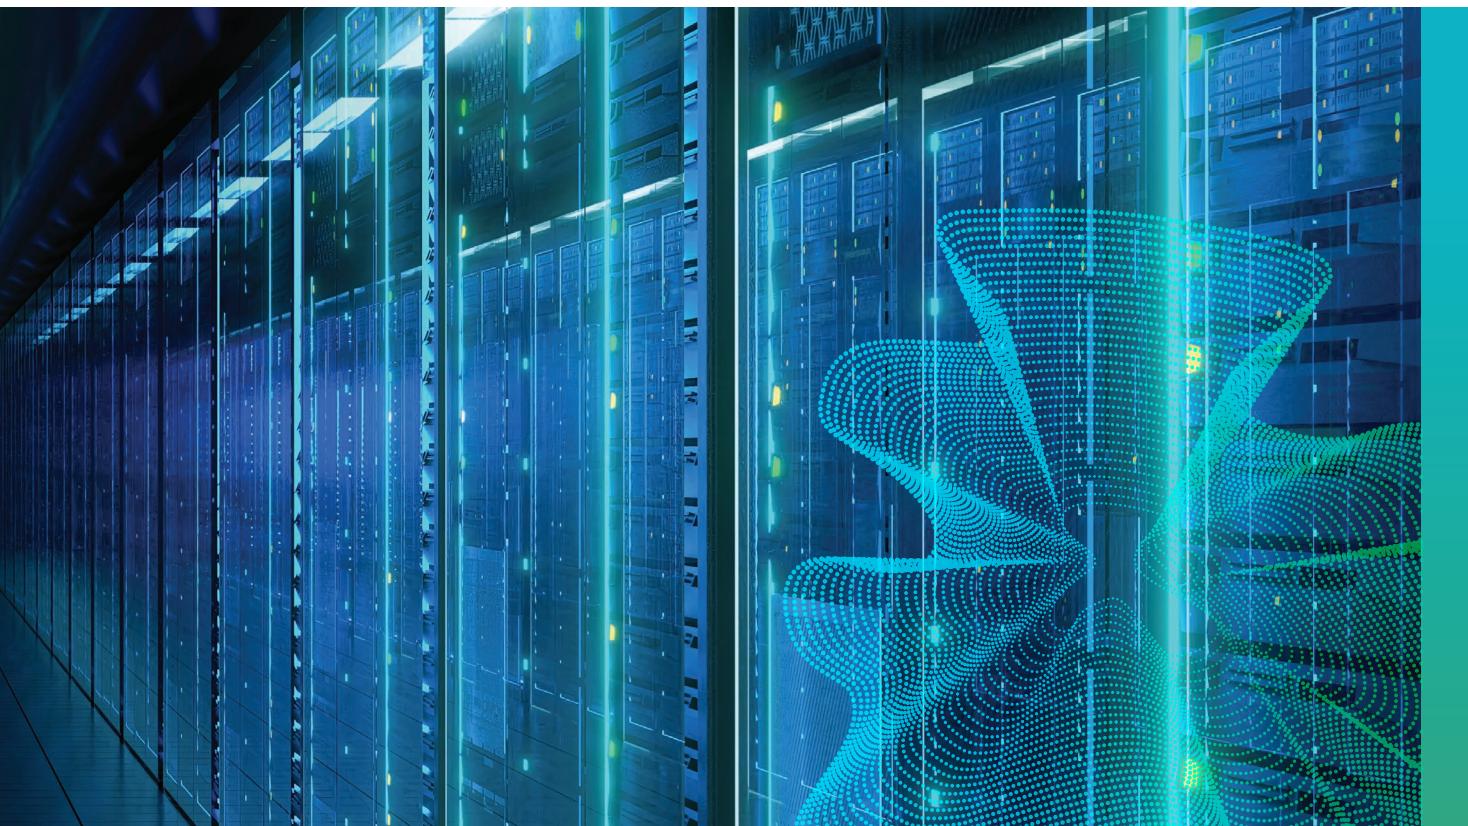

The need for IT Cooling

Precise temperature and humidity control

More and more businesses are opting to store their data on-site in enterprise data centres, and in the past standard wall mounted split systems may have been an option to cool this type of application.

However, complex IT environments are often characterised by variable cooling loads, which require a high cooling capacity at full load in order to allow the IT equipment to operate correctly when it is most needed.

The perfect match between efficiency and reliability

The need for high sensible cooling and close control of both temperature and humidity in critical IT environments has therefore never been higher, and this is where our new range of specialist IT cooling systems makes it possible to keep temperature and humidity constant, even with very wide load variations, ensuring the correct room conditions all year round.

With our IT cooling systems, both efficiency and reliability are paramount throughout all the stages of research, design and manufacturing. By using this approach, along with over 50 years of manufacturing experience within the IT cooling sector, we are able to offer tailor made IT cooling solutions that have been designed to fulfil this requirement, reducing operational costs in the process through the use of highly efficient technology.

Mitsubishi Electric close control cooling systems

Mitsubishi Electric's close control systems are specifically designed for rooms with a high sensible cooling load that require precise temperature and humidity control.

Because of the need for close control 24 hours a day, 365 days a year, an inverter driven compressor has been incorporated into many of the outdoor units, maximising the energy efficiency of each system. Features include:

- DX or chilled water versions
- Precise temperature and humidity control
- High Sensible cooling
- Easily integrates into existing and new control networks
- Back-up and rotate functions
- Inverter driven capacity control
- New generation EC PUL (Polymeric Ultralight) high efficiency fans
- Free cooling
- Dual fluid circuits available for the highest reliability

Designing the optimum IT cooling system

Two factors need to be taken into account when designing the perfect system for IT cooling: density and capacity. Mitsubishi Electric's wide range of products allows you to choose the correct balance of these factors, in order to meet your individual application requirements.

Mitsubishi Electric's range of dedicated IT cooling equipment includes DX systems specifically designed for IT applications, and for those who are familiar with the benefits and installation processes of our existing Mitsubishi Electric HVAC outdoor units. This opens up new opportunities for the application of DX systems in critical IT environments.



Density - Low / Medium / High

When considering the type of air conditioning required for an IT cooling application, one of the most important factors to consider is density.

What does density mean?


The density of an IT cooling application describes how much cooling power is required to remove the heat produced by the IT equipment or machinery in a given space.

For most IT cooling applications, the 'space' is a computer rack, which is a physical chassis that can house multiple computers, or servers. A computer rack is also known as a server rack or computer cabinet.

To characterise the density, the cooling power required to maintain the temperature in the rack must be calculated.

For IT cooling applications where the cooling power required in a single rack is less than 5kW, this would be described as **low density**.

Where the cooling power required is between 5-15kW, the density of the rack would be described as being **medium**, and where greater than 15kW, described as **high**.

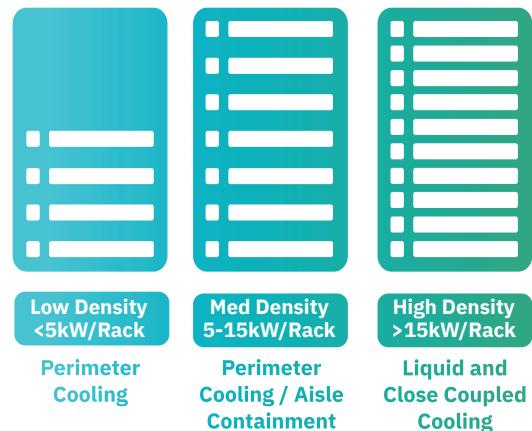

Selecting the right system

In low density applications it is possible to maintain temperatures in the rack by controlling the room temperature as a whole, using perimeter air conditioners.

However, as the density of the rack increases, the risk of localised areas of the data room overheating also increases, and these 'hot spots' must be removed to ensure IT equipment isn't damaged through overheating.


To remove the risk of hot spots in higher density applications, localised cooling is installed closer to the racks to ensure the cooling is delivered where it's needed most.



Low Density Applications



Computer room air conditioners, known as CRAC units, are located around the perimeter of the data room.

These systems draw warm air in from the racks, while cooler conditioned air is then typically blown under a raised floor and out through grilles to the front of the server racks, to create hot and cold aisles within the data room.

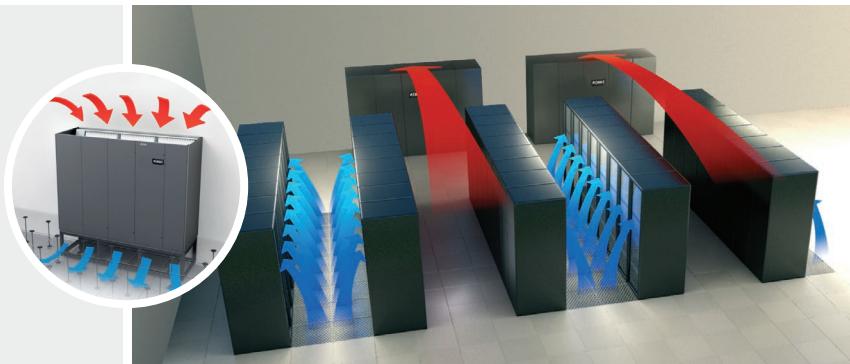

Medium Density Applications

Perimeter CRAC units are combined with aisle containment for medium density applications. In this type of system, the cold and hot air streams are physically separated to ensure they do not mix, and to prevent hot spots from occurring.

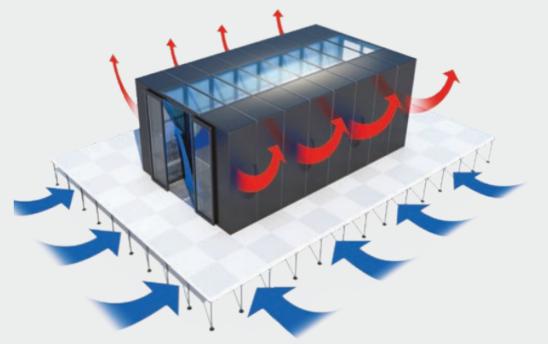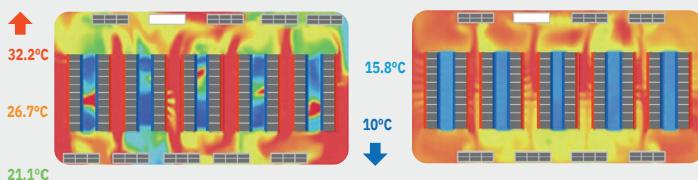

High Density Applications

For the highest density applications, the addition of localised cooling can meet the heavy demands of the system. In-row systems are used to give close coupled air conditioning. Beyond that, for operations such as AI workloads, liquid cooling with Coolant Distribution Units (CDUs) are most effective.



Capacity - Small to Large Scale Applications

Another factor that will dictate the type of equipment required for an IT cooling application is the total capacity of the data centre.

Small Capacity Applications

Smaller capacity applications are commonly designed with more cost effective and simpler direct expansion (DX) technology. DX equipment doesn't require the installation of water pipework or the need for 3rd party ancillaries, such as pumps and control valves, making them a convenient solution for smaller projects.

Historically, contractors may have chosen to install comfort cooling air conditioning products in these types of applications. While these products offer a solution, a more targeted approach is often required, and as such we have developed the M Series **MSY-TP** wall mounted system, which has been designed specifically for high sensible cooling.



5kW - Small

The Gap in Capacity

As system capacity increases, it becomes impractical to install a large number of small wall mounted systems. However, at the same time the application doesn't lend itself to apply highly specialised IT cooling equipment.

This is where the **s-MEXT DX** comes in; it uses the same ethos of 'plug and play' as our Mr Slim split-system technology, and helps fill the gap between low and high capacity applications, without any upskilling requirement.



50kW - Medium

Large Capacity Applications

For **large capacity applications** customers and installation contractors would usually opt for highly specialised applied products. Applying these products requires a high level of design and product knowledge.

Usually these products are bespoke and are typically installed by specialist IT cooling contractors.

DX technology is utilised in this arena, however in these larger applications, technology that uses chilled water becomes more prevalent. These systems, while being higher in terms of CAPEX, can offer increased efficiency through the use of free cooling and higher operating temperatures in the data centre, where running costs are more important to manage.



Low Density / Low Capacity Applications

The need for high sensible cooling

Dedicated IT cooling equipment provides many benefits for small, low density IT cooling applications. Although comfort cooling systems can be convenient solutions, specific IT Cooling systems are strongly recommended where there is a need for high sensible cooling.

The total cooling capacity of any air conditioning unit is comprised of "**sensible cooling**" and "**latent cooling**".


- Sensible cooling** is the ability to remove heat that causes a change in temperature, but no change in the moisture content
- Latent cooling** is the ability to remove moisture from the surrounding environment

The cooling capacity stated for a comfort cooling air conditioning unit is usually its total cooling capacity (i.e. sensible + latent). Latent cooling is important in comfort cooling applications due to the presence of people in the space, who will produce moisture in the air and increase the humidity levels.

However, in a data centre, the electronic equipment generates only dry heat (no moisture), so the sensible cooling capacity becomes the most useful value. The common way to define this is to use the sensible heat ratio (or sensible heat factor) which is expressed as:

$$\text{Sensible Heat Factor (SHF)} = \frac{\text{(Sensible Cooling)}}{\text{(Total Cooling)}}$$

For comfort air conditioning, the SHF is typically between 0.60 and 0.70; the coil/airflow is designed to remove 60% to 70% sensible heat load and 30% to 40% latent heat load (moisture). The cooling equipment used in a data centre is designed for an SHF between 0.85 and 0.95; that is 85% to 95% sensible heat load and 5% to 15% latent load. These cooling units will effectively remove the high sensible heat load produced by the electronic equipment in a data centre.

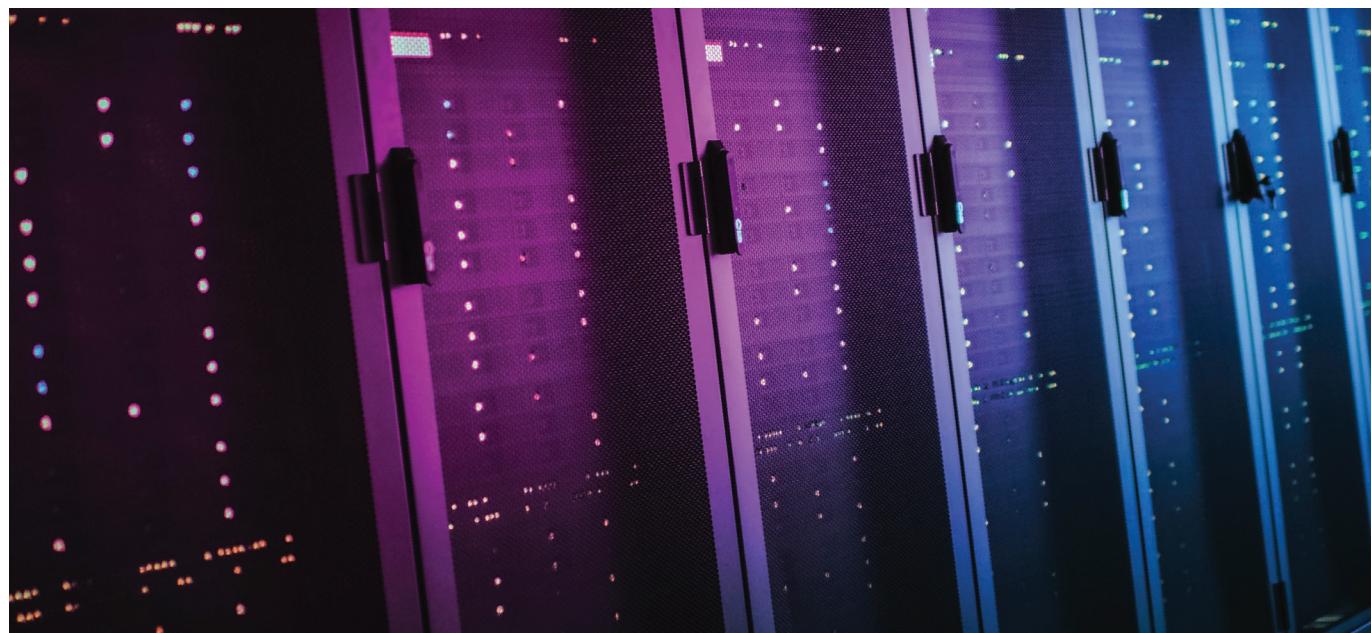

M series

M Series MSY-TP R32 High SHF Wall Mounted System

The M Series MSY-TP wall mounted system blends energy efficiency with a modern white design.

This cooling only unit has a high sensible cooling capacity, making it ideal for low density / low capacity computer rooms or areas that require a greater degree of sensible cooling.




- High sensible cooling capacity
- Cooling down to -25°C outdoor air temperature
- Highly energy efficient
- Weekly timer for greater control of scheduling
- Utilises lower GWP R32 refrigerant

The MSY-TP unit has a high SHF alongside a high Seasonal Energy Efficiency Ratio (SEER), which when combined, leads to a lower running cost over the course of its lifetime. The MSY-TP is able to achieve a higher SHF through using an oversized evaporator, which is designed for a high Delta T across the coil.

When compared to a standard comfort cooling air conditioner, the MSY-TP unit offers significant run cost savings over its lifetime.

R32

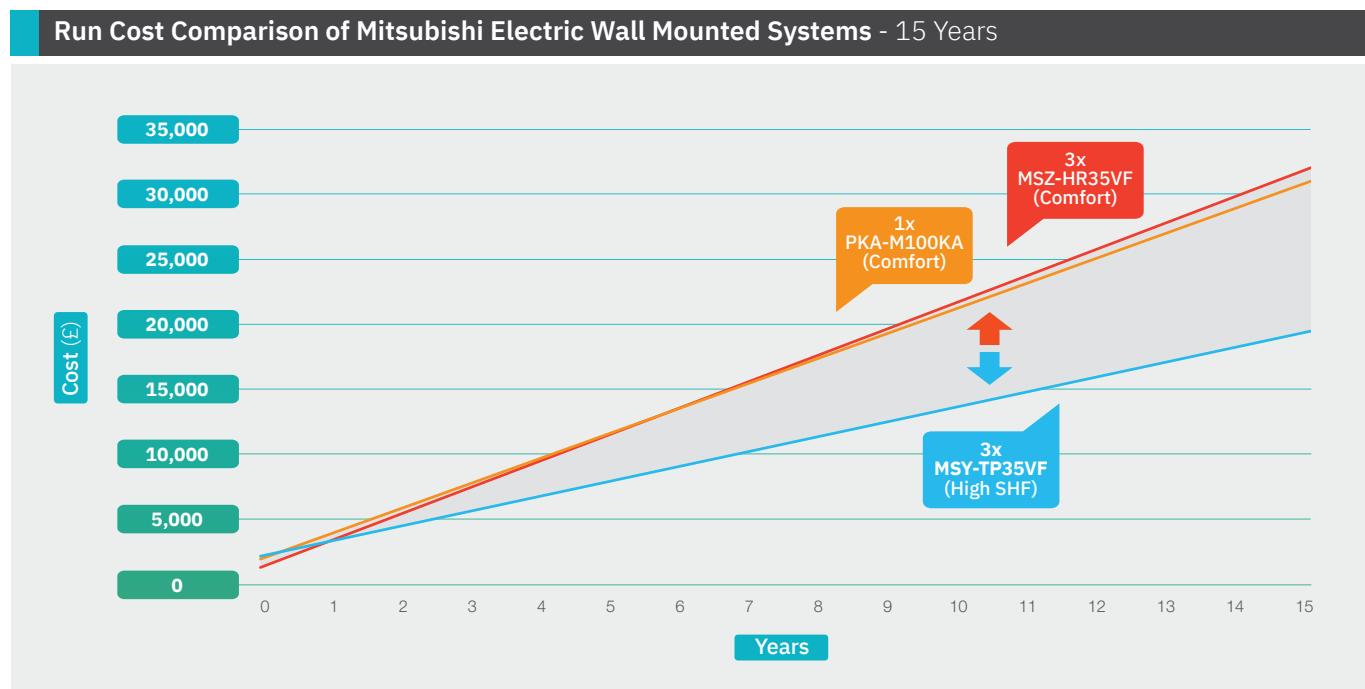

Filling the Gap: Medium Density / Medium Capacity Applications

Introducing the s-MEXT DX IT Cooling System

Computer room air conditioning is ideal for applications where high sensible cooling and close control of temperature and humidity are required.

s-MEXT takes advantage of more than 50 years experience of the RC brand within the IT cooling market, coupled with Mitsubishi Electric renowned quality standards.

The split cooling package consists of the indoor s-MEXT high precision air conditioner connected to a Mr Slim Power Inverter outdoor unit. The result is a full inverter split system, designed according to the best quality standards and dedicated to the most reliable IT environments.

Hybrid of packaged and bespoke equipment	High efficiency
Plug and play technology with up to 100m pipe runs	Full Mitsubishi Electric inverter technology and EC plug fans
Reliable and trusted technology	3 years warranty on the indoor unit
Compact with small footprint	Up to 7 years warranty on the outdoor unit

6-42kW in either upflow or downflow configurations →



↑ s-MEXT DX CRAC Units

↑ Mr Slim Power Inverter Outdoor Units

R32

■ Trusted Mitsubishi Electric Power Inverter technology

The s-MEXT DX system is able to be connected to our new lower GWP R32 refrigerant Power Inverter outdoor units. The use of a Power Inverter outdoor unit simplifies the installation process, removing the need for oil traps and double risers and allowing pipe sizes to be easily calculated.




Developed for high-performance operation, the Power Inverter offers a host of advanced functions:

- **Redundancy functions with automatic switchover in the event of a fault**
- **'Easy maintenance' function and automatic refrigerant level monitoring**
- **Inverter Compressor allows for continuous modulation, achieving a high energy saving performance**
- **Inverter DC Axial fans**

■ New generation EC fans

High performing EC fans on the s-MEXT unit are made of polymeric ultralight material in order to ensure perfect airflow modulation at partial loads. **The fans deliver advantages in terms of:**

- **Reduction of noise levels by 4-5 dB(A) compared to traditional solutions**
- **Reduction of the absorbed power by 25% compared to traditional solutions**

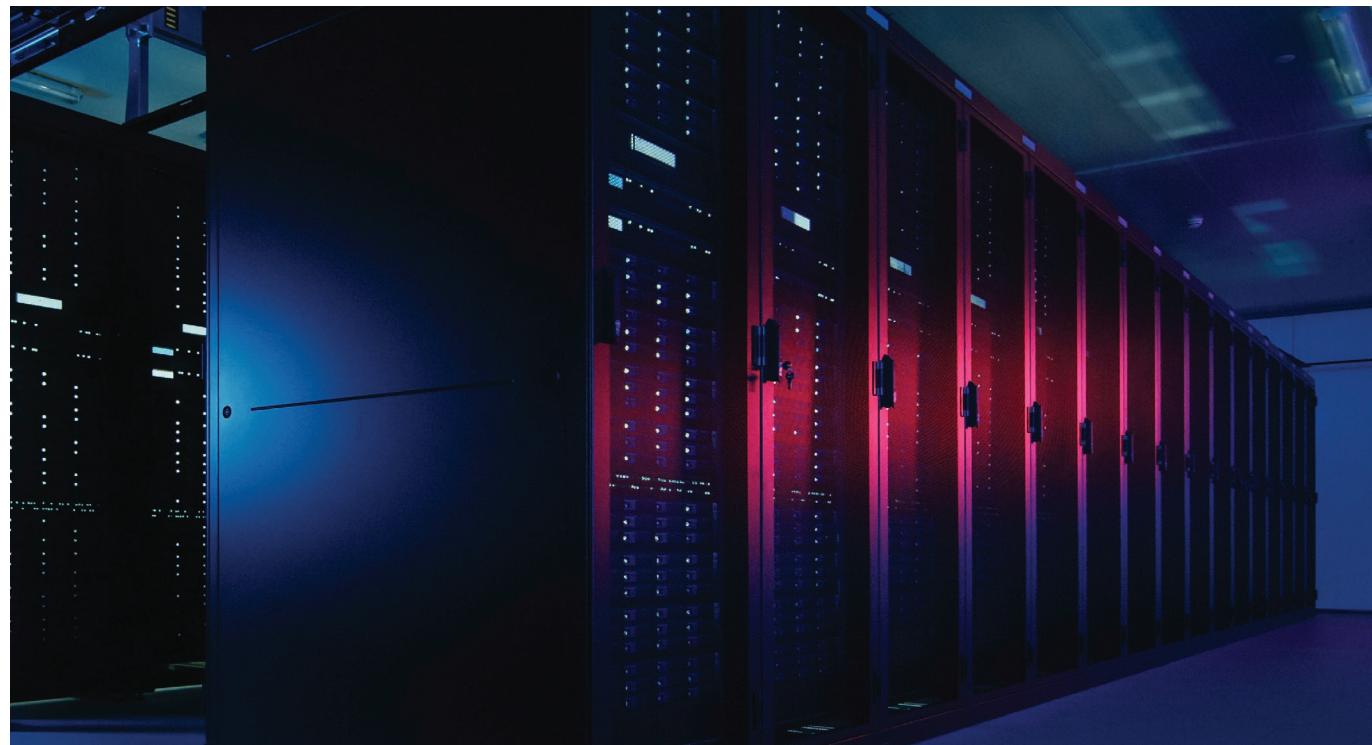


s-MEXT DX

■ Harnessing the highest capacity into a compact footprint

s-MEXT controls temperature and relative humidity with pinpoint accuracy, even in the case of very strong thermal variations. Brilliantly engineered to deliver top-class efficiency values, the indoor unit features a range of premium quality components, such as EC plug fans, an evaporating coil with hydrophilic treatment and a PID microprocessor control system.

A wide selection of accessories are also available to suit the most critical installation requirements.


The fact that the compressor is contained in the outdoor unit allows for a compact s-MEXT footprint when compared to standard CRAC units, freeing up valuable space in the data centre.

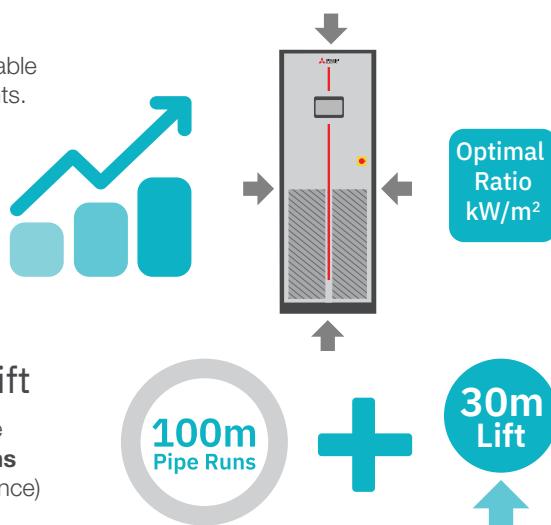

■ Extended pipe runs and lift



By combining the s-MEXT CRAC unit with the Mr Slim Power Inverter outdoor unit, **pipe runs of up to 100m with a 30m lift** (height difference) are possible.





■ Airflow options

The s-MEXT is available in two different airflow configurations, ensuring installation flexibility.

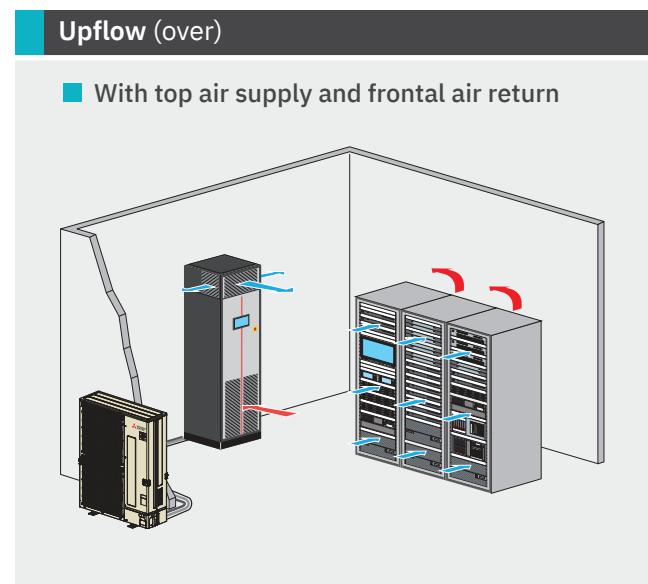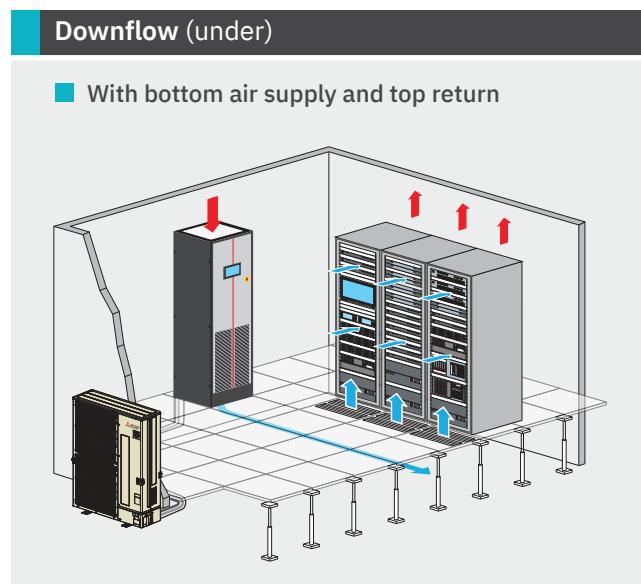

■ Warranty

3 years warranty
on the s-MEXT indoor unit

 up to
7 years warranty
on the Mr Slim Power Inverter outdoor unit

Medium Density / Large Capacity Applications

x-MEXT DX / w-MEXT / w-NEXT

High precision air conditioners are ideal for applications where high sensible cooling and close control of temperature and humidity are required. The x-MEXT DX, w-MEXT and w-NEXT ranges make it possible to keep temperature and humidity constant even with very strong load variations, ensuring premium sensible cooling capacity values.

- Perimeter units with upflow and downflow configurations
- Ultralight composite EC plug fans resulting in reduced noise and power usage
- Integrated control of up to 10 units for intelligent redundancy management
- Automatic restart from power outage
- Return air temperature operating limits up to 40°C
- Optional Modbus RS485 and BACnet TCP/IP connectivity
- Optional electrical heater and steam humidifiers

The **x-MEXT** direct expansion air cooled range is perfect for keeping room conditions constant under varying loads, whilst being highly energy efficient.

The **w-MEXT** and **w-NEXT** are high precision computer room air handlers (CRAH) designed for IT cooling that utilises a chilled water feed.


x-MEXT DX

30-129kW →

w-MEXT / w-NEXT

5-204kW →





■ Precise temperature and humidity control

Complex IT environments are characterised by extremely variable thermal loads, which require a high level of cooling capacity at full load, to ensure the continual efficient and effective operation of IT equipment.

The x-MEXT DX and w-MEXT/w-NEXT provide this, ensuring a reliable performance throughout the lifetime of the system.

■ Airflow configurations

Like with the s-MEXT DX, both the x-MEXT DX and the w-MEXT/w-NEXT systems are available in both downflow and upflow configurations, ensuring installation flexibility across a multitude of applications.

Downflow (under)



Air suction is from the top of the unit and air delivery is provided to the underfloor void.

Upflow (over)



Air intake can be at the front, rear or bottom of the unit, and the air delivery is from the top of the unit, into ducts behind suspended ceilings or from front delivery plenums.

■ EC plug fans

Specifically designed for high precision air conditioners, the new EC PUL (Polymeric Ultralight) fans of the x-MEXT DX and w-MEXT/w-NEXT feature a new compact design and an innovative blade geometry, resulting in a higher airflow rate and reduced operating costs. **The advantages compared to standard EC fans are:**



■ Reduction in noise levels by 4-5dB(A)

■ 20% efficiency increase


x-MEXT DX

The x-MEXT DX air cooled range incorporates full inverter driven BLDC Mitsubishi Electric compressors and a new microchannel coil remote condenser, perfect for keeping room conditions constant under varying loads, whilst being highly energy efficient.

The best of both worlds:

The x-MEXT is available in both DX only, as well as a Dual Fluid version for maximum resilience, alongside the ability to incorporate free cooling from ambient heat rejection plant.

- Full inverter technology with BLDC Mitsubishi Electric compressors
- Microchannel coil remote condensers with AC or EC axial fans
- Front access for easy inspection and routine maintenance

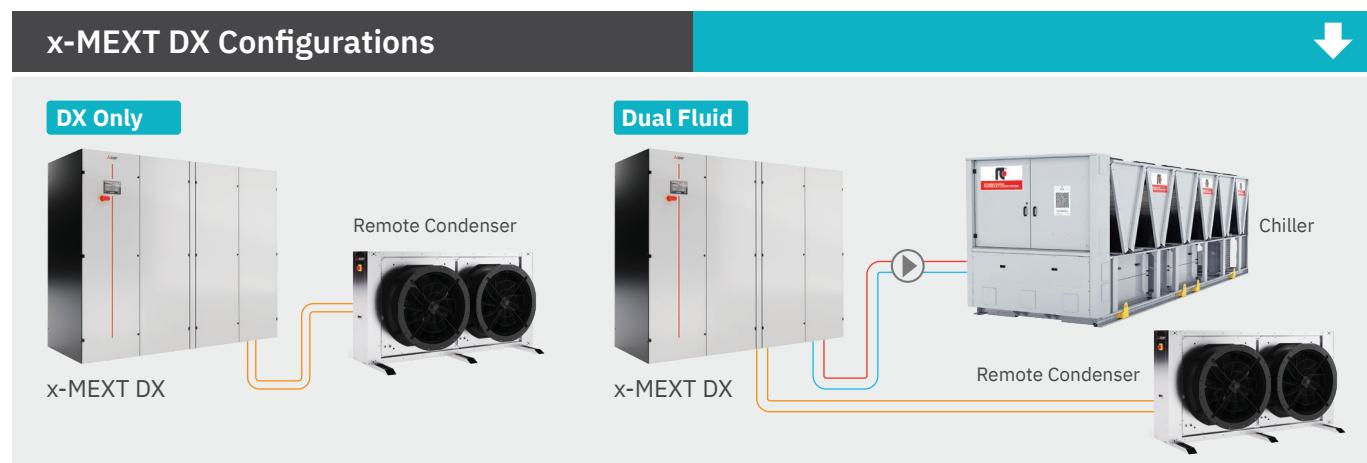

MEGR Remote Condensers

The MEGR models are high efficiency remote condensers that can be coupled with the x-MEXT DX close control air conditioning units.

Each condenser features microchannel coils and AC or EC axial fans in order to provide the best-in-class efficiency and higher corrosion resistance. The condensers can be installed either vertically or horizontally and are available as an ultra-low noise version.



Key Features

- 50% less refrigerant charge compared to traditional finned coil remote condensers, with up to a 45% increase in heat exchange efficiency
- Microchannel condenser coil consisting of parallel flow aluminium tubes, result in a greater level of heat exchange due to a lower thermal resistance, weight reduction and a lower pressure level
- Stable and efficient operation is achieved thanks to the use of uncoated aluminium blades, dynamic balancing and precise airflow control
- Fans include optimised full bell mouth with guiding vane and short diffuser
- Low noise levels are achieved due to the incorporation of fans, advanced electronics and sound-proof insulation
- High corrosion resistance on both the aluminium casing and coils

R410A

w-MEXT and w-NEXT

Ideal for applications where high sensible cooling and close control of temperature and humidity are required. The w-MEXT and w-NEXT chilled water ranges incorporate the latest EC plug fan(s), advanced controls software and an increased coil area resulting in the highest efficiency.

- High Efficiency - EC plug fans
- Small footprint
- Adaptive Set Point
- Active Redundancy
- Available in Upflow (over) and Downflow (under) variants
- High water temperatures
- Integrated temperature control

w-Mext and w-NEXT Configurations



Single Circuit



Double Circuit



■ Single chilled water circuit configuration

Chilled water air conditioners utilise water coming from a single chiller as a means to transfer heat. The liquid flow in the unit's water coil is managed by an internal 2 or 3-way valve.

■ Double chilled water circuit configuration

These units are provided as standard with two water circuits that never work simultaneously, as they operate as 100% back up to each other. Such circuits are connected to two different chiller lines, completely independent of one another.

Dual circuit configurations are the perfect solution for applications where **Reliability, Safety** and **Redundancy** are paramount.

w-MEXT-XL

Extra Large Computer Room Air Handler (CRAH)

Mitsubishi Electric's w-MEXT-XL is a purpose built, extra large CRAH, specifically designed to meet the needs of large colocation and hyperscale data centres. Its extra height gives an ideal balance of improved performance, but design familiarity.




With a capacity ranging from 193kW to 336kW, in four module sizes, the w-MEXT-XL is available in three performance versions with a perfectly matched heat exchanger designed for 10K, 12K and 15K Delta T conditions, giving it the best in class efficiency. Additionally the w-MEXT-XL can be used with downflow or rear-flow configurations with options for hydraulic connections (version dependent).

- Design purposefully for meeting hyperscale and large colocation data centres needs
- Exceptional performance with best in class efficiency
- Uniquely versatile with flexible hydraulic connections, multiple air delivery versions and a range of sizes
- Options for high quality EC fans fitted with harmonic filters for THDi < 5%

w-MEXT-XL AIRFLOW VERSIONS

Rear-flow

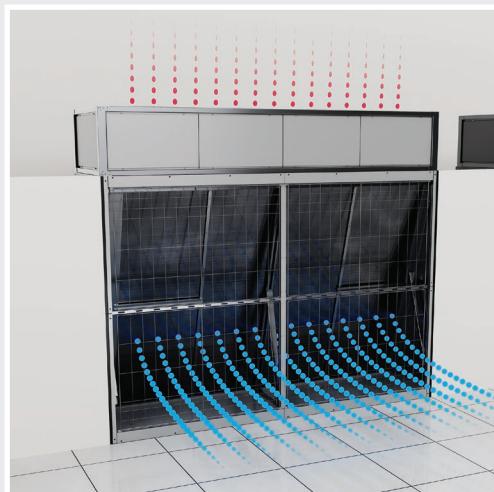

The unit is installed in the technical corridor.
Air from the whitespace is taken into the top of the unit and discharged horizontally through the back of the unit. Ideal for environments without raised flooring.

Downflow



The unit is installed within the white space.
Air from the whitespace is taken into the top of the unit and discharged into the floor void (directional blanking panels available on request). This version works with suitable raised floor. Technical details and performance available on request.


MEWALL

Data Centre Fan Wall

Mitsubishi Electric's new MEWALL brings performance and reliability at scale. It is ideal for hyperscale data centres and large co-location customers, so that they can fully utilise their large building structures to deliver improved efficiencies and make every kW count.

By changing the airflow convention, the unit is designed for horizontal airflow at scale. This allows for taller heat exchangers, with elevated water temperatures, improving performance over conventional designs. It also allows for the separation of the white space from the technical corridor, simplifying security arrangements. Most importantly, this design eliminates the need for raised floors: simplifying building design, installation and reducing costs.

- Eliminates the need for raised floors in your white space**
- Highly efficient EC fan combined with efficient heat exchanger**
- Operates at modern hyperscale conditions**
- Easy to service - fully accessible from the front**
- Advanced control and networking options**

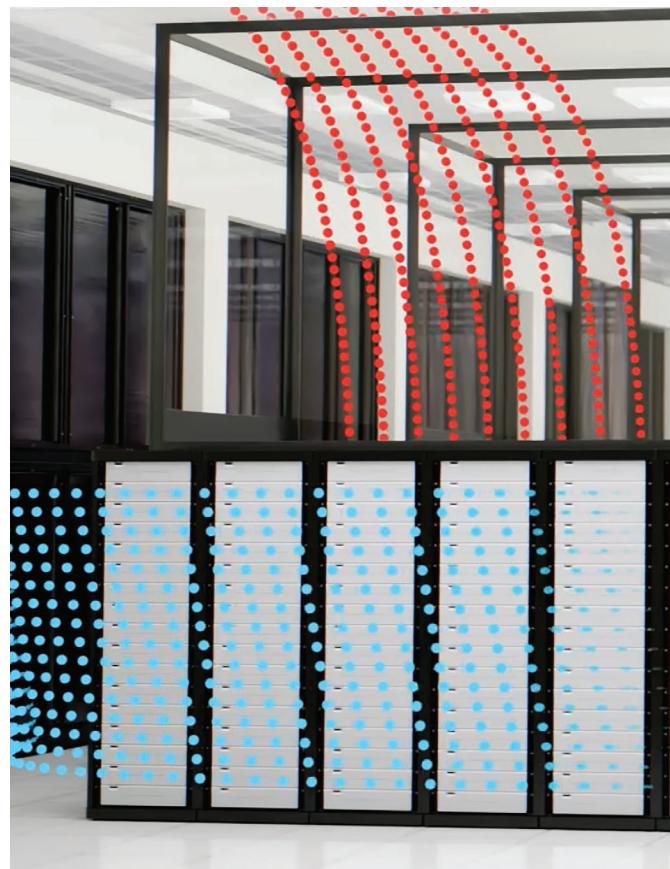

High Density Applications

In IT cooling applications where the cooling required per rack exceeds 15kW, the risk of hot spots demand a more targeted cooling solution.

Mitsubishi Electric's range of close coupled air conditioning solutions

Utilising the latest generation of cooling technologies to prevent the risk of hot spots in the data centre, the goal of close coupled air conditioning is to bring the cooling technology as near to the heat source as possible: the computer rack.

By moving the air conditioner closer to the computer rack, a more precise delivery of inlet air and a more immediate capture of exhaust air is possible, ensuring the most demanding IT systems are kept at optimal conditions, reducing the risk of outages, while maintaining optimal efficiency.



Multi Density with Variable Refrigerant Flow [VRF]

Bringing together Mitsubishi Electric's leading VRF Technology with close coupled precision cooling.

Mitsubishi Electric's new Multi Density systems combine the efficiency, quality and simplicity of City Multi VRF, with high performance close coupled cooling solutions for high density data rooms.

Plug and play

High efficiency

Long pipe runs

Proven technology

■ Mitsubishi Electric cooling only VRF outdoor units

Multi Density is ideal for applications where high sensible cooling and close control of temperature in high density applications is required. Multi Density takes advantage of more than 50 years' experience of the RC brand within the IT cooling market, coupled with Mitsubishi Electric renowned quality standards.

This indoor cooling package consists of multiple Coolside close coupled air conditioners, connected to a City Multi VRF outdoor unit. The result is a full inverter multi-split system, designed according to the best quality standards and dedicated to the most reliable IT environments.



CITY MULTI

■ Coolside close coupled In-row cooling solutions

These systems are suitable for application in modern IT infrastructure that is typically characterised by high thermal loads, and are particularly suitable for high density racks and blade server cooling in data centres with hot-spots.


The range is able to cope with the high density of the thermal load, with minimal impact of space in the data centre. In-row technology puts the air conditioning unit directly within the rows of racks to cool the localised heat sources.



Multi Density Features & Benefits

Up to 8 close coupled indoor units connected to one VRF outdoor unit

High density hot spots are cooled by multiple indoor units connected to a VRF outdoor unit, working together as a unique system.

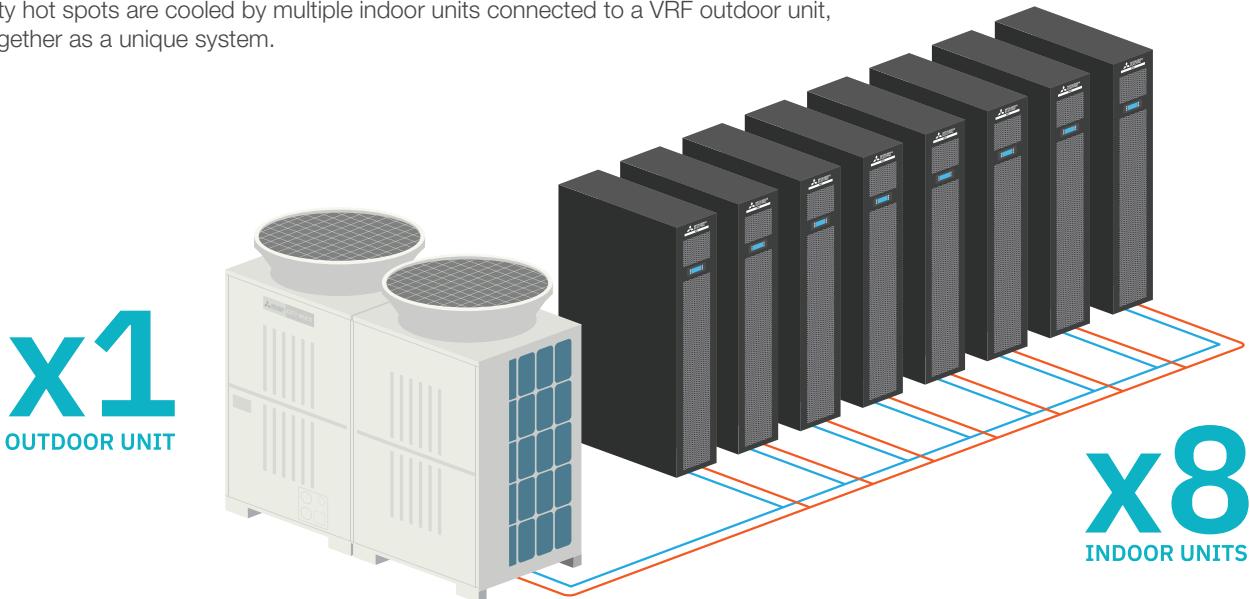

Compact footprint

By minimising the number of outdoor units, the overall footprint of the system is reduced.

System reliability

Multi Density is configurable to provide customers with their desired level of reliability (configuration N, N+1, 2N).

The Multi Density system is in line with TIER III and IV design topologies, based on the configuration selected.

TIER
100%
99.95%
99.9%
99.85%
99.8%
99.75%
99.7%

II

III

IV

Application flexibility

Match any kind of cooling requirement, from localised cooling, to hot and cold aisle cooling management.

Plug and play installation

No additional elements such as pumps, tanks or valves are required. This helps to reduce installation time and costs, and minimise future maintenance requirements.



Active redundancy

The Active Redundancy function ensures that heat loads are balanced amongst the units (including those units in stand-by) according to the actual system requirements of the IT infrastructure. Multi Density is perfectly set-up for this, due to its multi unit configuration.



The modular approach of Multi Density Systems


Close coupled In-row units are connected in a primary-secondary configuration. If the primary unit becomes disconnected, 'Dynamic Primary' logic automatically elects a new primary from the remaining units and the system will continue to operate effectively.

Thanks to the flexible and modular approach of the Multi Density system, selection of the ideal solution for a data centre, based on the level of redundancy required, is easily achievable.

Configuration without redundancy (N)

Ideal for small to medium sized IT applications


- 1 outdoor unit paired with up to 5 indoor units
- Average system EER is approx. 3.00
- Cooling capacity up to 50kW

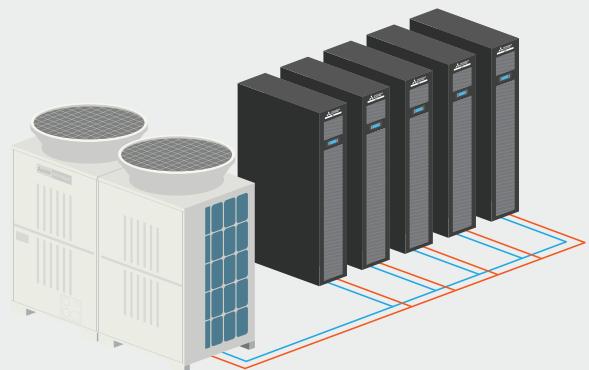

Configuration with redundancy (N+1)

Ideal for TIER II IT applications

- 2 outdoor units paired with up to 8 indoor units
- The external units operate load sharing at partial loads for higher efficiency
- In case of failure of one of the outdoor units, the second one operates at full load
- Average system EER approx. 3.25
- Cooling capacity up to 50kW

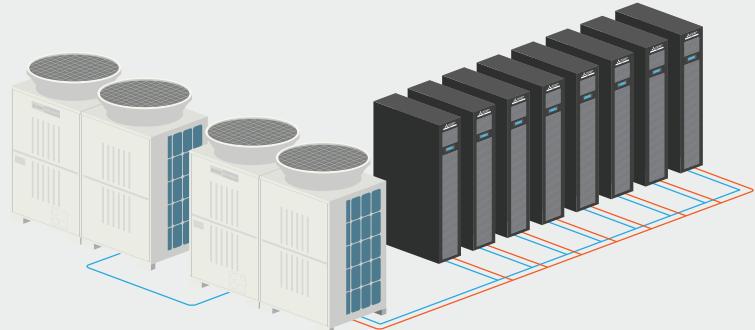


Configuration 2N

Ideal for TIER III and TIER IV data centres

In accordance with the Uptime Institute's classification, this configuration offers:

- A fully redundant and mirrored system with two independent distribution systems
- 1+1 outdoor units paired with 5+5 indoor units

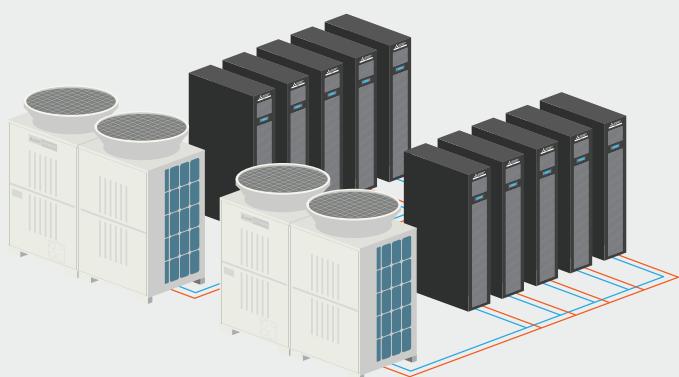

High Density Coolside Range

The Coolside range of close coupled air conditioning systems provides highly efficient targeted cooling, low operating costs and a flexible layout

Modulation of airflow is possible due to the incorporation of EC high efficiency fans:

- EC fans adapt to the thermal load detected by sensors positioned in the hot and cold aisles
- New generation EC brushless fans made of ultralight material
- Noise level reduction of 4-5 dB(A) compared to standard fans
- Absorbed power reduction of 15% compared to standard fans
- 'Hot Swappable' EC fans can be accessed from the front



■ Active free cooling

High density Coolside solutions (single or dual circuit) allow a water circuit to harness the free cooling potential. In the Coolside Dual Circuit version, while the primary circuit (circuit 1) could be water cooled via an external dry cooler in order to maximise the free cooling benefits, the secondary backup circuit (circuit 2) can be easily combined with a free cooling chiller, for perfect redundancy and unbeatable efficiency.

■ Direct expansion or chilled water versions available

Perfectly compatible with most racks and ready for future expansion of the cooling system.

Coolside DX: Direct Expansion

- DC inverter compressor
- New generation EC brushless fans
- **Capacity from 4.7 to 68.3kW**

Coolside DF: Dual Fluid

- DC inverter compressor
- Double coil
- **Capacity from 4.5 to 16.7kW**

Coolside CW: Chilled Water

- New generation EC brushless fans
- 3-way modulating valve
- **Capacity from 16 to 74.7kW**

Coolside FC: Free Cooling

- DC inverter compressor
- New-generation EC brushless fans
- **Capacity from 4.6 to 17.5kW**
- 60% of the year in free cooling

Coolside Row DX: Direct Expansion with Integrated Compressor

- Installation within the row; does not require underfloor plenum, ducts or false-ceilings
- DC inverter compressor integrated within the air conditioner
- **Capacity from 14 to 39kW**

Coolside Configurations

From large to small IT environments, Coolside solutions are available in both 'In-row' and 'Enclosure' configurations, providing a range of adaptable data centre solutions.

In-row air delivery options

Ideal for hot and cold aisles, the 'In-row' configuration draws the air from the hot aisle of the data centre (35°C) through the rear of the unit. The air is then cooled and delivered to the cold aisle (18-20°C) from the front of the rack.



Left-side frontal air delivery.
Rear air suction.



Frontal air delivery from
both sides. Rear air suction.



Right-side frontal air delivery.
Rear air suction.




Frontal air delivery.
Rear air suction.



Right-side frontal air delivery.
Right-side air suction from the rear.



Left-side frontal air delivery.
Left-side air suction from the rear.

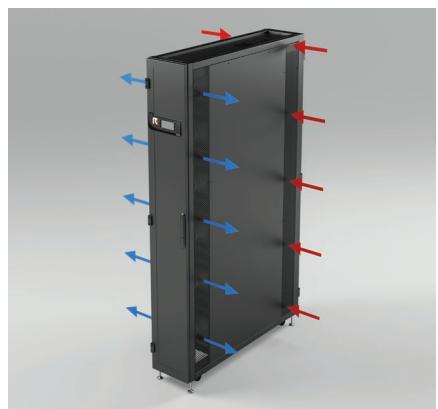

Frontal air delivery from both sides.
Rear air suction from both sides.

Liquid Cooling

ME-CDU

In the coming age of AI deployments, a highly versatile and redundant Coolant Distribution Unit (CDU), ready to integrate into hybrid environments is required.



The new age of the hyperscale data centre requires increasingly higher density of computing where air-based cooling cannot provide all the answers. CDUs are an effective interface for utilising the existing Facility Water System (FWS) and interfacing - but separating - from the Technology Cooling System (TCS).

Our CDU is available in a single compact module, operating from 750kW to 1MW in capacity. Design for operating with the latest high density, high temperature servers, the equipment operates nominally with a TCS at 34°C / 24°C and a FWS at 20°C / 30°C - creating many opportunities for heat reclaim and reuse.

- Safe operation with 25-micron filter on the TCS circuit
- Reliable operation with N+1 redundant pumps on the TCS circuit
- 304/316 stainless-steel piping and connections
- Continuous operation with hot-swappable components
- New controls HMI display specifically developed for CDU applications
- Ready for hybrid cooling data centres




Chiller & Heat Rejection Systems

Free Cooling Technology - the ultimate solution to harness the full potential of outdoor air

In British climates, data centre managers can reduce the OPEX (operating expenditure) of their IT cooling plant by taking advantage of favourable environmental conditions, when the outdoor air is cooler than the operating water temperature serving the air conditioning units.


For example, in a data centre with an operating water temperature of 28/20°C (In/Out), a free cooling chiller from RC can satisfy the whole cooling demand for 50% of the time utilising free cooling. For the majority of the remainder of the time, the demand is then satisfied by running the compressors at part loads, alongside free cooling. This means that 99.9% of the time the chiller will be operating with free cooling activated, and will spend minimal time in pure 'mechanical' mode.

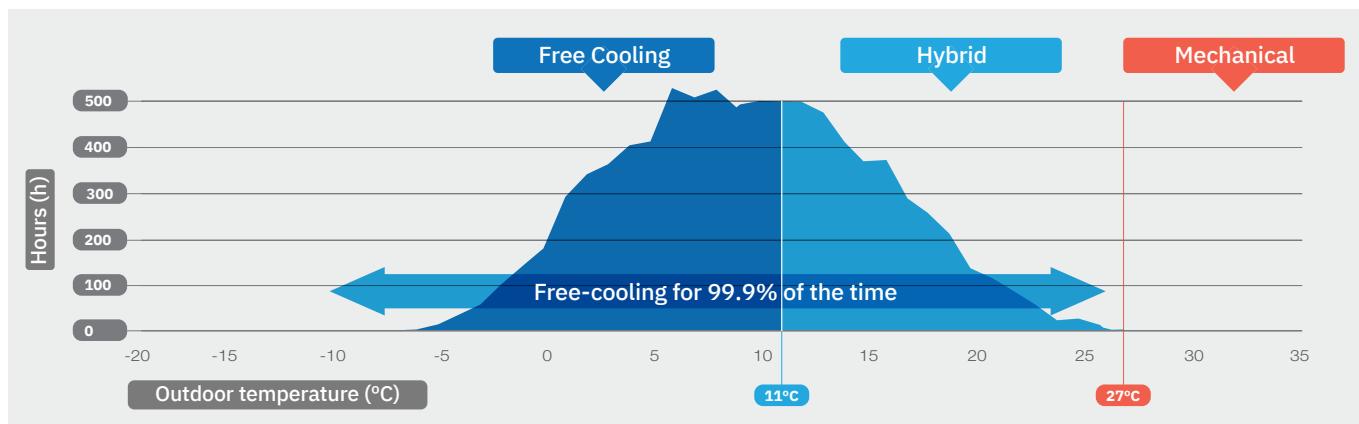

- The higher the water operating temperature - the greater the annual free cooling potential

The energy saving as a result of the use of free cooling is dependent on the water temperature required to operate the air conditioning units within the data centre. Raising the operating water temperature, allows the use of free cooling for larger proportions of the year. Comparing the efficiency of a free cooling chiller and a traditional scroll compressor chiller, the large efficiency gap in the free cooling temperature range is evident. In any modern IT infrastructure, free cooling technology is a crucial technology to reduce OPEX and energy usage.

In total free cooling, the compressors are off and minimum energy is needed to satisfy the nominal cooling capacity

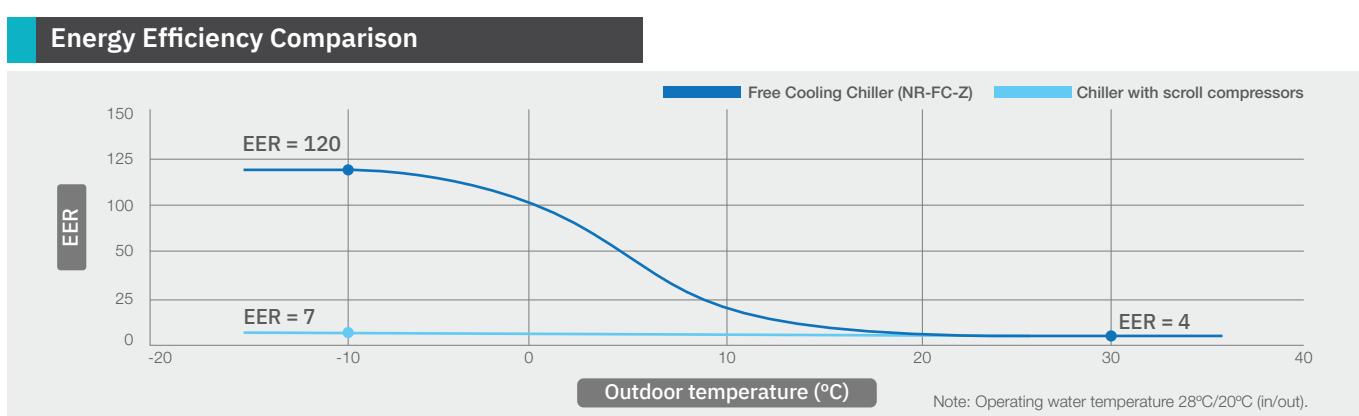

NR2-FC-G06-Z

Free Cooling Chiller dedicated to high temperature IT environments



Air cooled chiller with scroll compressors and free cooling technology from 364 to 978kW

Specifically designed to operate with high water temperatures (supply set-point up to 24°C) and a high Delta T (up to 11°C), the NR2-FC-G06-Z delivers substantial energy savings in modern data centres. The free cooling hydraulic equipment allows the unit to utilise outside air to meet the cooling capacity.

When the air temperature is too high to allow complete free cooling, highly efficient scroll compressors ensure full load coverage. Smart LAN functions also allow simple plug and play connection of multiple NR2-FC-G06-Z chillers and enhance the system's efficiency and stability.

R454B



Smart LAN Logic

Embedded functions for multi-unit systems

Group controls

Up to 16 chillers can be connected and run as a group to enhance the system's efficiency and dependability.

Dynamic primary

Stand-by unit management

Load sharing or sequencing

Resource priority management

Group fast restart

Centralised pump control

Adaptive set-point

The indoor chilled water units communicate their load conditions to the external group of chillers, adjusting their operating set-point accordingly, maximising energy savings.

Total Free Cooling from 11°C

Thanks to large free cooling coils, the NR2-FC-G06-Z uses the outdoor air as its main source to produce cooling. **With a set-point of 20°C, the total free cooling operation is possible from outdoor air temperatures of 11°C.** This means that most of the time the chiller can provide the required cooling capacity without using the compressor.

The highest standards of reliability and reduced running costs, without any compromises.

i-FR-G05-Z

Air Cooled Inverter Chiller



Air cooled chiller with inverter screw compressors for outdoor installation from 477 to 1697kW

Thanks to the variable speed technology applied on both the compressors and fans, the i-FR-G05-Z ensures top-level energy efficiency values and complete dependability.

Optimised to work with high temperature IT environments, the chiller's outstanding performance brings significant PUE (Power Usage Effectiveness) reduction and helps to keep the OPEX under control.

R513A

 **LOW GWP**
-56% GWP vs R134a

 **Non-flammable**
Safety Class A1

Leading Inverter Technology

The new i-FR-G05-Z showcases the latest variable speed technology:

Dual screw compressors with integrated refrigerant cooled inverter motor and smart variable Vi Logic

High efficiency variable speed fans

Optional variable speed hydronic modules

High Degree of Configurability

A bespoke list of options, such as integrated hydronic modules, allows the i-FR-G05-Z to be configurable for multiple applications.

Extended Operating Range

Wide operating range, working with outdoor air temperatures from -20°C up to +55°C, thanks to specifically developed options and smart control logic.

Smart Variable Vi Logic

Variable speed drive

An integrated and compact frequency converter (refrigerant cooled) for outstanding seasonal efficiency and wide capacity regulation.

Automatic internal volume ratio adaption


An integrated Vi slider adapts the internal geometry to the current operating condition, thus ensuring the best efficiency.

Extra durability achieved via dedicated components:

- Envelope control function, 3-stage warning and alarm system, safe-torque-off function
- Carbon steel bearings granted for a lifetime of over 150,000 hours

High efficiency high speed motor

For unprecedented full and part load efficiencies and extremely wide and accurate capacity regulation.

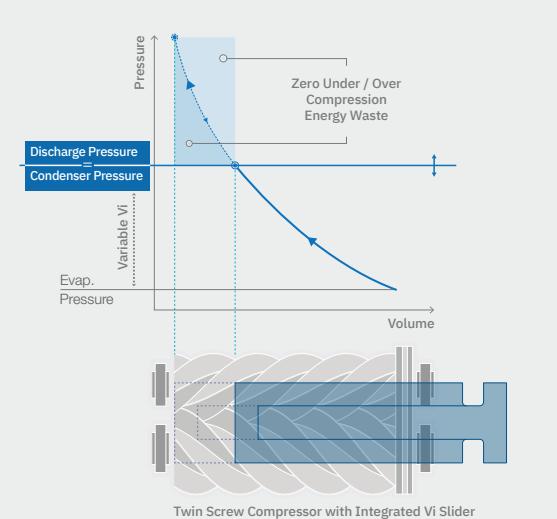

TR2-FC-G04-Z

High Efficiency Air Cooled
Free Cooling Chiller



High efficiency air cooled chiller with oil-free compressors and free cooling from 302-1693kW

Strict energy consumption and environmental impact regulations continually drive for more efficient air conditioning. Achieving the greatest energy savings and ensuring long-term sustainability are challenges that modern cooling systems need to address.

R1234ze  7 (>1)

Key Features


- Oil Free magnetic levitating centrifugal compressors
- Low GWP HFO Refrigerant
- EC Fans
- Extended use of free cooling
- Optimised for high water temperatures 32°C / 20°C

The TR2-FC-G04-Z range of chillers adopts highly efficient oil-free centrifugal technology with an advanced free cooling system that has been conceived to reduce the compressor operation and maximise the use of the outdoor air.

This leading compressor technology brings benefits in terms of efficiency, adjustments, vibrations and weight. Magnetic levitation eliminates the need for lubricant, through precise management of the levitating drive shaft. Partial load efficiency, which is crucial during the hybrid operation, is therefore dramatically increased.

This product utilises the RC brand's knowledge and experience in oil-free compressor unit development, across multiple of projects all over the world.

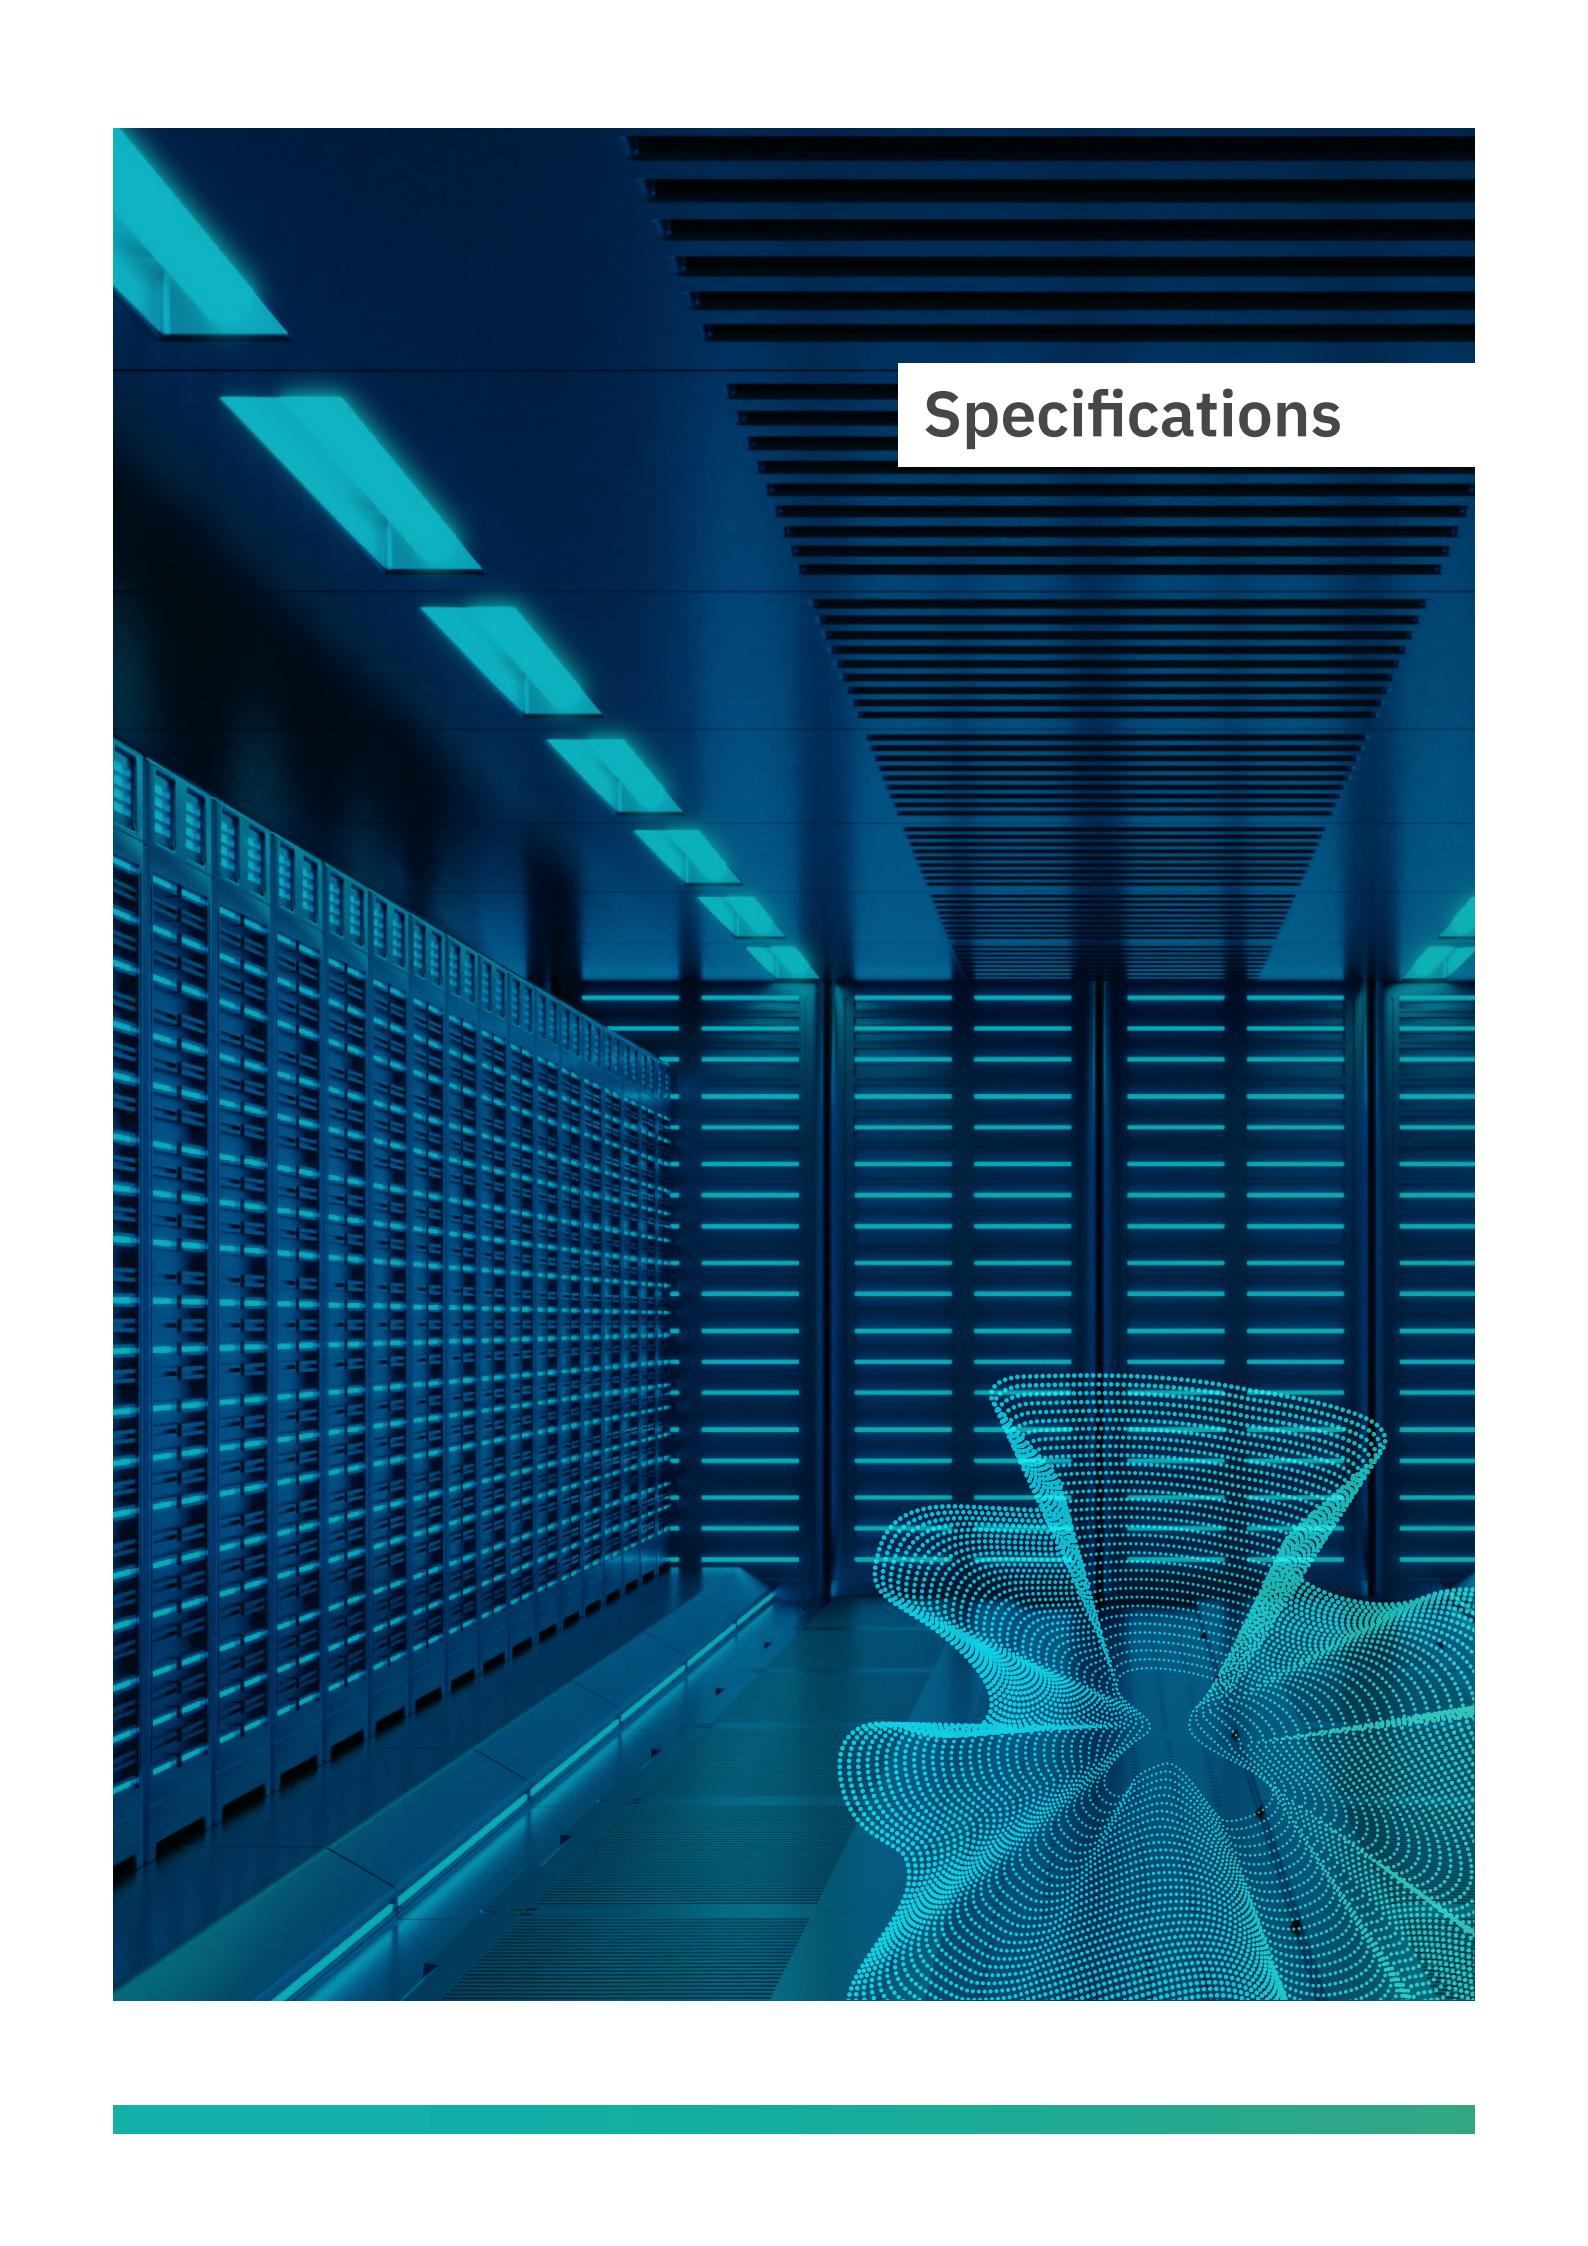

A photograph of a server room with rows of server racks. The room is dimly lit with blue ambient lighting from the server racks and overhead linear fluorescent lights. In the bottom right foreground, there is a large, abstract, glowing blue digital brain graphic composed of numerous small dots.

Specifications

MSY-TP

High SHF Wall Mounted System - Inverter Heat Pump (Cooling Only)



The M Series MSY-TP High SHF wall mounted system blends energy efficiency with a modern white design.

This cooling only unit has a high sensible cooling capacity, making it ideal for small computer rooms or areas that require a greater degree of sensible cooling. The MSY-TP also utilises lower GWP R32 refrigerant.

Key Features

- Compact and stylish white design
- High sensible cooling ability
- Weekly timer provides greater control of scheduling
- Cooling down to -25°C outdoor air temperature

Mseries **R32**

MSY-TP - INDOOR UNITS

MODEL	MSY-TP35VF	MSY-TP50VF
CAPACITY (kW)	Cooling (nominal) Cooling (UK)	3.5 (1.5-4.0) 3.47 (1.48-3.96)
SHF (nominal)	0.98	0.82
EER (nominal)	4.61	3.45
SEER (BS EN14825)	9.00	8.00
ErP ENERGY EFFICIENCY CLASS	Cooling	A+++
AIRFLOW (l/s)	Cooling - Lo-Mi-Hi-SHi	168-193-228-273
PIPE SIZE mm (in)	Gas Liquid	9.52 (3/8") 6.35 (1/4")
SOUND PRESSURE LEVEL (dBA)	Cooling - Lo-Mi-Hi-SHi	31-36-40-45
SOUND POWER LEVEL (dBA)		60
DIMENSIONS (mm)	Width x Depth x Height	923 x 250 x 305
WEIGHT (kg)	12.5	12.5
ELECTRICAL SUPPLY		220-240V, 50Hz
FUSE RATING (BS88) – HRC (A)	10	10
INTERCONNECTING CABLE No. CORES	4	4

MUY-TP - OUTDOOR UNITS

MODEL	MUY-TP35VF	MUY-TP50VF
SOUND PRESSURE LEVEL (dBA)	Cooling	45
SOUND POWER LEVEL (dBA)	Cooling	58
WEIGHT (kg)	34	34
DIMENSIONS (mm)	Width x Depth x Height	800 x 285 x 550
ELECTRICAL SUPPLY		Fed by Indoor Unit
PHASE	Single	Single
SYSTEM POWER INPUT (kW)	Cooling (nominal) Cooling (UK)	0.76 0.64
STARTING CURRENT (A)	3.6	6.4
SYSTEM RUNNING CURRENT (A)	Cooling [MAX]	3.6 [9.2]
FUSE RATING (BS88) – HRC (A)		6.4 [9.2]
MAINS CABLE No. CORES	3	3
MAX Pipe LENGTH (m)	20	20
MAX HEIGHT DIFFERENCE (m)	12	12
CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675)	0.85 / 0.57	0.85 / 0.57
MAX ADDITIONAL REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675)	0.13 / 0.09	0.13 / 0.09

Notes: The SHF figures are based on nominal conditions.

Requires an additional MAC-334IF-E interface and PAR-40MAA wired remote controller.



Multi Density

R410A Close Coupled Precision Air Conditioning

Mitsubishi Electric's new Multi Density systems combine the efficiency, quality and simplicity of VRF with high performance close coupled air conditioning units.

Multi Density is ideal for applications where high sensible cooling and close control of temperature in high density applications is required. This system consists of multiple indoor 'coolside' close coupled air conditioners connected to a City Multi VRF outdoor unit. The result is a full inverter multi-split system, designed according to the best quality standards and dedicated to the most reliable IT environments.

The range is particularly suitable for high density racks and blade server cooling in data centres. It is able to cope the high density of the thermal load, putting the air conditioning unit directly within the rows of racks to cool the localised heat sources (hot spots).

Key Features

- High Efficiency - full Mitsubishi Electric inverter technology
- Small footprint
- Pipe runs up to 165m
- Trusted VRF technology

R410A

CRAC UNITS (Computer Room Air Conditioner)				
MODEL	m-MRAC-Z G02 F/S 009 m-MROW-Z G02 F/S 009	m-MRAC-Z G02 F/S 015 m-MROW-Z G02 F/S 015	m-MRAC-Z G02 F/S 025 m-MROW-Z G02 F/S 025	
COOLING CAPACITY (kW) ¹	Total Sensible	10.6 9.6	16.6 15.7	28.6 27.4
SHR ²		0.91	0.94	0.96
EC SUPPLY FAN (no.)		2	4	5
AIRFLOW (m ³ /h)		1,500	2,700	4,200
NOMINAL EXTERNAL STATIC PRESSURE (Pa)		20	20	20
MAX EXTERNAL STATIC PRESSURE (Pa)		60	60	60
POWER INPUT (kW) ³		0.18	0.34	0.85
REFRIGERANT		R410A	R410A	R410A
REFRIGERANT CIRCUITS (n°)		1	1	1
AIR FILTERS	NO.	2	2	2
	Extended filtering surface (m ²)	0.35	0.35	0.35
	Efficiency [ISO EN 16890] (COARSE)	40%	40%	40%
SOUND LEVEL [ISO 3744] (dB(A)) ⁴	Pressure Level Power Level	63.5 79	64.5 80	70.5 86
POWER SUPPLY (V / Ph / Hz)		230 / 1 / 50	230 / 1 / 50	230 / 1 / 50
ABSORBED CURRENT (A) ⁵		0.8	1.5	4
STARTING CURRENT (A)		2.9	5.8	7.3
DIMENSIONS (mm)	Width Depth (MROW / MRAC) Height	300 1000 / 1200 2,085	300 1000 / 1200 2,085	300 1000 / 1200 2,085
NET WEIGHT (kg)	In-Row Enclosure	175 185	190 200	193 203
CONNECTIONS	Refrigerant pipes diameter - Gas (Ø Inch) Refrigerant pipes diameter - Liquid (Ø Inch) Condensate (Ømm) ⁶ Power supply wiring cable (no. x mm ²) ⁷	3/4" 1/2" 16 3G1.5	7/8" 5/8" 16 3G1.5	1" 3/4" 16 3G1.5

OUTDOOR UNITS		
MODEL	m-MOCU-Z G02 050	2 x m-MOCU-Z G02 050
RATED COOLING CAPACITY	kW	50
SYSTEM EER ²	kW/kW	2.96
SOUND PRESSURE LEVEL (dB(A))	Cooling	65
WEIGHT (kg)		304
DIMENSIONS (mm)	Width x Depth x Height	1650 x 740 x 1750
POWER SUPPLY (V / Hz)		380-415v, 50Hz
PHASE		3
OUTDOOR POWER INPUT (kW)	Cooling (nominal)	15.2
STARTING CURRENT (A)		27.8
MAX RUNNING CURRENT (A)	Cooling	37.6
FUSE RATING (BS88) - HRC (A)		40
MAINS CABLE	No. Cores	5G6
MAX PIPE LENGTH (m)		165
MAX HEIGHT DIFFERENCE (m)		50 (40 ⁷)
CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (t)	R410A (GWP 2088)	11.8 / 24.6
GUARANTEED OPERATING RANGE (°C)	Max Temp Min Temp	45 -15

Notes: THE COOLING CAPACITY DOES NOT CONSIDER THE SUPPLY FAN MOTOR THERMAL LOAD. ¹All data are refers to the Rating Configuration with 2x m-MROW-Z G02 F/S 025 @35°C Outdoor Temperature and 35°C/27%h Indoor Temperature. ² SHR = Sensible cooling capacity / Total cooling capacity. ³ Corresponding to the nominal ESP=20Pa. ⁴ Sound pressure level on air return at 1m. ⁵ Rubber pipe - refers to internal diameter. ⁶ Minimum section. It's possible to connect indoor units with a sum of sizing from 25 to 75. These units contain <HFC R410A (GWP100 2088)> fluorinated greenhouse gas. ⁷ When outdoor unit is below indoor unit.

s-MEXT-G00 DX

 R32

R32 Computer Room Air Conditioner (CRAC) with Outdoor Condensing Units

Ideal for smaller IT Cooling environments, the s-MEXT system combines a high quality indoor CRAC with the renowned Mitsubishi Electric's Mr. Slim Power Inverter condensing unit to create an efficient and precision Direct Expansion (DX) Split System for server rooms, UPS rooms and Mechanical and Technical rooms (MERs & TERs).

The s-MEXT utilises the lower GWP refrigerant R32, a 66% reduction when compared to the traditional R410A. The indoor CRAC is fitted with a variable speed EC fan as standard, enabling it to deliver cooled air with a high Sensible Heat Ratio (SHR). This, combined with the inverter scroll compressor of the Mr. Slim condensing unit allows the s-MEXT system to perfectly match your white-space's requirements at part load conditions and improve cooling efficiency.

Available with electric heaters and humidifiers inbuilt to the CRAC, the s-MEXT can control both temperature and humidity precisely through the 7 inch graphical display that can show historical data of the unit's performance. The s-MEXT can be installed with up to 100m of pipework separation between the indoor CRAC and the outdoor unit, making it flexible and adaptable for any site conditions. It can be supplied with support frames and plenums, along with common BMS interface cards.

Key Features

- Available as upflow (O) or downflow (U) airflows version along with support frames and plenums
- High efficiency variable speed EC plugs fans as standard to ensure high SHR cooling
- Hydrophilic coating to ensure any condensate drains away from the indoor CRAC
- LAN Network configurations for up to 10 units to enable duty/standby and rotation functions
- Full-function control of temperature and humidity with humidifier and electric heater
- Versatile install with pipework separation of up to 100m



s-MEXT-G00 DX



R32 Computer Room Air Conditioner (CRAC) with Outdoor Condensing Units

			Systems with Single-Phase Outdoor Units			Systems with Three-Phase Outdoor Units					
System Information			s-MEXT-G00-DX-F1-006-S	s-MEXT-G00-DX-F1-009-S	s-MEXT-G00-DX-F1-013-S	s-MEXT-G00-DX-F1-009-S	s-MEXT-G00-DX-F1-013-S	s-MEXT-G00-DX-F2-022-S	s-MEXT-G00-DX-F3-028-S	s-MEXT-G00-DX-F3-038-D	s-MEXT-G00-DX-F3-044-D
INDOOR UNIT POWER SUPPLY	V/ph/Hz	230/1/50	230/1/50	230/1/50		230/1/50	230/1/50	230/1/50	400/3+N/50	400/3+N/50	400/3+N/50
QUANTITY OF OUTDOOR UNITS	Pcs	1	1	1		1	1	1	1	2	2
OUTDOOR UNIT TYPECODE		PUZ-ZM60VHA2	PUZ-ZM100VDA	PUZ-ZM125VDA		PUZ-ZM100YDA	PUZ-ZM125YDA	PUZ-ZM250YKA2	PUZ-ZM250YKA2	PUZ-ZM200YKA2	PUZ-ZM250YKA2
OUTDOOR UNIT POWER SUPPLY	V/ph/Hz	230/1/50	230/1/50	230/1/50		400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50
Indoor Unit Data			s-MEXT-G00-DX-F1-006-S	s-MEXT-G00-DX-F1-009-S	s-MEXT-G00-DX-F1-013-S	s-MEXT-G00-DX-F1-009-S	s-MEXT-G00-DX-F1-013-S	s-MEXT-G00-DX-F2-022-S	s-MEXT-G00-DX-F3-028-S	s-MEXT-G00-DX-F3-038-D	s-MEXT-G00-DX-F3-044-D
PERFORMANCE											
COOLING CAPACITY ¹	Total	kW	6.8	10.1	11.9	10.1	11.9	22.6	28.0	39.0	42.5
	Sensible	kW	6.2	8.9	10.2	8.9	10.2	19.3	26.2	33.6	35.3
SHR ²			0.91	0.88	0.86	0.88	0.86	0.85	0.94	0.86	0.83
SYSTEM EER ³	Nominal	kW/kW	4.67	4.30	3.49	4.30	3.49	3.18	2.68	3.58	2.88
REFRIGERANT											
TYPE			R32	R32	R32	R32	R32	R32	R32	R32	R32
NUMBER OF CIRCUITS			No.	1	1	1	1	1	1	2	2
CONNECTIONS											
REFRIGERANT PIPE	Gas	Ø Inch	5/8"	5/8"	5/8"	5/8"	5/8"	1"	1"	1"	1"
	Liquid	Ø Inch	3/8"	3/8"	3/8"	3/8"	3/8"	1/2"	1/2"	3/8"	1/2"
CONDENSATE ⁴	Ø mm	19	19	19	19	19	19	19	19	19	19
POWER SUPPLY CABLE ⁵	No. x mm ²	3G1.5	3G1.5	3G1.5	3G1.5	3G1.5	3G1.5	5G1.5	5G1.5	5G1.5	5G1.5
ELECTRICAL DATA											
STARTING CURRENT (SA)	A		2	2	2.8	2	2.8	3.3	3.8	3.8	3.8
MAX ABSORBED CURRENT (FLA)	A		27.8	27.8	27.6	27.8	27.6	35.9	28.8	28.8	28.8
FANS (EC)											
QUANTITY	No.		1	1	1	1	1	2	1	1	1
AIRFLOW	m ³ /h	2000	2500	2800	2500	2800	5000	7600	8800	10000	
NOMINAL ESP ⁶	Pa	20	20	20	20	20	20	20	20	20	20
POWER INPUT ⁷	kW	0.21	0.35	0.47	0.35	0.47	0.70	0.64	1.43	1.96	
ELECTRICAL HEATERS											
STEPS	No.		2	2	2	2	2	3	3	3	3
POWER INPUT	kW		2.6	2.6	2.6	2.6	2.6	3.9	9.0	9.0	9.0
HUMIDIFIER											
CAPACITY	kg/h	3.0	3.0	3.0	3.0	3.0	3.0	8.0	8.0	8.0	
POWER INPUT	kW	2.3	2.3	2.3	2.3	2.3	2.3	6.0	6.0	6.0	6.0
SOUND ⁸											
SOUND PRESSURE LEVEL	dB(A)	53	57	61	57	61	60	60	63	67	
SOUND POWER LEVEL	dB(A)	69	73	77	73	77	76	76	79	83	
FILTERS											
EFFICIENCY CLASS	ISO EN 16890	COARSE	60%	60%	60%	60%	60%	60%	60%	60%	
SIZE AND WEIGHT ⁹											
FRAME SIZE			F1	F1	F1	F1	F1	F2	F3	F3	F3
WIDTH (A)	mm	600	600	600	600	600	1000	1000	1000	1000	1000
DEPTH (B)	mm	500	500	500	500	500	500	890	890	890	
HEIGHT (H)	mm	1980	1980	1980	1980	1980	1980	1980	1980	1980	
NET WEIGHT	Upflow (O) kg	103	106	110	106	110	165	237	237	237	
	Downflow (U) kg	110	115	120	115	120	175	247	247	247	
Outdoor Unit(s) Data ¹⁰			PUZ-ZM60VHA2	PUZ-ZM100VDA	PUZ-ZM125VDA	PUZ-ZM100YDA	PUZ-ZM125YDA	PUZ-ZM250YKA2	PUZ-ZM250YKA2	PUZ-ZM200YKA2	PUZ-ZM250YKA2
INSTALLATION											
PIPEWORK SEPARATION ¹¹	Standard		30	40	40	40	40	30	30	30	30
	Max ¹²		55	100	100	100	100	100	100	100	100
ELECTRICAL DATA											
POWER INPUT	Nominal	kW	1.25	2	2.94	2	2.94	6.41	9.67	4.73	6.41
MAX OPERATING CURRENT	A		19.0	27.2	27.2	8.7	9.7	22.5	22.5	22.5	22.5
POWER SUPPLY CABLE	No. x mm ²	3G4	3G4	3G4	5G1.5	5G1.5	5G6	5G6	5G6	5G6	5G6
SOUND											
SOUND PRESSURE LEVEL ¹³			53	44	50	44	50	62	62	62	62
SOUND POWER LEVEL			67	63	70	63	70	77	77	77	77
SIZE AND WEIGHT											
WIDTH (A)	mm	950	1110	1050	1110	1050	1050	1050	1050	1050	
DEPTH (B)	mm	355	505	370	505	370	370	370	370	370	
HEIGHT (H)	mm	943	870	1338	870	1338	1338	1338	1338	1338	
WEIGHT	kg	70	107	116	114	125	135	135	137	135	

Notes: The cooling capacity does not consider the supply fan motor thermal load. 1. Gross value based on return air of 27°C - 47%RH; Ambient Temperature 35°C; ESP=20Pa; Interconnecting pipework length 5m. 2. SHR = Sensible Cooling Capacity / Total Cooling Capacity. 3. EER = Energy Efficiency Ratio. b 4. Rubber pipe - referred to internal diameter. 5. Minimum section. 6. External Static Pressure. 7. Corresponding to the nominal ESP=20Pa. 8. As per ISO 3744. Sound pressure level on air return at 1m. 9. All data refers to a single outdoor unit / circuit. 11. In one direction. 12. Additional refrigerant required for pipework separation greater than the standard. 13. Average sound pressure level, at 1m distance, unit in a free field on a reflective surface according to ISO3744. Non-binding value obtained from the sound power level.

x-MEXT DX

R410A Computer Room Air Conditioner (CRAC) with Outdoor Condensing Units

The x-MEXT DX is a highly efficient computer room air conditioner (CRAC), incorporating a wide range of options and configurations, and manufactured to the highest Mitsubishi Electric quality and reliability standards.

The x-MEXT includes BLDC Mitsubishi Electric compressors, microchannel heat exchanger options, and an EC fan on the indoor unit with an impeller made of recycled plastic, that is specifically design for the x-MEXT range.



Key Features

- Perimeter unit with upflow (over) and downflow (under) configurations
- Full inverter technology with BLDC Mitsubishi Electric compressors and a proprietary fan design
- Excellent efficiency with load matching control
- Advanced in-house developed control software
- Intelligent LAN controls for up to 15 units
- Interface cards available with many common BEMS protocols
- Automatic transfer switches and fast restart options
- Optional low ambient temperature kit for extreme conditions
- Full function humidifier and heating options
- Optional dampers, floor stands and discharge plenums

R410A

CRAC UNITS (Computer Room Air Conditioner)	x-MEXT-i-G02 -DX-U/0-029	x-MEXT-i-G02 -DX-U/0-040	x-MEXT-i-G02 -DX-U/0-051	x-MEXT-i-G02 -DX-U/0-052	x-MEXT-i-G02 -DX-U/0-067	x-MEXT-i-G02 -DX-U/0-076	x-MEXT-i-G02 -DX-U/0-078	x-MEXT-i-G02 -DX-U/0-090	x-MEXT-i-G02 -DX-U/0-108	x-MEXT-i-G02 -DX-U/0-140
PERFORMANCE - with Condensers listed										
COOLING CAPACITY ¹ Total	kW	27.7	38.8	49.5	50.4	63.9	74.4	75.9	87.6	104.0
SHR	Nominal	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
EER ²	Nominal	3.45	3.32	2.93	3.55	3.15	3.14	3.63	3.38	3.12
FANS										
AIRFLOW	m ³ /h	8,000	10,500	11,000	14,750	17,000	17,000	21,500	22,500	25,500
FAN TYPE		Centrifugal EC								
FANS	No.	1	1	1	2	2	2	2	3	3
POWER INPUT	kW	0.80	1.61	1.85	2.16	3.20	3.22	3.21	3.66	5.15
MAX EXTERNAL STATIC PRESSURE	Pa	364	299	243	237	173	169	300	245	141
REFRIGERANT										
REFRIGERANT		R410A								
REFRIGERANT CIRCUITS	No.	1	1	1	1	1	1	2	2	2
COMPRESSOR(S) TYPE	Operating Mode	i	i	i	i	1+i	1+i	2(i)	2(i)	2(1+i)
FILTERS										
FILTERS	No.	2	2	2	3	3	3	4	4	4
EFFICIENCY CLASS ³	Coarse	60%	60%	60%	60%	60%	60%	60%	60%	60%
SOUND LEVEL										
PRESSURE LEVEL ⁴	Downflow [under] / Upflow [over] dB(A)	50 / 69	47 / 65	47 / 64	48 / 66	47 / 65	47 / 64	49 / 68	49 / 67	50 / 69
POWER LEVEL ⁴	Downflow [under] / Upflow [over] dB(A)	67 / 86	64 / 82	64 / 81	65 / 83	64 / 82	64 / 81	67 / 86	67 / 85	68 / 87
ELECTRICAL										
POWER SUPPLY	V/ph/Hz	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50
MAX RUNNING CURRENT ⁵ FLA	A	30.6	41.5	41.5	47	57.4	57.4	82	82	108
DIMENSIONS AND WEIGHT										
FRAME SIZE		M	M	M	L	L	L	XL	XL	XL
DIMENSIONS	Width	mm	1,142	1,142	1,142	1,600	1,600	2,550	2,550	2,550
	Depth	mm	885	885	885	885	885	885	885	885
	Height	mm	1,980	1,980	1,980	1,980	1,980	1,980	1,980	1,980
NET WEIGHT	Upflow [over]	kg	363	372	375	459	502	799	806	915
	Downflow [under]	kg	372	380	383	477	520	839	846	955
CONNECTIONS⁶										
REFRIGERANT PIPE	Gas	Ø mm	18	22	22	28	28	2 x 22	2 x 22	2 x 28
DIAMETER	Liquid	Ø mm	16	18	18	18	18	2 x 18	2 x 18	2 x 18
CONDENSATE DRAIN		Ø mm	19	19	19	19	19	19	19	19

OUTDOOR REMOTE CONDENSER(S)	MEGR-MC-E 034	MEGR-MC-E 049	MEGR-MC-E 067	MEGR-MC-E 067	MEGR-MC-E 082	MEGR-MC-E 110	2 x MEGR-MC-E 049	2 x MEGR-MC-E 055	2 x MEGR-MC-E 067	2 x MEGR-MC-E 082
FAN TYPE	Axial EC	Axial EC	Axial EC	Axial EC	Axial EC	Axial EC	Axial EC	Axial EC	Axial EC	Axial EC
FANS	No.	1	2	2	2	3	4	2	2	3
AIRFLOW	m ³ /h	9,550	15,555	19,000	19,000	25,000	36,600	15,555	18,300	19,000
POWER SUPPLY	V/ph/Hz	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50
MAX RUNNING CURRENT	FLA	A	1.92	3.84	3.84	3.84	5.76	7.68	3.84	3.84
SOUND LEVEL ⁴	Pressure	dB(A)	56	54	58	58	59	59	54	59
DIMENSIONS ⁹	W x L x H	mm	1,140 x 1,360 x 1,168	1,140 x 2,040 x 1,168	1,140 x 2,600 x 1,168	1,140 x 2,600 x 1,168	2,200 x 2,280 x 1,168	1,140 x 2,040 x 1,168	1,140 x 2,600 x 1,168	1,140 x 2,600 x 1,168
NET WEIGHT	kg	50	82	96	96	114	169	82	82	96
CONNECTION SIZE ⁵	Gas	Ømm	18	22	22	22	28	28	22	22
REFRIGERANT PIPE DIAMETER	Liquid	Ømm	16	18	18	18	22	22	18	18

Notes: *1 Gross Total Values shown for Downflow [under] airflow configuration. Operating Conditions: Return Air Temperature: 30°C / Relative Humidity: 35% / Ambient: 35°C / External Static Pressure: 20Pa. *2 EER for indoor unit only.

*3 As per ISO EN 16890. Other filter options are available. *4 Average sound level, at 1m distance, unit in a free field on a reflective surface according to ISO 3744. *5 Equipment connection only, consult x-MEXT / MEGR databooks for interconnecting pipework sizing. *6 Rubber pipe - refers to internal diameter. *7 All data is "per condenser". Typical condenser arrangement shown, other condenser sizing combinations are available. *8 Other type of fans are available.

*9 Based on vertical airflow direction. These units contain <HFC R410A [GWP100 2088]> fluorinated greenhouse gas.

w-MEXT

Chilled Water Computer Room Handler (CRAH)

The w-MEXT chilled water range incorporates the latest EC Plug fans, advanced controls software and maximises the coil area to bring high efficiency and high SHR performance to smaller data centre and server room environments.

Group controls and smart control strategies are not reserved for larger environments: w-MEXT can operate with intelligent integrated LAN functions for active redundancy and also integrate with the Hydronic Plant Connect (HPC) group control system, bringing harmony between the CRAHs and Chillers.

Additional options for electric heating and humidification further extend control and operational functionality.



Key Features

- Compact footprint with Under, Over and Displacement airflows
- Adaptive set-point
- High efficiency EC plug fans
- LAN controls for up to 15 units
- Variety of valve options

CRAH UNITS (Computer Room Air Handler)									
MODEL		w-MEXT U/O 006 F1	w-MEXT U/O 009 F1	w-MEXT U/O 011 F1	w-MEXT U/O 013 F1	w-MEXT U/O 016 F2	w-MEXT U/O 022 F2	w-MEXT U/O 026 F2	
PERFORMANCE									
COOLING CAPACITY ¹	Total	kW	4.6	7.9	9.7	12.5	15.4	20.4	25.6
SHR	Nominal		1.00	1.00	1.00	1.00	1.00	1.00	1.00
EER ²	Nominal		65.3	37.6	30.2	27.8	38.5	30.0	26.9
FANS									
AIRFLOW	m ³ /h		1,500	2,200	2,500	2,700	4,300	5,000	5,400
FAN TYPE		Centrifugal EC							
FANS	No.	1	1	1	1	2	2	2	
POWER INPUT	kW	0.07	0.21	0.32	0.45	0.40	0.68	0.95	
MAX EXTERNAL STATIC PRESSURE	Pa	201	471	384	276	277	370	254	
WATER CIRCUIT									
FLOW RATE	l/s	0.22	0.38	0.46	0.60	0.74	0.97	1.22	
PRESSURE DROP ³	kPa	23.5	61.1	32.2	55.7	46.5	80.2	108	
FILTERS									
FILTERS	No.	1	1	1	1	2	2	2	
EFFICIENCY CLASS ⁴	Coarse	60%	60%	60%	60%	60%	60%	60%	
SOUND LEVEL									
PRESSURE LEVEL ⁵	dB(A)	43	56	58	60	53	60	62	
POWER LEVEL ⁵	dB(A)	59	72	74	76	69	76	78	
ELECTRICAL									
POWER SUPPLY	V/ph/Hz	230 / 1 / 50	230 / 1 / 50	230 / 1 / 50	230 / 1 / 50	230 / 1 / 50	230 / 1 / 50	230 / 1 / 50	
MAX RUNNING CURRENT ⁶	FLA	A	3.6	4.0	4.0	4.0	7.2	8.0	8.0
ELECTRIC HEATER (optional)									
STEPS	No.	2	2	2	2	3	3	3	
CAPACITY	kW	2.6	2.6	2.6	2.6	3.9	3.9	3.9	
MAX RUNNING CURRENT ⁷	FLA	A	11.3	11.3	11.3	16.9	16.9	16.9	
HUMIDIFIER (optional)									
QUANTITY	No.	1	1	1	1	1	1	1	
CAPACITY	kg/h	3.0	3.0	3.0	3.0	3.0	3.0	3.0	
MAX RUNNING CURRENT ⁸	FLA	A	14.1	14.1	14.1	14.1	14.1	14.1	
DIMENSIONS AND WEIGHT									
FRAME SIZE		F1	F1	F1	F1	F2	F2	F2	
DIMENSIONS	Width	mm	600	600	600	1,000	1,000	1,000	
	Depth	mm	500	500	500	500	500	500	
	Height	mm	1,980	1,980	1,980	1,980	1,980	1,980	
NET WEIGHT	Upflow [over]	kg	103	109	116	120	163	173	181
	Downflow	kg	110	118	126	130	173	183	191
CONNECTIONS									
WATER ⁹	[under]	Ø inch	3/4"	3/4"	3/4"	1"	1 1/4"	1 1/4"	1 1/4"
	Inlet	Ø inch	3/4"	3/4"	3/4"	1"	1 1/4"	1 1/4"	1 1/4"
CONDENSATE DRAIN ¹⁰	Outlet	Ø mm	19	19	19	19	19	19	19

Notes: *1: Gross total values shown. Operating conditions: Return Air Temperature: 26°C / Relative Humidity: 40% / Water Inlet: 10°C / Water ΔT: 5K / Glycol: 0% / External Static Pressure: 20Pa. *2: EER for indoor unit only.

*3: For heat exchanger coil and 2-port valve only. *4: As per ISO EN 16890. Other filter options are available. *5: Average sound level, at 1m distance, unit in a free field on a reflective surface according to ISO 3744.

Values for downflow [under] and upflow [over] only. *6: Cooling only version. Humidifier / electrical heating options will change value. Refer to databook. *7: For electric heater only. *8: For humidifier only.

*9: As per ISO 228/1-G. *10: Rubber pipe - refers to internal diameter.

w-NEXT

Chilled Water Computer Room Handler (CRAH)

High precision air conditioners are ideal for applications where high sensible cooling and close control of temperature and humidity are required.

The w-NEXT chilled water range incorporates the latest EC plug fan(s), advanced controls software and an increased coil area resulting in the highest efficiency.



Key Features

- High Efficiency - EC plug fans
- Small footprint
- Adaptive Set Point
- Active Redundancy
- Available in Upflow [over] and Downflow [under] variants

CRAH UNITS (Computer Room Air Handler)

MODEL	w-NEXT S 045 E3P	w-NEXT S 053 E4	w-NEXT S 072 E5	w-NEXT S 081 E6
CAPACITY (kW)* ²				
Total	41.0	48.1	66.1	73.5
Sensible	41.0	48.1	66.1	73.5
SHR* ³	1.00	1.00	1.00	1.00
EER	18.6	22.4	22.8	21.2
EC SUPPLY FAN(S)	No.	1	1	2
AIRFLOW (m ³ /h)		10,800	13,100	16,350
EXTERNAL STATIC PRESSURE (Pa)		20	20	20
MAX EXTERNAL STATIC PRESSURE (Pa)		297	194	532
POWER INPUT (kW)* ⁴		2.20	2.15	2.90
AIR FILTERS	No.	2	3	4
	Extended filtering surface (m ²)	1.71	2.07	2.59
	Efficiency [ISO EN 16890] (COARSE)	60%	60%	60%
CHILLED WATER FLOW RATE (l/s)		1.96	2.30	3.16
WATERSIDE PRESSURE DROP (kPa)	Coil + 2-Port Valve	34.1	37.3	42.9
SOUND LEVEL dB(A) (ISO3774)* ⁵	Downflow - Power / Pressure	73 / 57	74 / 57	73 / 56
	Upflow - Power / Pressure	77 / 61	78 / 61	77 / 60
POWER SUPPLY (V/Ph/Hz)		400 / 3+N / 50	400 / 3+N / 50	400 / 3+N / 50
MAX POWER ABSORBED (kW)		2.90	2.70	5.40
MAX RUNNING CURRENT (A)		4.4	4.2	8.4
DIMENSIONS (mm)	Width	1085	1305	1630
	Depth	930	930	930
	Height	1925	1980	1980
NET WEIGHT (kg)	Downflow	321	345	470
	Upflow	329	379	428
CONNECTIONS	Water Inlet / Outlet ISO 7/1 (Ø inch)	1 1/4"	1 1/2"	2"
	Condensate (Ømm)* ⁶	19	19	19

CRAH UNITS (Computer Room Air Handler)

MODEL	w-NEXT S 100 E7	w-NEXT S 120 E8	w-NEXT S 138 E9	w-NEXT S 160 E10* ¹	w-NEXT S 215 E10* ¹
CAPACITY (kW)* ²					
Total	91.6	111.0	126.0	147.0	204.0
Sensible	91.6	111.0	126.0	147.0	177.0
SHR* ³	1.00	1.00	1.00	1.00	0.87
EER	23.0	17.8	19.6	22.8	31.7
EC SUPPLY FAN(S)	No.	2	3	3	3
AIRFLOW (m ³ /h)		24,200	28,300	33,100	37,150
EXTERNAL STATIC PRESSURE (Pa)		20	20	20	20
MAX EXTERNAL STATIC PRESSURE (Pa)		247	237	309	207
POWER INPUT (kW)* ⁴		3.98	6.22	6.42	6.44
AIR FILTERS	No.	4	5	6	6
	Extended filtering surface (m ²)	3.83	4.47	5.24	6.54
	Efficiency [ISO EN 16890] (COARSE)	60%	60%	60%	60%
CHILLED WATER FLOW RATE (l/s)		4.38	5.33	6.04	7.03
WATERSIDE PRESSURE DROP (kPa)	Coil + 2-Port Valve	31.7	48.6	47	66.7
SOUND LEVEL dB(A) (ISO3774)* ⁵	Downflow - Power / Pressure	76 / 59	79 / 61	80 / 62	79 / 61
	Upflow - Power / Pressure	80 / 63	83 / 65	81 / 63	N/A
POWER SUPPLY (V/Ph/Hz)		400 / 3+N / 50	400 / 3+N / 50	400 / 3+N / 50	400 / 3+N / 50
MAX POWER ABSORBED (kW)		5.40	8.10	8.70	8.10
MAX RUNNING CURRENT (A)		8.3	12.6	13.3	12.5
DIMENSIONS (mm)	Width	2175	2499	2899	3510
	Depth	930	930	930	930
	Height	1980	1980	1980	1980
NET WEIGHT (kg)	Downflow	589	660	753	900
	Upflow	535	598	679	N/A
CONNECTIONS	Water Inlet / Outlet ISO 7/1 (Ø inch)	2 1/2"	2 1/2"	3"	3"
	Condensate (Ømm)* ⁶	19	19	19	19

Notes: THE COOLING CAPACITY DOES NOT CONSIDER THE SUPPLY FAN MOTOR THERMAL LOAD. *1 Downflow version only. *2 Gross value based on return air at 24°C - 45%RH; Chiller water 7°C / 12°C.

*3 SHR = Sensible cooling capacity / Total cooling capacity. *4 Fan(s) input power (ESP=20Pa). *5 Average level at 1m from unit in free field conditions. *6 Rubber pipe - refers to internal diameter.

w-MEXT-XL

Extra Large Computer Room Air Handler (CRAH)

Mitsubishi Electric's w-MEXT-XL is a purpose built, extra large CRAH, specifically designed to meet the needs of large colocation and hyperscale data centers.

With a capacity ranging from 193kW to 336kW, in four module sizes, the w-MEXT-XL is available in three performance versions with a perfectly matched heat exchanger designed for 10K, 12K and 15K Delta T conditions, giving it the best in class efficiency. Additionally the **w-MEXT-XL** can be used with downflow or rear-flow configurations with options for hydraulic connections (version dependent).

An array of high quality industry leading options are available to the **w-MEXT-XL** including; harmonic filters for EC fans to provide a guaranteed THDi < 5%, fast restart using inbuilt Ultracap with new embedded logic for ultra-quick cooling restoration, EPIV valves with advance monitoring, Automatic Transfer Switch (ATS) to automatically switch to alternative power supply and more.



Key Features

- Design purposefully for meeting hyperscale and large colocation datacenters needs
- Exceptional performance with best in class efficiency
- Uniquely versatile with flexible hydraulic connections, multiple air delivery versions and a range of sizes
- Options for high quality EC fans fitted with harmonic filters for THDi < 5%
- Available with an extensive array of accessories such as Fast Restart and EPIV Valves
- Designed for effortless maintenance with frontal access to all components, easy filter changes and sliding EC fans

CRAH UNITS (Computer Room Air Handler)

MODEL		R 150			R 200			R 250			R 300		
WORKING CONDITIONS		MDT	HDT	SHDT									
PERFORMANCE													
COOLING CAPACITY	Total kW	199	198	224	220	221	262	297	281	324	303	302	336
SHR ¹	Nominal	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
EER	Nominal	18.5	18.3	20.6	22.1	21.5	25.9	20.6	19.6	22.8	21.7	21.5	23.9
FANS													
AIRFLOW	m ³ /h	49,500	48,800	48,800	52,700	52,500	51,700	66,000	65,500	65,000	66,500	65,700	66,000
FAN TYPE	EC Radial	EC Radial	EC Radial	EC Radial	EC Radial	EC Radial	EC Radial	EC Radial	EC Radial	EC Radial	EC Radial	EC Radial	EC Radial
FANS	No.	3	3	3	3	3	3	4	4	4	4	4	4
POWER INPUT	kW	10.80	10.80	10.80	9.97	10.30	10.10	14.40	14.40	14.20	14.00	14.10	14.10
MAX EXTERNAL STATIC PRESSURE	Pa	46	46	46	64	47	68	42	48	57	60	60	60
WATER CIRCUIT													
FLOW RATE	l/s	4.79	3.97	3.59	5.29	4.42	4.2	7.12	5.63	5.19	7.27	6.05	5.38
PRESSURE DROP	kPa	128	87.8	73.3	134	92.9	99.1	156	103	111	145	128	140
FILTERS													
FILTERS	No.	6	6	6	8	8	8	8	8	8	8	8	8
AVAILABLE STATIC PRESSURE	Pa	522	540	540	403	427	434	526	530	530	497	513	508
NOISE DATA													
TOTAL SOUND POWER ²	dB(A)	62	62	62	63	63	64	61	61	61	60	60	60
SOUND POWER	dB(A)	81	81	81	82	82	83	80	80	80	79	79	79
ELECTRICAL													
POWER SUPPLY	V/ph/Hz	400/3+N/50											
MAX RUNNING CURRENT ³	FLA A	18.9	18.9	18.9	18.9	18.9	18.9	25.2	25.2	25.2	25.2	25.2	25.2
DIMENSIONS AND WEIGHT													
FRAME SIZE		H7P	H7P	H7P	H8P	H8P	H9P	H9P	H9P	H10P	H10P	H10P	H10P
LENGTH (A)	mm	2,550	2,550	2,550	3,000	3,000	3,400	3,400	3,400	3,400	3,400	3,400	3,400
WIDTH (B)	mm	1,070	1,070	1,070	1,070	1,070	1,070	1,070	1,070	1,070	1,070	1,070	1,070
HEIGHT (H)	mm	2,925	2,925	2,925	2,925	2,925	2,925	2,925	2,925	2,925	2,925	2,925	2,925
WEIGHT	kg	991	1,051	1,075	1,086	1,161	1,240	1,323	1,343	1,433	1,441	1,462	1,558

Notes: MDT (Medium Delta T): Indoor conditions: Return air temperature 37°C - Relative humidity 25%. Chilled water: Inlet 20°C - Outlet 30°C - 0% Glycol. HDT (High Delta T): Indoor conditions: Return air temperature 37°C - Relative humidity 25%. Chilled water: Inlet 20°C - Outlet 32°C - 0% Glycol. SHDT (Super High Delta T): Indoor conditions: Return air temperature 40°C - Relative humidity 20%. Chilled water: Inlet 20°C - Outlet 35°C - 0% Glycol.

¹: SHR = Sensible cooling capacity gross / Total cooling capacity gross. ²: Average sound pressure level, at 1m distance, unit in a free field on a reflective surface according to ISO3744. Non-binding value obtained from the sound power level.

³: The electric data indicated refer only to the standard indoor unit without accessories. Data table shows rear-flow design. Downflow details and performance available on request.

MEWALL

Data Centre Fan Wall

Mitsubishi Electric's new and improved MEWALL brings performance and reliability at scale. It is ideal for hyperscale data centres and large co-location customers, so that they can fully utilise their large building structures to deliver improved efficiencies and make every kW count.

By changing the airflow convention, the unit is designed for horizontal airflow at scale. This allows for taller heat exchangers, with elevated water temperatures, improving performance over conventional designs. It also allows for the separation of the white space from the technical corridor, simplifying security arrangements. Most importantly, this design eliminates the need for raised floors: simplifying building design, installation and reducing costs.

Available in 2 sizes for 350kW to 400kW applications, it is available with a variety of options including an option to replace the side panels with filters to lower the airflow pressure drop and further improve on efficiency.



Key Features

- State of the art EC fans with high efficiency air intake grilles
- High quality, low pressure drop filters easily accessible from the front
- Improved performance with side filter version
- Eliminates the need for raised floors in your white space
- Highly efficient EC fan combined with efficient heat exchanger
- Operates at modern hyperscale conditions
- Easy to service - fully accessible from the front
- Advanced control and networking options
- Available with variety of options including a variety of hydronic control valves, harmonic filters, fast restarts, display and more...

MEWALL			
MODEL	402	462	
Frame	3B2	3H2	
PERFORMANCE^{*1}			
COOLING CAPACITY Total	kW	430	
SENSIBLE HEAT RATIO (SHR)		1	
ENERGY EFFICIENCY RATIO (EER) ^{*2}	kW/kW	17.8	
FANS			
FANS TYPE	EC RADIAL	EC RADIAL	
QUANTITY	No.	8	
AIRFLOW	m ³ /hr	129,000	
EXTERNAL STATIC PRESSURE (ESP)	Pa	50	
FANS POWER INPUT	kW	24.2	
CHILLED WATER CIRCUIT^{*1}			
WATER FLOW	l/s	8.61	
TOTAL PRESSURE DROP ^{*3}	kPa	134	
FILTERS			
Qty	No.	1	
NOISE DATA			
TOTAL SOUND POWER	dB(A)	88	
TOTAL SOUND PRESSURE ^{*4}	dB(A)	68	
ELECTRICAL			
POWER SUPPLY	V/ph/Hz	400 / 3+N / 50	
MAX ABSORBED CURRENT (FLA)	A	44.8	
DIMENSIONS AND WEIGHT			
DIMENSIONS ^{*5}	Width	mm	3,600
	Depth	mm	1,600
	Height	mm	3,500
WEIGHT ^{*5}	kg		2,460
			3,600
			1,600
			4,000
			2,545

Notes:

^{*1}: Gross Total Values Shown. Operating Conditions: Return Air Temperature: 37°C / Relative Humidity: 25% / Water Inlet: 20°C / Water Delta T: 12K / Glycol: 0%.

^{*2}: EER for indoor unit only.

^{*3}: Pressure drop includes heat exchanger and hydronic valve.

^{*4}: Average sound pressure level, at 1m distance, unit in a free field on a reflective surface according to ISO3744. Non-binding value obtained from the sound power level.

^{*5}: Unit in standard configuration, without optional accessories.

ME-CDU

Coolant Distribution Unit (CDU)

In the acceleration towards an AI landscape, Mitsubishi Electric's ME-CDU is our new Coolant Distribution Unit (CDU) enabling an efficient, effective and reliable interface from liquid cooled servers to heat reuse or rejection - ensuring a continuous operation of the white space.

The ME-CDU is available in a single compact module, operating from 750kW to 1.2MW in capacity. Design for operating with the latest high density, high temperature servers, the equipment operates nominally with a Technology Cooling System (TCS) at 34°C / 24°C and a Facility Water System (FWS) at 20°C / 30°C - creating many opportunities for heat reclaim and reuse.

Provided with twin variable speed inverter pumps to give efficient operation and redundancy, the ME-CDU also has high quality 25-micron filters on the TCS, a touch screen display with advance control logic, and flexibility with the option for top or bottom connections. Along with the Mitsubishi Electric's vast portfolio of chillers, heat pumps, fan walls, CRACs and CRAHs, our new ME-CDU matches perfectly to your evolving requirements.

Key Features

- Available in a single compact module
- 4 capacities from 750kW to 1.2MW
- Engineered for stability, precision and continuity
- Efficient operation variable speed hydronic pumps in redundant configuration
- Advanced controls with touch screen interface and energy monitoring
- Inbuilt redundancy of pumps, temperature and pressure sensors and automatic refill tank to maintain pressures against micro-leaks
- Safe operation with 25-micron filter on the TCS and a 500-micron filter on the FWS
- Enhanced control capabilities, including water conductivity monitoring, pH and hardness sensing unique within this category combined with a newly designed HMI developed specifically for CDU applications
- Ready to integrate in hybrid cooling applications and heat reuse systems



ME-CDU					
MODEL	750	900	1100	1200	
DIMENSIONS					
WIDTH (A)	mm	1,100	1,100	1,100	1,100
DEPTH (B)	mm	1,500	1,500	1,500	1,500
HEIGHT (H)	mm	2,100	2,100	2,100	2,100
PERFORMANCES¹					
COOLING CAPACITY	kW	750	900	1,100	1,200
EER	W/W	74.3	83.3	77.5	67.0
APPROACH DELTA T	K	4	4	4	4
PLANT SIDE (FWS)²					
FLUID	WATER		WATER		WATER
FLUID FLOW	m ³ /h	64.5	77.4	94.6	103.2
PRESSURE DROPS	kPa	80	83	87	95
CONNECTIONS	inch	4	4	6	6
FILTERS	No.	1	1	1	1
SERVER SIDE (TCS)					
FLUID	PROPELYNE GLYCOL 25%		PROPELYNE GLYCOL 25%		PROPELYNE GLYCOL 25%
FLUID FLOW	m ³ /h	68.3	81.9	100.2	109.3
CONNECTIONS	inch	4	4	6	6
INTEGRATED PUMP(S) CONFIGURATION	1+1		1+1		1+1
FILTERS	No.	3	3	3	3
ELECTRICAL DATA					
POWER SUPPLY ³	400V / 3ph / 50Hz		400V / 3ph / 50Hz		400V / 3ph / 50Hz
MAX POWER CONSUMPTION	kW	15.0	17.0	22.5	26.0
PUMPS POWER INPUT @200 kPa Available Head	kW	10.1	10.8	14.2	17.9
PUMPS POWER INPUT @350 kPa Available Head	kW	13.4	17.4	21.5	25.9

Notes:

¹ Performance based on the following condition: Plant Side using water at 20/30°C; Server side using 25% propelyne glycol at 34/24°C.

² Plant side pumps external to the CDU.

³ 60Hz power supply options available.



Telephone: 01707 282880

MELServe Customer Services & Support: 0161 866 6089

Option 1 - Homeowners

Option 2 - Commercial Products

Option 3 - Residential Ecodan Installer or Service Provider

Commercial Product Options (following Option 2)

Option 1 - Technical Support

Option 2 - Spares

Option 3 - Warranty

Option 4 - Site Visits

Option 5 - Training

Middlesex: 020 8783 1008

Scotland: 01786 450 348

email: air.conditioning@meuk.mee.com

website: les.mitsubishielectric.co.uk



UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division,
Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880

IRELAND Mitsubishi Electric Europe,

Plunkett House, Grange Castle Business Park, Nangor Road, Dublin 22, Ireland. Telephone: (00353) 1 4198800 Email: sales.info@meir.mee.com Web: les.mitsubishielectric.ie

Country of origin: United Kingdom - Italy - Turkey - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2026. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only and please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R515B (GWP:292), R454C (GWP:148), R1234ze (GWP:7) or R1234yf (GWP:4). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a hydrocarbon, R290 (GWP:0.02). *These GWP values are based on IPCC 6th edition.

Effective as of February 2026

