

PAR-W31MAA

Standard Wired Remote Controller

The PAR-W31MAA provides control when connected to e-series EACV1500/1800 and Ecodan QAHV units.

Key Features & Benefits:


- Dedicated e-series QAHV controller
- Button lock
- Contact number under fault condition
- Fault codes





REMOTE CONTROLLERS		PAR-W31MAA
Description		Standard Wired Remote Controller
Connect to		e-series EACV / EAHV (1500 / 1800) and Ecodan QAHV
Max Number of Units		6 (depends on unit connected)
Compatibility		e-series EACV / EAHV (1500 / 1800) and Ecodan QAHV
Dimensions (mm) (WxDxH)		120 x 19 x 120
Control	On/Off	✓
	Mode	✓
	Setpoint	✓
	Fan Speed	x
	Air Direction	x
	Permit/Prohibit	x
Monitor	Filter Sign	x
	On/Off	✓
	Mode	✓
	Setpoint	✓
	Fan Speed	x
	Air Direction	x
Backlight	Permit/Prohibit	✓
	Filter Sign	x
	Fault Codes	✓
	Room Temperature	x
	Backlight	✓
	Setpoint Limitation	x
	Independent Vane Control	x
	Contact Number under Fault Condition	✓
	Scheduling	Weekly
	Night Set Back	x
Button Lock	x	
Easy Maintenance with Mr Slim	x	
Run / Standby with Mr Slim	x	
Silent Mode with Mr Slim	x	
Energy Saving with Mr Slim	x	
Occupancy Sensor (PIR)	x	

PAR-W31MAA DIMENSIONS

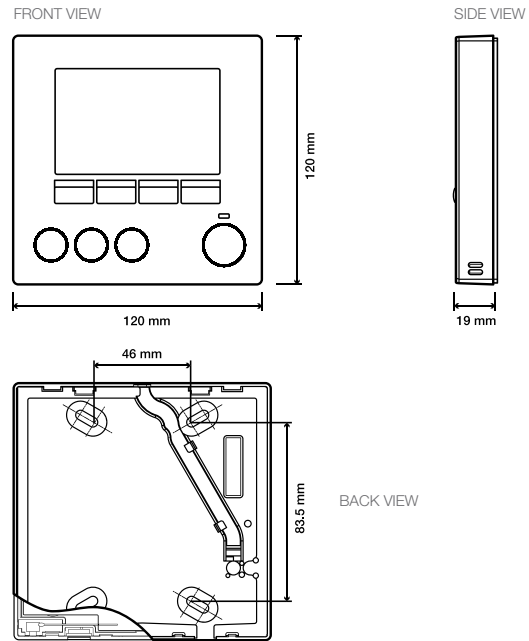


Notes: *1 Permit/Prohibit is via Centralised Controllers. ✓ = Yes, x = No, - = Not applicable

PAR-W31MAA System Diagram



Telephone: 01707 282880
email: air.conditioning@meuk.mee.com
les.mitsubishielectric.co.uk



UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880 Fax: 01707 278881
IRELAND Mitsubishi Electric Europe, Westgate Business Park, Ballymount, Dublin 24, Ireland. Telephone: (01) 419 8800 Fax: (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2020. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R1234ze (GWP:7) or R1234yf (GWP:4). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP:1975), R32 (GWP:550), R407C (GWP:1650) or R134a (GWP:1300).

Effective as of May 2020

