

# TRADITIONAL RADIATORS

Equivalent output double panel,  
double convector radiator

# i-LIFE2 Slim

Fan assisted radiator

## VS

ROUND 1

### HEAT UP TIMES



NATURAL  
CONVECTION

15 mins



3 mins



FAN ASSISTED  
CONVECTION




ALUMINIUM HEAT EXCHANGER

ROUND 2

### WALL SPACE


HEAT OUTPUT  
PROPORTIONAL  
TO SURFACE  
AREA

45°C  
FLOW TEMP

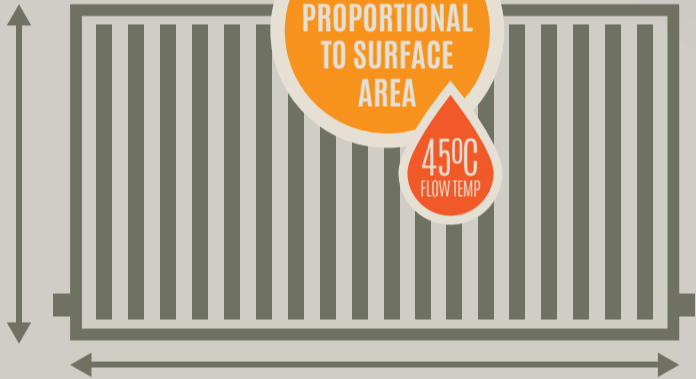

HIGH HEAT  
OUTPUT FROM  
COMPACT  
SPACE

45°C  
FLOW TEMP

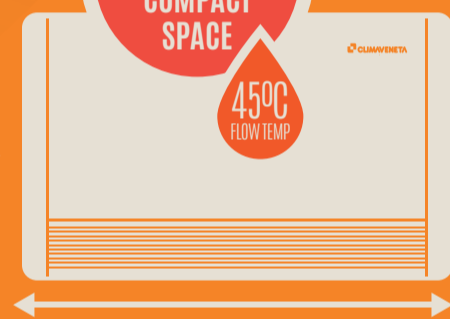

50%  
SPACE SAVING

ROUND 3

### WEIGHT

48 kg



17 kg



EASY  
INSTALLATION  
ALMOST  
ANYWHERE

ROUND 4

### CONTROLS

THERMOSTATIC  
RADIATOR  
VALVES:

- × LIMITED CONTROL
- × STICKING
- × LEAKS



FINGERTIP CONTROL

EASILY MODERATES  
INDIVIDUAL ROOM  
TEMPERATURES



## THE WINNER

Find out more at: [heating.mitsubishielectric.co.uk](http://heating.mitsubishielectric.co.uk)

