


## **MEHP-iS-G07 /0102**

CIBSE TM65 Embodied Carbon Mid-level Calculation

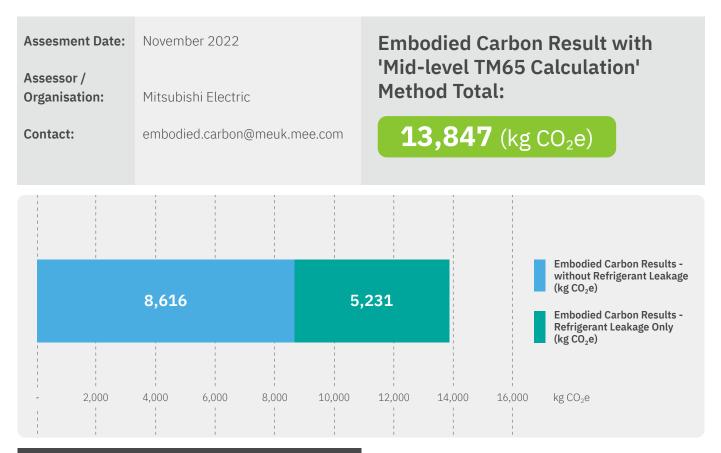

## MEHP-iS-G07 /0102 - Product Information

| Capacity of equipment (kW)<br>Product weight (kg)<br>Material breakdown for at least 95% | 100<br>1033<br>Y |
|--|------------------|
| Material breakdown for at least 95%  |                  |
|  | Y                |
| of the product weight? (Y/N)   |                  |
| Service life of the product (years)  | 15               |
| Type of refrigerant  | R32              |
| Refrigerant GWP  | 675              |
| Energy consumption of the factory per<br>unit of product (kWh)                           | 179.4            |
| Location of manufacture  | Europe           |
| Product Complexity   | Category 3: High |





## MEHP-iS-G07 /0102

CIBSE TM65 Embodied Carbon Mid-level Calculation



| Embodied Carbon Results Breakdown (kg $CO_2e$ ) |  |
|---|--|
| A1. Material extraction                         |  |

| A1: Material extraction | 4,680 |
|-------------------------|-------|
| A2: Transport           | 818   |
| A3: Manufacturing       | 244   |
| A4: Transport to Site   | 214   |
| B1: Use                 | 5,063 |
| B3: Repair              | 603   |
| C1: Deconstruction      | 169   |
| C2: Transport           | 14    |
| C3: Waste Processing    | 52    |
| C4: Disposal            | 3     |

| Embodied Carbon Results - without Refrigerant Leakage (kg $\rm CO_2e$ ) |       |
|---|-------|
| A1-C4 (excluding B1,C1)   | 6,628 |
| A1-C4 with Buffer Factor (excluding B1, C1)                             | 8,616 |

## Embodied Carbon Result - Refrigerant Leakage Only (kg CO<sub>2</sub>e)

| B1 (Refrigerant leakage during use) + C1 (Refrigerant leakage end of life) | 5,231 |
|--|-------|
|  | -,    |

| Assumptions                                     |                                   |
|---|-----------------------------------|
| A1: Material carbon coefficient source          | TM65 Table 2.1 & The ICE Database |
| B1: Refrigerant annual leakage rate (%)         | 2 (TM65 Assumption)               |
| C1: Refrigerant end of life recovery rate (%)   | 99 (TM65 Assumption)              |
| B3: Materials replaced as part of repair (%)    | <b>10</b> (TM65 Assumption)       |
| C4: Percentage of product going to landfill (%) | <b>30</b> (TM65 Assumption)       |




Telephone: 01707 282880 email: embodied.carbon@meuk.mee.com les.mitsubishielectric.co.uk

Mitsubishi Electric

Cooling and Heating UK





o mitsubishielectricuk\_les

Mitsubishi Electric Living Environmental Systems UK

BLOG thehub.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880 Fax: 01707 278881 IRELAND Mitsubishi Electric Europe, Westgate Business Park, Ballymount, Dublin 24, Ireland. Telephone: (01) 419 8800 Fax: (01) 419 8800 International code: (003531)

Country of origin: United Kingdom - Italy - Turkey - Japan - Thailand - Malaysia. @Mitsubishi Electric Europe 2022, Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks of their respective owners.

Effective as of November 2022



