



2024 Product Catalogue

Market leading solutions to **cool, heat,**
ventilate & control the nation's buildings

M&E Edition

les.mitsubishielectric.co.uk

Welcome to Mitsubishi Electric

Mitsubishi Electric is a market leader in providing solutions to cool, heat, ventilate and control our buildings.

As a major manufacturer of some of these pivotal technologies, we hold the UK's energy challenges close to our heart. We want to help the nation achieve its climate goals; we want to help individuals and businesses reduce the energy consumption of their buildings, whilst also helping to reduce their annual running costs.

At Mitsubishi Electric, we are constantly evolving and today our areas of expertise go way beyond the advanced air conditioning systems that formed the foundation of our business. Here in the UK, we provide advanced solutions that cool, heat, ventilate and control buildings in the most energy efficient and cost-effective ways possible. Through technical expertise, experience and an innovative product range, we enable buildings everywhere to significantly improve energy efficiency, reduce running costs and adhere to increasingly tough legislation. **We also provide a variety of additional services and benefits to our customers which include:**

- Product training and technical support
- Contractor Partner Programme
- CPD guides and presentations
- Design and consultancy services
- Apps and tools

Working towards a better use of energy in buildings

Mitsubishi Electric's global framework for realising a sustainable planet - **Environmental Sustainability Vision 2050** - is translated in the UK into our **Green Gateway philosophy**, which is central to the way we do business. With this initiative, we are seeking to use our position as a manufacturer of key technologies to increase awareness and improve energy use in the built environment.

By constantly challenging everyone involved to combat the issues we all face and encouraging constructive dialogue throughout the industry, we aim to help everyone address their energy use and to work towards a more sustainable future. Working within the construction industry in this way we are continually developing energy efficient cooling, heating and ventilation solutions - all managed by the most advanced control systems available.



Contents



Commercial Heat Pumps
& Chillers **1**

IT Cooling **2**

Residential Heating **3**

Ventilation **4**

Controls **5**

Services **6**



Commercial Heat Pumps & Chillers

A new generation of energy saving
and innovative technology





Contents

Commercial Heat Pumps - An Overview	1.5	Chillers - An Overview	1.28
Ecodan Hydrodan EHWT17D-MHEDW R32 Water to Water Heat Pump	1.6	MECH-iS-G07 R32 Modular Air Cooled Chiller	1.30
e-Series EAHV R32 Modular Air Source Heat Pump	1.8	MECH-iF-G05 R513A High Performance Air Cooled Chiller	1.31
MEHP-iS-G07 R32 Modular Air Source Heat Pump	1.10	MECH-iF-G04 R1234ze High Performance Air Cooled Chiller	1.32
Ecodan CRHV R410A Ground / Water Source Heat Pump	1.12	e-Series EACV R32 Modular Air Cooled Chiller	1.33
Ecodan CAHV R454C Air Source Heat Pump	1.14	NX2 R454B 2 Compressor Air Cooled Chiller	1.34
Ecodan QAHV R744 Air Source Heat Pump	1.16	NX2 R454B 4 Compressor Air Cooled Chiller	1.35
NX2-N R454B Air Source Heat Pump	1.18	NX2 R454B 4-8 Compressor Air Cooled Chiller	1.36
FOCS-N R513A Air Source Heat Pump	1.21	i-FX2-G05 R513A Air Cooled Chiller	1.38
i-FX-N R513A Air Source Heat Pump	1.23	i-FX2-G04 R1234ze Air Cooled Chiller	1.40
NX2-W-G06-H R454B Water to Water Heat Pump	1.24	FX2 R513A Air Cooled Chiller	1.44
i-FX-Q2 R513A Air Source Integra Unit	1.25	FX2 R1234ze Air Cooled Chiller	1.49
EW-HT R134a Water to Water Heat Pump	1.27	Accessories / Optional Extras	1.50

Commercial Heat Pumps & Chillers

The Innovative Commercial Heat Pump & Chiller Range

Mitsubishi Electric has developed a range of heat pumps and chillers specifically designed for heating and cooling commercial buildings.

The Ecodan® range provides renewable heating, challenging traditional heating solutions, whilst meeting the energy and carbon reduction demands of today and beyond. At the same time the e-Series modular chiller range provides a low-carbon, flexible and cost effective option, allowing up to six individual units to be connected together to provide a system capacity from 150kW to 1,080kW, in either cooling only or heat pump options.

In 2015 Mitsubishi Electric purchased Climaveneta, enhancing our product line up and marking our full scale entry into the chiller market.

Climaveneta is a strong European brand, supported by 45 years of customer trust and high quality production. Its range of energy-saving, low-noise and innovative heat pump and chiller technology further expands the application and customisation capabilities we are now able to offer.

Through our technical expertise, long experience and innovative product range, we enable building operators everywhere to significantly improve energy efficiency, reduce running costs and adhere to increasingly tough legislation.

**We believe that global climate challenges need local solutions.
Our aim is to help individuals and businesses reduce the energy consumption of their buildings and their running costs.**



ecodan[®]
Renewable Heating Technology


e-series

CLIMAVENETA

Commercial Heat Pumps & Chillers

Our Commercial Heating range at a glance


The range of heat pumps on the market is now wider than it ever has been. This means it's possible to select exactly the right equipment for the specific application. Our commercial heat pumps fall into three broad ranges:

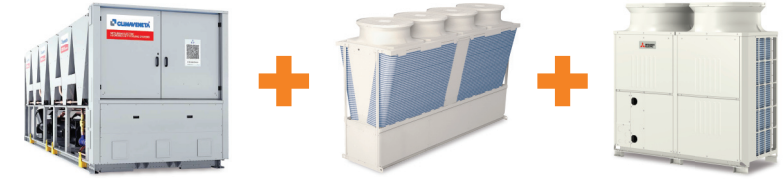

Mitsubishi Electric - Modular heat pumps manufactured to the highest quality standard, and suitable for a range of different applications.

Climaveneta - Commercial heat pumps that use a wide range of low and lower GWP refrigerants, alongside the latest fixed speed/inverter scroll and screw compressors.

Ecodan - A range of renewable heat pumps that efficiently and reliably generate sustainable space heating and hot water all year round.

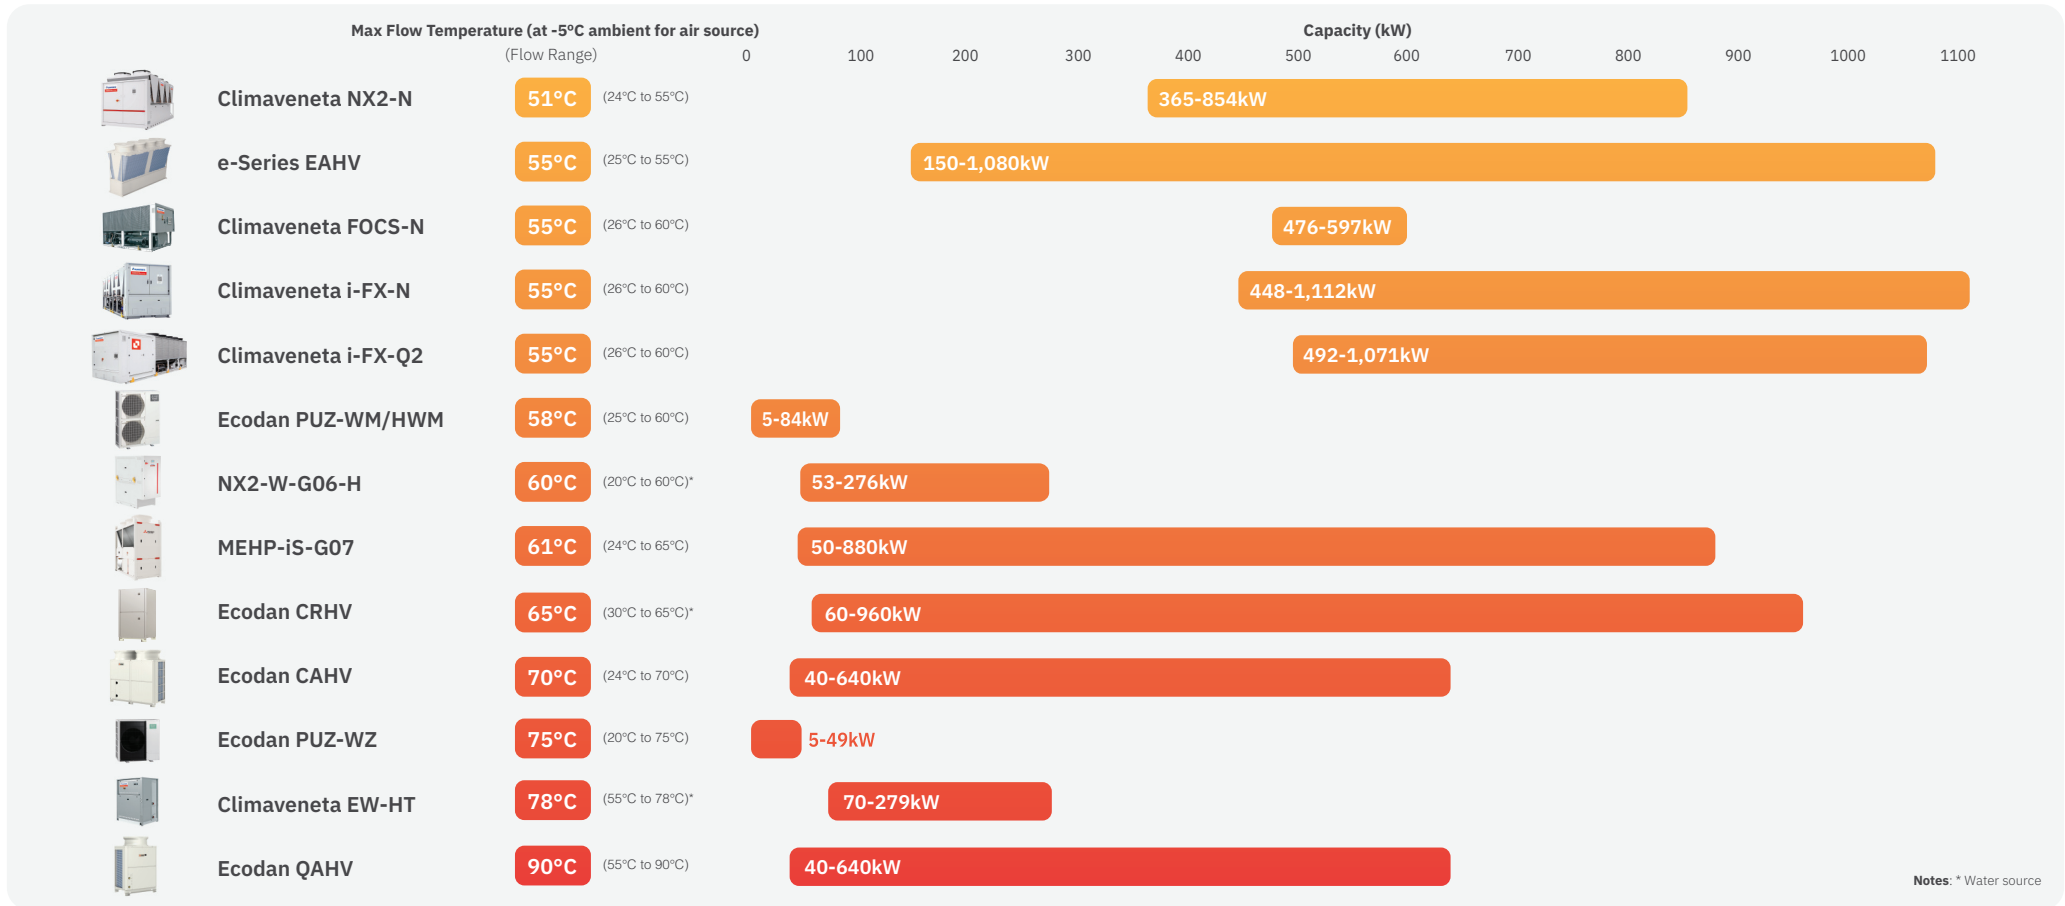

Notes: * Water source



Hydrodan EHWT17D-MHEDW R32 Water to Water Heat Pump



The **Ecodan Hydrodan** is a water to water heat pump, designed to produce heating and hot water in residential apartments, and connect to a 5th generation ambient temperature heat network deployed throughout the building. The use of these networks helps to reduce overheating in apartments and also produces negligible distribution losses. The local heat network can be maintained at ambient temperature by a Mitsubishi Electric commercial heat pump, environmental source or connected to a district heat network.

Key Features & Benefits

- Removable heat pump module - simple for repairs
- Highly efficient heating and hot water production - low running costs for owners
- Low quantity R32 refrigerant - low environmental impact
- PIC valve network control - simple pressure balancing and flow control
- Ultra-low noise output - no disturbance for owners




MODEL	EHWT17D-MHEDW			
CAPACITY INFORMATION	L20 / W35	Heating Capacity (min-max)	kW	1.2 - 8.0
		Power Input (min-max)	kW	0.3 - 1.0
		COP (Nom.)	-	9.2
	L20 / W45	Heating Capacity (min-max)	kW	1.1 - 7.5
		Power Input (min-max)	kW	0.5 - 1.3
		COP (Nom.)	-	6.3
	L20 / W55 (DHW)	Heating Capacity (DHW)	kW	6.3
		Power Input (DHW)	kW	1.3
		COP (DHW)	-	5.0
	L25 / W35	Heating Capacity (min-max)	kW	1.5 - 9.3
		Power Input (min-max)	kW	0.2 - 1.0
		COP (Nom.)	-	11.3
	L25 / W45	Heating Capacity (min-max)	kW	1.3 - 8.5
		Power Input (min-max)	kW	0.4 - 1.3
		COP (Nom.)	-	7.8
L25 / W55 (DHW)	Heating Capacity (DHW)	kW	6.8	
	Power Input (DHW)	kW	1.5	
	COP (DHW)	-	5.4	
	Heating Circuit Flow Rate (min - max)	l/min	7.1 - 27.7	
LOOP INFORMATION	Control Type	-	PICV + Actuator	
	Inlet Temperature Range (min - max)	°C	10 - 30	
	Flow Rate (min - max)	l/min	7.2 - 24	
	Maximum Loop Pressure Rating	bar	10	
	Pipe Connection Size	mm	28	
ELECTRICAL INFORMATION	Voltage/Phase/Frequency	v/ph/Hz	230v/1ph/50Hz	
	Fuse Rating - Heat Pump/Immersion Heater	A	16/20	
	Number of Connections	-	2	
	Immersion Rating (Tank)	kW	3	
GENERAL INFORMATION	Start up Current	A	3.1	
	Unit Dimensions (WxDxH)	mm	595 x 680 x 1750	
	Compressor Type	-	Rotary compressor	
	Domestic Hot Water Tank Volume (net)	l	170	
	Weight (empty)	kg	166	
	Weight (full)	kg	345	
	Refrigerant	-	R32	
	Volume of Refrigerant	kg	0.9	
	Heating Temperature Range	°C	20 - 60	
	Hot Water Temperature Range	°C	40 - 60	
	Internal Water Volume Loop Side / Heating Side	l	3.16 / 5.47	
	Sound Power Level	dBA	38	
	Sound Pressure Level @1m	dBA	27	




Certificate Number: 037-0101-22
Product (Type): Heat Pumps (Water/Water)
Product Reference: EHWT17D-MHEDW


Rear View

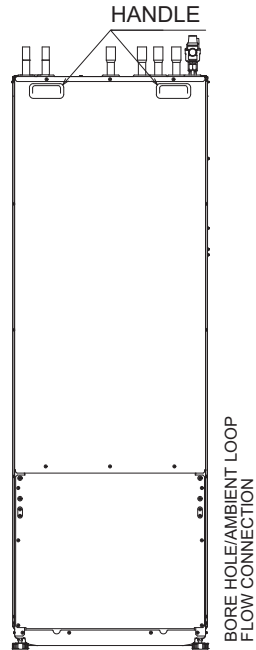


Left Side View

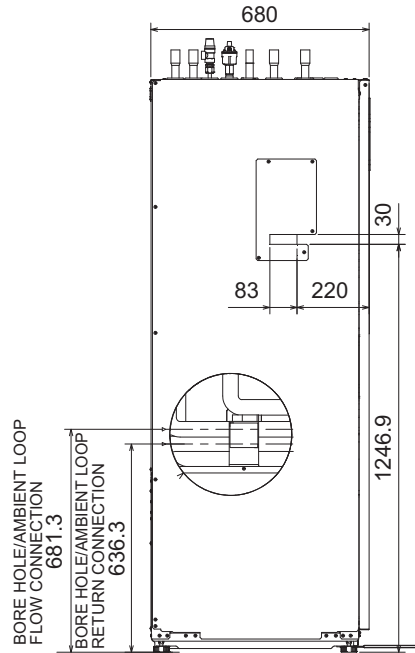


Front View

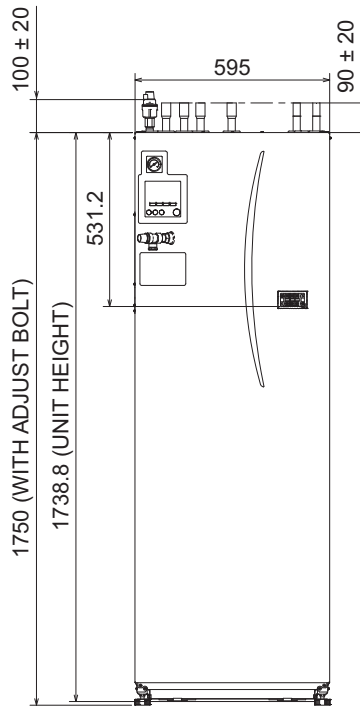

Right Side View

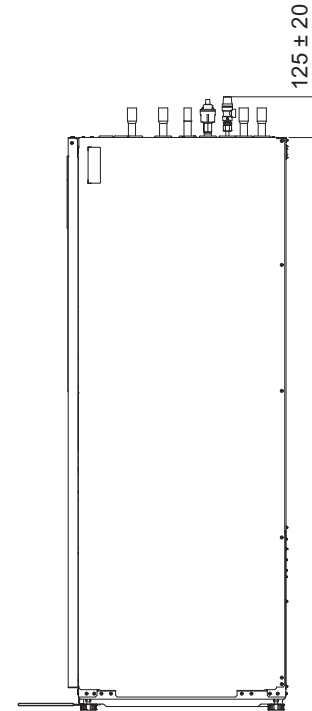

Upper View

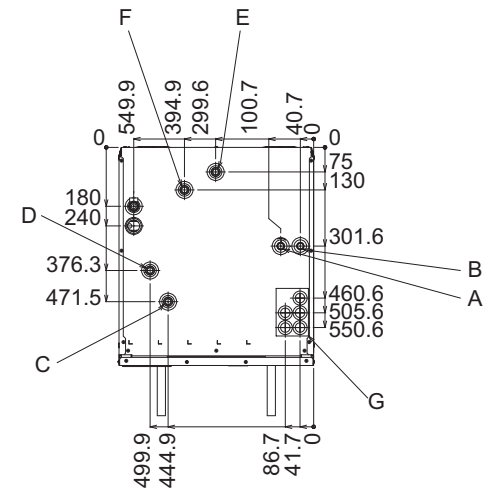

Letter	Pipe description	Connection size/type
A	DHW outlet connection	22 mm/Compression
B	Cold water inlet connection	22 mm/Compression
C	Space heating return connection	28 mm/Compression
D	Space heating flow connection	28 mm/Compression
E	Ambient loop return connection	28 mm/Compression
F	Ambient loop flow connection	28 mm/Compression
G	Electrical cable inlets	For inlets 1 and 2, run low-voltage wires including external input wires and thermistor wires. For inlets 3, 4 and 5, run high-voltage wires including power cable, and external output wires. *For a wireless receiver (option) cable and ecodan Wi-Fi interface (option) cable, use inlet 1.

e-series

EAHV R32 Modular Air Source Heat Pump

(150 to 1,080kW)

The R32 e-Series **EAHV** range allows for up to 6 individual units to be connected together to provide a system capacity from 150kW to 1,080kW. Using this modular approach reduces space requirements and simplifies lifting and installation.

Key Features & Benefits

- Highly efficient inverter scroll compressors
- Modular to maximise space saving
- Y-shaped heat exchangers allow for a greater surface area, maximising efficiency, whilst also keeping the units much narrower than conventional heat pumps

R32




MODEL		EAHV-M1500YCL-N	EAHV-M1800YCL-N
POWER SOURCE		3-phase 4-wire 380-400-415v 50/60Hz	
COOLING CAPACITY ¹		150	180
	Power Input	kW	44.73
	EER		3.35
	IPLV ⁶		6.42
	Water Flow Rate	m ³ /h	25.8
COOLING CAPACITY (EN14511) ²		149.18	178.80
	Power Input	kW	45.55
	EER		3.28
	Eurovent Efficiency Class		A
	SEER		5.52
	Performance (I _{s,c})	%	217.8
	Water Flow Rate	m ³ /h	25.8
HEATING CAPACITY ³		150	180
	Power Input	kW	42.61
	COP		3.52
	Water Flow Rate	m ³ /h	25.8
HEATING CAPACITY (EN14511) ⁴		150.82	181.20
	Power Input	kW	43.43
	COP		3.47
	SCOP Low/Medium		3.31/2.88
	Water Flow Rate	m ³ /h	25.8
CURRENT INPUT			
	Cooling Current 380-400-415V ¹	A	76 - 72 - 69
	Heating Current 380-400-415V ³	A	72 - 68 - 66
	Maximum Current	A	120
WATER PRESSURE DROP ¹			
	Standard Piping	kPa	56
	Inside Header Piping	kPa	134
TEMP RANGE			
	Cooling	°C	Outlet water 4~30
	Heating	°C	Outlet water 25~55
	Outdoor (Cooling)	°C	-15~52
	Outdoor (Heating)	°C	-20~43
CIRCULATING WATER VOLUME RANGE		m ³ /h	12.9~43.0
SOUND PRESSURE LEVEL (Measured in anechoic room) at 1m ¹		dB (A)	65
SOUND POWER LEVEL (Measured in anechoic room) ¹		dB (A)	83
DIAMETER OF WATER PIPE (Standard piping)		Inlet	65A (2 1/2B) housing type joint
		Outlet	65A (2 1/2B) housing type joint
DIAMETER OF WATER PIPE (Inside header piping)		Inlet	150A (6B) housing type joint
		Outlet	150A (6B) housing type joint
EXTERNAL FINISH		Polyester powder coating steel plate	
EXTERNAL DIMENSION		3400 x 1080 x 2350	
NET WEIGHT		1280 (2822)	
DESIGN PRESSURE			
	Standard Piping	kg (lbs)	1280 (2822)
	Inside Header Piping	kg (lbs)	1307 (2881)
	R32	MPa	4.15
	Water	MPa	1.0
HEAT EXCHANGER			
	Water Side	Stainless steel plate and copper brazing	
	Air Side	Salt-resistant cross fin & aluminium tube	
COMPRESSOR			
	Type	Inverter scroll hermetic compressor	
	Starting Method	Inverter	
	Quantity	4	
	Motor Output	kW	11.5 x 4
FAN			
	Air Flow Rate	m ³ /min	270 x 4
		L/s	4500 x 4
		cfm	9534 x 4
	Type, Quantity	Propeller fan x 4	
	Starting Method	Inverter	
	Motor Output	kW	0.92 x 4
	External Static Pressure	Pa	20
REFRIGERANT			
	Type x Charge	R32 x 11.5 (kg) x 4 ⁵	
	Control	LEV	


Notes:

- Under normal cooling conditions at outdoor temp 35°CDB/24°CWB (95°FDB / 75.2°FWB) outlet water temp 7°C (44.6°F) inlet water temp 12°C (53.6°F). Pump input is not included in cooling capacity and power input.
- Under normal cooling conditions at outdoor temp 35°CDB/24°CWB (95°FDB/75.2°FWB) outlet water temp 7°C (44.6°F) inlet water temp 12°C (53.6°F). Pump input is included in cooling capacity and power input based on EN14511.
- Under normal heating conditions at outdoor temp 7°CDB/6°CWB (44.6°FDB/42.8°FWB) outlet water temp 45°C (113°F) inlet water temp 40°C (104°F). Pump input is not included in heating capacity and power input.
- Under normal heating conditions at outdoor temp 7°CDB/6°CWB (44.6°FDB/42.8°FWB) outlet water temp 45°C (113°F) inlet water temp 40°C (104°F). Pump input is included in heating capacity and power input based on EN14511.
- Amount of factory-charged refrigerant is 3 (kg) x 4. Please add the refrigerant at the field.
- IPLV is calculated in accordance with AHRI 550-590.
- Please don't use the steel material for the water piping.
- Please always make water circulate, or pull the circulation water out completely when not in use.
- Please do not use groundwater or well water in direct.
- The water circuit must be closed circuit.
- Due to continuous improvement, the above specifications may be subject to change without notice.
- This model doesn't equip with a pump.


Front View

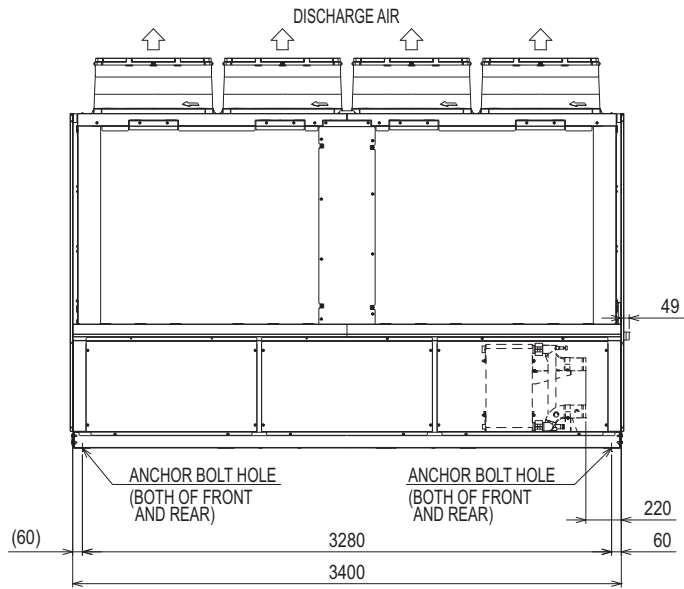

Side View

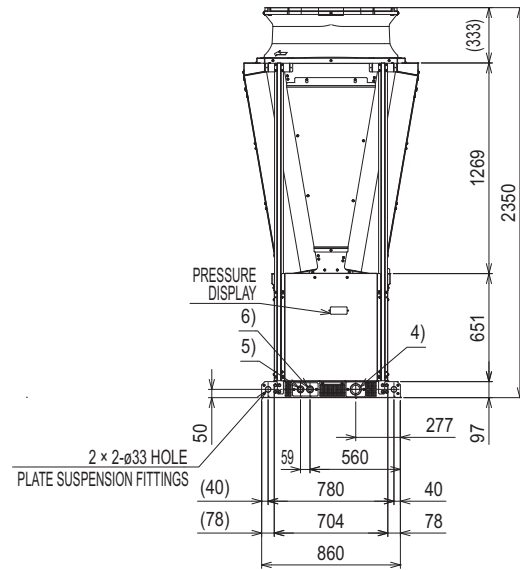

Upper View

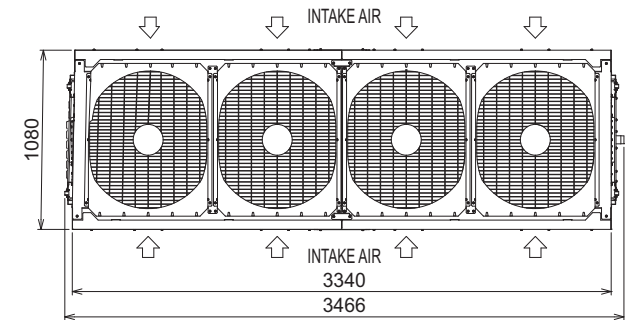

MEHP-iS-G07 R32 Modular Air Source Heat Pump

(50 to 880kW)



Mitsubishi Electric's new **MEHP-iS-G07** heat pump range is manufactured to the highest quality standards. Featuring a compact design and modular expansion capabilities, it is suitable for many different applications, from comfort to industrial applications.

Key Features & Benefits

- Hot water up to 65°C
- Best-in-class for low noise levels
- Compact design and modular expansion
- New Smart Coordinated Defrost
- Exceptional performance at part load operating conditions


R32

MODEL		0051	0061	0071	0082	0092	0102	0112
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE								
COOLING ONLY (GROSS VALUE)								
COOLING CAPACITY ¹	kW	48.10	53.11	60.09	68.39	74.18	85.99	93.98
TOTAL POWER INPUT ¹	kW	17.0	19.95	25.48	24.91	30.10	31.86	37.61
EER ¹	kW/kW	2.829	2.668	2.357	2.747	2.465	2.696	2.500
COOLING ONLY (EN14511 VALUE)								
COOLING CAPACITY ^{1*2}	kW	48.0	53.0	60.0	68.3	74.1	85.9	93.8
EER ^{1*2}	kW/kW	3.81	2.64	2.34	2.73	2.45	2.68	2.48
HEATING ONLY (GROSS VALUE)								
TOTAL HEATING CAPACITY ³	kW	49.92	59.86	69.87	79.89	89.85	100.1	110.1
TOTAL POWER INPUT ³	kW	14.39	17.65	21.98	23.95	28.53	29.65	34.19
COP ³	kW/kW	3.465	3.403	3.177	3.343	3.151	3.382	3.216
HEATING ONLY (EN14511 VALUE)								
TOTAL HEATING CAPACITY ^{3*2}	kW	50.0	60.0	70.0	80.0	90.0	100.3	110.3
COP ^{3*2}	kW/kW	3.44	3.38	3.15	3.32	3.12	3.35	3.18
COOLING WITH PARTIAL RECOVERY								
COOLING CAPACITY ⁴	kW	49.9	55.1	62.34	70.95	76.96	89.22	97.5
TOTAL POWER INPUT ⁴	kW	16.44	19.28	24.62	24.09	29.10	30.81	36.36
DESUPERHEATER HEATING CAPACITY ⁴	kW	14.39	17.02	21.96	20.98	25.61	26.76	31.89
EXCHANGERS								
HEAT EXCHANGER USER SIDE IN COOLING								
WATER FLOW ¹	l/s	2.30	2.54	2.874	3.27	3.547	4.112	4.494
PRESSURE DROP AT THE HEAT EXCHANGER ¹	kPa	14.4	17.6	22.5	17.2	20.2	20.8	24.9
HEAT EXCHANGER USER SIDE IN HEATING								
WATER FLOW ³	l/s	2.41	2.889	3.373	3.856	4.337	4.832	5.311
PRESSURE DROP AT THE HEAT EXCHANGER ³	kPa	15.8	22.7	31.0	23.9	30.2	28.7	34.7
PARTIAL RECOVERY USER SIDE IN REFRIGERATION								
WATER FLOW ⁴	l/s	0.695	0.822	1.06	1.012	1.236	1.292	1.539
PRESSURE DROP AT THE HEAT EXCHANGER ⁴	kPa	11.1	15.5	25.7	11.6	17.3	13.3	18.8
REFRIGERANT CIRCUIT								
COMPRESSORS NR.	No.	1	1	1	2	2	2	2
NO. CIRCUITS	No.	1	1	1	1	1	1	1
REGULATION		Stepless	Stepless	Stepless	Stepless	Stepless	Stepless	Stepless
MIN. CAPACITY STEP	%	27	27	27	22	22	20	20
REFRIGERANT		R32	R32	R32	R32	R32	R32	R32
THEORETICAL REFRIGERANT CHARGE	kg	12.0	12.0	12.0	18.0	18.0	25.0	25.0
OIL CHARGE	kg	3.5	3.5	3.5	7.0	7.0	7.0	7.0
RC (ASHRAE) ⁵	kg/kW	0.25	0.23	0.20	0.27	0.24	0.29	0.27
FANS								
QUANTITY	No.	2	2	2	3	3	4	4
AIR FLOW	m ³ /s	5.89	5.89	5.89	8.89	8.89	11.77	11.77
TOTAL FANS POWER INPUT	kW	0.88	0.88	0.88	1.41	1.41	1.88	1.88
NOISE LEVEL								
TOTAL SOUND PRESSURE ⁶	dB(A)	59	60	62	62	63	63	63
TOTAL SOUND POWER LEVEL IN COOLING ^{7*8}	dB(A)	77	78	80	80	81	82	82
TOTAL SOUND POWER LEVEL IN HEATING ^{7*9}	dB(A)	77	78	80	80	81	82	82
SIZE AND WEIGHT								
WIDTH (A) ¹⁰	mm	2085	2085	2085	2600	2600	3225	3225
DEPTH (B) ¹⁰	mm	1100	1100	1100	1100	1100	1100	1100
HEIGHT (H) ¹⁰	mm	2400	2400	2400	2400	2400	2400	2400
OPERATING WEIGHT ¹⁰	kg	710	710	710	960	960	1085	1085

Notes:


1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% RH.
4. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C; Plant (side) heat exchanger recovery water (in/out) 40°C/45°C.
5. Rated in accordance with AHRI Standard 550/590.
6. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
7. Sound power on the basis of measurements taken in compliance with ISO 9614.
8. Sound power level in cooling, outdoors.
9. Sound power level in heating, outdoors.
10. Unit in standard configuration, without optional accessories.

Chassis Size 1

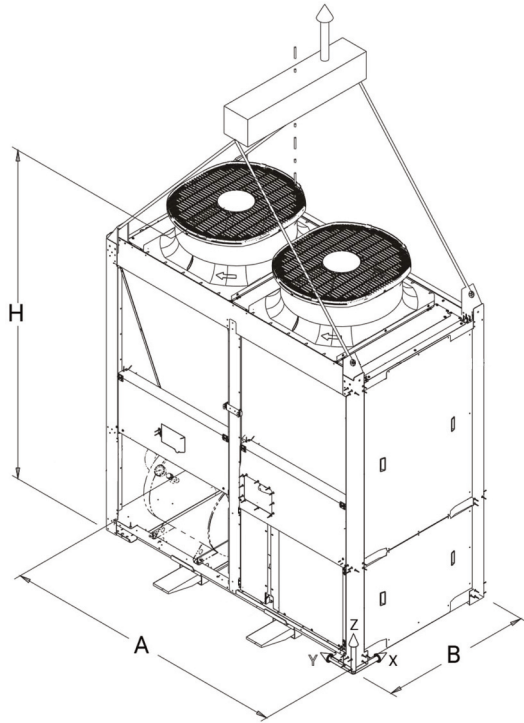


SIZE	A [mm]	B [mm]	H [mm]
MEHP/MECH-iS-G07 0051	2085	1100	2400
MEHP/MECH-iS-G07 0061	2085	1100	2400
MEHP/MECH-iS-G07 0071	2085	1100	2400

Chassis Size 2

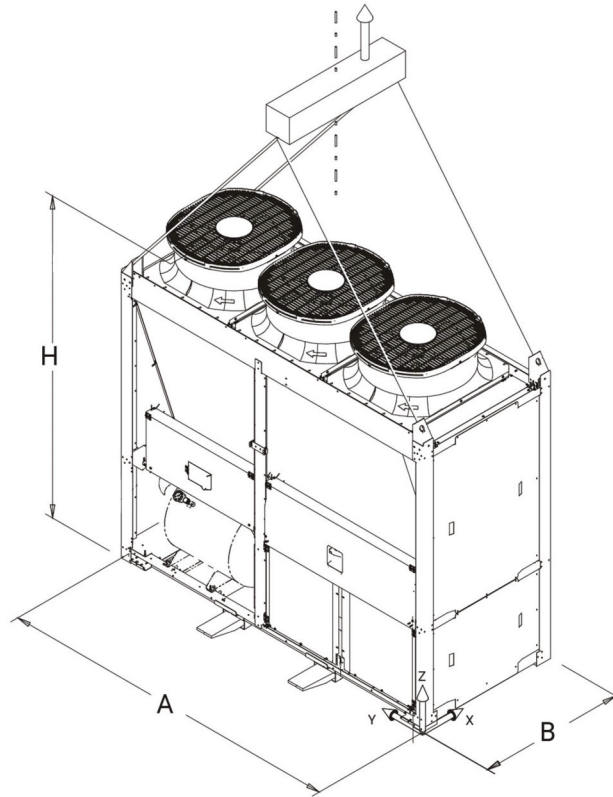

SIZE	A [mm]	B [mm]	H [mm]
MEHP/MECH-iS-G07 0082	2600	1100	2400
MEHP/MECH-iS-G07 0092	2600	1100	2400

Chassis Size 3

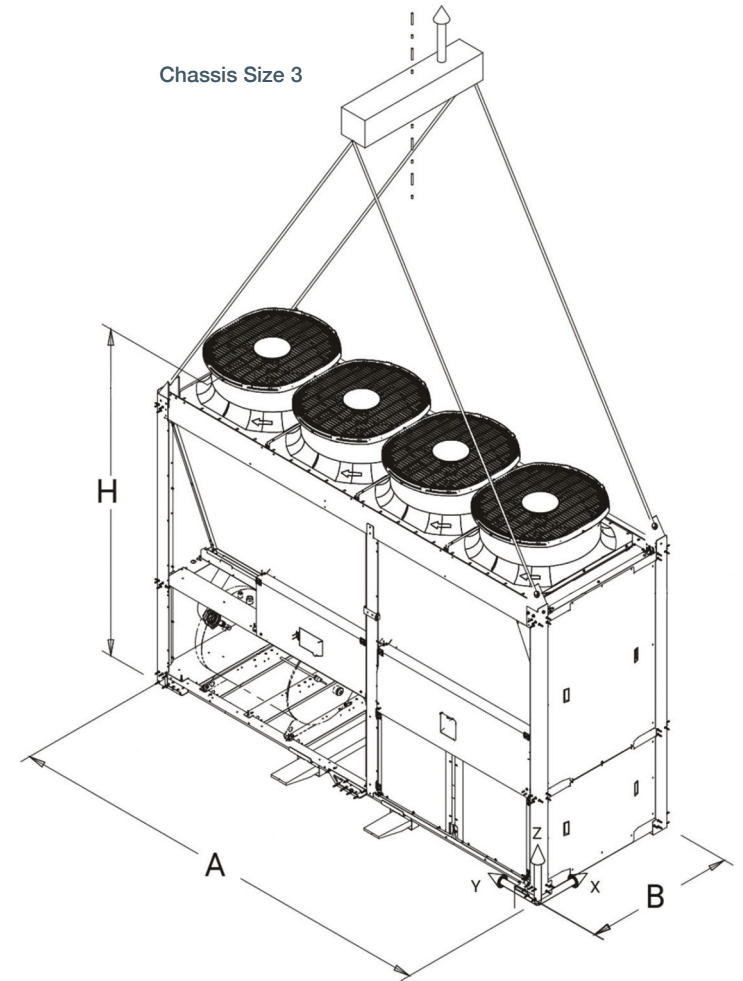

SIZE	A [mm]	B [mm]	H [mm]
MEHP/MECH-iS-G07 0102	3225	1100	2400
MEHP/MECH-iS-G07 0112	3225	1100	2400

CRHV R410A Ground / Water Source Heat Pump



PLEASE NOTE: Full design criteria is needed to ascertain the capacity which could change based on heat source temperature and building flow temperature.

- Under normal heating conditions at brine inlet: 0°C, outlet water temp 35°C as tested to BS EN14511 (60kW)
- Under normal heating conditions at brine inlet: 0°C, outlet water temp 35°C as tested to BS EN14511 (45kW)
- Under normal heating conditions at water inlet: 10°C, outlet water temp 35°C as tested to BS EN14511 (60kW)
- Under normal heating conditions at water inlet: 10°C, outlet water temp 35°C as tested to BS EN14511 (45kW)
- Sound power level as tested to BS EN12102
- Heat source inlet temperature above 27°C and up to 45°C option must reverse the inlet and outlet heat source connections and refer to manual for dip switch changes
- The system should be adequately protected from freezing
- MCB Sizes BS EN60898-2 & BS EN60947-2

* LTHW - Low Temperature Hot Water

* Please use adequate frost protection to ensure pipework and the unit do not freeze if the system is powered down

* Please do not use ground water or well water directly within the unit

* The water circuit must be a closed circuit

η_s is the seasonal space heating energy efficiency (SSHEE)

η_w is the water heating energy efficiency



Certificate Number: MCS HP0002
Product Type: Heat Pumps
Product Reference: CRHV-P600YA-HPB

The inverter driven Ecodan **CRHV** monobloc ground / water source heat pump can operate singly, or be banked together to create a system that can modulate and cascade available units on and off to meet the load from a building.

This level of modulation is unprecedented within the heating industry, and with cascade and rotation built in as standard, the Ecodan CRHV system is perfectly suited to a wide range of commercial applications.


Key Features & Benefits

- Wide range of heat sources - bore holes, slinkies, aquifers, lakes, rivers and waste heat
- Multiple unit cascade control of up to 16 units / 960kW
- Ability to rotate units based on accumulated run hours
- Provides up to 65°C water flow temperatures without booster heaters
- Low maintenance, just electrical and water connections
- Heat recovery applications can be achieved by moving heat between applications
- Passive cooling possible by exchanging ground / water source with a chilled water system


R410A

MODEL		CRHV-P600YA-HPB
HEAT PUMP SPACE HEATER - 55°C		ErP Rating η_s SCOP
HEAT PUMP SPACE HEATER - 35°C		ErP Rating η_s SCOP
HEATING ¹ (B0/W35)		Capacity (kW) Power Input inc. pump (kW) COP
SEASONAL EFFICIENCY EN14825 (SPF) HEATING ² (B0/W35)		B0/W35 (60kW) Capacity (kW) Power Input inc. pump (kW) COP
SEASONAL EFFICIENCY EN14825 (SPF) HEATING ³ (W10/W35)		B0/W35 (45kW) Capacity (kW) Power Input inc. pump (kW) COP
SEASONAL EFFICIENCY EN14825 (SPF) HEATING ⁴ (W10/W35)		W10/W35 (60kW) Capacity (kW) Power Input inc. pump (kW) COP
SEASONAL EFFICIENCY EN14825 (SPF) HEATING ⁴ (W10/W35)		W10/W35 (45kW) Capacity (kW) Power Input inc. pump (kW) COP
SOUND DATA		W10/W35 (45kW) Pressure Level L_{pA} at 1m (dBA) Power Level L_{wA} (dBA) ⁵
WATER DATA		Heat Source (Brine) (l/s (m ³ /hr)) Building Side (LTHW) (l/s (m ³ /hr)) Heat Source Outlet (Brine) (mm (")) Heat Source Inlet (Brine) (mm (")) Building Side Outlet (LTHW) (mm (")) Building Side Inlet (LTHW) (mm (")) Operating Temperature Range Heat Source Inlet (Brine) (°C) Heat Source Inlet Option (Brine) (°C) ⁶ Building Side Outlet (LTHW) (°C)
		1.5 to 4.1 (5.4 to 15) 1.5 to 4.4 (5.4 to 16) 50.8 (R2) screw 50.8 (R2) screw 50.8 (R2) screw 50.8 (R2) screw -5 to +27 -5 to +45 +30 to +65 Min 30% Ethylene Glycol or equivalent
		Heat Source (Brine) (kPa) Building Side (LTHW) (kPa) Heat Source (Brine) (MPa(Bar)) Building Side (LTHW) (MPa(Bar)) Maximum Working Pressure
		12 7 1 (10) 1 (10)
DIMENSIONS		Width (mm) Depth (mm) Height (mm)
		934 780 1561
WEIGHT (kg)		395
REFRIGERANT		Type Charge (kg) / CO ₂ Equivalent (t) Max pressure (MPa (Bar)) Compressor Type Circuit type
		R410A 9 / 18.7 4.15 (41.5) Inverter Driven Hermetically Sealed System
ELECTRICAL DATA		Electrical Supply Phase Maximum Running Current (A) Fuse Rating - MCB Size (A) ⁸
		415V, 50Hz 3 44 50

Front View

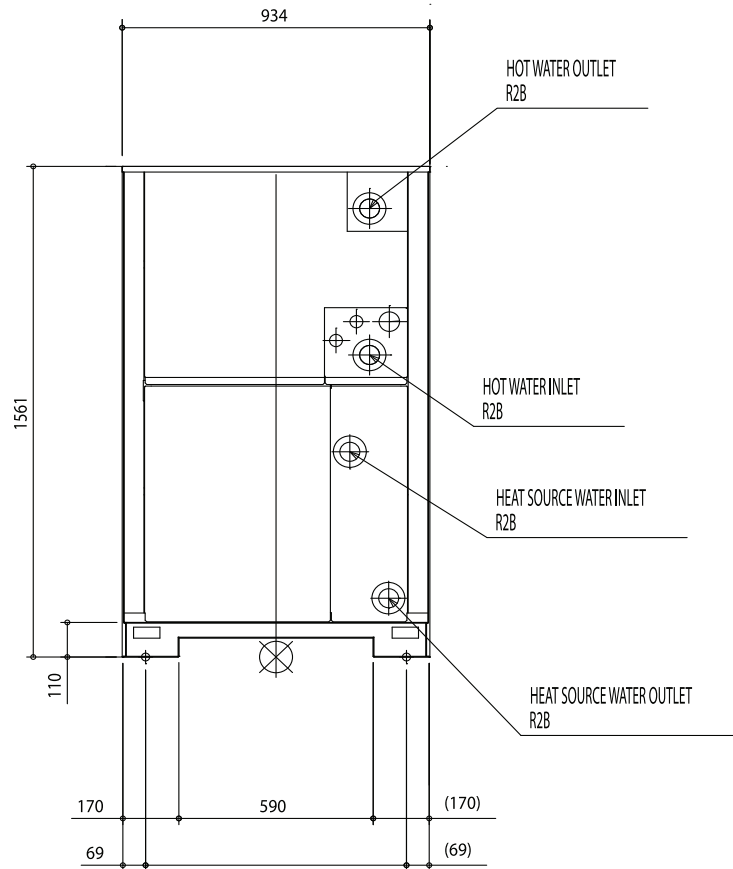

Side View

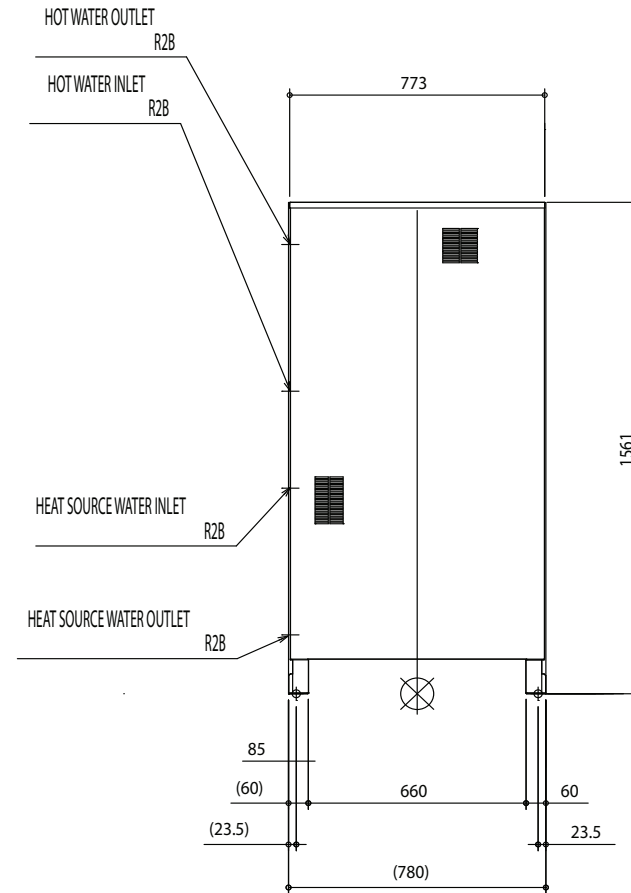


CAHV R454C Air Source Heat Pump



Certificate Number: 037-0113-23
Product (Type): Outdoor Air/Water
Product Reference: CAHV-R450YA-HPB

Notes:

- Under normal heating conditions at the outdoor temperature of 7°CDB/6°CWB, the outlet water temperature of 45°C, and the inlet water temperature of 40°C.
- Under normal heating conditions at the outdoor temperature of -5°CDB/-6°CWB and the outlet water temperature of 55°C.
- Under normal heating conditions at the outdoor temperature of 7°CDB/6°CWB when the unit is set to the "Capacity Priority" mode through the dry NC-contact.
- The sound pressure level is a value measured in an anechoic room in accordance with the conventional method in JRA4060.
-



Outdoor temp. -20°CDB/Outlet water temp. 45-60°C
Outdoor temp. -30°CDB/Outlet water temp. 35-70°C
Outdoor temp. 40°CDB/Outlet water temp. 24-70°C

- 4.0 - 15.0 m³/h under the following conditions:
 - When the outdoor temperature is below 0°C,
 - When the outlet water temperature is 30°C or below AND the outdoor temperature is 6°C or below.

The Mitsubishi Electric Ecodan **CAHV** air source heat pump utilises low GWP R454C refrigerant, offering a robust, low carbon system for the provision of sanitary hot water and space heating. This innovative heat pump solution can operate as a single system or form part of a multiple unit system, making it suitable for a wide range of commercial applications, including schools and hospitals.

A multiple unit system has the ability to cascade available units on and off to meet the load requirements of a building. As an example of this unique modulation, a 16 unit system allows 0.5kW increments of capacity, from 7.8kW all the way up to 640kW*. With cascade and rotation built in as standard, the Ecodan CAHV is perfectly set up to reliably generate sustainable space heating and hot water all year round.

* At nominal conditions A7W35


Key Features & Benefits

- Low GWP R454C refrigerant and reduced embodied carbon helps achieve CSR targets
- Achieves 70°C outlet temperature down to -20°C ambient temperature for continuous heating provision
- Multiple unit cascade control from 7.8kW to 640kW* capacity provides design flexibility
- Water flow temperatures from 24°C to 70°C without boost heaters, results in cost and energy savings
- Advanced heat exchange design combined with the properties of R454C refrigerant enables a shorter defrost time


R454C

MODEL		CAHV-R450YA-HPB	
POWER SOURCE		3-phase 4-wire 380-400-415V 50/60 Hz	
CAPACITY(EN14511) ¹		40	
		Power input	kW
		Current input	A
		COP (kW/kW)	2.85
		SCOP Low/Medium	3.57/3.24
CAPACITY ²		33.4	
		Power input	kW
		Current input	A
		COP (kW/kW)	2.01
MAXIMUM CURRENT INPUT		A	
WATER PRESSURE DROP ¹		10.2 kPa (1.47 psi)	
TEMPERATURE RANGE ⁵		Outlet water temperature	24 - 70°C
		Outdoor temperature	D.B. -25 - 43°C
CIRCULATING WATER VOLUME RANGE ⁵		25 l/min - 250 l/min	
SOUND PRESSURE LEVEL (measured 1m below the unit in an anechoic room) ¹¹ ⁴		dB(A)	
		64	
SOUND PRESSURE LEVEL (measured 1m below the unit in an anechoic room) ¹³ ⁴		dB(A)	
		72	
WATER PIPE DIAMETER AND TYPE		Inlet	mm (in)
		Outlet	mm (in)
		38.1 (1 1/2"), housing type joint	
		38.1 (1 1/2"), housing type joint	
EXTERNAL FINISH		Acrylic painted steel sheet <Munsell 5Y 8/1 or similar>	
EXTERNAL DIMENSIONS (Width x Depth x Height)		mm	
		1750 x 740 x 1710	
NET WEIGHT		kg	
		359	
DESIGN PRESSURE		R454C	MPa
		Water	MPa
		1.0	
HEAT EXCHANGER		Water-side	Copper brazed stainless steel sheet
		Air-side	Plate fins and copper tubes
COMPRESSOR		Type	Inverter scroll hermetic compressor
		Manufacturer	MITSUBISHI ELECTRIC CORPORATION
		Starting method	Inverter
		Motor output	kW
		Lubricant	FVC32EA
FAN		Air flow rate	L/s
		External static pressure	10 Pa (1mm H2O)
		Type and quantity	Propeller fan x 2
		Control and driving mechanism	Inverter control, direct driven by motor
		Motor output	kW
		0.92 x 2	
HIC (HEAT INTER-CHANGER) CIRCUIT		Copper pipe	
PROTECTION DEVICES		High pressure	High-pressure sensor and switch set at 3.85 MPa (643 psi)
		Inverter circuit	Overheat and overcurrent protection
		Compressor	Overheat protection
		Fan motor	Thermal switch
DEFROSTING METHOD		Auto-defrost mode (Reversed refrigerant cycle)	
REFRIGERANT		Type and factory charge	kg
		Flow and temperature control	R454C, 9.0 kg
		LEV and HIC circuit	


Upper View

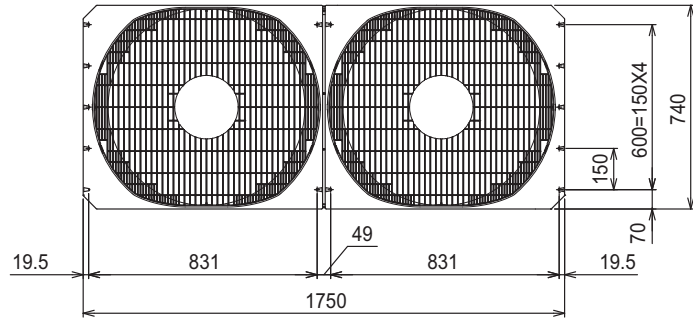

Front View

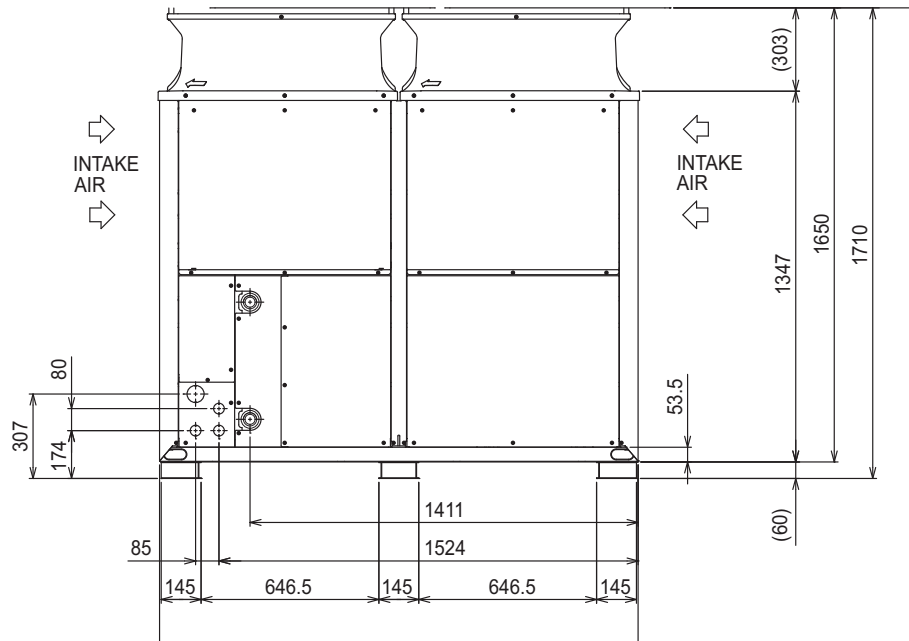

Side View

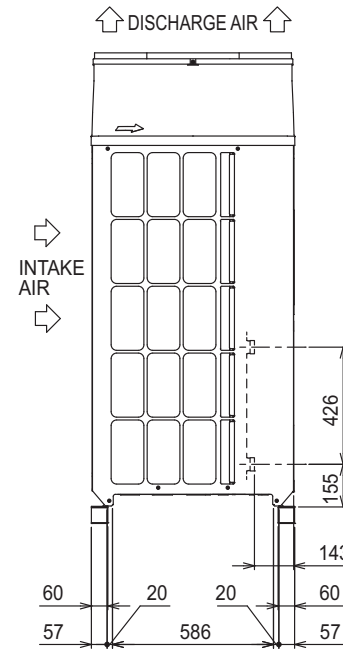



QAHV R744 Air Source Heat Pump



Specifically designed for commercial sanitary hot water application, where gas boilers, combined heat and power systems (CHP) or electric water heating have been traditionally utilised, the 40kW Ecodan **QAHV** provides a low carbon solution for hotels, apartment blocks, leisure centres, hospitals, care homes, restaurants and education.

Utilising the natural and stable refrigerant CO₂ (R744), the environmentally clean solution enables compliance to strict local planning laws and boosts BREEAM points. With the increasing decarbonisation of the electrical grid, the QAHV provides a high efficiency, low carbon hot water delivery solution with leaving water temperature up to 90°C.

Key Features & Benefits

- High efficiency at high flow temperatures
- Utilises CO₂ refrigerant which has a GWP of 1
- Uses a unique twisted and spiral gas cooler to enhance energy efficiency
- Full heating capacity down to -3°C outdoor temperature and operates down to -25°C
- Super low noise levels
- Able to utilise with an indirect system

R744


MODEL		QAHV-N560YA-HPB
WATER HEATING 65°C ¹	CAPACITY (kW)	40
	POWER INPUT (kW)	10.31
	CURRENT INPUT (A)	16.3
	COP	3.88
WATER HEATING 65°C ²	CAPACITY (kW)	40
	POWER INPUT (kW)	10.97
	CURRENT INPUT (A)	18.3
	COP	3.65
WATER HEATING 65°C ³	CAPACITY (kW)	40
	POWER INPUT (kW)	11.6
	CURRENT INPUT (A)	18.7
	COP	3.44
WATER HEATING ENERGY EFFICIENCY CLASS TEMPERATURE RANGE	FOR MEDIUM TEMPERATURE APPLICATION	A
	INLET WATER TEMPERATURE (°C)	5 ~ 63
	OUTLET WATER TEMPERATURE (°C)	55 ~ 90
	OUTDOOR TEMPERATURE (°C)	-25~43
ELECTRICAL	MAX CURRENT INPUT (A)	33.8
	ELECTRICAL SUPPLY (V / Hz)	380-415v, 50Hz
	PHASE	3
	FUSE RATING - MCB SIZES (A) ⁵	40
WATER DETAIL	INLET / OUTLET (mm (in.))	19.05 (Rc 3/4") / 19.05 (Rc 3/4")
	ALLOWABLE EXTERNAL PUMP HEAD (kPa)	77
DIMENSIONS (mm)	WIDTH	1220
	DEPTH	760
	HEIGHT	1837 (1777 without legs)
WEIGHT (kg)		400
NOISE LEVEL	SOUND PRESSURE ⁴ (dB(A))	56
REFRIGERANT	TYPE	R744 (GWP 1)
	REFRIGERANT CHARGE (kg) / CO ₂ EQUIVALENT (t)	6.5 / 0.0065

Notes:


1. Under Normal heating conditions at the outdoor temp, 16°CDB/12°CWB, the outlet water temperature 65°C, and the inlet water temperature 17°C
2. Under Normal heating conditions at the outdoor temp, 7°CDB/6°CWB, the outlet water temperature 65°C, and the inlet water temperature 9°C
3. Under Normal heating conditions at the outdoor temp, 7°CDB/6°CWB, the outlet water temperature 65°C, and the inlet water temperature 15°C
4. Measured 1m from the front of the unit in an anechoic room
5. MCB Sizes BS EN60898-2 & BS EN60947-2




Upper View

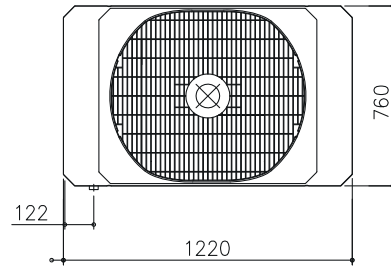

Front View

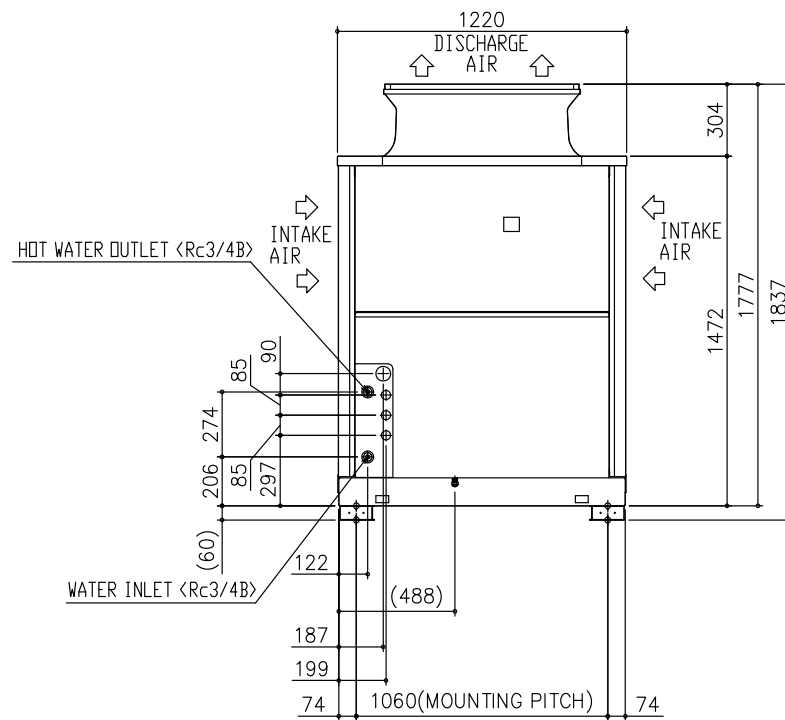

Side View

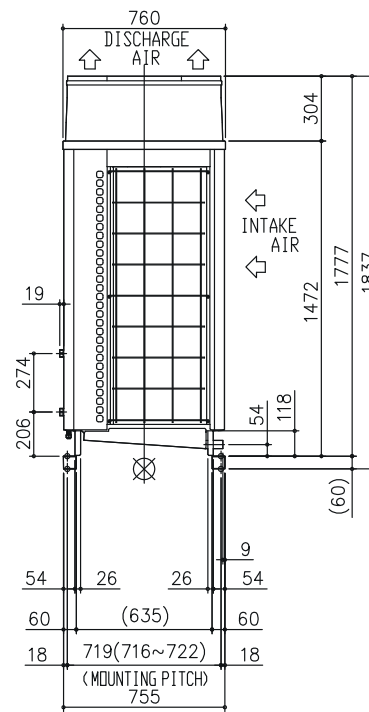

NX2-N R454B Air Source Heat Pump

(365 to 580kW)

Standard Version (/K)



CLIMAVENETA

Notes:

- Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C.
- Values in compliance with EN14511.
- Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C; Source (side) heat exchanger air (in) 7.0°C - 87% R.H.
- Seasonal coefficient of performance.
- Rated in accordance with AHRI Standard 550/590.
- Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
- Parameter calculated according to [REGULATION (EU) N. 2016/2281].
- Seasonal energy efficiency ratio.
- Seasonal space cooling energy efficiency.
- Sound power on the basis of measurements made in compliance with ISO 9614.
- Sound power level in cooling, outdoors.
- Sound power level in heating, outdoors.
- Unit in standard configuration/execution, without optional accessories.
- Average Weather Conditions. Seasonal space heating efficiency class LOW TEMPERATURE [REGULATION (EU) N. 813/2013].
- Variable flow rate and variable temperature calculation.

Designed for medium to large capacity commercial applications, the Climaveneta **NX2-N** heat pump range is the ideal solution for LTHW in a wide range of applications. Every unit goes through rigorous end of line testing, guaranteeing performance and reliability.

Key Features & Benefits

- Lower GWP R454B refrigerant
- Wide capacity range
- Scroll compressors
- Patented fan section layout

R454B

MODEL		0344	0364	0404	0446	0506	0526	0546
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE								
COOLING ONLY (GROSS VALUE)¹								
COOLING CAPACITY	kW	334.7	355	382.4	430.6	475.7	516.4	533.6
TOTAL POWER INPUT	kW	122.8	126.2	141.6	163	175.4	183.7	189.4
EER	kW/kW	2.73	2.81	2.70	2.64	2.71	2.81	2.82
COOLING ONLY (EN14511 VALUE)^{1,2}								
COOLING CAPACITY	kW	334.3	354.7	382.0	430.2	475.1	515.9	533.1
EER	kW/kW	2.69	2.78	2.67	2.62	2.68	2.78	2.79
SEER ^{7,8}	kW/kW	3.93	4.04	4.07	4.01	3.93	4.07	4.1
PERFORMANCE ηs ^{7,9}	%	154	159	160	157	154	160	161
HEATING ONLY (GROSS VALUE)³								
TOTAL HEATING CAPACITY	kW	364.7	386.5	414.9	469.4	512.7	560.2	579.9
TOTAL POWER INPUT	kW	119.3	124.9	134.8	155.5	168.4	181.7	186.9
COP	kW/kW	3.06	3.09	3.08	3.02	3.05	3.08	3.10
HEATING ONLY (EN14511 VALUE)^{2,3}								
TOTAL HEATING CAPACITY	kW	365.2	387.0	415.4	470.0	513.3	560.7	580.5
COP	kW/kW	3.02	3.06	3.04	2.98	3.00	3.05	3.07
HEATING ONLY (EN14825 VALUE)^{14,15}								
RATED HEATING CAPACITY AT Tdesign, h	kW	268	294	323	369	388	363	373
BIVALENT TEMPERATURE	°C	-7	-7	-7	-7	-7	-10	-10
SCOP ⁴	kW/kW	3.6	3.7	3.73	3.66	3.53	3.49	3.53
SEASONAL SPACE HEATING ENERGY EFFICIENCY	%	141	145	146	143	138	137	137
EXCHANGERS								
HEAT EXCHANGER USER SIDE IN COOLING¹								
WATER FLOW	l/s	16.01	16.98	18.29	20.59	22.75	24.70	25.52
PRESSURE DROP	kPa	48.1	38.5	44.7	43.4	53.0	43.5	46.4
HEAT EXCHANGER USER SIDE IN HEATING³								
WATER FLOW	l/s	17.6	18.66	20.03	22.66	24.75	27.04	27.99
PRESSURE DROP	kPa	58.2	46.5	53.5	52.6	62.7	52.1	55.9
REFRIGERANT CIRCUIT								
COMPRESSORS	No.	4	4	4	6	6	6	6
NUMBER OF CAPACITY STEPS	No.	4	4	4	6	6	6	6
NO. CIRCUITS	No.	2	2	2	3	3	3	3
REGULATION	STEPS	STEPS	STEPS	STEPS	STEPS	STEPS	STEPS	STEPS
MINIMUM CAPACITY STEP	%	25	25	25	17	17	17	17
REFRIGERANT TYPE		R454B	R454B	R454B	R454B	R454B	R454B	R454B
REFRIGERANT CHARGE	kg	64.8	68.4	68.4	83.7	87.3	98.1	113
OIL CHARGE	kg	25	25	25	39	38	38	38
Fc (ASHRAE) ⁵	kg/kW	0.2	0.19	0.18	0.2	0.19	0.19	0.21
FANS								
QUANTITY	No.	12	12	12	10	18	18	18
AIR FLOW	m ³ /s	35.95	34.59	34.59	39.52	53.07	51.13	51.88
FANS POWER INPUT	kW	2	2	2	2	2	2	2
NOISE LEVEL								
SOUND PRESSURE ⁶	dB(A)	76	76	76	76	76	76	76
SOUND POWER LEVEL IN COOLING ^{10,11}	dB(A)	96	96	96	96	97	97	97
SOUND POWER LEVEL IN HEATING ^{10,12}	dB(A)	96	96	96	96	97	97	97
DIMENSIONS AND WEIGHT¹³								
WIDTH	mm	2260	2260	2260	2260	2260	2260	2260
DEPTH	mm	3905	3905	3905	4515	5690	5690	5690
HEIGHT	mm	2450	2450	2450	2450	2450	2450	2450
OPERATING WEIGHT	kg	3030	3110	3150	4040	4400	4530	4600

NX2-N R454B Air Source Heat Pump

(362 to 569kW)

Low Noise Version (/SL)



- Notes:**
1. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C.
 2. Values in compliance with EN14511.
 3. Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C; Source (side) heat exchanger air (in) 7.0°C - 87% R.H.
 4. Seasonal coefficient of performance.
 5. Rated in accordance with AHRI Standard 550/590.
 6. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
 7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
 8. Seasonal energy efficiency ratio.
 9. Seasonal space cooling energy efficiency.
 10. Sound power on the basis of measurements made in compliance with ISO 9614.
 11. Sound power level in cooling, outdoors.
 12. Sound power level in heating, outdoors.
 13. Unit in standard configuration/execution, without optional accessories.
 14. Average Weather Conditions. Seasonal space heating efficiency class LOW TEMPERATURE [REGULATION (EU) N. 813/2013].
 15. Variable flow rate and variable temperature calculation.

 Eurovent Certified Data

Designed for medium to large capacity commercial applications, the Climaveneta **NX2-N** heat pump range is the ideal solution for LTHW in a wide range of applications. Every unit goes through rigorous end of line testing, guaranteeing performance and reliability.

Key Features & Benefits

- Lower GWP R454B refrigerant
- Wide capacity range
- Scroll compressors
- Patented fan section layout

R454B

MODEL		0344	0364	0404	0446	0506	0526	0546
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE								
COOLING ONLY (GROSS VALUE)¹								
COOLING CAPACITY	kW	316.4	336.8	370.6	409.4	440.0	486.6	506.1
TOTAL POWER INPUT	kW	128.4	132.8	144.6	170.3	184.7	194.0	199.4
EER	kW/kW	2.46	2.54	2.56	2.40	2.40	2.51	2.54
COOLING ONLY (EN14511 VALUE)^{1,2}								
COOLING CAPACITY	kW	316.0	336.4	370.2	409.0	443.6	486.1	505.7
EER	kW/kW	2.44	2.51	2.54	2.38	2.38	2.49	2.51
SEER ^{7,8}	kW/kW	4.10	4.13	4.23	4.14	4.10	4.19	4.19
PERFORMANCE η _s ^{7,9}	%	161	162	166	162	161	165	165
HEATING ONLY (GROSS VALUE)³								
TOTAL HEATING CAPACITY	kW	362.0	379.2	420.1	470.8	511.1	552.0	568.8
TOTAL POWER INPUT	kW	114.1	120.5	131.1	150.6	162.1	174.2	180.3
COP	kW/kW	3.17	3.15	3.2	3.13	3.15	3.17	3.16
HEATING ONLY (EN14511 VALUE)^{2,3}								
TOTAL HEATING CAPACITY	kW	362.5	379.6	420.6	471.4	511.7	552.6	569.4
COP	kW/kW	3.13	3.11	3.16	3.09	3.11	3.13	3.12
HEATING ONLY (EN14825 VALUE)^{14,15}								
RATED HEATING CAPACITY AT Tdesign, h	kW	227	252	319	294	390	356	378
BIVALENT TEMPERATURE	°C	-7	-7	-7	-7	-7	-7	-7
SCOP ⁴	kW/kW	3.67	3.71	3.78	3.67	3.80	3.73	3.72
SEASONAL SPACE HEATING ENERGY EFFICIENCY	%	144	145	148	144	149	146	146
EXCHANGERS								
HEAT EXCHANGER USER SIDE IN COOLING¹								
WATER FLOW	l/s	15.13	16.11	17.72	19.58	21.23	23.27	24.20
PRESSURE DROP	kPa	43.0	34.6	41.9	39.2	46.2	38.6	41.8
HEAT EXCHANGER USER SIDE IN HEATING³								
WATER FLOW	l/s	17.47	18.30	20.28	22.73	24.67	26.65	27.46
PRESSURE DROP	kPa	57.4	44.7	54.9	52.9	62.3	50.6	53.7
REFRIGERANT CIRCUIT								
COMPRESSORS	No.	4	4	4	6	6	6	6
NUMBER OF CAPACITY STEPS	No.	4	4	4	6	6	6	6
NO. CIRCUITS	No.	2	2	2	3	3	3	3
REGULATION	STEPS	2	2	2	3	3	3	3
MINIMUM CAPACITY STEP	%	25	25	25	17	17	17	17
REFRIGERANT TYPE		R454B	R454B	R454B	R454B	R454B	R454B	R454B
REFRIGERANT CHARGE	kg	71.9	74.1	85.2	96.3	106	112	113
OIL CHARGE	kg	25	25	25	39	38	38	38
Rc (ASHRAE) ⁵	kg/kW	0.23	0.22	0.23	0.24	0.24	0.23	0.23
FANS								
QUANTITY	No.	10	8	8	18	18	14	12
AIR FLOW	m ³ /s	27.28	30.33	29.48	35.07	33.16	42.86	45.49
FANS POWER INPUT	kW	1	1	1	1	1	1	1
NOISE LEVEL								
SOUND PRESSURE ⁶	dB(A)	68	68	68	68	68	69	69
SOUND POWER LEVEL IN COOLING ^{10,11}	dB(A)	88	88	88	89	89	90	90
SOUND POWER LEVEL IN HEATING ^{10,12}	dB(A)	89	89	89	90	90	91	91
DIMENSIONS AND WEIGHT¹³								
WIDTH	mm	2260	2260	2260	2260	2260	2260	2260
DEPTH	mm	4515	5080	5080	5690	5690	6865	7430
HEIGHT	mm	2450	2450	2450	2450	2450	2450	2450
OPERATING WEIGHT	kg	3330	3460	3630	4640	4750	5050	5170

NX2-N R454B Air Source Heat Pump

(376 to 853kW)

High Efficiency Version (/A)



CLIMAVENETA

Notes:

1. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C; Source (side) heat exchanger air (in) 7.0°C - 87% R.H.
4. Seasonal coefficient of performance.
5. Rated in accordance with AHRI Standard 550/590.
6. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
8. Seasonal energy efficiency ratio.
9. Seasonal space cooling energy efficiency.
10. Sound power on the basis of measurements made in compliance with ISO 9614.
11. Sound power level in cooling, outdoors.
12. Sound power level in heating, outdoors.
13. Unit in standard configuration/execution, without optional accessories.
14. Average Weather Conditions. Seasonal space heating efficiency class LOW TEMPERATURE [REGULATION (EU) N. 813/2013].
15. Variable flow rate and variable temperature calculation.

Designed for medium to large capacity commercial applications, the Climaveneta **NX2-N** heat pump range is the ideal solution for LTHW in a wide range of applications. Every unit goes through rigorous end of line testing, guaranteeing performance and reliability.

Key Features & Benefits

- Lower GWP R454B refrigerant
- Wide capacity range
- Scroll compressors
- Patented fan section layout

R454B

MODEL		0344	0364	0404	0446	0506	0526	0546	0606	0708	0738	0768	0808
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE													
COOLING ONLY (GROSS VALUE)¹													
COOLING CAPACITY	kW	345.3	361.5	399.8	446.5	500.0	525.8	543.5	599.3	696.6	724.8	762.0	799.2
TOTAL POWER INPUT	kW	116.8	121.4	133.4	152.0	168.8	177	182.1	196.5	228.7	238.0	248.8	262.0
EER	kW/kW	2.96	2.98	3.00	2.94	2.96	2.97	2.99	3.05	3.05	3.05	3.06	3.05
COOLING ONLY (EN14511 VALUE)^{11,2}													
COOLING CAPACITY	kW	344.9	361.1	399.3	446.0	499.5	525.3	543.0	598.8	696.0	724.2	761.4	798.6
EER	kW/kW	2.95	2.95	2.96	2.92	2.92	2.94	2.95	3.01	3.01	3.01	3.03	3.02
SEER ^{7,8}	kW/kW	4.28	4.39	4.44	4.36	4.28	4.37	4.37	4.56	4.56	4.56	4.58	4.56
PERFORMANCE η _s ^{7,9}	%	168	172	175	171	168	172	172	180	179	180	180	179
HEATING ONLY (GROSS VALUE)³													
TOTAL HEATING CAPACITY	kW	376.3	397.2	426.7	492.5	531.0	573.6	596.0	640.0	752.7	794.7	825.4	853.3
TOTAL POWER INPUT	kW	116.4	123.0	131.8	153.1	164.1	177.1	184.0	193.6	227.6	239.7	250.1	258.1
COP	kW/kW	3.23	3.23	3.24	3.22	3.24	3.24	3.24	3.31	3.31	3.32	3.30	3.31
HEATING ONLY (EN14511 VALUE)^{2,3}													
TOTAL HEATING CAPACITY	kW	376.8	397.7	427.2	493.1	531.6	574.2	596.6	640.6	753.4	795.3	826.0	854.1
COP	kW/kW	3.19	3.19	3.20	3.17	3.19	3.20	3.20	3.26	3.26	3.28	3.26	3.26
HEATING ONLY (EN14825 VALUE)^{14,15}													
RATED HEATING CAPACITY AT Tdesign, h	kW	271	296	321	368	386	356	371	-	-	-	-	-
BIVALENT TEMPERATURE	°C	-7	-7	-7	-7	-7	-10	-10	-	-	-	-	-
SCOP ⁴	kW/kW	3.76	3.83	3.79	3.90	3.81	3.80	3.83	-	-	-	-	-
SEASONAL SPACE HEATING ENERGY EFFICIENCY	%	147	150	149	153	149	149	150	-	-	-	-	-
EXCHANGERS													
HEAT EXCHANGER USER SIDE IN COOLING¹¹													
WATER FLOW	l/s	16.51	17.29	19.12	21.35	23.91	25.14	25.99	28.66	33.31	34.66	36.44	38.22
PRESSURE DROP	kPa	51.2	39.9	48.8	46.7	58.5	45.1	48.2	51.1	50.3	40.5	44.7	49.2
HEAT EXCHANGER USER SIDE IN HEATING³													
WATER FLOW	l/s	18.17	19.17	20.60	23.77	25.63	27.69	28.77	30.89	36.34	38.36	39.84	41.19
PRESSURE DROP	kPa	62.0	49.1	56.6	57.9	67.3	54.6	59.0	59.4	59.9	49.6	53.5	57.2
REFRIGERANT CIRCUIT													
COMPRESSORS	No.	4	4	4	6	6	6	6	6	8	8	8	8
NUMBER OF CAPACITY STEPS	No.	4	4	4	6	6	6	6	6	8	8	8	8
NO. CIRCUITS	No.	2	2	2	3	3	3	3	3	4	4	4	4
REGULATION	STEPS	STEPS	STEPS	STEPS	STEPS	STEPS	STEPS	STEPS	STEPS	STEPS	STEPS	STEPS	STEPS
MINIMUM CAPACITY STEP	%	25	25	25	17	17	17	17	17	12.5	12.5	12.5	12.5
REFRIGERANT TYPE		R454B	R454B	R454B	R454B	R454B	R454B	R454B	R454B	R454B	R454B	R454B	R454B
REFRIGERANT CHARGE	kg	81.0	86.4	86.9	109	112	124	133	133	162	173	174	176
OIL CHARGE	kg	25	25	25	39	38	38	38	38	50	50	50	50
Rc (ASHRAE) ⁵	kg/kW	0.24	0.24	0.22	0.25	0.23	0.24	0.25	0.22	0.23	0.24	0.23	0.22
FANS													
QUANTITY	No.	8	8	8	16	12	12	12	12	16	16	16	16
AIR FLOW	m ³ /s	47.93	46.12	46.12	56.58	70.76	68.18	69.18	69.18	95.87	92.24	92.24	92.24
FANS POWER INPUT	kW	2	2	2	2	2	2	2	2	2	2	2	2
NOISE LEVEL													
SOUND PRESSURE ⁶	dB(A)	77	77	77	76	77	77	77	78	77	78	78	78
SOUND POWER LEVEL IN COOLING ^{10,11}	dB(A)	97	97	97	97	98	98	98	99	99	100	100	100
SOUND POWER LEVEL IN HEATING ^{10,12}	dB(A)	97	97	97	97	98	98	98	-	-	-	-	-
DIMENSIONS AND WEIGHT¹³													
WIDTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260
DEPTH	mm	5080	5080	5080	6255	7430	7430	7430	7430	9780	9780	9780	9780
HEIGHT	mm	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450
OPERATING WEIGHT	kg	3350	3440	3480	4650	4900	5060	5140	5200	6580	6760	6800	6840

FOCS-N R513A Air Source Heat Pump

(465 to 584kW)

Low Noise, High Efficiency
Version (/SL-CA)



Notes:

1. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C; Source (side) heat exchanger air (in) 7.0°C - 87% R.H.
4. Seasonal Coefficient of Performance.
5. European seasonal energy efficiency ratio.
6. Average Weather Conditions. Seasonal space heating efficiency class LOW TEMPERATURE (REGULATION (EU) N. 813/2013).
7. Fixed flow rate and variable temperature calculation.
8. Rated in accordance with AHRI Standard 550/590.
9. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
10. Sound power on the basis of measurements made in compliance with ISO 9614.
11. Sound power level in cooling, outdoors.
12. Sound power level in heating, outdoors.
13. Unit in standard configuration/execution, without optional accessories.

Eurovent Certified Data

Designed for medium to large capacity LTHW commercial applications, the Climaveneta **FOCS-N** heat pump features screw compressors and is suitable for a wide range of projects. The new generation of air source heat pump has been perfectly designed for reducing operating costs, while keeping an extremely compact design.

Key Features & Benefits

- Compact design
- Lower GWP R513A refrigerant
- Screw compressors

R513A

MODEL		2022	2222	2422	2622
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE					
COOLING ONLY (GROSS VALUE) ¹					
COOLING CAPACITY	kW	440.7	487.9	519.6	558.6
TOTAL POWER INPUT	kW	169.4	178.7	192.6	217.5
EER	kW/kW	2.60	2.73	2.70	2.57
ESEER ⁵	kW/kW	3.76	3.84	3.83	3.85
COOLING ONLY (EN14511 VALUE) ^{11,2}					
COOLING CAPACITY	kW	439.6	486.6	518.0	557.4
EER	kW/kW	2.58	2.70	2.67	2.55
ESEER ⁵	kW/kW	3.67	3.74	3.71	3.77
HEATING ONLY (GROSS VALUE) ³					
TOTAL HEATING CAPACITY	kW	465.6	519.6	551.8	583.9
TOTAL POWER INPUT	kW	147.7	160.8	172.4	182.6
COP	kW/kW	3.15	3.23	3.20	3.20
HEATING ONLY (EN14511 VALUE) ^{2,3}					
TOTAL HEATING CAPACITY	kW	466.9	521.2	553.7	585.2
COP	kW/kW	3.13	3.21	3.18	3.18
HEATING ONLY (EN14825 VALUE) ^{6,7}					
RATED HEATING CAPACITY AT Tdesign, h	kW	340	371	365	393
BIVALENT TEMPERATURE	°C	-7	-7	-9	-9
SCOP ⁴	kW/kW	3.39	3.44	3.41	3.56
SEASONAL SPACE HEATING ENERGY EFFICIENCY	%	132	135	134	139
EXCHANGERS					
HEAT EXCHANGER USER SIDE IN COOLING ¹					
WATER FLOW	l/s	21.08	23.33	24.85	26.71
PRESSURE DROP	kPa	28.8	32.5	36.8	24.0
HEAT EXCHANGER USER SIDE IN HEATING ³					
WATER FLOW	l/s	22.47	25.08	26.64	28.18
PRESSURE DROP	kPa	32.7	37.5	42.3	26.8
REFRIGERANT CIRCUIT					
COMPRESSORS	No.	2	2	2	2
NUMBER OF CAPACITY STEPS	No.	0	0	0	0
NO. CIRCUITS	No.	2	2	2	2
REGULATION		STEPLESS	STEPLESS	STEPLESS	STEPLESS
MINIMUM CAPACITY STEP	%	25	25	25	25
REFRIGERANT TYPE		R513A	R513A	R513A	R513A
REFRIGERANT CHARGE	kg	243	268	285	307
OIL CHARGE	kg	44	44	44	44
Rc (ASHRAE) ⁸	kg/kW	0.56	0.55	0.55	0.55
FANS					
QUANTITY	No.	10	12	12	12
AIR FLOW	m ³ /s	35.07	46.62	42.44	42.44
FANS POWER INPUT	kW	1.1	1.1	1.1	1.1
NOISE LEVEL					
SOUND PRESSURE ⁹	dB(A)	69	70	70	70
SOUND POWER LEVEL IN COOLING ^{10,11}	dB(A)	89	91	91	91
SOUND POWER LEVEL IN HEATING ^{10,12}	dB(A)	90	92	92	92
DIMENSIONS AND WEIGHT ¹³					
WIDTH	mm	2260	2260	2260	2260
DEPTH	mm	4900	5800	5800	5800
HEIGHT	mm	2430	2430	2430	2430
OPERATING WEIGHT	kg	6190	6680	6770	7010

FOCS-N R513A Air Source Heat Pump

(474 to 596kW)

High Efficiency Version (/CA)



Notes:

- Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C.
- Values in compliance with EN14511.
- Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C; Source (side) heat exchanger air (in) 7.0°C - 87% R.H.
- Seasonal Coefficient of Performance.
- European seasonal energy efficiency ratio.
- Average Weather Conditions. Seasonal space heating efficiency class LOW TEMPERATURE [REGULATION (EU) N. 813/2013].
- Fixed flow rate and variable temperature calculation.
- Rated in accordance with AHRI Standard 550/590.
- Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
- Sound power on the basis of measurements made in compliance with ISO 9614.
- Sound power level in cooling, outdoors.
- Sound power level in heating, outdoors.
- Unit in standard configuration/execution, without optional accessories.

Eurovent Certified Data

Designed for medium to large capacity LTHW commercial applications, the Climaveneta **FOCS-N** heat pump features screw compressors and is suitable for a wide range of projects. The new generation of air source heat pump has been perfectly designed for reducing operating costs, while keeping an extremely compact design.

Key Features & Benefits

- Compact design
- Lower GWP R513A refrigerant
- Screw compressors

R513A

MODEL		2022	2222	2422	2622
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE					
COOLING ONLY (GROSS VALUE)¹					
COOLING CAPACITY	kW	459.6	502.8	537.8	586
TOTAL POWER INPUT	kW	164.0	176.2	188.1	209.6
EER	kW/kW	2.80	2.85	2.86	2.80
ESEER ⁵	kW/kW	3.82	3.85	3.85	3.88
COOLING ONLY (EN14511 VALUE)^{11,2}					
COOLING CAPACITY	kW	458.4	501.4	536.1	584.7
EER	kW/kW	2.77	2.82	2.82	2.77
ESEER ⁵	kW/kW	3.72	3.75	3.73	3.80
HEATING ONLY (GROSS VALUE)³					
TOTAL HEATING CAPACITY	kW	474.9	525.3	558.7	595.6
TOTAL POWER INPUT	kW	149.3	162.5	174.2	184.5
COP	kW/kW	3.18	3.23	3.21	3.23
HEATING ONLY (EN14511 VALUE)^{2,3}					
TOTAL HEATING CAPACITY	kW	476.3	526.9	560.6	597.0
COP	kW/kW	3.16	3.21	3.18	3.21
HEATING ONLY (EN14825 VALUE)^{6,7}					
RATED HEATING CAPACITY AT Tdesign, h	kW	342	372	361	393
BIVALENT TEMPERATURE	°C	-7	-7	-9	-9
SCOP ⁴	kW/kW	3.38	3.41	3.38	3.56
SEASONAL SPACE HEATING ENERGY EFFICIENCY	%	132	133	132	139
EXCHANGERS					
HEAT EXCHANGER USER SIDE IN COOLING¹					
WATER FLOW	l/s	21.98	24.05	25.72	28.02
PRESSURE DROP	kPa	31.3	34.5	39.4	26.5
HEAT EXCHANGER USER SIDE IN HEATING³					
WATER FLOW	l/s	22.92	25.36	26.97	28.75
PRESSURE DROP	kPa	34.1	38.3	43.4	27.9
REFRIGERANT CIRCUIT					
COMPRESSORS	No.	2	2	2	2
NUMBER OF CAPACITY STEPS	No.	0	0	0	0
NO. CIRCUITS	No.	2	2	2	2
REGULATION		STEPLESS	STEPLESS	STEPLESS	STEPLESS
MINIMUM CAPACITY STEP	%	25	25	25	25
REFRIGERANT TYPE		R513A	R513A	R513A	R513A
REFRIGERANT CHARGE	kg	233	256	253	276
OIL CHARGE	kg	44	44	44	44
Rc (ASHRAE) ⁸	kg/kW	0.51	0.51	0.48	0.48
FANS					
QUANTITY	No.	10	12	12	12
AIR FLOW	m ³ /s	50.61	65.60	61.02	61.02
FANS POWER INPUT	kW	2	2	2	2
NOISE LEVEL					
SOUND PRESSURE ⁹	dB(A)	79	80	80	80
SOUND POWER LEVEL IN COOLING ^{10,11}	dB(A)	99	101	101	101
SOUND POWER LEVEL IN HEATING ^{10,12}	dB(A)	99	101	101	101
DIMENSIONS AND WEIGHT¹³					
WIDTH	mm	2260	2260	2260	2260
DEPTH	mm	4900	5800	5800	5800
HEIGHT	mm	2430	2430	2430	2430
OPERATING WEIGHT	kg	6050	6630	6710	6950

i-FX-N R513A Air Source Heat Pump

(452 to 1,111kW)

High Efficiency Version (/A)



Notes:

1. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C; Source (side) heat exchanger air (in) 7.0°C - 87% R.H.
4. Seasonal Coefficient of Performance
5. European seasonal energy efficiency ratio.
6. Average Weather Conditions. Seasonal space heating efficiency class LOW TEMPERATURE (REGULATION) (EU) N. 813/2013).
7. Variable flow rate and variable temperature calculation.
8. Rated in accordance with AHRI Standard 550/590.
9. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
10. Sound power on the basis of measurements made in compliance with ISO 9614.
11. Sound power level in cooling, outdoors.
12. Sound power level in heating, outdoors.
13. Unit in standard configuration/execution, without optional accessories.

 Eurovent Certified Data

Designed for medium to large capacity LTHW commercial applications, the Climaveneta **i-FX-N** heat pump features inverter driven screw compressors and is suitable for a wide range of projects. The new generation of air source heat pump has been perfectly designed for reducing operating costs, while keeping an extremely compact design.

Key Features & Benefits

- Total Inverter Technology
- Lower GWP R513A refrigerant
- Inverter screw compressors

R513A

MODEL		0472	0512	0572	0602	0652	0772	0902	1002	1152
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE										
COOLING ONLY (GROSS VALUE)¹										
COOLING CAPACITY	kW	465.0	517.9	549.9	590.8	669.9	764.1	899.3	1034	1154
TOTAL POWER INPUT	kW	166.0	177.9	194.2	211.1	237.8	265.5	314.0	351.4	390.5
EER	kW/kW	2.80	2.91	2.83	2.80	2.82	2.88	2.86	2.94	2.96
ESEER ⁵	kW/kW	4.56	4.66	4.66	4.61	4.51	4.55	4.58	4.66	4.71
COOLING ONLY (EN14511 VALUE)^{11,12}										
COOLING CAPACITY	kW	464.6	517.4	549.4	590.4	669.4	763.6	898.8	1033	1153
EER	kW/kW	2.78	2.88	2.80	2.78	2.79	2.85	2.84	2.91	2.93
ESEER ⁵	kW/kW	4.41	4.49	4.47	4.48	4.36	4.41	4.44	4.50	4.56
HEATING ONLY (GROSS VALUE)³										
TOTAL HEATING CAPACITY	kW	452.8	506.3	547.4	575.3	663.8	747.6	871.4	1006	1111
TOTAL POWER INPUT	kW	139.1	152.6	166.0	174.8	202.2	223.2	261.3	293.8	327.5
COP	kW/kW	3.26	3.32	3.30	3.30	3.28	3.35	3.34	3.42	3.39
HEATING ONLY (EN14511 VALUE)^{2,3}										
TOTAL HEATING CAPACITY	kW	453.2	506.8	547.9	575.7	664.3	748.1	872.0	1007	1112
COP	kW/kW	3.23	3.29	3.26	3.27	3.26	3.32	3.31	3.39	3.36
HEATING ONLY (EN14825 VALUE)^{6,7}										
RATED HEATING CAPACITY AT Tdesign, h	kW	348	384	-	-	-	-	-	-	-
BIVALENT TEMPERATURE	°C	-7	-7	-	-	-	-	-	-	-
SCOP ⁴	kW/kW	4.00	4.03	-	-	-	-	-	-	-
SEASONAL SPACE HEATING ENERGY EFFICIENCY	%	157	158	-	-	-	-	-	-	-
EXCHANGERS										
HEAT EXCHANGER USER SIDE IN COOLING¹										
WATER FLOW	l/s	22.24	24.76	26.29	28.25	32.04	36.54	43.01	49.43	55.17
PRESSURE DROP	kPa	32.0	36.6	41.2	26.9	33.3	34.3	32.4	42.8	37.5
HEAT EXCHANGER USER SIDE IN HEATING³										
WATER FLOW	l/s	21.86	24.44	26.42	27.77	32.04	36.09	42.07	48.56	53.64
PRESSURE DROP	kPa	31.0	35.6	41.6	26.0	33.3	33.4	31.0	41.3	35.4
REFRIGERANT CIRCUIT										
COMPRESSORS	No.	2	2	2	2	2	2	2	2	2
NUMBER OF CAPACITY STEPS	No.	0	0	0	0	0	0	0	0	0
NO. CIRCUITS	No.	2	2	2	2	2	2	2	2	2
REGULATION		STEPLESS	STEPLESS	STEPLESS	STEPLESS	STEPLESS	STEPLESS	STEPLESS	STEPLESS	STEPLESS
MINIMUM CAPACITY STEP	%	-	-	-	-	-	-	-	-	-
REFRIGERANT TYPE		R513A	R513A	R513A	R513A	R513A	R513A	R513A	R513A	R513A
REFRIGERANT CHARGE	kg	233	259	253	276	288	391	495	518	618
OIL CHARGE	kg	44	44	44	44	38	60	60	60	60
Rc (ASHRAE) ⁸	kg/kW	0.51	0.51	0.46	0.47	0.43	0.52	0.56	0.51	0.54
FANS										
QUANTITY	No.	10	12	12	12	14	16	20	24	24
AIR FLOW	m ³ /s	48.50	58.37	58.37	58.37	69.25	79.14	97.00	121.0	116.7
FANS POWER INPUT	kW	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
NOISE LEVEL										
SOUND PRESSURE ⁹	dB(A)	80	81	81	81	81	81	81	82	82
SOUND POWER LEVEL IN COOLING ^{10,11}	dB(A)	100	102	102	102	102	103	103	105	105
SOUND POWER LEVEL IN HEATING ^{10,12}	dB(A)	101	103	103	103	103	104	104	106	106
DIMENSIONS AND WEIGHT¹³										
WIDTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260
DEPTH	mm	4900	5800	5800	5800	7000	7900	10000	11800	11800
HEIGHT	mm	2580	2580	2580	2580	2580	2580	2580	2580	2580
OPERATING WEIGHT	kg	6400	6894	7033	7256	7518	8551	9835	11578	12651

NX2-W-G06-H R454B Water to Water Heat Pump Reversible on the Hydraulic Side

(53 to 276kW)



CLIMAVENETA

Designed to accommodate a variety of applications, Climaveneta's **NX2-W-G06-H** is a compact and flexible water to water heat pump, which is reversible on the hydraulic side.

Key Features & Benefits

- Exceptional SEER and SCOP performance
- Rotary Scroll compressors with IDV technology
- Up to 60°C supply water temperature
- Advanced decentralised control options (MultiManager)
- Low GWP R454B refrigerant
- Inbuilt safety equipment for an A2L refrigerant
- Compatible with Variable Primary Flow (VPF)
- Compact design

R454B

MODEL		0042	0052	0062	0072	0082	0092	0112	0122	0142	0162	0182	0202	0222	0242
PERFORMANCE - HEATING ONLY															
GROSS VALUE ¹															
TOTAL HEATING CAPACITY	kW	53.5	62.6	73.4	83.3	92.6	105.4	121.3	136.8	158.9	176.7	207.4	222.9	244.9	275.6
TOTAL POWER INPUT	kW	12.5	14.3	16.5	18.6	20.6	23.7	27.2	30.3	35.5	39.7	45.6	48.8	53.9	59.9
COP	kW/kW	4.28	4.38	4.45	4.48	4.50	4.45	4.46	4.52	4.48	4.45	4.55	4.57	4.54	4.60
EN14511 VALUES ^{1, 2}															
TOTAL HEAT CAPACITY	kW	53.6	62.7	73.5	83.5	92.7	105.5	121.5	136.9	159.1	176.9	207.6	223.2	245.3	275.9
COP	kW/kW	4.04	4.12	4.23	4.25	4.32	4.28	4.29	4.35	4.31	4.28	4.35	4.39	4.34	4.36
SEASONAL PERFORMANCE - LOW TEMPERATURE³															
RATED HEAT OUTPUT AT T _{designh}	kW	63	74	87	99	110	125	144	163	189	210	247	265	291	325
SCOP		6.29	6.51	6.74	6.71	6.87	6.89	6.83	6.83	6.83	6.78	6.81	6.81	7.13	6.61
PERFORMANCE η_s	%	243	254	262	261	267	268	265	265	265	263	264	264	277	256
SEASONAL PERFORMANCE - MEDIUM TEMPERATURE⁴															
RATED HEAT OUTPUT AT T _{designh}	kW	59	69	80	91	101	115	133	150	175	194	227	244	269	302
SCOP		4.48	4.64	4.76	4.78	4.97	4.93	4.93	4.93	4.94	4.86	4.89	4.97	5.14	4.84
PERFORMANCE η_s	%	171	178	182	183	191	189	189	189	190	186	188	191	197	186
PERFORMANCE - COOLING ONLY															
GROSS VALUE ⁵															
TOTAL COOLING CAPACITY	kW	45.84	53.92	64.85	73.47	82.96	94.45	108.5	122.6	142.0	157.2	184.6	200.2	217.8	242.1
TOTAL POWER INPUT	kW	10.04	11.34	13.18	14.94	16.13	18.48	21.38	23.89	27.78	31.48	36.25	38.67	42.78	48.13
EER	kW/kW	4.58	4.77	4.91	4.93	5.16	5.10	5.70	5.13	5.11	4.99	5.10	5.17	5.09	5.03
EN14511 VALUES ^{5, 12}															
TOTAL COOLING CAPACITY	kW	45.7	53.8	64.7	73.3	82.8	94.3	108.3	122.4	141.7	156.9	184.3	199.8	217.4	241.7
EER	kW/kW	4.39	4.56	4.74	4.72	5.00	4.97	4.93	4.98	4.96	4.83	4.92	5.00	4.91	4.84
SEASONAL PERFORMANCE⁶															
P _{rated,c}	kW	45.7	53.8	64.7	73.3	82.8	94.3	108.3	122.4	141.7	156.9	184.3	199.8	217.4	241.7
SEER		6.31	6.63	7.01	7.04	7.18	7.41	6.97	7.09	7.2	7.02	7.22	7.17	7.13	6.80
PERFORMANCE η_s	%	250	262	278	279	284	293	276	281	285	278	286	284	282	269
ELECTRICAL DATA															
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
FLA ⁷	Total	A	32	37	42	48	53	59	68	76	91	99	113	121	135
EXCHANGERS															
MINIMUM WATER FLOW	Evaporator	l/s	1.333	1.583	1.917	2.167	2.444	2.806	3.222	3.639	4.222	4.667	5.472	5.944	6.472
MINIMUM WATER FLOW	User Side	l	180	240	313	350	399	472	466	574	712	929	921	940	926
MINIMUM WATER FLOW	Condenser	l/s	1.056	1.222	1.472	1.667	1.889	2.139	2.472	2.778	3.250	3.611	4.222	4.556	4.972
HEAT EXCHANGER IN HEATING¹¹															
WATER FLOW	User Side	l/s	2.584	3.022	3.542	4.021	4.471	5.087	5.857	6.602	7.671	8.529	10.01	10.76	11.82
PRESSURE DROP ²	User Side	kPa	25.3	25.2	29.0	34.4	15.3	15.2	16.7	16.3	17.0	20.7	21.4	22.7	23.5
WATER FLOW	Source Side	l/s	3.331	3.92	4.609	5.243	5.837	6.622	7.632	8.631	10	11.11	13.1	14.11	15.48
PRESSURE DROP ²	Source Side	kPa	84.1	91.1	55.8	55.3	54.3	54.2	59.4	60.1	61.2	62.0	71.2	63.4	75.7
HEAT EXCHANGER USER SIDE IN COOLING⁵															
WATER FLOW	User Side	l/s	2.192	2.579	3.101	3.513	3.967	4.517	5.188	5.865	6.788	7.519	8.83	9.572	10.41
PRESSURE DROP ²	User Side	kPa	36.4	39.4	25.3	24.8	25.1	25.2	27.4	27.7	28.2	28.4	32.3	29.2	34.3
WATER FLOW	Source Side	l/s	2.66	3.107	3.716	4.21	4.721	5.38	6.186	6.981	8.086	8.988	10.52	11.38	12.41
PRESSURE DROP ²	Source Side	kPa	26.8	26.6	32.0	37.7	17.1	17.0	17.5	18.3	18.9	23.0	23.7	25.3	31.8
REFRIGERANT CIRCUIT															
COMPRESSORS	No.	2	2	2	2	2	2	2	2	2	2	2	2	2	2
CAPACITY STEPS	No.	2	2	2	2	2	2	2	2	2	2	2	2	2	2
CIRCUITS	No.	1	1	1	1	1	1	1	1	1	1	1	1	1	1
REGULATION															
MINIMUM CAPACITY STEP	%	48	42	35	31	43	33	42	37	32	39	33	37	44	49
REFRIGERANT		R454B	R454B	R454B	R454B	R454B	R454B	R454B	R454B	R454B	R454B	R454B	R454B	R454B	R454B
REFRIGERANT CHARGE ⁸	kg	3.4	4.7	5.0	6.0	7.2	8.6	9.9	11.3	12.5	13.3	16.3	19.3	19.7	19.8
OIL CHARGE	kg	6.0	6.3	6.3	6.9	6.9	9.4	9.7	9.7	9.7	9.7	12.2	12.2	12.2	12.2
RC (ASHRAE) ⁹	kg/kW	0.08	0.09	0.08	0.08	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.10	0.09
NOISE LEVELS															
TOTAL SOUND PRESSURE ¹⁰	dB(A)	57	58	59	61	61	63	63	63	69	70	70	70	72	72
TOTAL SOUND POWER LEVEL IN COOLING ¹¹	dB(A)	73	74	75	77	77	80	80	80	86	87	87	87	89	89
TOTAL SOUND POWER LEVEL IN HEATING ¹¹	dB(A)	74	75	76	78	78	81	81	81	87	88	88	88	90	90
SIZE AND WEIGHT¹²															
WIDTH	mm	885	885	885	885	885	885	885	885	885	885	885	885	885	885
DEPTH	mm	1320	1320	1320	1320	1320	1640	1640	1640	1640	1640	1640	1640	1640	1640
HEIGHT	mm	1495	1495	1495	1495	1495	1805	1805	1805	1805	1805	1805	1805	1805	1805
OPERATING WEIGHT	kg	470	490	510	530	560	670	690	700	770	820	860	890	960	970

Notes:

- User side exchanger hot water temperature (in/out) 40°C/45°C; Source side exchanger water temperature (in/out) 10°C / 7°C (or maximum calculated temperature coming from the maximum flow rate allowed).
- Values in compliance with EN14511.
- Seasonal space heating energy efficiency class Low Temperature [Regulation (EU) N. 813/2013]. Average Weather Conditions. Type of calculation with variable flow and variable temperature.
- Seasonal space heating energy efficiency class Medium Temperature [Regulation (EU) N. 813/2013]. Average Weather Conditions. Type of calculation with variable flow and variable temperature.
- Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger water (in/out) 30°C/35°C.
- Parameter calculated according to [Regulation (EU) N. 2016/2281].
- Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
- Theoretical - refer to serial plate for actual charge volumes.
- Rate in accordance with AHRH standard 550/590.
- Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
- Sound power on the basis of measurement taken in compliance with ISO 9614.
- Unit in standard configuration, without optional accessories.

i-FX-Q2 R513A Air Source Integra Unit

(497 to 1,071kW)

High Efficiency Version (/CA)

Key Features & Benefits

- Total Inverter Technology
- Multiple heat recovery configurations
- ErP2021 compliant
- Low noise
- Energy efficient
- Lower GWP R513A refrigerant



Notes:

1. Unit in standard configuration, without optional accessories.
 2. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C.
 3. Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C; Source (side) heat exchanger air (in) 7.0°C - 87% R.H.
 4. Unit performance with inverter compressor at nominal speed.
 5. Values in compliance with EN14511.
 6. Plant (side) cooling exchanger water *7.00°C (same water flow rate found during the cooling mode); Plant (side) heat exchanger water *45.00°C (same water flow rate found during the heating mode).
 7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
 8. Parameter calculated for LOW-TEMPERATURE applications in AVERAGE climate conditions according to [REGULATION (EU) N. 813/2013].
 9. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
 10. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
 11. Sound power on the basis of measurements taken in compliance with ISO 9614.
 12. Sound power level in cooling, outdoors.
 13. Sound power level in heating, outdoors.
- The units highlighted in this publication contain [GWP100 631] fluorinated greenhouse gases.
ELCA Engine ver.4.5.4.0

■ Eurovent Certified Data

The Climaveneta range of **i-FX-Q2** air source Integra units are designed to produce chilled and hot water simultaneously and efficiently using variable frequency drive compressors. Available with lower GWP R513A refrigerant, the new i-FX-Q2 units apply variable speed technology in all of its main components, achieving top-level performances in any load condition.

R513A

MODEL			0502	0532	0602	0652	0702	0802	0902	1002	1102
PERFORMANCE - GROSS VALUE¹											
COOLING CAPACITY ²	Cooling Only	kW	520.5	536.1	570	670.8	712.2	787.4	982.0	1048	1125
EER ²	Cooling Only	kW/kW	2.89	2.96	3.02	2.92	2.98	3.01	2.85	2.94	2.74
TOTAL HEATING CAPACITY ³	Heating Only	kW	496.8	496.8	531	643.9	684.9	764.8	939.9	988.7	1071
COP ³	Heating Only	kW/kW	3.25	3.25	3.32	3.29	3.33	3.41	3.19	3.17	3.22
PERFORMANCE RATED - EN14511 VALUES^{4,5}											
COOLING CAPACITY ²	Cooling Only	kW	487.0	530.8	569.5	626.3	688.4	786.9	914.4	984.6	1082
EER ²	Cooling Only	kW/kW	2.99	2.99	2.99	2.99	2.99	2.99	3.03	3.01	2.86
TOTAL HEATING CAPACITY ⁵	Heating Only	kW	463.4	491.5	531.3	599.0	659.5	765.3	871.2	938.3	1029
COP ⁵	Heating Only	kW/kW	3.31	3.27	3.3	3.34	3.32	3.38	3.33	3.36	3.35
COOLING WITH TOTAL HEAT RECOVERY - EN14511 VALUES¹⁶											
COOLING CAPACITY		kW	488.1	532.5	570.1	623.5	682.1	783.9	913.9	986.8	1101
TOTAL POWER INPUT		kW	145.7	160.5	170.6	185.6	205.6	234.7	275.7	292.5	329.6
RECOVERY HEAT EXCHANGER CAPACITY		kW	623.1	681.2	728.8	795.2	872.3	1002	1168	1257	1405
TER		kW/kW	7.63	7.56	7.62	7.65	7.56	7.61	7.55	7.67	7.6
SEASONAL EFFICIENCY IN COOLING (REG. EU 2016/2281) - AMBIENT REFRIGERATION⁷											
P _{rated,c}		kW	-	-	-	626	688	787	914	985	1082
SEER			-	-	-	5.09	5.13	5.03	4.74	4.67	4.65
PERFORMANCE η _s		%	-	-	-	201	202	198	186	184	183
SEASONAL EFFICIENCY IN HEATING (REG. EU 813/2013)^{8,9}											
P _{design}		kW	372	372	393	-	-	-	-	-	-
SCOP			3.93	3.93	3.89	-	-	-	-	-	-
PERFORMANCE η _s		%	154	154	153	-	-	-	-	-	-
HEAT EXCHANGERS⁴											
WATER FLOW ²	Cooling - User Side	l/s	23.31	25.41	27.26	29.97	32.95	37.65	43.76	47.12	51.77
PRESSURE DROP AT THE HEAT EXCHANGER ²	Cooling - User Side	kPa	40.8	51.6	32.5	40.5	45.4	29.0	39.7	42.3	51.4
WATER FLOW ³	Heating - User Side	l/s	22.35	23.71	25.63	28.89	31.81	36.92	42.02	45.26	49.63
PRESSURE DROP AT THE HEAT EXCHANGER ³	Heating - User Side	kPa	23.0	25.9	21.9	27.6	32.7	32.9	42.6	35.6	30.6
ELECTRICAL DATA											
POWER SUPPLY		V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
F.L.A. ⁹	Total	A	362	362	387	458	484	515	576	625	699
REFRIGERANT CIRCUIT											
COMPRESSORS NR.		N°	2	2	2	2	2	2	2	2	2
NO. CIRCUITS		N°	2	2	2	2	2	2	2	2	2
REGULATION											
REFRIGERANT			R513A	R513A	R513A	R513A	R513A	R513A	R513A	R513A	R513A
THEORETICAL REFRIGERANT CHARGE											
FANS		kg	253	275	307	338	372	425	451	473	473
NOISE LEVEL⁴											
QUANTITY		N°	10	10	12	14	16	16	16	20	20
AIRFLOW		m³/s	57.29	57.29	68.18	79.04	89.76	87.47	87.47	111.2	111.2
NOISE LEVEL⁴											
TOTAL SOUND PRESSURE ¹⁰		dB(A)	67	67	68	69	69	68	70	70	70
TOTAL SOUND POWER LEVEL IN COOLING ^{11,12}		dB(A)	100	100	101	102	102	101	103	103	103
SOUND POWER LEVEL IN HEATING ^{11,13}		dB(A)	100	100	101	102	102	101	103	103	103
SIZE AND WEIGHT¹											
WIDTH		mm	2260	2260	2260	2260	2260	2260	2260	2260	2260
DEPTH		mm	8150	8150	8900	9650	10400	10400	10400	11900	11900
HEIGHT		mm	2530	2530	2530	2530	2530	2530	2530	2530	2530
OPERATING WEIGHT		kg	8350	8380	9080	9590	10060	11010	12310	14110	14150

1.25

Commercial Heat
Pumps & Chillers

NX2-W-G06-H R454B Water to Water Heat Pump Reversible on the Hydraulic Side
i-FX-Q2 R513A Air Source Integra Unit, High Efficiency Version

i-FX-Q2 R513A Air Source Integra Unit

(492 to 1,018kW)

Low Noise Version (/SL-CA)

Key Features & Benefits

- Total Inverter Technology
- Multiple heat recovery configurations
- ErP2021 compliant
- Low noise
- Energy efficient
- Lower GWP R513A refrigerant



Notes:

1. Unit in standard configuration, without optional accessories.
 2. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C.
 3. Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C; Source (side) heat exchanger air (in) 7.0°C - 87% R.H.
 4. Unit performance with inverter compressor at nominal speed.
 5. Values in compliance with EN14511.
 6. Plant (side) cooling exchanger water *7.00°C (same water flow rate found during the cooling mode); Plant (side) heat exchanger water */45.00°C (same water flow rate found during the heating mode).
 7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
 8. Parameter calculated for LOW-TEMPERATURE applications in AVERAGE climate conditions according to [REGULATION (EU) N. 813/2013].
 9. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
 10. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
 11. Sound power on the basis of measurements taken in compliance with ISO 9614.
 12. Sound power level in cooling, outdoors.
 13. Sound power level in heating, outdoors.
- The units highlighted in this publication contain [GWP100 631] fluorinated greenhouse gases.
ELCA Engine ver.4.5.4.0

■ Eurovent Certified Data

The Climaveneta range of **i-FX-Q2** air source Integra units are designed to produce chilled and hot water simultaneously and efficiently using variable frequency drive compressors. Available with lower GWP R513A refrigerant, the new i-FX-Q2 units apply variable speed technology in all of its main components, achieving top-level performances in any load condition.

R513A

MODEL			0502	0532	0602	0652	0702	0802	0902	1002	1102
PERFORMANCE - GROSS VALUE¹											
COOLING CAPACITY ²	Cooling Only	kW	498.6	513.3	549	646.7	686.7	765.6	905.4	982	1039
EER ²	Cooling Only	kW/kW	2.72	2.79	2.91	2.82	2.91	2.93	2.81	2.83	2.69
TOTAL HEATING CAPACITY ³	Heating Only	kW	492	492	526.1	637.4	678.9	756.3	881.6	948.9	1018
COP ³	Heating Only	kW/kW	3.26	3.26	3.33	3.31	3.34	3.41	3.32	3.35	3.38
PERFORMANCE RATED - EN14511 VALUES^{4,5}											
COOLING CAPACITY ²	Cooling Only	kW	467.1	508	548.6	603.6	664.5	765.1	880.5	951.2	1038
EER ²	Cooling Only	kW/kW	2.86	2.85	2.88	2.92	2.94	2.91	2.85	2.87	2.66
TOTAL HEATING CAPACITY ⁵	Heating Only	kW	459	486.8	526.4	593.3	653.7	756.8	860.7	929	1018
COP ⁵	Heating Only	kW/kW	3.33	3.28	3.31	3.35	3.34	3.39	3.33	3.38	3.36
COOLING WITH TOTAL HEAT RECOVERY - EN14511 VALUES¹⁶											
COOLING CAPACITY		kW	488.1	532.6	570.1	623.5	682.1	783.8	913.9	986.8	1100
TOTAL POWER INPUT		kW	145.5	160.3	170.4	185.3	205.4	234.5	274.6	291.6	329.3
RECOVERY HEAT EXCHANGER CAPACITY		kW	623.1	681.4	728.8	795.2	872.3	1002	1168	1257	1405
TER		kW/kW	7.64	7.57	7.62	7.66	7.57	7.61	7.58	7.7	7.61
SEASONAL EFFICIENCY IN COOLING (REG. EU 2016/2281) - AMBIENT REFRIGERATION⁷											
P _{rated,C}		kW	-	-	-	604	665	765	881	951	1038
SEER			-	-	-	5.08	5.13	4.97	4.71	4.63	4.61
PERFORMANCE η _s		%	-	-	-	200	202	196	185	182	181
SEASONAL EFFICIENCY IN HEATING (REG. EU 813/2013)¹⁸											
P _{design}		kW	370	370	393	-	-	-	-	-	-
SCOP			4.01	3.93	4.00	-	-	-	-	-	-
PERFORMANCE η _s		%	157	154	157	-	-	-	-	-	-
HEAT EXCHANGERS⁴											
WATER FLOW ²	Cooling - User Side	l/s	22.36	24.32	26.26	28.89	31.8	36.61	42.14	45.52	49.69
PRESSURE DROP AT THE HEAT EXCHANGER ²	Cooling - User Side	kPa	37.5	47.3	30.2	37.6	42.3	27.4	36.8	39.5	47.4
WATER FLOW ³	Heating - User Side	l/s	22.14	23.48	25.39	28.62	31.53	36.51	41.52	44.81	49.13
PRESSURE DROP AT THE HEAT EXCHANGER ³	Heating - User Side	kPa	22.6	25.4	21.5	27.1	32.1	32.1	41.5	34.9	30
ELECTRICAL DATA											
POWER SUPPLY		V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
F.L.A. ⁹	Total	A	362	362	387	458	484	515	576	625	699
REFRIGERANT CIRCUIT											
COMPRESSORS NR.		N°	2	2	2	2	2	2	2	2	2
NO. CIRCUITS		N°	2	2	2	2	2	2	2	2	2
REGULATION											
REFRIGERANT			R513A	R513A	R513A	R513A	R513A	R513A	R513A	R513A	R513A
THEORETICAL REFRIGERANT CHARGE		kg	253	275	307	338	372	425	451	473	473
FANS											
QUANTITY		N°	10	10	12	14	16	16	16	20	20
AIRFLOW		m³/s	41.76	41.76	49.42	56.84	64.96	62.17	62.17	80.03	80.03
NOISE LEVEL⁴											
TOTAL SOUND PRESSURE ¹⁰		dB(A)	57	58	58	59	59	59	61	61	59
TOTAL SOUND POWER LEVEL IN COOLING ^{11,12}		dB(A)	90	91	91	92	92	92	94	94	92
SOUND POWER LEVEL IN HEATING ^{11,13}		dB(A)	90	91	91	92	92	92	94	94	92
SIZE AND WEIGHT¹											
WIDTH		mm	2260	2260	2260	2260	2260	2260	2260	2260	2260
DEPTH		mm	8150	8150	8900	9650	10400	10400	10400	11900	11900
HEIGHT		mm	2530	2530	2530	2530	2530	2530	2530	2530	2530
OPERATING WEIGHT		kg	8800	8830	9530	10040	10510	11450	12750	14560	14600

EW-HT R134a Water to Water Heat Pump

(70 to 279kW)



CLIMAVENETA

Notes:

1. Plant (side) heat exchanger water (in/out) 70°C/78°C; Source (side) heat exchanger water (in/out) 45°C/40°C.
2. Values in compliance with EN14511.
3. Seasonal space heating energy efficiency class MEDIUM TEMPERATURE in AVERAGE climate conditions. [REGULATION (EU) N. 813/2013].
4. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
5. Sound power on the basis of measurements made in compliance with ISO 9614.
6. Sound power level in heating, indoors.
7. Unit in standard configuration/execution, without optional accessories.
8. Seasonal space heating energy efficiency.
9. Fixed flow rate and variable temperature calculation.

The units highlighted in this publication contain HFC R134a [GWP₁₀₀1430] fluorinated greenhouse gases.

The Climaveneta **EW-HT** is perfect for applications where very high temperature water is needed. With the ability to provide hot water up to 78°C, and when used in combination with our INTEGRA range of 4-pipe systems, the operating parameters of the EW-HT make it the ideal solution for a wide range of applications. Applications such as residential and commercial buildings, industrial process heat recovery (including IT Cooling) and district heating systems.

Key Features & Benefits

- Wide operating range, with hot water production up to 78°C (evaporator water outlet up to 40°C)
- Maximum reliability with two independent refrigerant circuits, designed to ensure maximum efficiency at full load
- Compact design
- Electronic expansion valve supplied as standard

R134a

MODEL		0152	0182	0202	0262	0302	0412	0512	0612
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE - HEATING ONLY¹									
HEATING CAPACITY	kW	70.2	79.3	92.5	113	139	181	225	279
TOTAL POWER INPUT	kW	17.0	18.9	22.0	27.9	34.2	43.7	55.1	67.6
COP	kW/kW	4.13	4.20	4.20	4.05	4.08	4.14	4.08	4.13
PERFORMANCE - HEATING ONLY (EN14511 VALUE)^{1,2}									
HEATING CAPACITY	kW	70.4	79.5	92.7	113	140	181	225	280
COP	kW/kW	4.01	4.07	4.08	3.94	3.98	4.04	4.01	4.06
SEASONAL ENERGY EFFICIENCY (REG. EU 813/2013)^{3,9}									
PDESIGN	kW	38.6	43.6	50.0	61.6	78.1	104	128	157
SCOP		3.27	3.39	3.45	3.30	3.30	3.25	3.27	3.30
PERFORMANCE η_s ⁹	%	123	128	130	124	124	122	123	124
EXCHANGERS¹									
HEAT EXCHANGER WATER FLOW (USER / SOURCE)	l/s	2.15 / 2.62	2.42 / 2.97	2.83 / 3.47	3.45 / 4.19	4.26 / 5.18	5.52 / 6.74	6.87 / 8.35	8.54 / 10.41
HEAT EXCHANGER PRESSURE DROP (USER / SOURCE)	kPa	23.9 / 45.4	25.0 / 46.7	24.2 / 51.8	24.2 / 53.8	19.7 / 49.7	19.8 / 50.1	19.8 / 37.6	20.1 / 37.7
REFRIGERANT CIRCUIT									
COMPRESSORS	No.	2	2	2	2	2	2	2	2
NUMBER OF CIRCUITS	No.	2	2	2	2	2	2	2	2
TYPE OF REGULATION									
MINIMUM CAPACITY STEPS	%	50	50	50	50	50	50	50	50
TYPE OF REFRIGERANT									
REFRIGERANT CHARGE	kg	6	7	8	9	10	11	12	13
OIL CHARGE	kg	5	7	7	7	7	9	14	13
NOISE LEVEL									
SOUND POWER LEVEL ^{5,6}	dB(A)	74	74	74	76	76	78	78	80
SOUND PRESSURE LEVEL ⁴	dB(A)	58	58	58	60	60	62	62	64
DIMENSIONS AND WEIGHT⁷									
WIDTH	mm	1223	1223	1223	1223	1223	1223	1223	1223
DEPTH	mm	877	877	877	877	877	877	877	877
HEIGHT	mm	1496	1496	1496	1496	1496	1496	1496	1496
OPERATING WEIGHT	kg	365	380	390	415	430	610	675	740

Commercial Heat Pumps & Chillers


Our Chiller Range - An Overview

Consisting of a wide range of models, the Mitsubishi Electric range of chillers are a new generation of water chiller designed for comfort and process cooling applications.

Modern multi-function buildings, shopping centres, large business centres and process cooling are just some of the examples where increased comfort and precision control are required. The Mitsubishi Electric range of chillers can deliver all of this and more through their ability to be easily integrated into ever increasingly complex building systems.

In order to maximise performance, reliability and overall system efficiency, the Mitsubishi Electric range of products bring advanced technology and know-how together in customisable packages to aid design, specification, installation and on-going operation.

- Advanced modular technology
- Scalable and fully customisable
- Air source and water cooled versions
- Plate or Shell & Tube heat exchanger options

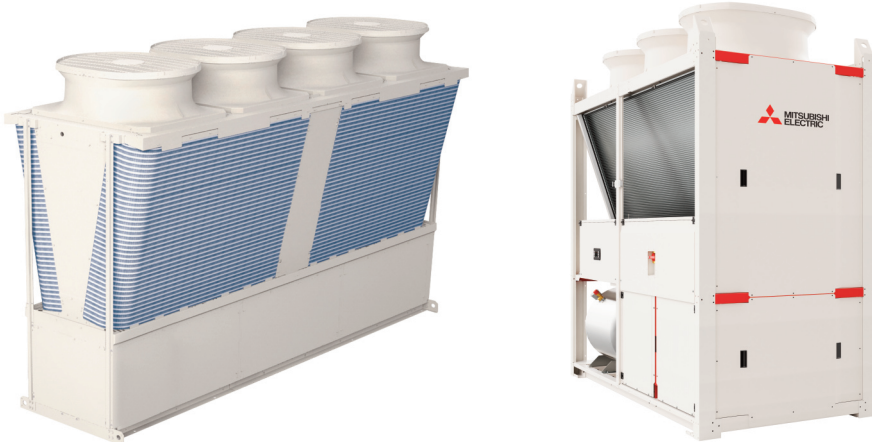

Flexible Application Options

Comfort Cooling

By using hydronic terminals, a simple application of a chiller can include cooling a space or environment to a set temperature. By using water as the medium of energy, high sensible cooling and stable room temperatures can be achieved.

- Retail stores / Shopping centres
- Airports
- Offices
- Cinemas / Theatres
- Schools / Universities
- Museums
- Hotels and Resorts
- Hospitals / Healthcare

Process Cooling

During manufacturing processes, many substances become hot and if overheated can negatively effect the productivity and efficiency of the process. By correctly applying a chiller it is possible to ensure optimum temperatures and conditions are maintained at a steady state.

- Manufacturing processes
- Automotive and Electronic processes
- Energy and Power generation
- Industrial technology
- IT Cooling

 **CLIMVENETA**



Commercial Heat Pumps & Chillers

Our Chiller range at a glance

A wide range of advanced, customisable models for use in efficiently cooling a space or an environment to a set temperature. Our chillers fall into two broad ranges:



Mitsubishi Electric - Modular chillers manufactured to the highest quality standard, and suitable for a range of different applications, from comfort to industrial and even IT cooling processes.

Climaveneta - Chillers that use a wide range of low and lower GWP refrigerants, alongside the latest fixed speed/inverter scroll and screw compressors.



MECH-iS-G07

R32 Modular

Air Cooled Chiller

(50 to 880kW)



Mitsubishi Electric's new **MECH-iS-G07** chiller range is manufactured to the highest quality standards. Featuring a compact design and modular expansion capabilities, it is suitable for many different applications, from comfort to industrial applications and even IT cooling processes.

Key Features & Benefits

- Wide water temperatures from -12°C to +24°C
- Best-in-class for low noise levels
- Compact design and modular expansion
- New Smart Coordinated Defrost
- Exceptional performance at part load operating conditions

R32

MODEL		0051	0061	0071	0082	0092	0102	0112
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE								
COOLING ONLY (GROSS VALUE)								
COOLING CAPACITY ¹	kW	50.09	60.11	70.14	80.14	90.23	100.2	110.2
TOTAL POWER INPUT ¹	kW	15.16	19.13	26.89	26.24	32.57	31.43	37.90
EER ¹	kW/kW	3.296	3.147	2.606	3.057	2.767	3.191	2.908
COOLING ONLY (EN14511 VALUE)								
COOLING CAPACITY	kW	50.0	60.0	70.0	80.0	90.0	100.0	110.0
EER ¹⁴	kW/kW	3.28	3.11	2.58	3.02	2.74	3.15	2.87
COOLING WITH PARTIAL RECOVERY								
COOLING CAPACITY ⁵	kW	51.97	62.36	72.77	83.15	93.61	104.0	114.3
TOTAL POWER INPUT ⁵	kW	14.66	18.50	25.99	25.37	31.48	30.39	36.64
DESUPERHEATER HEATING CAPACITY ⁵	kW	12.68	16.19	23.11	22.16	27.82	26.37	32.15
EXCHANGERS								
HEAT EXCHANGER USER SIDE IN COOLING								
WATER FLOW ¹	l/s	2.395	2.874	3.354	3.833	4.315	4.792	5.270
PRESSURE DROP AT THE HEAT EXCHANGER ¹¹	kPa	15.6	22.5	30.6	23.6	29.9	28.3	34.2
PARTIAL RECOVERY USER SIDE IN REFRIGERATION								
WATER FLOW ¹	l/s	0.612	0.781	1.116	1.070	1.343	1.273	1.552
PRESSURE DROP AT THE HEAT EXCHANGER ¹¹	kPa	8.57	14.0	28.5	12.9	20.4	12.9	19.1
PERFORMANCE								
COOLING ONLY (GROSS VALUE)								
16°C/10°C								
COOLING CAPACITY ²	kW	54.69	65.32	75.82	87.60	98.20	109.4	120.1
TOTAL POWER INPUT ²	kW	15.47	19.61	27.69	26.82	33.41	32.06	38.73
EER ²	kW/kW	3.529	3.332	2.736	3.269	2.940	3.408	3.103
23°C/15°C								
COOLING CAPACITY ³	kW	62.37	73.93	85.00	100.1	111.5	124.7	136.4
TOTAL POWER INPUT ³	kW	15.86	20.25	28.85	27.55	34.52	32.81	39.78
EER ³	kW/kW	3.925	3.640	2.941	3.640	3.232	3.802	3.427
EXCHANGERS								
16°C/10°C								
WATER FLOW ²	l/s	2.181	2.605	3.024	3.494	3.917	4.362	4.788
PRESSURE DROP AT THE HEAT EXCHANGER ¹¹	kPa	12.9	18.5	24.9	19.6	24.7	23.4	28.2
23°C/15°C								
WATER FLOW ³	l/s	1.868	2.215	2.546	2.999	3.339	3.735	4.086
PRESSURE DROP AT THE HEAT EXCHANGER ¹¹	kPa	9.50	13.3	17.6	14.5	17.9	17.2	20.6
REFRIGERANT CIRCUIT								
COMPRESSORS NR.	No.	1	1	1	2	2	2	2
NO. CIRCUITS	No.	1	1	1	1	1	1	1
REGULATION								
MIN. CAPACITY STEP	%	27	27	27	22	22	20	20
REFRIGERANT		R32	R32	R32	R32	R32	R32	R32
THEORETICAL REFRIGERANT CHARGE	kg	8.00	8.00	8.00	11.00	11.00	13.00	13.00
OIL CHARGE	kg	3.50	3.50	3.50	7.00	7.00	7.00	7.00
RC (ASHRAE) ⁹	kg/kW	0.16	0.13	0.12	0.14	0.12	0.13	0.12
FANS								
QUANTITY	No.	2	2	2	3	3	4	4
AIR FLOW	m ³ /s	6.86	7.01	7.01	9.84	9.84	12.97	12.97
TOTAL FANS POWER INPUT	kW	0.96	1.00	1.00	1.41	1.41	1.88	1.88
NOISE LEVEL								
TOTAL SOUND PRESSURE ⁷	dB(A)	45	46	48	48	49	50	50
TOTAL SOUND POWER LEVEL IN COOLING ^{8,9}	dB(A)	77	78	80	80	81	82	82
SIZE AND WEIGHT								
WIDTH (A) ¹⁰	mm	2085	2085	2085	2600	2600	3225	3225
DEPTH (B) ¹⁰	mm	1100	1100	1100	1100	1100	1100	1100
HEIGHT (H) ¹⁰	mm	2400	2400	2400	2400	2400	2400	2400
OPERATING WEIGHT ¹⁰	kg	630	630	630	830	830	940	940

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Plant (side) cooling exchanger water (in/out) 16°C/10°C; Source (side) heat exchanger air (in) 35°C.
3. Plant (side) cooling exchanger water (in/out) 23°C/15°C; Source (side) heat exchanger air (in) 35°C.
4. Values in compliance with EN14511.
5. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C; Plant (side) heat exchanger recovery water (in/out) 40°C/45°C.
6. Rated in accordance with AHRI Standard 550/590.
7. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
8. Sound power on the basis of measurements taken in compliance with ISO 9614.
9. Sound power level in cooling, outdoors.
10. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

For dimensional drawings of this model please see page 1.11

MECH-iF-G05 R513A High Performance Air Cooled Chiller

(414 to 921kW)



Mitsubishi Electric's new **MECH-iF-G05** high performance chiller brings a new class of efficiency with its proprietary Variable Speed Drive (VSD) screw compressor cooling. Available with three configurations for noise performance (Standard, NR Kit and SL version), it features a wide operating envelope and a patented Reduced Exergy Depletion (RED) Cooler, further driving efficiencies and energy saving.

Key Features & Benefits

- Best in class efficiency
- Mitsubishi Electric's proprietary single screw compressor
- 3 noise configurations available
- CU/AL coil treatments available
- Wide operating envelope down to -20°C ambient*

*Additional low temperature options may be required.

R513A

MODEL		0411	0802	0902	0411	0802	0902	0411	0802	0902
VERSION		-	-	-	-NR	-NR	-NR	-SL	-SL	-SL
PERFORMANCE - COOLING ONLY										
GROSS VALUE¹										
TOTAL COOLING CAPACITY	kW	414.4	814.7	921.1	411.0	807.0	913.0	407.1	799.6	903.7
TOTAL POWER INPUT	kW	133.7	249.6	289.6	134.5	251.0	291.1	135.6	252.8	293.1
EER	kW/kW	3.10	3.26	3.18	3.06	3.22	3.14	3.00	3.16	3.08
EN14511 VALUES^{1,2}										
TOTAL COOLING CAPACITY	kW	413.9	814.1	920.4	410.6	806.3	912.4	406.6	799.0	903.1
EER	kW/kW	3.06	3.22	3.15	3.01	3.17	3.10	2.96	3.12	3.05
SEASONAL PERFORMANCE³										
P _{RATED,C}	kW	413.9	814.1	920.4	410.6	806.3	912.4	406.6	799.0	903.1
SEER		5.34	5.62	5.73	5.33	5.61	5.73	5.32	5.62	5.73
PERFORMANCE η _s	%	210	222	226	210	222	226	210	222	226
HEAT EXCHANGER IN COOLING¹										
WATER FLOW	User Side l/s	19.8	39.0	44.1	19.7	38.6	43.7	19.5	38.2	43.2
PRESSURE DROP ²	User Side kPa	54.1	50.9	40.7	53.3	50	40.1	52.5	49.3	39.4
ELECTRICAL DATA										
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
FLA ⁴	Total A	269	533	554	269	533	554	269	533	554
EXCHANGERS										
MINIMUM WATER FLOW	Evaporator l/s	6.1	14.5	18.1	6.1	14.5	18.1	6.1	14.5	18.1
MINIMUM WATER CONTENT	Plant l	2000	2800	3200	2000	2800	3200	2000	2800	3200
FANS										
QUANTITY	No.	6	12	14	6	12	14	6	12	14
AIRFLOW	m ³ /s	32.4	64.8	75.6	29.4	58.8	68.6	27.8	55.6	64.8
REFRIGERANT CIRCUIT										
COMPRESSORS	No.	1	2	2	1	2	2	1	2	2
CIRCUITS	No.	1	2	2	1	2	2	1	2	2
REFRIGERANT		R513A	R513A	R513A	R513A	R513A	R513A	R513A	R513A	R513A
REFRIGERANT CHARGE ⁵	kg	89	170	199	89	170	199	89	170	199
NOISE LEVELS										
TOTAL SOUND PRESSURE ⁶	dB(A)	64	65	70	61	62	68	57	58	64
TOTAL SOUND POWER LEVEL IN COOLING ⁷	dB(A)	96	98	103	93	95	101	89	91	97
SIZE AND WEIGHT⁸										
WIDTH	mm	4150	7900	9150	4150	7900	9150	4150	7900	9150
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2500	2500	2500	2500	2500	2500	2500	2500	2500
OPERATING WEIGHT	kg	4350	8150	8610	4350	8150	8610	4350	8150	8610

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
5. Theoretical - refer to serial plate for actual charge volumes.
6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
7. Sound power on the basis of measurement taken in compliance with ISO 9614.
8. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

MECH-iF-G04 R1234ze High Performance Air Cooled Chiller (346 to 828kW)

Mitsubishi Electric's new **MECH-iF-G04** high performance chiller brings a new class of efficiency with its proprietary Variable Speed Drive (VSD) screw compressor cooling. Available with three configurations for noise performance (Standard, NR Kit and SL version), it features a wide operating envelope and a patented Reduced Exergy Depletion (RED) Cooler, further driving efficiencies and energy saving.

Key Features & Benefits

- Best in class efficiency
- Mitsubishi Electric's proprietary single screw compressor
- 3 noise configurations available
- CU/AL coil treatments available
- Low GWP refrigerant (GWP₁₀₀ = 1)*

*IPCC AR5

R1234ze



MODEL		0351	0702	0802	0351	0702	0802	0351	0702	0802
VERSION		-	-	-	-NR	-NR	-NR	-SL	-SL	-SL
PERFORMANCE - COOLING ONLY										
GROSS VALUE¹										
TOTAL COOLING CAPACITY	kW	346.0	701.9	828.1	342.6	696.2	819.5	339.2	690.0	811.0
TOTAL POWER INPUT	kW	105.8	213.0	269.5	106.0	213.5	270.5	106.6	214.3	271.6
EER	kW/kW	3.27	3.30	3.07	3.23	3.26	3.03	3.18	3.22	2.99
EN14511 VALUES^{1,2}										
TOTAL COOLING CAPACITY	kW	345.5	701.3	827.4	342.2	695.6	818.8	338.8	689.3	810.4
EER	kW/kW	3.22	3.25	3.04	3.19	3.22	3.00	3.14	3.18	2.95
SEASONAL PERFORMANCE³										
P _{RATED,C}	kW	345.5	701.3	827.4	342.2	695.6	818.8	338.8	689.3	810.4
SEER		5.68	5.83	5.85	5.68	5.83	5.85	5.67	5.83	5.84
PERFORMANCE η _s	%	224	230	231	224	230	231	224	230	231
HEAT EXCHANGER IN COOLING⁴										
WATER FLOW	User Side l/s	16.5	33.6	39.6	16.4	33.3	39.2	16.2	33.0	38.8
PRESSURE DROP ²	User Side kPa	48	54.1	48.4	47.2	53.4	47.6	46.5	52.6	46.7
ELECTRICAL DATA										
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
FLA ⁴	Total A	251	503	509	251	503	509	251	503	509
EXCHANGERS										
MINIMUM WATER FLOW	Evaporator l/s	5.7	12.3	14.6	5.7	12.3	14.6	5.7	12.3	14.6
MINIMUM WATER CONTENT	Plant l	1700	2400	2800	1700	2400	2800	1700	2400	2800
FANS										
QUANTITY	No.	6	12	14	6	12	14	6	12	14
AIRFLOW	m ³ /s	32.4	64.8	75.6	29.4	58.8	68.6	27.8	55.6	64.8
REFRIGERANT CIRCUIT										
COMPRESSORS	No.	1	2	2	1	2	2	1	2	2
CIRCUITS	No.	1	2	2	1	2	2	1	2	2
REFRIGERANT		R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze
REFRIGERANT CHARGE ⁵	kg	74	150	177	74	150	177	74	150	177
NOISE LEVELS										
TOTAL SOUND PRESSURE ⁶	dB(A)	68	70	72	66	68	70	59	61	63
TOTAL SOUND POWER LEVEL IN COOLING ⁷	dB(A)	100	103	105	98	101	103	91	94	96
SIZE AND WEIGHT⁸										
WIDTH	mm	4150	7900	9150	4150	7900	9150	4150	7900	9150
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2500	2500	2500	2500	2500	2500	2500	2500	2500
OPERATING WEIGHT	kg	4050	7650	8580	4050	7650	8580	4110	7730	8670

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
5. Theoretical - refer to serial plate for actual charge volumes.
6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
7. Sound power on the basis of measurement taken in compliance with ISO 9614.
8. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

e-series

EACV R32 Modular Air Cooled Chiller

(150 to 1,080kW)

The R32 e-Series **EACV** range allows for up to 6 individual units to be connected together to provide a system capacity from 150kW to 1,080kW. Using this modular approach reduces space requirements and simplifies lifting and installation.

Key Features & Benefits

- Highly efficient inverter scroll compressors
- Modular to maximise space saving
- Y-shaped heat exchangers allow for a greater surface area, maximising efficiency, whilst also keeping the units much narrower than conventional chillers

R32



MODEL		EACV-M1500YCL-N	EACV-M1800YCL-N
POWER SOURCE		3-phase 4-wire 380-400-415v 50/60Hz	
COOLING CAPACITY ¹		150	180
	Power Input	44.73	57.02
	EER	3.35	3.16
	IPLV ⁴	6.42	6.31
	Water Flow Rate	25.8	31.0
COOLING CAPACITY (EN14511) ²		149.18	178.80
	Power Input	45.55	58.22
	EER	3.28	3.07
	Eurovent Efficiency Class	A	B
	SEER	5.52	5.36
	Performance (η _{s,c})	217.8	211.4
	SEPR (HT)	7.11	6.36
	Water Flow Rate	25.8	31.0
CURRENT INPUT		76 - 72 - 69	96 - 91 - 88
	Cooling Current 380-400-415V ¹		
	Maximum Current	120	120
WATER PRESSURE DROP ¹		56	79
	Standard Piping		
	Inside Header Piping	134	190
TEMP RANGE		Outlet water 4~30	Outlet water 4~30
	Cooling		
	Outdoor	-15~52	-15~52
CIRCULATING WATER VOLUME RANGE		12.9~43.0	12.9~43.0
	SOUND PRESSURE LEVEL (Measured in anechoic room) at 1m ¹	65	67
	SOUND POWER LEVEL (Measured in anechoic room) ¹	83	85
DIAMETER OF WATER PIPE		65A (2 1/2B) housing type joint	65A (2 1/2B) housing type joint
	(Standard piping)		
	Outlet	65A (2 1/2B) housing type joint	65A (2 1/2B) housing type joint
DIAMETER OF WATER PIPE		150A (6B) housing type joint	150A (6B) housing type joint
	(Inside header piping)		
	Outlet	150A (6B) housing type joint	150A (6B) housing type joint
EXTERNAL FINISH		Polyester powder coating steel plate	Polyester powder coating steel plate
EXTERNAL DIMENSION		3400 x 1080 x 2350	3400 x 1080 x 2350
NET WEIGHT		1039 (2291)	1039 (2291)
	Standard Piping		
	Inside Header Piping	1067 (2352)	1067 (2352)
DESIGN PRESSURE		4.15	4.15
	R32		
	Water	1.0	1.0
HEAT EXCHANGER		Water Side	Water Side
	MPa	Stainless steel plate and copper brazing	Stainless steel plate and copper brazing
	Air Side	Salt-resistant corrugated fin & aluminium micro channel	Salt-resistant corrugated fin & aluminium micro channel
COMPRESSOR		Inverter scroll hermetic compressor	Inverter scroll hermetic compressor
	Type		
	Starting Method	Inverter	Inverter
	Quantity	4	4
FAN		11.5 x 4	11.5 x 4
	Motor Output		
	kW	270 x 4	270 x 4
	Air Flow Rate		
	m ³ /min	4500 x 4	4500 x 4
	L/s	9534 x 4	9534 x 4
	cfm		
	Type, Quantity	Propeller fan x 4	Propeller fan x 4
	Starting Method	Inverter	Inverter
	Motor Output	0.92 x 4	0.92 x 4
	External Static Pressure	20	20
REFRIGERANT		R32 x 4.7 (kg) x 4 ³	R32 x 4.7 (kg) x 4 ³
	Type x Charge		
	Control	LEV	LEV

Notes:

- Under normal cooling conditions at outdoor temp 35°CDB/24°CWB (95°FDB/75.2°FWB) outlet water temp 7°C (44.6°F) inlet water temp 12°C (53.6°F). Pump input is not included in cooling capacity and power input.
 - Under normal cooling conditions at outdoor temp 35°CDB/24°CWB (95°FDB/75.2°FWB) outlet water temp 7°C (44.6°F) inlet water temp 12°C (53.6°F). Pump input is included in cooling capacity and power input based on EN14511.
 - Amount of factory-charged refrigerant is 3 (kg) x 4. Please add the refrigerant at the field.
 - IPLV is calculated in accordance with AHRI 550-590.
- *Please don't use the steel material for the water piping.
 *Please always make water circulate, or pull the circulation water out completely when not in use.
 *Please do not use groundwater or well water in direct.
 *The water circuit must be closed circuit.
 *Due to continuous improvement, the above specifications may be subject to change without notice.
 *This model doesn't equip with a pump.

For dimensional drawings of this model please see page 2.9

NX2

2 Compressor R454B Air Cooled Chiller

(40 to 208kW)



The **NX2** units are air cooled chillers with scroll compressors designed for delivering the best efficiencies in comfort applications. The complete range is Eurovent certified and all the sizes are completely ErP2021 compliant. Available from 40kW to 208kW using lower GWP R454B refrigerant, the NX2 is a two scroll compressor, single circuit solution. All the main hydraulic and mechanical components can be integrated within the unit, allowing for the ideal plug & play solution to be configured for HVAC plants within applications including hotels, offices, leisure centres, hospitals and universities.

Key Features & Benefits

- Two Scroll compressors
- ErP2021 compliant
- Low noise
- Energy efficient
- Lower GWP R454B refrigerant

R454B

MODEL		0042	0052	0062	0072	0082	0092	0102	0112	0122	0142	0162	0182	0202	0222	
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE																
COOLING ONLY (GROSS VALUE)																
COOLING CAPACITY ¹	kW	40.53	48.50	54.16	60.98	68.18	79.82	93.31	103.8	116.5	129.6	152.0	174.2	186.9	208.7	208.7
TOTAL POWER INPUT ¹	kW	13.64	2.970	17.02	17.66	20.47	25.36	27.94	32.74	38.27	44.42	47.39	55.37	61.54	70.86	70.86
EER ¹	kW/kW	2.978	3.019	3.188	3.446	3.327	3.142	3.344	3.174	3.042	2.919	3.207	3.144	3.039	2.944	2.944
COOLING ONLY (EN14511 VALUE)																
COOLING CAPACITY ^{1*2}	kW	40.40	48.50	54.00	60.80	68.00	79.60	93.10	103.5	116.2	129.3	151.7	173.9	186.6	208.3	208.3
EER ^{1*2}	kW/kW	2.920	2.970	3.120	3.380	3.260	3.090	3.290	3.110	2.990	2.870	3.150	3.100	3.000	2.900	2.900
ENERGY EFFICIENCY																
SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281)																
AMBIENT REFRIGERATION																
P _{RATED,C} ⁷	kW	40.4	48.5	54.0	60.8	68.0	79.6	93.1	104	116	129	152	174	187	208	208
SEER ^{7*8}		4.61	4.72	4.56	4.65	4.57	4.60	4.53	4.29	4.32	4.38	4.48	4.49	4.48	4.46	4.46
PERFORMANCE η _s ^{7*9}	%	181	186	179	183	180	181	178	168	170	172	176	177	176	175	175
EXCHANGERS																
HEAT EXCHANGER USER SIDE IN REFRIGERATION																
WATER FLOW ¹	l/s	1.938	2.323	2.590	2.916	3.261	3.817	4.462	4.965	5.573	6.198	7.268	8.331	8.937	9.979	9.979
PRESSURE DROP AT THE HEAT EXCHANGER	kPa	44.8	33.3	41.4	45.4	46.2	45.3	36.6	45.4	45.5	42.6	47.9	44.1	38.5	48.0	48.0
REFRIGERANT CIRCUIT																
COMPRESSORS NR.	No.	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
CIRCUITS	No.	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
REFRIGERANT CHARGE	kg	7.60	7.60	8.00	9.90	10.0	11.1	13.1	14.3	15.5	15.8	21.9	22.7	22.8	22.9	22.9
NOISE LEVEL																
SOUND PRESSURE ³	dB(A)	49	50	49	51	52	52	52	52	52	53	54	55	55	56	56
SOUND POWER LEVEL IN COOLING ^{4*5}	dB(A)	81	82	81	83	84	84	84	84	84	85	86	87	87	88	88
SIZE AND WEIGHT																
WIDTH ⁶	mm	1825	1825	1825	2395	2395	2395	2325	2825	2825	2825	3980	3980	3980	3980	3980
DEPTH ⁶	mm	1195	1195	1195	1195	1195	1195	1195	1195	1195	1195	1195	1195	1195	1195	1195
HEIGHT ⁶	mm	1865	1865	1865	1865	1865	1865	1980	1980	1980	1980	1980	1980	1980	1980	1980
OPERATING WEIGHT ⁶	kg	500	510	550	630	630	640	770	770	850	920	1130	1170	1180	1220	1220



Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
4. Sound power on the basis of measurements taken in compliance with ISO 9614.
5. Sound power level in cooling, outdoors.
6. Unit in standard configuration, without optional accessories.
7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
8. Seasonal energy efficiency ratio.
9. Seasonal space cooling energy efficiency.

 Eurovent Certified Data

NX2

4 Compressor R454B Air Cooled Chiller

(168 to 345kW)

The **NX2** units are air cooled chillers with scroll compressors designed for delivering the best efficiencies in comfort applications. The complete range is Eurovent certified and all the sizes are completely ErP2021 compliant. Available from 168kW to 345kW using lower GWP R454B refrigerant, the NX2 is a four scroll compressor, twin circuit solution. All the main hydraulic and mechanical components can be integrated within the unit, allowing for the ideal plug & play solution to be configured for HVAC plants within applications including hotels, offices, leisure centres, hospitals and universities.

Key Features & Benefits

- Twin circuit tandem scroll compressors
- ErP2021 compliant
- Low noise
- Energy efficient
- Lower GWP R454B refrigerant

R454B



Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
4. Sound power on the basis of measurements taken in compliance with ISO 9614.
5. Sound power level in cooling, outdoors.
6. Unit in standard configuration, without optional accessories.
7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
8. Seasonal energy efficiency ratio.
9. Seasonal space cooling energy efficiency.

■ Eurovent Certified Data

MODEL		0184P	0214P	0244P	0264P	0294P	0334P	0374P
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE								
COOLING ONLY (GROSS VALUE)								
COOLING CAPACITY ¹	kW	168.4	197.5	226.2	250.7	280.0	313.1	345.8
TOTAL POWER INPUT ¹	kW	49.44	58.24	68.66	77.32	81.59	93.64	106.6
EER ¹	kW/kW	3.409	3.393	3.293	3.243	3.431	3.345	3.244
COOLING ONLY (EN14511 VALUE)								
COOLING CAPACITY ^{1,2}	kW	168.1	197.2	225.8	250.4	279.7	312.8	345.4
EER ^{1,2}	kW/kW	3.350	3.340	3.240	3.200	3.380	3.300	3.200
ENERGY EFFICIENCY								
SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281)								
AMBIENT REFRIGERATION								
P _{INTED,C} ⁷	kW	168	197	226	250	280	313	345
SEER ^{7,8}		4.73	4.76	4.78	4.79	4.71	4.73	4.62
PERFORMANCE η _s ^{7,9}	%	186	188	188	189	185	186	182
EXCHANGERS								
HEAT EXCHANGER USER SIDE IN REFRIGERATION								
WATER FLOW ¹	l/s	8.052	9.444	10.81	11.99	13.39	14.97	16.54
PRESSURE DROP AT THE HEAT EXCHANGER	kPa	42.7	44.3	46.7	46.6	42.8	39.8	48.5
REFRIGERANT CIRCUIT								
COMPRESSORS NR.	No.	4	4	4	4	4	4	4
CIRCUITS	No.	2	2	2	2	2	2	2
REFRIGERANT CHARGE	kg	30.1	31.9	37.5	37.6	47.5	51.8	51.9
NOISE LEVEL								
SOUND PRESSURE ³	dB(A)	54	54	55	55	56	58	59
SOUND POWER LEVEL IN COOLING ^{4,5}	dB(A)	86	86	87	87	88	90	91
SIZE AND WEIGHT								
WIDTH ⁶	mm	3160	3160	3160	3160	4335	4335	4335
DEPTH ⁶	mm	2250	2250	2250	2250	2250	2250	2250
HEIGHT ⁶	mm	2290	2290	2290	2290	2290	2290	2290
OPERATING WEIGHT ⁶	kg	1620	1640	1850	1880	2230	2260	2470

NX2

4-8 Compressor

R454B Air Cooled Chiller

(379 to 867kW)

Standard Version (/K)



CLIMAVENETA

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
4. Sound power on the basis of measurements taken in compliance with ISO 9614.
5. Sound power level in cooling, outdoors.
6. Unit in standard configuration, without optional accessories.
7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
8. Seasonal energy efficiency ratio.
9. Seasonal space cooling energy efficiency.

■ Eurovent Certified Data

The **NX2** units are air cooled chillers with scroll compressors designed for delivering the best efficiencies in comfort applications. The complete range is Eurovent certified and all the sizes are completely ErP2021 compliant. All the main hydraulic and mechanical components can be integrated within the unit, allowing for the ideal plug & play solution to be configured for HVAC plants within applications including hotels, offices, leisure centres, hospitals and universities.

Key Features & Benefits

- ErP2021 compliant
- Low noise
- Energy efficient
- Lower GWP R454B refrigerant

R454B

MODEL		0404	0424	0464	0515	0576	0585	0636	0676	0706	0768	0808	0848	0898	0928
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE															
COOLING ONLY (GROSS VALUE)															
COOLING CAPACITY ¹	kW	379.1	398.9	437.0	488.0	538.9	546.7	597.9	636.3	656.5	720.5	759.5	798.1	835.5	867.1
TOTAL POWER INPUT ¹	kW	115.6	122.6	136.9	152.1	167.3	168.6	183.8	198.1	200.3	218.0	231.4	245.1	259.3	273.5
EER ¹	kW/kW	3.279	3.254	3.192	3.208	3.221	3.243	3.253	3.212	3.278	3.305	3.282	3.256	3.222	3.170
COOLING ONLY (EN14511 VALUE)															
COOLING CAPACITY ^{1,2}	kW	378.6	398.5	436.5	487.5	538.3	546.2	597.3	635.7	655.8	719.8	758.8	797.4	834.8	866.3
EER ^{1,2}	kW/kW	3.220	3.210	3.140	3.160	3.170	3.200	3.210	3.170	3.230	3.260	3.230	3.220	3.180	3.130
ENERGY EFFICIENCY															
SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281)															
AMBIENT REFRIGERATION															
P _{RATED,C} ⁷	kW	379	398	436	488	538	546	597	636	656	720	759	797	835	866
SEER ^{7,8}		4.67	4.68	4.65	4.70	4.70	4.76	4.75	4.73	4.77	4.75	4.74	4.75	4.75	4.74
PERFORMANCE η _s ^{7,9}	%	184	184	183	185	185	187	187	186	188	187	187	187	187	187
EXCHANGERS															
HEAT EXCHANGER USER SIDE IN REFRIGERATION															
WATER FLOW ¹	l/s	18.13	19.08	20.90	23.34	25.77	26.14	28.59	30.43	31.39	34.45	36.32	38.17	39.96	41.46
PRESSURE DROP AT THE HEAT EXCHANGER	kPa	61.8	48.6	58.3	55.1	67.1	42.5	50.9	49.2	52.4	56.9	63.3	47.2	51.7	55.7
REFRIGERANT CIRCUIT															
COMPRESSORS NR.	No.	4	4	4	5	6	5	6	6	6	8	8	8	8	8
CIRCUITS	No.	2	2	2	2	2	2	2	3	2	4	4	4	4	4
REFRIGERANT CHARGE	kg	46.6	51.5	51.7	59.6	64.4	72.0	74.8	75.1	85.6	88.5	95.1	104	106	106
NOISE LEVEL															
SOUND PRESSURE ³	dB(A)	62	62	62	62	63	63	62	62	63	63	63	64	64	64
SOUND POWER LEVEL IN COOLING ^{4,5}	dB(A)	94	94	94	94	95	95	95	95	96	96	96	97	97	97
SIZE AND WEIGHT															
WIDTH ⁶	mm	3905	3905	3905	5080	5080	5080	6255	6255	6255	7430	7430	7430	7430	7430
DEPTH ⁶	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT ⁶	mm	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560
OPERATING WEIGHT ⁶	kg	2590	2620	2660	3190	3420	3500	3940	3980	4100	4970	5010	5080	5120	5150

NX2 4-8 Compressor R454B Air Cooled Chiller

(380 to 872kW)

High Efficiency Version (/A)



Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
4. Sound power on the basis of measurements taken in compliance with ISO 9614.
5. Sound power level in cooling, outdoors.
6. Unit in standard configuration, without optional accessories.
7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
8. Seasonal energy efficiency ratio.
9. Seasonal space cooling energy efficiency.

Eurovent Certified Data

The **NX2** units are air cooled chillers with scroll compressors designed for delivering the best efficiencies in comfort applications. The complete range is Eurovent certified and all the sizes are completely ErP2021 compliant. All the main hydraulic and mechanical components can be integrated within the unit, allowing for the ideal plug & play solution to be configured for HVAC plants within applications including hotels, offices, leisure centres, hospitals and universities.

Key Features & Benefits

- ErP2021 compliant
- Low noise
- Energy efficient
- Lower GWP R454B refrigerant

R454B

MODEL		0404	0424	0464	0515	0576	0585	0636	0676	0706	0768	0808	0848	0898	0928	
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE																
COOLING ONLY (GROSS VALUE)																
COOLING CAPACITY ¹	kW	380.1	400.0	439.8	490.2	540.8	548.6	599.7	639.0	658.6	721.1	762.2	801.1	839.7	872.3	
TOTAL POWER INPUT ¹	kW	111.3	117.1	129.4	145.0	161.1	161.7	177.4	188.0	194.1	211.0	222.5	234.3	246.4	258.3	
EER ¹	kW/kW	3.415	3.416	3.399	3.381	3.357	3.393	3.380	3.399	3.393	3.418	3.426	3.419	3.408	3.377	
COOLING ONLY (EN14511 VALUE)																
COOLING CAPACITY ^{1,2}	kW	379.6	399.5	439.2	489.7	540.2	548.1	599.1	638.4	658.0	720.5	761.5	800.4	839.0	871.6	
EER ^{1,2}	kW/kW	3.350	3.370	3.340	3.330	3.300	3.350	3.330	3.350	3.350	3.370	3.370	3.380	3.360	3.330	
ENERGY EFFICIENCY																
SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281)																
AMBIENT REFRIGERATION																
P _{RATED,C} ⁷	kW	380	400	439	490	540	548	599	638	658	720	762	800	839	872	
SEER ^{7,8}		4.74	4.77	4.73	4.78	4.72	4.82	4.82	4.86	4.83	4.81	4.81	4.83	4.84	4.86	
PERFORMANCE η _s ^{7,9}	%	187	188	186	188	186	190	190	191	190	189	189	190	190	191	
EXCHANGERS																
HEAT EXCHANGER USER SIDE IN REFRIGERATION																
WATER FLOW ¹	l/s	18.18	19.13	21.03	23.44	25.86	26.24	28.68	30.56	31.50	34.49	36.45	38.31	40.16	41.72	
PRESSURE DROP AT THE HEAT EXCHANGER	kPa	62.1	48.8	59.0	55.6	67.6	42.8	51.2	49.6	52.7	57.0	63.7	47.6	52.2	56.4	
REFRIGERANT CIRCUIT																
COMPRESSORS NR.	No.	4	4	4	5	6	5	6	6	6	8	8	8	8	8	
CIRCUITS	No.	2	2	2	2	2	2	2	3	2	4	4	4	4	4	
REFRIGERANT CHARGE	kg	56.1	59.9	62.7	76.5	77.9	80.8	88.8	94.1	98.8	107	129	129	129	129	
NOISE LEVEL																
SOUND PRESSURE ³	dB(A)	63	63	63	62	63	63	63	64	64	64	64	64	65	65	65
SOUND POWER LEVEL IN COOLING ^{4,5}	dB(A)	95	95	95	95	96	96	96	97	97	97	97	98	98	98	
SIZE AND WEIGHT																
WIDTH ⁶	mm	5080	5080	5080	6255	6255	6255	7430	7430	7430	9780	9780	9780	9780	9780	
DEPTH ⁶	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	
HEIGHT ⁶	mm	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	
OPERATING WEIGHT ⁶	kg	2960	2960	3000	3600	3830	3900	4290	4430	4450	5660	5720	5770	5810	5850	

i-FX2-G05 R513A Air Cooled Chiller

(533 to 1,079kW)

Standard Version (-K)



The new generation of customisable screw compressor chillers has arrived with Climaveneta's range of **i-FX2** air cooled chillers. Available with 3 efficiency levels, all of which can be combined with 4 different levels of noise suppression, and the ability to fit integrated hydronic pumps; the **i-FX2** range has a multitude of combinations to match your project requirements.

Key Features & Benefits

- Next generation efficient design
- Wide operating envelope for comfort and process applications
- Variety of low noise versions to match your project requirements
- Exceptionally compact design
- Wide variety of customisations available including factory fitted hydronic pumps

R513A

MODEL		0532	0602	0622	0672	0732	0802	0892	0972	1032	1082
PERFORMANCE - COOLING ONLY											
GROSS VALUE¹											
TOTAL COOLING CAPACITY	kW	533.2	597.3	623.6	674.3	725.5	800.5	889.2	966.7	1034	1079
TOTAL POWER INPUT	kW	182.5	202.8	208.4	224.5	247.3	280.9	307.4	325.4	344.5	362.8
EER	kW/kW	2.92	2.95	2.99	3.00	2.93	2.85	2.89	2.97	3.00	2.97
EN14511 VALUES^{1,2}											
TOTAL COOLING CAPACITY	kW	532.7	596.7	623.0	673.7	724.8	799.9	888.5	966.0	1033	1078
EER	kW/kW	2.89	2.91	2.96	2.97	2.90	2.82	2.86	2.94	2.97	2.93
SEASONAL PERFORMANCE³											
P _{PARTED,C}	kW	533	597	623	674	725	800	888	966	1033	1078
SEER		5.08	5.00	5.06	4.89	4.85	4.87	4.99	5.00	4.90	4.97
PERFORMANCE η_s	%	200	197	199	193	191	192	197	197	193	196
HEAT EXCHANGER IN COOLING⁴											
WATER FLOW	User Side l/s	25.5	28.6	29.8	32.2	34.7	38.3	42.5	46.2	49.4	51.6
PRESSURE DROP ²	User Side kPa	43.3	54.4	45.8	53.5	56.3	46.3	57.1	42.5	48.6	64.5
ELECTRICAL DATA											
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
FLA ⁴	Total A	360	398	407	436	481	559	624	626	639	701
EXCHANGERS											
MINIMUM WATER FLOW	Evaporator l/s	13.1	13.1	14.4	14.4	16.7	20.0	20.0	24.7	24.7	22.5
MINIMUM WATER CONTENT	Plant l	1900	2100	2200	2400	2500	2800	3100	3400	3600	3800
FANS											
QUANTITY	No.	6	7	7	8	8	9	10	11	12	12
AIRFLOW	m ³ /s	30.9	36.1	36.1	41.2	41.2	46.4	51.5	56.7	61.8	61.8
REFRIGERANT CIRCUIT											
COMPRESSORS	No.	2	2	2	2	2	2	2	2	2	2
CIRCUITS	No.	2	2	2	2	2	2	2	2	2	2
REFRIGERANT		R513A	R513A	R513A	R513A	R513A	R513A	R513A	R513A	R513A	R513A
REFRIGERANT CHARGE ⁵	kg	83	92	94	101	112	132	143	155	166	167
NOISE LEVELS											
TOTAL SOUND PRESSURE ⁶	dB(A)	68	69	69	69	70	69	70	71	71	71
TOTAL SOUND POWER LEVEL IN COOLING ⁷	dB(A)	100	101	101	101	102	102	103	104	104	104
SIZE AND WEIGHT⁸											
WIDTH	mm	4150	5400	5400	5400	5400	6650	6650	7900	7900	7900
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640
OPERATING WEIGHT	kg	4500	5000	5007	5106	5388	5863	5974	6464	6584	7031

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
5. Theoretical - refer to serial plate for actual charge volumes.
6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
7. Sound power on the basis of measurement taken in compliance with ISO 9614.
8. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

i-FX2-G05 R513A Air Cooled Chiller

(1,123 to 1,859kW)

Standard Version (-K)



- Notes:**
1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
 2. Values in compliance with EN14511.
 3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
 4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
 5. Theoretical - refer to serial plate for actual charge volumes.
 6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
 7. Sound power on the basis of measurement taken in compliance with ISO 9614.
 8. Sound power level in cooling, outdoors.

8. Unit in standard configuration, without optional accessories.

Eurovent Certified Data

The new generation of customisable screw compressor chillers has arrived with Climaveneta's range of **i-FX2** air cooled chillers. Available with 3 efficiency levels, all of which can be combined with 4 different levels of noise suppression, and the ability to fit integrated hydronic pumps; the **i-FX2** range has a multitude of combinations to match your project requirements.

Key Features & Benefits

- Next generation efficient design
- Wide operating envelope for comfort and process applications
- Variety of low noise versions to match your project requirements
- Exceptionally compact design
- Wide variety of customisations available including factory fitted hydronic pumps

R513A

MODEL		1122	1192	1242	1382	1452	1552	1633	1703	1863	
PERFORMANCE - COOLING ONLY											
GROSS VALUE¹											
TOTAL COOLING CAPACITY	kW	1123	1185	1243	1382	1450	1551	1628	1702	1859	
TOTAL POWER INPUT	kW	384.0	389.6	413.8	454.1	495.0	501.8	550.3	579.2	621.9	
EER	kW/kW	2.92	3.04	3.01	3.04	2.93	3.09	2.96	2.94	2.99	
EN14511 VALUES^{1,2}											
TOTAL COOLING CAPACITY	kW	1122	1184	1242	1382	1449	1550	1627	1701	1858	
EER	kW/kW	2.88	3.00	2.96	3.01	2.89	3.05	2.92	2.90	2.96	
SEASONAL PERFORMANCE³											
P _{PARTED,C}	kW	1122	1184	1242	1382	1449	1550	1627	1701	1858	
SEER		5.01	5.04	5.05	5.12	5.03	5.16	4.99	5.04	5.13	
PERFORMANCE η_s	%	197	199	199	202	198	203	197	198	202	
HEAT EXCHANGER IN COOLING⁴											
WATER FLOW	User Side	l/s	53.7	56.7	59.4	66.1	69.3	74.2	77.9	81.4	88.9
PRESSURE DROP ²	User Side	kPa	69.9	67.6	69.9	61.3	67.5	58.5	69.4	75.9	52.6
ELECTRICAL DATA											
POWER SUPPLY		V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	
FLA ⁴	Total	A	785	825	857	932	984	1008	1094	1178	1270
EXCHANGERS											
MINIMUM WATER FLOW	Evaporator	l/s	22.5	23.6	24.2	28.3	28.3	37.2	38.9	38.9	41.7
MINIMUM WATER CONTENT	Plant	l	3900	4100	4400	4800	5100	5400	5700	6000	6500
FANS											
QUANTITY	No.	12	14	14	16	16	18	18	18	20	
AIRFLOW	m ³ /s	61.8	72.1	72.1	82.4	82.4	92.7	92.7	92.7	103	
REFRIGERANT CIRCUIT											
COMPRESSORS	No.	2	2	2	2	2	2	3	3	3	
CIRCUITS	No.	2	2	2	2	2	2	3	3	3	
REFRIGERANT		R513A	R513A	R513A	R513A	R513A	R513A	R513A	R513A	R513A	
REFRIGERANT CHARGE ⁵	kg	167	187	207	243	243	263	263	268	288	
NOISE LEVELS											
TOTAL SOUND PRESSURE ⁶	dB(A)	72	72	73	73	73	73	73	73	74	
TOTAL SOUND POWER LEVEL IN COOLING ⁷	dB(A)	105	105	106	106	106	106	106	106	107	
SIZE AND WEIGHT⁸											
WIDTH	mm	7900	9150	9150	10400	10400	11650	11650	11650	12900	
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	
HEIGHT	mm	2640	2640	2640	2640	2640	2640	2640	2640	2640	
OPERATING WEIGHT	kg	7409	8243	8249	9008	9008	10165	11301	11679	12284	

i-FX2-G04 R1234ze Air Cooled Chiller

(392 to 861kW)

High Efficiency Version (-E)

The new generation of customisable screw compressor chillers has arrived with Climaveneta's range of **i-FX2** air cooled chillers. Available with 3 efficiency levels, all of which can be combined with 4 different levels of noise suppression, and the ability to fit integrated hydronic pumps; the **i-FX2** range has a multitude of combinations to match your project requirements.

Key Features & Benefits

- Next generation of efficiency with exceptionally low GWP refrigerant ($GWP_{100} = 1$)*
- Wide operating envelope for comfort and process applications
- Variety of low noise versions to match your project requirements
- Exceptionally compact design
- Wide variety of customisations available including factory fitted hydronic pumps

*IPCC AR5

R1234ze



Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
5. Theoretical - refer to serial plate for actual charge volumes.
6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
7. Sound power on the basis of measurement taken in compliance with ISO 9614.
8. Sound power level in cooling, outdoors.
9. Unit in standard configuration, without optional accessories.

 Eurovent Certified Data

MODEL		0392	0432	0502	0552	0662	0742	0872
PERFORMANCE - COOLING ONLY								
GROSS VALUE¹								
TOTAL COOLING CAPACITY	kW	392.5	426.2	499.3	550.7	658.3	744.3	861.4
TOTAL POWER INPUT	kW	116.4	128.6	145.1	161.4	207.6	234.7	269.2
EER	kW/kW	3.37	3.31	3.44	3.41	3.17	3.17	3.20
EN14511 VALUES^{1,2}								
TOTAL COOLING CAPACITY	kW	392.0	425.7	498.8	550.2	657.7	743.7	860.8
EER	kW/kW	3.33	3.27	3.41	3.37	3.13	3.14	3.17
SEASONAL PERFORMANCE³								
P _{rated,c}	kW	392	426	499	550	658	744	861
SEER		2.56	5.59	5.59	5.65	5.64	5.42	5.40
PERFORMANCE η_s	%	219	221	220	223	223	214	213
HEAT EXCHANGER IN COOLING⁴								
WATER FLOW	User Side l/s	18.8	20.4	23.9	26.3	31.5	35.6	41.2
PRESSURE DROP ²	User Side kPa	39.1	46.2	33.3	40.6	51.0	40.0	33.7
ELECTRICAL DATA								
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
FLA ⁴	Total A	273	301	334	360	461	532	594
EXCHANGERS								
MINIMUM WATER FLOW	Evaporator l/s	9.2	9.2	13.9	13.9	14.4	20.0	24.7
MINIMUM WATER CONTENT	Plant l	1400	1500	1700	1900	2300	2600	3000
FANS								
QUANTITY	No.	6	7	8	8	10	12	12
AIRFLOW	m ³ /s	30.9	36.05	41.2	41.2	51.5	61.8	61.8
REFRIGERANT CIRCUIT								
COMPRESSORS	No.	2	2	2	2	2	2	2
CIRCUITS	No.	2	2	2	2	2	2	2
REFRIGERANT		R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze
REFRIGERANT CHARGE ⁵	kg	72	82	92	94	125	149	154
NOISE LEVELS								
TOTAL SOUND PRESSURE ⁶	dB(A)	68	69	69	70	69	71	73
TOTAL SOUND POWER LEVEL IN COOLING ⁷	dB(A)	100	101	101	102	102	104	106
SIZE AND WEIGHT⁸								
WIDTH	mm	4150	5400	5400	5400	6650	7900	7900
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2640	2640	2640	2640	2640	2640	2640
OPERATING WEIGHT	kg	4428	4942	5105	5105	5693	6579	7342

i-FX2-G04 R1234ze Air Cooled Chiller

(929 to 1,532kW)

High Efficiency Version (-E)



- Notes:**
1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
 2. Values in compliance with EN14511.
 3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
 4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
 5. Theoretical - refer to serial plate for actual charge volumes.
 6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
 7. Sound power on the basis of measurement taken in compliance with ISO 9614.
 8. Unit in standard configuration, without optional accessories.

Eurovent Certified Data

The new generation of customisable screw compressor chillers has arrived with Climaveneta's range of **i-FX2** air cooled chillers. Available with 3 efficiency levels, all of which can be combined with 4 different levels of noise suppression, and the ability to fit integrated hydronic pumps; the **i-FX2** range has a multitude of combinations to match your project requirements.

Key Features & Benefits

- Next generation of efficiency with exceptionally low GWP refrigerant (GWP₁₀₀ = 1)*
- Wide operating envelope for comfort and process applications
- Variety of low noise versions to match your project requirements
- Exceptionally compact design
- Wide variety of customisations available including factory fitted hydronic pumps

*IPCC AR5

R1234ze

MODEL		0932	1022	1072	1183	1323	1433	1533
PERFORMANCE - COOLING ONLY								
GROSS VALUE¹								
TOTAL COOLING CAPACITY	kW	929.7	1023	1072	1184	1327	1425	1532
TOTAL POWER INPUT	kW	285.7	303.4	325.3	360.6	408.8	433.9	473.0
EER	kW/kW	3.25	3.37	3.30	3.28	3.25	3.28	3.24
EN14511 VALUES^{1,2}								
TOTAL COOLING CAPACITY	kW	929.1	1023	1072	1183	1327	1424	1531
EER	kW/kW	3.22	3.32	3.25	3.25	3.21	3.24	3.21
SEASONAL PERFORMANCE³								
P _{PARTED,C}	kW	929	1023	1072	1183	1327	1424	1531
SEER		5.45	5.62	5.6	5.37	5.43	5.50	5.57
PERFORMANCE η_s	%	215	222	221	212	214	217	220
HEAT EXCHANGER IN COOLING⁴								
WATER FLOW	User Side l/s	44.5	48.9	51.3	56.6	63.5	68.1	73.2
PRESSURE DROP ²	User Side kPa	39.3	58.0	55.4	45.0	46.2	53.2	35.7
ELECTRICAL DATA								
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
FLA ⁴	Total A	642	687	719	818	892	960	1017
EXCHANGERS								
MINIMUM WATER FLOW	Evaporator l/s	24.7	22.5	23.6	28.3	38.9	38.9	41.7
MINIMUM WATER CONTENT	Plant l	3300	3600	3800	4100	4600	5000	5400
FANS								
QUANTITY	No.	14	16	16	18	18	20	20
AIRFLOW	m ³ /s	72.1	82.4	82.4	92.7	92.7	103	103
REFRIGERANT CIRCUIT								
COMPRESSORS	No.	2	2	2	3	3	3	3
CIRCUITS	No.	2	2	2	3	3	3	3
REFRIGERANT		R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze
REFRIGERANT CHARGE ⁵	kg	168	182	187	261	276	290	300
NOISE LEVELS								
TOTAL SOUND PRESSURE ⁶	dB(A)	73	73	73	73	73	74	74
TOTAL SOUND POWER LEVEL IN COOLING ⁷	dB(A)	106	106	106	106	106	107	107
SIZE AND WEIGHT⁸								
WIDTH	mm	9150	10400	10400	11650	11650	12900	12900
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2640	2640	2640	2640	2640	2640	2640
OPERATING WEIGHT	kg	8053	8634	8805	11067	11655	12243	12314

i-FX2-G04 R1234ze Air Cooled Chiller

(408 to 797kW)

Low noise with EC Fans
Version (-SL-K-EC)



The new generation of customisable screw compressor chillers has arrived with Climaveneta's range of **i-FX2** air cooled chillers. Available with 3 efficiency levels, all of which can be combined with 4 different levels of noise suppression, and the ability to fit integrated hydronic pumps; the **i-FX2** range has a multitude of combinations to match your project requirements.

Key Features & Benefits

- Next generation of efficiency with exceptionally low GWP refrigerant (GWP₁₀₀ = 1)*
- Wide operating envelope for comfort and process applications
- Variety of low noise versions to match your project requirements
- Exceptionally compact design
- Wide variety of customisations available including factory fitted hydronic pumps

*IPCC AR5

R1234ze

MODEL		0422	0452	0512	0572	0602	0672	0712	0772	0862
PERFORMANCE - COOLING ONLY										
GROSS VALUE¹										
TOTAL COOLING CAPACITY	kW	408.5	439.1	482.0	544.7	575.0	636.0	688.8	741.6	797.0
TOTAL POWER INPUT	kW	128.6	144.9	159.7	169.4	183.2	219.0	225.7	249.7	262.0
EER	kW/kW	3.18	3.03	3.02	3.22	3.14	2.90	3.05	2.97	3.04
EN14511 VALUES^{1,2}										
TOTAL COOLING CAPACITY	kW	408.1	438.6	481.6	544.2	574.5	635.4	688.1	740.9	796.5
EER	kW/kW	3.14	2.99	2.99	3.18	3.10	2.87	3.01	2.93	3.02
SEASONAL PERFORMANCE³										
P _{PARTED,C}	kW	408	439	482	544	574	635	688	741	796
SEER		5.45	5.35	5.28	5.39	5.34	5.24	5.40	5.16	5.11
PERFORMANCE η_s	%	215	211	208	213	211	207	213	203	201
HEAT EXCHANGER IN COOLING¹										
WATER FLOW	User Side l/s	19.5	21.0	23.1	26.1	27.5	30.4	32.9	35.5	38.1
PRESSURE DROP ²	User Side kPa	42.4	49.0	31.1	39.7	44.2	47.6	55.8	58.8	28.9
ELECTRICAL DATA										
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
FLA ⁴	Total A	291	316	339	379	398	458	489	525	551
EXCHANGERS										
MINIMUM WATER FLOW	Evaporator l/s	9.17	9.17	13.89	13.89	13.89	14.44	14.44	16.67	24.72
MINIMUM WATER CONTENT	Plant l	1400	1500	1700	1900	2000	2200	2400	2600	2800
FANS										
QUANTITY	No.	6	6	6	8	8	8	10	10	10
AIRFLOW	m ³ /s	27.78	27.78	27.78	37.04	37.04	37.04	46.30	46.30	46.30
REFRIGERANT CIRCUIT										
COMPRESSORS	No.	2	2	2	2	2	2	2	2	2
CIRCUITS	No.	2	2	2	2	2	2	2	2	2
REFRIGERANT		R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze
REFRIGERANT CHARGE ⁵	kg	72	76	78	92	94	96	125	130	136
NOISE LEVELS										
TOTAL SOUND PRESSURE ⁶	dB(A)	59	60	60	61	61	61	62	62	63
TOTAL SOUND POWER LEVEL IN COOLING ⁷	dB(A)	91	92	92	93	93	93	95	95	96
SIZE AND WEIGHT⁸										
WIDTH	mm	4150	4150	4150	5400	5400	5400	6650	6650	6650
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2640	2640	2640	2640	2640	2640	2640	2640	2640
OPERATING WEIGHT	kg	4949	4961	5056	5686	5686	5718	6283	6643	7405

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
5. Theoretical - refer to serial plate for actual charge volumes.
6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
7. Sound power on the basis of measurement taken in compliance with ISO 9614.
8. Sound power level in cooling, outdoors.

8. Unit in standard configuration, without optional accessories.



Eurovent Certified Data

i-FX2-G04 R1234ze Air Cooled Chiller

(926 to 1,619kW)

Low noise with EC Fans
Version (-SL-K-EC)



- Notes:**
1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
 2. Values in compliance with EN14511.
 3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
 4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
 5. Theoretical - refer to serial plate for actual charge volumes.
 6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
 7. Sound power on the basis of measurement taken in compliance with ISO 9614.
 8. Unit in standard configuration, without optional accessories.

Eurovent Certified Data

The new generation of customisable screw compressor chillers has arrived with Climaveneta's range of **i-FX2** air cooled chillers. Available with 3 efficiency levels, all of which can be combined with 4 different levels of noise suppression, and the ability to fit integrated hydronic pumps; the **i-FX2** range has a multitude of combinations to match your project requirements.

Key Features & Benefits

- Next generation of efficiency with exceptionally low GWP refrigerant (GWP₁₀₀ = 1)*
- Wide operating envelope for comfort and process applications
- Variety of low noise versions to match your project requirements
- Exceptionally compact design
- Wide variety of customisations available including factory fitted hydronic pumps

*IPCC AR5

R1234ze

MODEL		0962	1062	1152	1253	1333	1463	1573	1683
PERFORMANCE - COOLING ONLY									
GROSS VALUE¹									
TOTAL COOLING CAPACITY	kW	926.4	1016	1110	1186	1234	1412	1511	1619
TOTAL POWER INPUT	kW	305.0	322.0	363.7	383.3	404.2	461.3	499.1	529.9
EER	kW/kW	3.04	3.16	3.05	3.09	3.05	3.06	3.03	3.06
EN14511 VALUES^{1,2}									
TOTAL COOLING CAPACITY	kW	925.7	1015	1109	1185	1233	1411	1510	1619
EER	kW/kW	3.01	3.11	3.01	3.06	3.02	3.03	2.99	3.01
SEASONAL PERFORMANCE³									
P _{PARTED,C}	kW	926	1015	1109	1185	1233	1411	1510	1619
SEER		5.13	5.25	5.23	5.16	5.17	5.18	5.23	5.26
PERFORMANCE η _s	%	202	207	206	203	204	204	206	207
HEAT EXCHANGER IN COOLING⁴									
WATER FLOW	User Side l/s	44.3	48.6	53.1	56.7	59.0	67.5	72.3	77.4
PRESSURE DROP ²	User Side kPa	39.0	57.2	59.3	45.2	48.8	48.5	59.8	68.7
ELECTRICAL DATA									
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
FLA ⁴	Total A	651	702	764	812	857	987	1045	1097
EXCHANGERS									
MINIMUM WATER FLOW	Evaporator l/s	24.72	22.5	23.61	28.33	28.33	37.22	38.89	38.89
MINIMUM WATER CONTENT	Plant l	3200	3600	3900	4200	4300	4900	5300	5700
FANS									
QUANTITY	No.	12	14	14	16	16	18	18	20
AIRFLOW	m ³ /s	55.56	64.82	64.82	74.08	74.08	83.34	83.34	92.6
REFRIGERANT CIRCUIT									
COMPRESSORS	No.	2	2	2	3	3	3	3	3
CIRCUITS	No.	2	2	2	3	3	3	3	3
REFRIGERANT		R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze
REFRIGERANT CHARGE ⁵	kg	158	178	183	227	232	256	276	300
NOISE LEVELS									
TOTAL SOUND PRESSURE ⁶	dB(A)	63	63	63	63	63	64	64	64
TOTAL SOUND POWER LEVEL IN COOLING ⁷	dB(A)	96	96	96	96	96	97	97	97
SIZE AND WEIGHT⁸									
WIDTH	mm	7900	9150	9150	10400	10400	11650	11650	12900
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2640	2640	2640	2640	2640	2640	2640	2640
OPERATING WEIGHT	kg	7935	8697	8869	11375	11377	12508	12598	13171

FX2 R513A Air Cooled Chiller

(322 to 996kW)

Standard Version (/K)



Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
4. Sound power on the basis of measurements taken in compliance with ISO 9614.
5. Sound power level in cooling, outdoors.
6. Unit in standard configuration, without optional accessories.
7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
8. Seasonal energy efficiency ratio.
9. Seasonal space cooling energy efficiency.

Eurovent Certified Data

The Climaveneta range of **FX2** units are air cooled chillers with screw compressors, designed for delivering high efficiencies in comfort applications. Available with lower GWP R513A refrigerant, the new range features 2 or 3 compressors in multi-circuit configuration.

Key Features & Benefits

- Compact design
- Low noise
- Energy efficient
- Lower GWP R513A refrigerant

R513A

MODEL		0322	0352	0402	0472	0512	0572	0652	0702	0772	0852	0902	1002
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE													
COOLING ONLY (GROSS VALUE)													
COOLING CAPACITY ¹	kW	322.1	350.2	411.9	464.4	516.7	573.4	645.8	707.6	779.8	862.9	937.3	996.0
TOTAL POWER INPUT ¹	kW	102.4	119.2	133.1	146.1	172.5	188.6	207.4	239.2	254.6	272.4	295.1	315.5
EER ¹	kW/kW	3.146	2.938	3.095	3.179	2.995	3.040	3.114	2.958	3.063	3.168	3.176	3.157
ESEER ¹	kW/kW	4.430	4.440	4.510	4.500	4.440	4.460	4.470	4.480	4.470	4.450	4.450	4.460
COOLING ONLY (EN14511 VALUE)													
COOLING CAPACITY ^{1,2}	kW	321.8	349.8	411.5	463.9	516.2	572.9	645.2	707.0	779.1	862.3	936.6	995.2
EER ^{1,2}	kW/kW	3.120	2.910	3.060	3.140	2.970	3.010	3.080	2.930	3.020	3.130	3.140	3.120
ESEER ^{1,2}		4.300	4.300	4.350	4.310	4.290	4.280	4.300	4.320	4.270	4.290	4.280	4.270
ENERGY EFFICIENCY													
SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281)													
AMBIENT REFRIGERATION													
P _{RATED,C} ⁷	kW	322	350	412	464	516	573	645	707	779	862	937	995
SEER ^{7,8}		4.51	4.50	4.56	4.58	4.56	4.56	4.58	4.57	4.57	4.58	4.59	4.59
PERFORMANCE η _s ^{7,9}	%	177	177	179	180	179	179	180	180	180	180	180	181
EXCHANGERS													
HEAT EXCHANGER USER SIDE IN REFRIGERATION													
WATER FLOW ¹	l/s	15.40	16.75	19.70	22.21	24.71	27.42	30.88	33.84	37.29	41.27	44.82	47.63
PRESSURE DROP AT THE HEAT EXCHANGER	kPa	27.7	32.7	38.8	49.4	37.3	46.0	46.6	44.5	54.1	47.2	49.2	55.6
REFRIGERANT CIRCUIT													
COMPRESSORS NR.	No.	2	2	2	2	2	2	2	2	2	2	2	2
CIRCUITS	No.	2	2	2	2	2	2	2	2	2	2	2	2
REFRIGERANT CHARGE	kg	57.0	60.0	71.0	81.0	88.0	98.0	113	120	133	150	163	173
NOISE LEVEL													
SOUND PRESSURE ³	dB(A)	67	67	67	68	68	68	68	70	69	69	70	70
SOUND POWER LEVEL IN COOLING ^{4,5}	dB(A)	99	99	99	100	100	100	100	102	102	102	103	103
SIZE AND WEIGHT													
WIDTH ⁶	mm	2750	2750	4000	4000	4000	5250	5250	5250	6500	6500	7750	7750
DEPTH ⁶	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT ⁶	mm	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640
OPERATING WEIGHT ⁶	kg	3120	2950	3600	3730	4570	5060	5190	5550	6400	6980	7460	7620

FX2 R513A Air Cooled Chiller

(1,056 to 1,839kW)

Standard Version (/K)



Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
4. Sound power on the basis of measurements taken in compliance with ISO 9614.
5. Sound power level in cooling, outdoors.
6. Unit in standard configuration, without optional accessories.
7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
8. Seasonal energy efficiency ratio.
9. Seasonal space cooling energy efficiency.

 Eurovent Certified Data

The Climaveneta range of **FX2** units are air cooled chillers with screw compressors, designed for delivering high efficiencies in comfort applications. Available with lower GWP R513A refrigerant, the new range features 2 or 3 compressors in multi-circuit configuration.

Key Features & Benefits

- Compact design
- Low noise
- Energy efficient
- Lower GWP R513A refrigerant

R513A

MODEL		1052	1102	1152	1222	1262	1322	1402	1503	1593	1663	1773	1883
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE													
COOLING ONLY (GROSS VALUE)													
COOLING CAPACITY ¹	kW	1056	1098	1139	1232	1264	1332	1400	1506	1592	1664	1778	1839
TOTAL POWER INPUT ¹	kW	343.2	369.3	354.3	396.3	423.2	433.9	474.8	475.0	523.1	556.9	580.4	605.3
EER ¹	kW/kW	3.077	2.973	3.215	3.109	2.987	3.070	2.949	3.171	3.043	2.988	3.063	3.038
ESEER ¹	kW/kW	4.460	4.470	4.460	4.490	4.470	4.460	4.490	4.430	4.450	4.440	4.440	4.470
COOLING ONLY (EN14511 VALUE)													
COOLING CAPACITY ^{1,2}	kW	1055	1097	1138	1231	1264	1331	1399	1505	1591	1663	1777	1838
EER ^{1,2}	kW/kW	3.040	2.940	3.170	3.070	2.960	3.030	2.910	3.130	3.010	2.960	3.030	3.000
ESEER ^{1,2}		4.290	4.300	4.280	4.290	4.300	4.280	4.300	4.270	4.270	4.290	4.280	4.290
ENERGY EFFICIENCY													
SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281)													
AMBIENT REFRIGERATION													
P _{RATED,C} ⁷	kW	1055	1097	1138	1231	1264	1331	1399	1505	1591	1663	1777	1838
SEER ^{7,8}		4.56	4.56	4.58	4.60	4.56	4.57	4.58	4.59	4.59	4.58	4.60	4.63
PERFORMANCE η _s ^{7,9}	%	180	179	180	181	179	180	180	181	181	180	181	182
EXCHANGERS													
HEAT EXCHANGER USER SIDE IN REFRIGERATION													
WATER FLOW ¹	l/s	50.51	52.49	54.45	58.92	60.46	63.71	66.96	72.03	76.12	79.55	85.04	87.92
PRESSURE DROP AT THE HEAT EXCHANGER	kPa	48.3	52.1	56.1	61.6	48.8	54.2	59.9	52.5	58.6	45.1	51.6	59.1
REFRIGERANT CIRCUIT													
COMPRESSORS NR.	No.	2	2	2	2	2	2	2	3	3	3	3	3
CIRCUITS	No.	2	2	2	2	2	2	2	3	3	3	3	3
REFRIGERANT CHARGE	kg	179	104	195	210	214	232	238	263	271	281	303	318
NOISE LEVEL													
SOUND PRESSURE ³	dB(A)	71	71	71	71	72	73	73	73	73	73	73	73
SOUND POWER LEVEL IN COOLING ^{4,5}	dB(A)	104	104	104	104	105	106	106	106	106	106	106	106
SIZE AND WEIGHT													
WIDTH ⁶	mm	7750	7750	9000	9000	9150	10400	10400	11650	11650	11650	12900	12900
DEPTH ⁶	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT ⁶	mm	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640
OPERATING WEIGHT ⁶	kg	7870	7900	8430	8500	8860	9470	9610	12050	12110	12120	12710	12720

FX2 R513A Air Cooled Chiller

(310 to 960kW)

Low Noise Version (/SL-K)







Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
4. Sound power on the basis of measurements taken in compliance with ISO 9614.
5. Sound power level in cooling, outdoors.
6. Unit in standard configuration, without optional accessories.
7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
8. Seasonal energy efficiency ratio.
9. Seasonal space cooling energy efficiency.

 Eurovent Certified Data

The Climaveneta range of **FX2** units are air cooled chillers with screw compressors, designed for delivering high efficiencies in comfort applications. Available with lower GWP R513A refrigerant, the new range features 2 or 3 compressors in multi-circuit configuration.

Key Features & Benefits

-  Compact design
-  Low noise
-  Energy efficient
-  Lower GWP R513A refrigerant

R513A

MODEL		0322	0352	0402	0472	0512	0572	0652	0702	0772	0852	0902	1002
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE													
COOLING ONLY (GROSS VALUE)													
COOLING CAPACITY ¹	kW	310.2	358.4	410.2	450.1	511.7	557.4	621.9	713.0	770.4	828.6	901.6	959.9
TOTAL POWER INPUT ¹	kW	103.1	115.1	128.2	148.9	164.4	177.9	211.2	226.9	251.5	276.9	300.1	321.0
EER ¹	kW/kW	3.009	3.114	3.200	3.023	3.113	3.133	2.945	3.142	3.063	2.992	3.004	2.990
ESEER ¹	kW/kW	4.400	4.440	4.480	4.490	4.470	4.480	4.470	4.450	4.470	4.440	4.460	4.470
COOLING ONLY (EN14511 VALUE)													
COOLING CAPACITY ^{1,2}	kW	309.8	358.0	409.8	449.7	511.2	556.9	621.3	712.4	769.7	828.0	901.0	959.1
EER ^{1,2}	kW/kW	2.980	3.080	3.160	2.990	3.080	3.100	2.910	3.110	3.020	2.960	2.970	2.960
ESEER ^{1,2}		4.270	4.280	4.320	4.310	4.320	4.310	4.300	4.290	4.280	4.280	4.300	4.300
ENERGY EFFICIENCY													
SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281)													
AMBIENT REFRIGERATION													
P _{RATED,C} ⁷	kW	310	358	410	450	511	557	621	712	770	828	901	959
SEER ^{7,8}		4.46	4.50	4.56	4.55	4.57	4.55	4.55	4.56	4.58	4.56	4.58	4.58
PERFORMANCE η _s ^{7,9}	%	175	177	179	179	180	179	179	180	180	180	180	180
EXCHANGERS													
HEAT EXCHANGER USER SIDE IN REFRIGERATION													
WATER FLOW ¹	l/s	14.83	17.14	19.62	21.53	24.47	26.66	29.74	34.10	36.84	39.63	43.12	45.90
PRESSURE DROP AT THE HEAT EXCHANGER	kPa	25.7	34.3	38.5	46.4	36.6	43.5	43.2	45.2	52.8	43.5	45.5	51.6
REFRIGERANT CIRCUIT													
COMPRESSORS NR.	No.	2	2	2	2	2	2	2	2	2	2	2	2
CIRCUITS	No.	2	2	2	2	2	2	2	2	2	2	2	2
REFRIGERANT CHARGE	kg	57.0	66.0	76.0	81.0	93.0	103	113	131	140	150	163	173
NOISE LEVEL													
SOUND PRESSURE ³	dB(A)	55	55	56	56	57	57	57	57	58	58	59	59
SOUND POWER LEVEL IN COOLING ^{4,5}	dB(A)	87	87	88	88	89	89	89	90	91	91	92	92
SIZE AND WEIGHT													
WIDTH ⁶	mm	2750	4000	4000	4000	5250	5250	5250	6500	6500	6500	7750	7750
DEPTH ⁶	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT ⁶	mm	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640
OPERATING WEIGHT ⁶	kg	3380	3830	3960	4000	5270	5680	5720	6600	7090	7590	8100	8270

FX2 R513A Air Cooled Chiller

(1,098 to 1,773kW)

Low Noise Version (/SL-K)



Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
4. Sound power on the basis of measurements taken in compliance with ISO 9614.
5. Sound power level in cooling, outdoors.
6. Unit in standard configuration, without optional accessories.
7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
8. Seasonal energy efficiency ratio.
9. Seasonal space cooling energy efficiency.

■ Eurovent Certified Data

The Climaveneta range of **FX2** units are air cooled chillers with screw compressors, designed for delivering high efficiencies in comfort applications. Available with lower GWP R513A refrigerant, the new range features 2 or 3 compressors in multi-circuit configuration.

Key Features & Benefits

- Compact design
- Low noise
- Energy efficient
- Lower GWP R513A refrigerant

R513A

MODEL		1052	1102	1152	1222	1262	1322	1402	1503	1593	1663	1773	1883
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE													
COOLING ONLY (GROSS VALUE)													
COOLING CAPACITY ¹	kW	1037	1098	1131	1222	1257	1284	1386	1451	1573	1645	1714	1773
TOTAL POWER INPUT ¹	kW	341.7	359.9	347.4	388.0	415.0	441.0	467.8	483.3	519.5	550.6	593.8	620.9
EER ¹	kW/kW	3.035	3.051	3.256	3.149	3.029	2.912	2.963	3.002	3.028	2.988	2.886	2.856
ESEER ¹	kW/kW	4.450	4.480	4.480	4.480	4.450	4.470	4.480	4.450	4.470	4.440	4.440	4.450
COOLING ONLY (EN14511 VALUE)													
COOLING CAPACITY ^{1,2}	kW	1037	1097	1130	1222	1256	1283	1385	1451	1572	1644	1714	1772
EER ^{1,2}	kW/kW	3.000	3.020	3.210	3.110	3.000	2.880	2.930	2.970	2.990	2.960	2.860	2.820
ESEER ^{1,2}		4.290	4.300	4.290	4.290	4.290	4.310	4.290	4.290	4.290	4.300	4.280	4.280
ENERGY EFFICIENCY													
SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281)													
AMBIENT REFRIGERATION													
P _{RATED,C} ⁷	kW	1037	1097	1130	1222	1256	1283	1385	1451	1572	1644	1714	1772
SEER ^{7,8}		4.56	4.59	4.62	4.62	4.58	4.55	4.58	4.59	4.61	4.59	4.57	4.57
PERFORMANCE η _s ^{7,9}	%	179	180	182	182	180	179	180	180	182	180	180	180
EXCHANGERS													
HEAT EXCHANGER USER SIDE IN REFRIGERATION													
WATER FLOW ¹	l/s	49.60	52.51	54.06	58.46	60.10	61.40	66.26	69.40	75.22	78.65	81.99	84.78
PRESSURE DROP AT THE HEAT EXCHANGER	kPa	46.6	52.2	55.3	60.7	48.2	50.3	58.6	48.7	57.2	44.1	47.9	55.0
REFRIGERANT CIRCUIT													
COMPRESSORS NR.	No.	2	2	2	2	2	2	2	3	3	3	3	3
CIRCUITS	No.	2	2	2	2	2	2	2	3	3	3	3	3
REFRIGERANT CHARGE	kg	187	199	207	222	228	232	251	263	285	297	308	318
NOISE LEVEL													
SOUND PRESSURE ³	dB(A)	60	60	61	61	61	61	61	61	61	61	61	62
SOUND POWER LEVEL IN COOLING ^{4,5}	dB(A)	93	93	94	94	94	94	94	94	94	94	94	95
SIZE AND WEIGHT													
WIDTH ⁶	mm	9000	9000	10250	10250	10400	10400	11650	11650	12900	12900	12900	12900
DEPTH ⁶	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT ⁶	mm	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640
OPERATING WEIGHT ⁶	kg	8920	9060	9640	9710	10060	10150	10720	12980	13560	13560	13650	13670

FX2 R513A Air Cooled Chiller

(340 to 1,372kW)

High Efficiency Version (/E)



Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
4. Sound power on the basis of measurements taken in compliance with ISO 9614.
5. Sound power level in cooling, outdoors.
6. Unit in standard configuration, without optional accessories.
7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
8. Seasonal energy efficiency ratio.
9. Seasonal space cooling energy efficiency.

Eurovent Certified Data

The Climaveneta range of **FX2** units are air cooled chillers with screw compressors, designed for delivering high efficiencies in comfort applications. Available with lower GWP R513A refrigerant, the new range features 2 or 3 compressors in multi-circuit configuration.

Key Features & Benefits

- Compact design
- Low noise
- Energy efficient
- Lower GWP R513A refrigerant

R513A

MODEL		0352	0402	0452	0472	0572	0602	0652	0702	0772	0852	0902	1002	1052	1152	1222	1322	1402	
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	
PERFORMANCE																			
COOLING ONLY (GROSS VALUE)																			
COOLING CAPACITY ¹	kW	340.3	389.8	444.9	485.0	570.3	619.0	658.9	698.5	756.1	844.7	918.1	1001	1061	1133	1207	1311	1372	
TOTAL POWER INPUT ¹	kW	98.73	113.1	128.5	142.9	163.3	178.3	189.4	200.5	222.8	246.7	267.5	289.5	310.9	331.5	352.4	390.1	409.2	
EER ¹	kW/kW	3.448	3.447	3.462	3.394	3.492	3.472	3.479	3.484	3.394	3.424	3.432	3.458	3.413	3.418	3.425	3.361	3.353	
ESEER ¹	kW/kW	4.610	4.630	4.520	4.620	4.610	4.610	4.620	4.640	4.620	4.610	4.630	4.680	4.630	4.650	4.650	4.580	4.610	
COOLING ONLY (EN14511 VALUE)																			
COOLING CAPACITY ^{1,2}	kW	339.9	389.4	444.5	484.6	569.8	618.5	658.4	697.9	755.5	844.1	917.4	1000	1060	1132	1206	1310	1371	
EER ^{1,2}	kW/kW	3.410	3.410	3.430	3.360	3.450	3.440	3.440	3.440	3.360	3.390	3.390	3.410	3.370	3.370	3.380	3.330	3.320	
ESEER ^{1,2}		4.470	4.470	4.490	4.490	4.440	4.470	4.470	4.470	4.470	4.450	4.450	4.450	4.450	4.470	4.440	4.440	4.450	
ENERGY EFFICIENCY																			
SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281)																			
AMBIENT REFRIGERATION																			
P _{RATED,C} ⁷	kW	340	389	444	485	570	618	658	689	756	844	917	1000	1060	1132	1206	1310	1371	
SEER ^{7,8}		4.63	4.64	4.69	4.66	4.72	4.64	4.66	4.73	4.71	4.71	4.74	4.79	4.72	4.74	4.74	4.66	4.69	
PERFORMANCE η _s ^{7,9}	%	182	182	185	183	186	183	183	186	185	185	187	188	186	187	187	183	185	
EXCHANGERS																			
HEAT EXCHANGER USER SIDE IN REFRIGERATION																			
WATER FLOW ¹	l/s	16.27	18.64	21.27	23.20	27.27	29.60	31.51	33.40	36.16	40.40	43.90	47.88	50.72	54.17	57.73	62.68	65.62	
PRESSURE DROP AT THE HEAT EXCHANGER	kPa	26.5	34.8	27.7	32.9	41.4	34.1	38.6	43.4	36.3	40.0	47.2	61.2	48.7	53.2	59.2	39.7	43.5	
REFRIGERANT CIRCUIT																			
COMPRESSORS NR.	No.	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
CIRCUITS	No.	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
REFRIGERANT CHARGE	kg	65.0	76.0	86.0	94.0	109	117	126	134	143	160	173	188	200	213	227	244	258	
NOISE LEVEL																			
SOUND PRESSURE ³	dB(A)	66	67	67	67	67	67	68	68	68	68	69	69	70	70	70	70	71	
SOUND POWER LEVEL IN COOLING ^{4,5}	dB(A)	98	99	99	99	99	100	101	101	101	101	102	102	103	103	103	103	104	
SIZE AND WEIGHT																			
WIDTH ⁶	mm	4000	5250	5250	5250	6500	6500	7750	7750	7750	9000	9000	10250	10250	11650	11650	11650	12900	
DEPTH ⁶	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	
HEIGHT ⁶	mm	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	
OPERATING WEIGHT ⁶	kg	3660	4270	4390	4440	5660	5960	6420	6550	6640	7530	8060	8570	8920	9430	9550	10490	11150	

FX2 R1234ze Air Cooled Chiller

(255 to 1,561kW)

High Efficiency Version (/A)



Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
4. Sound power on the basis of measurements taken in compliance with ISO 9614.
5. Sound power level in cooling, outdoors.
6. Unit in standard configuration, without optional accessories.
7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
8. Seasonal energy efficiency ratio.
9. Seasonal space cooling energy efficiency.

Eurovent Certified Data

The Climaveneta range of **FX2** units are air cooled chillers with screw compressors, designed for delivering high efficiencies in comfort applications. Available with HFO1234ze refrigerant, the new range features 2 or 3 compressors in multi-circuit configuration.

Key Features & Benefits

- Compact design
- Low noise
- Energy efficient
- Low GWP HFO1234ze refrigerant

R1234ze


MODEL		0252	0302	0322	0352	0402	0452	0512	0572	0652	0772	0902	0972	1052	1152	1243	1373	1503	1593	
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE																				
COOLING ONLY (GROSS VALUE)																				
COOLING CAPACITY ¹	kW	255.3	289.9	315.1	365.0	405.4	445.9	519.7	573.4	679.0	781.7	903.5	967.9	1058	1145	1239	1362	1488	1561	
TOTAL POWER INPUT ¹	kW	75.98	87.26	94.43	106.7	121.7	135.2	156.8	172.2	204.8	235.6	276.0	287.2	319.7	343.6	373.1	415.8	446.3	473.4	
EER ¹	kW/kW	3.359	3.321	3.338	3.421	3.331	3.298	3.314	3.330	3.315	3.318	3.274	3.370	3.309	3.332	3.321	3.276	3.334	3.297	
ESEER ¹	kW/kW	4.530	4.500	4.560	4.480	4.500	4.590	4.530	4.570	4.530	4.550	4.530	4.540	4.590	4.630	4.550	4.570	4.590	4.600	
COOLING ONLY (EN14511 VALUE)																				
COOLING CAPACITY ^{1,2}	kW	255.0	289.5	314.7	364.7	405.0	445.4	519.2	572.9	678.4	781.0	902.9	967.1	1057	1145	1238	1361	1487	1560	
EER ^{1,2}	kW/kW	3.320	3.280	3.310	3.390	3.290	3.250	3.280	3.290	3.270	3.270	3.240	3.330	3.270	3.290	3.280	3.240	3.290	3.250	
ENERGY EFFICIENCY																				
SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281)																				
AMBIENT REFRIGERATION																				
P _{RATED,C} ⁷	kW	255	290	315	365	405	445	519	573	678	781	903	967	1057	1145	1238	1361	1487	1560	
SEER ^{7,8}		4.55	4.52	4.61	4.54	4.56	4.61	4.56	4.61	4.60	4.63	4.61	4.64	4.65	4.69	4.63	4.58	4.67	4.69	
PERFORMANCE η _s ^{7,9}	%	179	178	181	178	179	181	179	182	181	182	181	183	183	185	182	180	184	185	
EXCHANGERS																				
HEAT EXCHANGER USER SIDE IN REFRIGERATION																				
WATER FLOW ¹	l/s	12.21	13.86	15.07	17.46	19.39	21.32	24.85	27.42	32.47	37.38	43.21	46.28	50.57	54.77	59.24	65.14	71.14	74.65	
PRESSURE DROP AT THE HEAT EXCHANGER	kPa	38.1	36.3	23.9	32.1	39.7	48.0	34.3	41.8	51.5	54.3	35.3	52.5	48.4	53.3	46.9	46.2	55.1	60.7	
REFRIGERANT CIRCUIT																				
COMPRESSORS NR.	No.	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	
CIRCUITS	No.	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	
REFRIGERANT CHARGE	kg	51.0	55.0	59.0	67.0	72.0	81.0	93.0	98.0	123	142	152	160	191	195	216	222	232	248	
NOISE LEVEL																				
SOUND PRESSURE ³	dB(A)	66	67	67	68	68	68	68	70	69	70	71	71	73	73	73	73	73	73	
SOUND POWER LEVEL IN COOLING ^{4,5}	dB(A)	98	99	99	100	100	100	100	102	102	103	104	104	106	106	106	106	106	106	
SIZE AND WEIGHT																				
WIDTH ⁶	mm	4000	4000	4000	4000	4000	5250	5250	5250	6500	7750	7750	9000	10400	10400	11650	11650	12900	12900	
DEPTH ⁶	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	
HEIGHT ⁶	mm	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	
OPERATING WEIGHT ⁹	kg	3540	3560	3660	3810	4470	4990	5190	5250	6710	7650	7900	8340	9370	9440	11380	12070	12680	12930	

Commercial Heat Pumps & Chillers Accessories / Optional Extras

DESCRIPTION	MODEL REF.
e-Series	
Fin Guard for EACV-M / EAHV-M	EC-130FG
Ecodan CRHV	
Main Pipework Thermistor	TW-TH16
Differential Pressure Switch for Water Systems	KS10-EP100S
Wired Remote Controller	PAR-W21MAA-J
Centralised Controller	AE-C400E
AE-C400E Wall Mounted Box - for Wall Mounting	PAC-YK92TB-J
External Temperature Sensor and Solar Guard	TMP-O
Ecodan CAHV	
Main Pipework Thermistor	TW-TH16
Differential Pressure Switch for Water Systems	KS10-EP100S
Wired Remote Controller	PAR-W31MAA
Centralised Controller	AE-C400E
AE-C400E Wall Mounted Box - for Wall Mounting	PAC-YK92TB-J
Ecodan QAHV	
Main Pipework Thermistor	TW-TH16
Centralised Controller	AE-C400E
AE-C400E Wall Mounted Box - for Wall Mounting	PAC-YK92TB-J
Secondary Side Control Circuit Kit	Q-1SCK

IT Cooling

Close Control Computer Room
Air Conditioning Systems

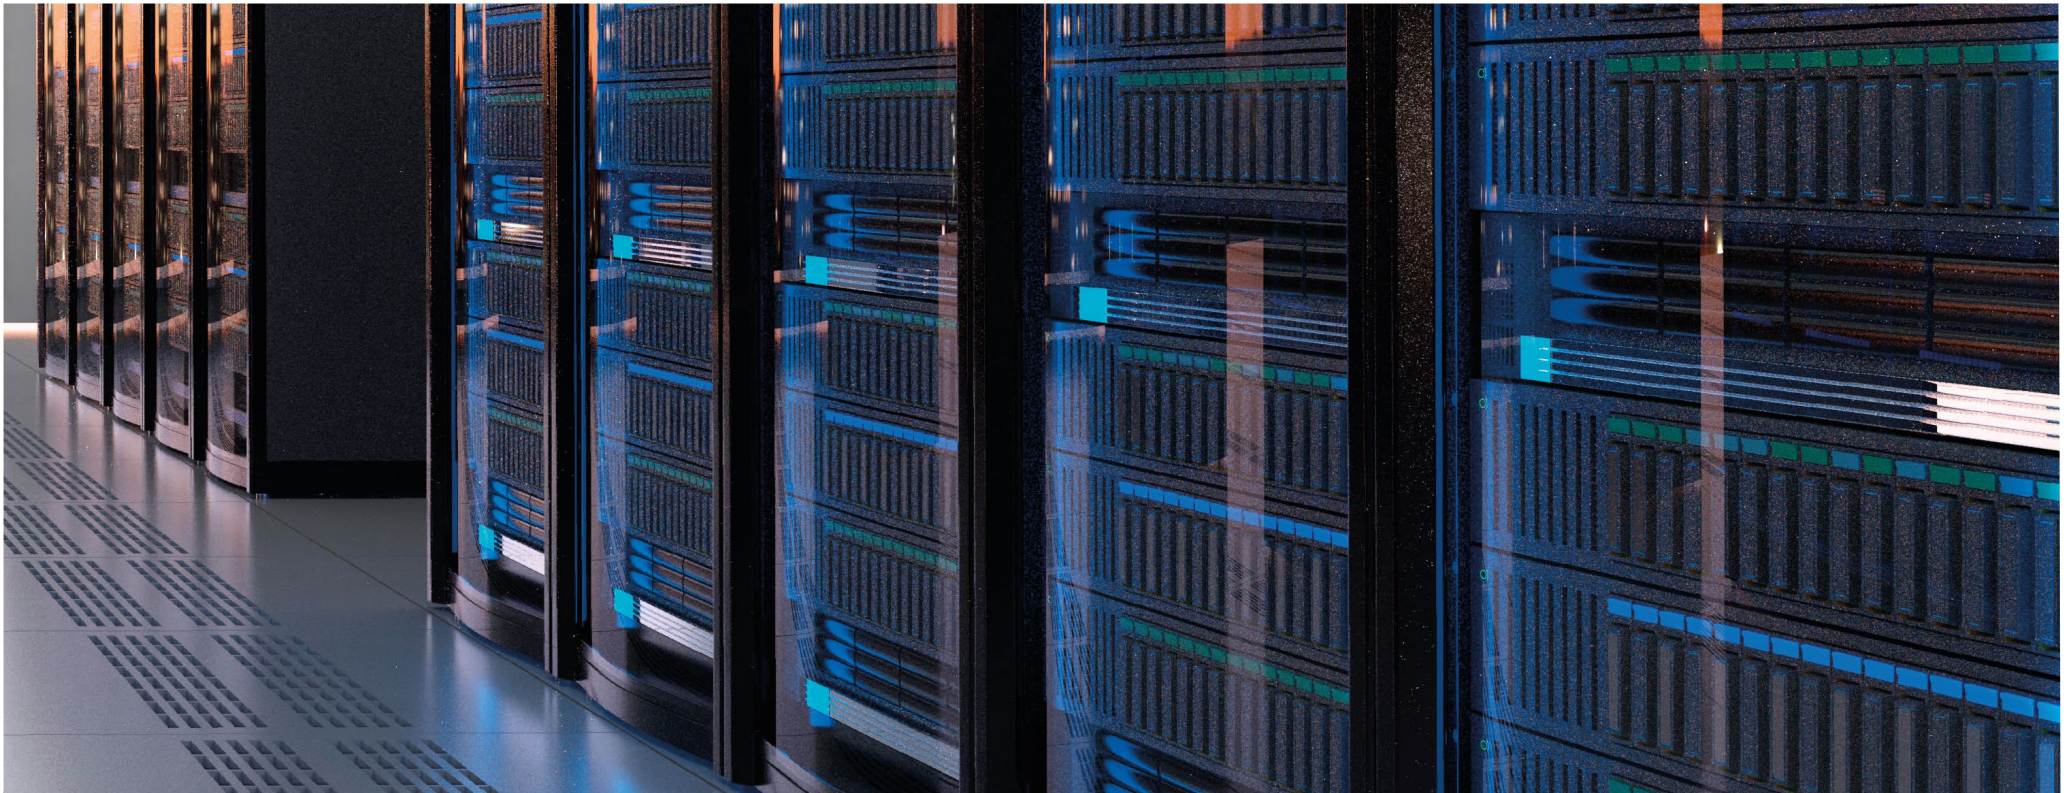



Contents

MSY-TP R32 High SHF Wall Mounted System, Inverter (Cooling Only)	2.6
s-MEXT DX R32 Close Control System	2.7
x-MEXT DX R410A Close Control System	2.8
w-MEXT Chilled Water Close Control System	2.9
w-NEXT Chilled Water Close Control System	2.10
MEWall Data Centre Fan Wall	2.11
m-MRAC / m-MROW R410A Multi Density Close Coupled Control System	2.12
TR2-FC-G04-Z R1234ze Free-Cooling Chiller	2.13
Accessories / Optional Extras	2.14

Close Control Air Conditioning Systems

Precise Temperature and Humidity Control

Complex IT environments are often characterised by variable cooling loads, which require a high cooling capacity at full load in order to allow the IT equipment to operate correctly when it is most needed.

Our IT Cooling range makes it possible to keep temperature and humidity constant, even with very wide load variations, ensuring the correct room conditions all year round.

The perfect match between efficiency and reliability

With our IT cooling systems, both efficiency and reliability are paramount throughout all the stages of research, design and manufacturing. By using this approach along **with over 50 years of manufacturing experience within the IT cooling sector**, we are able to offer tailor made IT Cooling solutions.

Close Control Air Conditioning Systems

The need for high sensible cooling and close control of both temperatures and humidity in critical IT environments has never been higher.

Mitsubishi Electric and RC IT cooling systems have been designed to fulfil this requirement, reducing operational costs in the process through the use of highly efficient technology, with many systems incorporating inverter control as standard.



Mitsubishi Electric Perimeter Cooling units

Mitsubishi Electric's Close Control systems are specifically designed for rooms with a high sensible cooling load that require precise temperature and humidity control. Because of the need for close control 24 hours a day, 365 days a year, an inverter driven compressor has been incorporated into the outdoor units, maximising the energy efficiency of the system.

- Many systems connect to Mr Slim Power Inverter outdoor units
- Easily integrates into existing and new control networks
- Quick recovery following power failure
- High Sensible cooling
- Close control of supply temperature
- Back-up and rotate function available
- Easy to install - no space required at the rear of the unit
- Inverter driven capacity control



RC Perimeter Cooling Units

The RC IT Cooling range of perimeter, upflow or downflow units have been designed to cool new and existing IT rooms efficiently and effectively. The perimeter range offers a broad range of unit types to meet any IT perimeter cooling demand.

- Precise temperature and humidity control
- New generation EC PUL (Polymeric ULtralight) high efficiency fans
- DC inverter technology
- Free cooling available
- Dual fluid circuits for the highest reliability
- Advanced control systems



MSY-TP

R32 High SHF Wall Mounted System

Inverter (Cooling Only)



The M Series **MSY-TP** R32 High SHF wall mounted system blends energy efficiency with a modern design. This cooling only unit has a high sensible cooling capacity, making it ideal for small computer rooms and areas that require a greater degree of sensible cooling. The MSY-TP also utilises lower GWP R32 refrigerant.

Key Features & Benefits

- Compact and stylish white design
- High sensible cooling ability
- Weekly timer provides greater control of scheduling
- Cooling down to -25°C outdoor air temperature

R32

MSY-TP - INDOOR UNITS		MSY-TP35VF	MSY-TP50VF
CAPACITY (kW)	Cooling (nominal)	3.5 (1.5-4.0)	5.0 (1.5-5.7)
	Cooling (UK)	3.47 (1.48-3.96)	4.96 (1.48-5.65)
SHF (nominal)		0.98	0.82
EER (nominal)		4.61	3.45
SEER (BS EN14825)		9.00	8.00
ErP ENERGY EFFICIENCY CLASS	Cooling	A+++	A++
AIRFLOW (l/s)	Cooling - Lo-Mi-Hi-SHi	168-193-228-273	168-193-228-273
PIPE SIZE mm (in)	Gas	9.52 (3/8")	9.52 (3/8")
	Liquid	6.35 (1/4")	6.35 (1/4")
SOUND PRESSURE LEVEL (dBA)	Cooling - Lo-Mi-Hi-SHi	31-36-40-45	31-36-40-45
SOUND POWER LEVEL (dBA)		60	60
DIMENSIONS (mm)	Width x Depth x Height	923 x 250 x 305	923 x 250 x 305
WEIGHT (kg)		12.5	12.5
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz
FUSE RATING (BS88) - HRC (A)		10	10
INTERCONNECTING CABLE No. CORES		4	4

MUY-TP - OUTDOOR UNITS		MUY-TP35VF	MUY-TP50VF
SOUND PRESSURE LEVEL (dBA)	Cooling	45	47
SOUND POWER LEVEL (dBA)	Cooling	58	61
WEIGHT (kg)		34	34
DIMENSIONS (mm)	Width x Depth x Height	800 x 285 x 550	800 x 285 x 550
ELECTRICAL SUPPLY		Fed by Indoor Unit	Fed by Indoor Unit
PHASE		Single	Single
SYSTEM POWER INPUT (kW)	Cooling (nominal)	0.76	1.45
	Cooling (UK)	0.64	1.12
STARTING CURRENT (A)		3.6	6.4
SYSTEM RUNNING CURRENT (A)	Cooling [MAX]	3.6 [9.2]	6.4 [9.2]
FUSE RATING (BS88) - HRC (A)		10	10
MAINS CABLE No. CORES		3	3
MAX PIPE LENGTH (m)		20	20
MAX HEIGHT DIFFERENCE (m)		12	12
CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675)		0.85 / 0.57	0.85 / 0.57
MAX ADDITIONAL REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675)		0.13 / 0.09	0.13 / 0.09

Notes: The SHF figures are based on nominal conditions. Requires an additional MAC-334IF-E interface and PAR-41MAA wired remote controller

s-MEXT DX

R32 Close Control System

High precision air conditioners are ideal for applications where high sensible cooling and close control of temperature and humidity are required. **s-MEXT** takes advantage of more than 50 years experience of the RC brand within the IT Cooling market, coupled with Mitsubishi Electric renowned quality standards. The split cooling package consists of the indoor s-MEXT high precision air conditioner connected to a Mr Slim R32 Power Inverter outdoor unit. The result is a full inverter split system, designed according to the best quality standards and dedicated to the most reliable IT environments.



Key Features & Benefits

- High efficiency achieved through Mr Slim Power Inverter technology
- EC plug fans fitted as standard
- Pipe runs up to 100m
- Full function - Humidifier & Heater options
- Available in Upflow [over] and Downflow [under] variants



CRAC UNITS (Computer Room Air Conditioning)			s-MEXT-G00-DX-F1-006-S	s-MEXT-G00-DX-F1-009-S	s-MEXT-G00-DX-F1-013-S	s-MEXT-G00-DX-F1-013-S	s-MEXT-G00-DX-F2-022-S	s-MEXT-G00-DX-F3-028-S	s-MEXT-G00-DX-F3-038-D	s-MEXT-G00-DX-F3-044-D
PERFORMANCE										
COOLING CAPACITY**	Total	kW	6.81	10.1	11.9	11.9	22.5	27.4	38.9	42.3
	Sensible	kW	6.08	8.88	10.2	10.2	19.3	25.4	33.6	35.2
SHR**2			0.89	0.88	0.86	0.86	0.86	0.93	0.86	0.83
EER			4.67	4.3	3.49	3.49	3.16	2.61	3.56	2.87
REFRIGERANT										
REFRIGERANT	Type		R32	R32	R32	R32	R32	R32	R32	R32
REFRIGERANT CIRCUITS	No.		1	1	1	1	1	1	2	2
CONNECTIONS										
REFRIGERANT PIPES DIAMETER - GAS	Ø Inch		5/8"	5/8"	5/8"	5/8"	1"	1"	1"	1"
REFRIGERANT PIPES DIAMETER - LIQUID	Ø Inch		3/8"	3/8"	3/8"	3/8"	1/2"	1/2"	3/8"	1/2"
CONDENSATE**5	Ø mm		19	19	19	19	19	19	19	19
POWER SUPPLY WIRING CABLE**6	No. x mm ²		3G1.5	3G1.5	3G1.5	3G1.5	3G1.5	5G1.5	5G1.5	5G1.5
FANS										
FAN TYPE		EC BASIC	EC BASIC	EC BASIC	EC BASIC	EC BASIC	EC BASIC	EC BASIC	EC BASIC	EC BASIC
EC SUPPLY FAN	No.		1	1	1	1	2	1	1	1
AIRFLOW	m ³ /h		2,000	2,500	2,800	2,800	5,000	7,600	8,800	10,000
NOMINAL EXTERNAL STATIC PRESSURE	Pa		20	20	20	20	20	20	20	20
POWER INPUT**3	kW		0.21	0.35	0.47	0.47	0.7	0.64	1.43	1.96
ELECTRICAL HEATER										
QUANTITY	No.		1	1	1	1	1	1	1	1
STEPS	No.		2	2	2	2	3	3	3	3
ELECTRICAL POWER ABS.	kW		2.6	2.6	2.6	2.6	3.9	9	9	9
MAX ABSORBED CURRENT	A		11.3	11.3	11.3	11.3	17	13	13	13
HUMIDIFIER										
QUANTITY	No.		1	1	1	1	1	1	1	1
CAPACITY	kg/h		3	3	3	3	3	8	8	8
ELECTRICAL POWER ABS.	kW		2.3	2.3	2.3	2.3	2.3	6	6	6
MAX ABSORBED CURRENT	A		14.1	14.1	14.1	14.1	14.1	12.4	12.4	12.4
SOUND LEVEL [ISO 3744]**4										
PRESSURE LEVEL	dB(A)		53	57	61	61	60	60	63	67
POWER LEVEL	dB(A)		69	73	77	77	76	76	79	83
ELECTRICAL DATA										
POWER SUPPLY	V/ph/Hz		230/1/50	230/1/50	230/1/50	230/1/50	230/1/50	400/3+N/50	400/3+N/50	400/3+N/50
STARTING CURRENT	A		2	2	2.8	2.8	3.3	3.4	3.8	3.8
MAX ABSORBED CURRENT	A		27.7	27.7	28.2	28.2	35	28.8	29.2	29.2
DIMENSIONS AND WEIGHT										
DIMENSIONS	Width	mm	600	600	600	600	1000	1000	1000	1000
	Depth	mm	500	500	500	500	500	890	890	890
	Height	mm	1,980	1,980	1,980	1,980	1,980	1,980	1,980	1,980
NET WEIGHT	Upflow (O)	kg	103	106	110	110	165	237	237	237
	Downflow (U)	kg	110	115	120	120	175	247	247	247

OUTDOOR UNITS		PUZ-ZM60VHA2	PUZ-ZM100VKA2	PUZ-ZM125VKA2	PUZ-ZM125YKA2	PUZ-ZM250YKA2	PUZ-ZM250YKA2	PUZ-ZM200YKA2	PUZ-ZM250YKA2
QUANTITY**7		1	1	1	1	1	1	2	2
ELECTRICAL SUPPLY	V/ph/Hz	230/1/50	230/1/50	230/1/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50
POWER INPUT	Nominal kW	1.25	2.00	2.94	2.94	6.42	10.10	4.74	6.41
STARTING CURRENT	A	5	12	4	4	5	5	5	5
MAX RUNNING CURRENT**8	A	19.0	26.5	9.5	9.5	22.5	22.5	22.5	22.5
POWER SUPPLY WIRING CABLE	No. x mm ²	3G4	3G4	3G4	5G1.5	5G6	5G6	5G6	5G6
REFRIGERANT CHARGE**9	Supplied / Max Additional kg	2.8 / 0.8	3.6 / 2.8	3.6 / 2.8	3.6 / 2.8	6.8 / 2.4	6.8 / 2.4	6.8 / 2.9	6.8 / 2.4
MAX PIPEWORK SEPARATION**10	Std / + Additional m	30 / 55	40 / 100	40 / 100	40 / 100	30 / 100	30 / 100	30 / 100	30 / 100
MAX HEIGHT DIFFERENCE	m	30	30	30	30	30	30	30	30
SOUND PRESSURE LEVEL**11	dB(A)	53	54	55	55	62	62	62	62
SOUND POWER LEVEL	dB(A)	67	69	70	70	77	77	77	77
AMBIENT OPERATING LIMITS**12	Min / Max °C	-15 / 46	-15 / 46	-15 / 46	-15 / 46	-15 / 46	-15 / 46	-15 / 46	-15 / 46
DIMENSIONS	Width	mm	950	1050	1050	1050	1050	1050	1050
	Depth	mm	355	370	370	370	370	370	370
	Height	mm	943	1338	1338	1338	1338	1338	1338
WEIGHT	kg	70	116	116	125	135	135	137	135

Notes:
 The cooling capacity does not consider the supply fan motor thermal load.
 **1 Gross value based on return air of 27°C - 47%RH; Ambient Temperature 35°C; ESP=20Pa; Interconnecting pipework length 5m. **2 SHR = Sensible cooling capacity / Total cooling capacity.
 **3 Corresponding to the nominal ESP=20Pa. **4 Sound pressure level on air return at 1m.
 **5 Rubber pipe - referred to internal diameter. **6 Minimum section.
 **7 Performance values shown are for a single unit / circuit. **8 Referring to outdoor unit only. **9 Per circuit.
 **10 Separation refers to pipework length. Some applications require additional consideration - please see the databook.
 **11 Average sound pressure level, at 1m distance, unit in a free field on a reflective surface according to ISO3744. Non-binding value obtained from the sound power level.
 **12 Optional air protection guide is required from temperatures below -5°C.
 ELCA Engine V 4.8.3.0

x-MEXT DX

R410A Close Control System



The **x-MEXT DX** is a highly efficient computer room air conditioner (CRAC), incorporating a wide range of options and configurations, and manufactured to the highest Mitsubishi Electric quality and reliability standards. The x-MEXT includes BLDC Mitsubishi Electric compressors, microchannel heat exchanger options, and an EC fan on the indoor unit with an impeller made of recycled plastic, that is specifically design for the x-MEXT range.

Key Features & Benefits

- Perimeter unit with upflow (over) and downflow (under) configurations
- Full inverter technology with BLDC Mitsubishi Electric compressors and a proprietary fan design
- Excellent efficiency with load matching control
- Advanced in-house developed control software
- Intelligent LAN controls for up to 15 units
- Interface cards available with many common BEMS protocols
- Automatic transfer switches and fast restart options
- Optional low ambient temperature kit for extreme conditions
- Full function humidifier and heating options
- Optional dampers, floor stands and discharge plenums

R410A

CRAC UNITS (Computer Room Air Conditioning)		x-MEXT-i-G02 -DX-U/O-029	x-MEXT-i-G02 -DX-U/O-040	x-MEXT-i-G02 -DX-U/O-051	x-MEXT-i-G02 -DX-U/O-052	x-MEXT-i-G02 -DX-U/O-067	x-MEXT-i-G02 -DX-U/O-076	x-MEXT-i-G02 -DX-U/O-078	x-MEXT-i-G02 -DX-U/O-090	x-MEXT-i-G02 -DX-U/O-108	x-MEXT-i-G02 -DX-U/O-140	
PERFORMANCE - WITH CONDENSERS LISTED												
COOLING CAPACITY*1	Total	kW	27.7	38.8	49.5	50.4	63.9	74.4	75.9	87.6	104.0	132.0
SHR	Nominal		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
EER*2	Nominal		3.45	3.32	2.93	3.55	3.15	3.14	3.63	3.38	3.12	2.61
FANS												
AIRFLOW		m ³ /h	8,000	10,500	11,000	14,750	17,000	17,000	21,500	22,500	25,500	27,000
FAN TYPE			Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC
FANS	No.		1	1	1	2	2	2	2	2	3	3
POWER INPUT		kW	0.80	1.61	1.85	2.16	3.20	3.22	3.21	3.66	5.15	6.24
MAX EXTERNAL STATIC PRESSURE		Pa	364	299	243	237	173	169	300	245	141	84
REFRIGERANT												
REFRIGERANT			R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A
REFRIGERANT CIRCUITS	No.		1	1	1	1	1	1	2	2	2	2
COMPRESSOR(S) TYPE	Operating Mode		i	i	i	i	1 + i	1 + i	2(i)	2(i)	2(1 + i)	2(1 + i)
FILTERS												
FILTERS	No.		2	2	2	3	3	3	4	4	4	4
EFFICIENCY CLASS*3	Coarse		60%	60%	60%	60%	60%	60%	60%	60%	60%	60%
SOUND LEVEL												
PRESSURE LEVEL*4	Downflow [under] / Upflow [over]	dB(A)	50 / 69	47 / 65	47 / 64	48 / 66	47 / 65	47 / 64	49 / 68	49 / 67	50 / 69	52 / 69
POWER LEVEL*4	Downflow [under] / Upflow [over]	dB(A)	67 / 86	64 / 82	64 / 81	65 / 83	64 / 82	64 / 81	67 / 86	67 / 85	68 / 87	70 / 87
ELECTRICAL												
POWER SUPPLY	V/ph/Hz		400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50
MAX RUNNING CURRENT	FLA	A	30.6	41.5	41.5	47	57.4	57.4	82	82	108	108
DIMENSIONS AND WEIGHT												
FRAME SIZE			M	M	M	L	L	L	XL	XL	XL	XL
DIMENSIONS	Width	mm	1,142	1,142	1,142	1,600	1,600	1,600	2,550	2,550	2,550	2,550
	Depth	mm	885	885	885	885	885	885	885	885	885	885
	Height	mm	1,980	1,980	1,980	1,980	1,980	1,980	1,980	1,980	1,980	1,980
NET WEIGHT	Upflow [over]	kg	363	372	375	459	502	503	799	806	915	916
	Downflow [under]	kg	372	380	383	477	520	521	839	846	955	957
CONNECTIONS*5												
REFRIGERANT PIPE DIAMETER	Gas	Ø mm	18	22	22	22	28	28	2 x 22	2 x 22	2 x 28	2 x 28
	Liquid	Ø mm	16	18	18	18	18	18	2 x 18	2 x 18	2 x 18	2 x 18
CONDENSATE DRAIN*6		Ø mm	19	19	19	19	19	19	19	19	19	19

OUTDOOR REMOTE CONDENSER(S)*7		MEGR-MC-E 034	MEGR-MC-E 049	MEGR-MC-E 067	MEGR-MC-E 067	MEGR-MC-E 082	MEGR-MC-E 110	2 x MEGR- MC-E 049	2 x MEGR- MC-E 055	2 x MEGR- MC-E 067	2 x MEGR- MC-E 082
FAN TYPE*8		Axial EC	Axial EC	Axial EC	Axial EC	Axial EC	Axial EC	Axial EC	Axial EC	Axial EC	Axial EC
FANS		No.	1	2	2	2	3	4	2	2	2
AIRFLOW		m ³ /h	9,550	15,555	19,000	19,000	25,000	36,600	15,555	18,300	19,000
POWER SUPPLY		V/ph/Hz	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50
MAX RUNNING CURRENT		FLA	1.92	3.84	3.84	3.84	5.76	7.68	3.84	3.84	5.76
SOUND LEVEL*4		Pressure	56	54	58	58	59	59	54	57	58
DIMENSIONS*9		Width	1,140	1,140	1,140	1,140	1,140	2,200	1,140	1,140	1,140
		Length	1,360	2,040	2,600	2,600	2,600	2,280	2,040	2,040	2,600
		Height	1,168	1,168	1,168	1,168	1,168	1,168	1,168	1,168	1,168
NET WEIGHT		kg	50	82	96	96	114	169	82	82	114
CONNECTION SIZE*5		Gas	Ømm	22	22	22	28	28	22	22	28
REFRIGERANT PIPE DIAMETER		Liquid	Ømm	18	18	18	18	22	18	18	18

Notes:

- *1 Gross Total Values shown for Downflow [under] airflow configuration. Operating Conditions:
Return Air Temperature: 30°C / Relative Humidity: 35% / Ambient: 35°C / External Static Pressure: 20Pa
- *2 EER for indoor unit only.
- *3 As per ISO EN 16890. Other filter options are available.
- *4 Average sound level, at 1m distance, unit in a free field on a reflective surface according to ISO 3744.
- *5 Equipment connection only; consult x-MEXT / MEGR databooks for interconnecting pipework sizing.
- *6 Rubber pipe - refers to internal diameter.
- *7 All data is "per condenser". Typical condenser arrangement shown, other condenser sizing combinations are available.
- *8 Other type of fans are available.
- *9 Based on vertical airflow direction.
- These units contain <HFC R410A [GWP₁₀₀ 2088]> fluorinated greenhouse gas.

w-MEXT

Chilled Water Close Control System



The **w-MEXT** chilled water range incorporates the latest EC Plug fans, advanced controls software and maximises the coil area to bring high efficiency and high SHR performance to smaller data centre and server room environments.

Group controls and smart control strategies are not reserved for larger environments: w-MEXT can operate with intelligent integrated LAN functions for active redundancy and also integrate with the Hydronic Plant Connect (HPC) group control system, bringing harmony between the CRAHs and Chillers.

Additional options for electric heating and humidification further extend control and operational functionality.

Key Features & Benefits

- Compact footprint with Under, Over and Displacement airflows
- Adaptive set-point
- High efficiency EC plug fans
- LAN controls for up to 15 units
- Variety of valve options

CRAH UNITS (Computer Room Air Handler)			w-MEXT U/O 006 F1	w-MEXT U/O 009 F1	w-MEXT U/O 011 F1	w-MEXT U/O 013 F1	w-MEXT U/O 016 F2	w-MEXT U/O 022 F2	w-MEXT U/O 026 F2
PERFORMANCE									
COOLING CAPACITY*1	Total	kW	4.6	7.9	9.7	12.5	15.4	20.4	25.6
	Nominal		1.00	1.00	1.00	1.00	1.00	1.00	1.00
SHR	Nominal		65.3	37.6	30.2	27.8	38.5	30.0	26.9
EER*2	Nominal								
FANS									
AIRFLOW		m³/h	1,500	2,200	2,500	2,700	4,300	5,000	5,400
FAN TYPE			Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC
FANS	No.		1	1	1	1	2	2	2
POWER INPUT		kW	0.07	0.21	0.32	0.45	0.40	0.68	0.95
MAX EXTERNAL STATIC PRESSURE		Pa	201	471	384	276	277	370	254
WATER CIRCUIT									
FLOW RATE		l/s	0.22	0.38	0.46	0.60	0.74	0.97	1.22
PRESSURE DROP*3		kPa	23.5	61.1	32.2	55.7	46.5	80.2	108
FILTERS									
FILTERS	No.		1	1	1	1	2	2	2
EFFICIENCY CLASS*4	Coarse		60%	60%	60%	60%	60%	60%	60%
SOUND LEVEL									
PRESSURE LEVEL*5		dB(A)	43	56	58	60	53	60	62
POWER LEVEL*5		dB(A)	59	72	74	76	69	76	78
ELECTRICAL									
POWER SUPPLY		V/ph/Hz	230 / 1 / 50	230 / 1 / 50	230 / 1 / 50	230 / 1 / 50	230 / 1 / 50	230 / 1 / 50	230 / 1 / 50
MAX RUNNING CURRENT*6	FLA	A	3.6	4.0	4.0	4.0	7.2	8.0	8.0
ELECTRIC HEATER (optional)									
STEPS	No.		2	2	2	2	3	3	3
CAPACITY		kW	2.6	2.6	2.6	2.6	3.9	3.9	3.9
MAX RUNNING CURRENT*7	FLA	A	11.3	11.3	11.3	11.3	16.9	16.9	16.9
HUMIDIFIER (optional)									
QUANTITY	No.		1	1	1	1	1	1	1
CAPACITY		kg/h	3.0	3.0	3.0	3.0	3.0	3.0	3.0
MAX RUNNING CURRENT*8	FLA	A	14.1	14.1	14.1	14.1	14.1	14.1	14.1
DIMENSIONS AND WEIGHT									
FRAME SIZE			F1	F1	F1	F1	F2	F2	F2
DIMENSIONS	Width	mm	600	600	600	600	1,000	1,000	1,000
	Depth	mm	500	500	500	500	500	500	500
	Height	mm	1,980	1,980	1,980	1,980	1,980	1,980	1,980
	NET WEIGHT								
	Upflow [over]	kg	103	109	116	120	163	173	181
	Downflow [under]	kg	110	118	126	130	173	183	191
CONNECTIONS									
WATER*9	Inlet	Ø inch	3/4"	3/4"	3/4"	1"	1 1/4"	1 1/4"	1 1/4"
	Outlet	Ø inch	3/4"	3/4"	3/4"	1"	1 1/4"	1 1/4"	1 1/4"
CONDENSATE DRAIN*10		Ø mm	19	19	19	19	19	19	19

Notes:

- *1: Gross total values shown. Operating conditions: Return Air Temperature: 26°C / Relative Humidity: 40% / Water Inlet: 10°C / Water ΔT: 5K / Glycol: 0% / External Static Pressure: 20Pa.
- *2: EER for indoor unit only.
- *3: For heat exchanger coil and 2-port valve only.
- *4: As per ISO EN 16890. Other filter options are available.
- *5: Average sound level, at 1m distance, unit in a free field on a reflective surface according to ISO 3744. Values for downflow [under] and upflow [over] only.
- *6: Cooling only version. Humidifier / electrical heating options will change value. Refer to databook.
- *7: For electric heater only.
- *8: For humidifier only.
- *9: As per ISO 228/1-G.
- *10: Rubber pipe - refers to internal diameter.

w-NEXT

Chilled Water Close Control System



High precision air conditioners are ideal for applications where high sensible cooling and close control of temperature and humidity are required. The **w-NEXT** chilled water range incorporates the latest EC plug fan(s), advanced controls software and an increased coil area resulting in the highest efficiency.

Key Features & Benefits

- High Efficiency - EC plug fans
- Small footprint
- Adaptive Set Point
- Active Redundancy
- Available in Upflow [over] and Downflow [under] variants

CRAH UNITS (Computer Room Air Handler)		w-NEXT S 045 E3P	w-NEXT S 053 E4	w-NEXT S 072 E5	w-NEXT S 081 E6
CAPACITY (kW)*2	Total	41.0	48.1	66.1	73.5
	Sensible	41.0	48.1	66.1	73.5
SHR**3		1.00	1.00	1.00	1.00
EER		18.6	22.4	22.8	21.2
EC SUPPLY FAN(S)	No.	1	1	2	2
AIRFLOW (m³/h)		10,800	13,100	16,350	20,000
EXTERNAL STATIC PRESSURE (Pa)		20	20	20	20
MAX EXTERNAL STATIC PRESSURE (Pa)		297	194	532	458
POWER INPUT (kW)**4		2.20	2.15	2.90	3.47
AIR FILTERS	No.	2	3	3	4
	Extended filtering surface (m²)	1.71	2.07	2.59	3.16
	Efficiency [ISO EN 16890] (COARSE)	60%	60%	60%	60%
CHILLED WATER FLOW RATE (l/s)		1.96	2.30	3.16	3.51
WATERSIDE PRESSURE DROP (kPa)	Coil + 2-Port Valve	34.1	37.3	42.9	35.6
SOUND LEVEL dB(A) (ISO3774)**5	Downflow - Power / Pressure	73 / 57	74 / 57	73 / 56	75 / 58
	Upflow - Power / Pressure	77 / 61	78 / 61	77 / 60	79 / 62
POWER SUPPLY (V/Ph/Hz)		400 / 3+N / 50	400 / 3+N / 50	400 / 3+N / 50	400 / 3+N / 50
MAX POWER ABSORBED (kW)		2.90	2.70	5.40	5.80
MAX RUNNING CURRENT (A)		4.4	4.2	8.4	8.9
DIMENSIONS (mm)	Width	1085	1305	1630	1875
	Depth	930	930	930	930
	Height	1925	1980	1980	1980
	NET WEIGHT (kg)				
DOWNFLOW	Downflow	321	345	470	531
	Upflow	329	379	428	483
CONNECTIONS	Water Inlet / Outlet ISO 7/1 (Ø inch)	1 1/4"	1 1/2"	2"	2"
	Condensate (Ømm)**6	19	19	19	19

CRAH UNITS (Computer Room Air Handler)		w-NEXT S 100 E7	w-NEXT S 120 E8	w-NEXT S 138 E9	w-NEXT S 160 E10*1	w-NEXT S 215 E10*1
CAPACITY (kW)*2	Total	91.6	111.0	126.0	147.0	204.0
	Sensible	91.6	111.0	126.0	147.0	177.0
SHR**3		1.00	1.00	1.00	1.00	0.87
EER		23.0	17.8	19.6	22.8	31.7
EC SUPPLY FAN(S)	No.	2	3	3	3	3
AIRFLOW (m³/h)		24,200	28,300	33,100	37,150	37,150
EXTERNAL STATIC PRESSURE (Pa)		20	20	20	20	20
MAX EXTERNAL STATIC PRESSURE (Pa)		247	237	309	207	207
POWER INPUT (kW)**4		3.98	6.22	6.42	6.44	6.44
AIR FILTERS	No.	4	5	6	6	6
	Extended filtering surface (m²)	3.83	4.47	5.24	6.54	6.54
	Efficiency [ISO EN 16890] (COARSE)	60%	60%	60%	60%	60%
CHILLED WATER FLOW RATE (l/s)		4.38	5.33	6.04	7.03	9.74
WATERSIDE PRESSURE DROP (kPa)	Coil + 2-Port Valve	31.7	48.6	47	66.7	62.2
SOUND LEVEL dB(A) (ISO3774)**5	Downflow - Power / Pressure	76 / 59	79 / 61	80 / 62	79 / 61	79 / 61
	Upflow - Power / Pressure	80 / 63	83 / 65	81 / 63	N/A	N/A
POWER SUPPLY (V/Ph/Hz)		400 / 3+N / 50	400 / 3+N / 50	400 / 3+N / 50	400 / 3+N / 50	400 / 3+N / 50
MAX POWER ABSORBED (kW)		5.40	8.10	8.70	8.10	8.10
MAX RUNNING CURRENT (A)		8.3	12.6	13.3	12.5	12.5
DIMENSIONS (mm)	Width	2175	2499	2699	3510	3510
	Depth	930	930	930	930	930
	Height	1980	1980	1980	1980	1980
	NET WEIGHT (kg)					
DOWNFLOW	Downflow	589	660	753	900	970
	Upflow	535	598	679	N/A	N/A
CONNECTIONS	Water Inlet / Outlet ISO 7/1 (Ø inch)	2 1/2"	2 1/2"	3"	3"	3"
	Condensate (Ømm)**6	19	19	19	19	19

THE COOLING CAPACITY DOES NOT CONSIDER THE SUPPLY FAN MOTOR THERMAL LOAD

*1 Downflow version only.

*2 Gross value based on return air at 24°C - 45%RH; Chiller water 7°C / 12°C.

*3 SHR = Sensible cooling capacity / Total cooling capacity.

*4 Fan(s) input power (ESP=20Pa).

*5 Average level at 1m from unit in free field conditions.

*6 Rubber pipe - refers to internal diameter.

MEWall

Data Centre Fan Wall



Mitsubishi Electric's new **MEWall** brings performance and reliability at scale. It is ideal for hyperscale datacentres and large co-location customers, so that they can leverage their size to deliver improved efficiencies and make every kilowatt count.

By changing the airflow convention to horizontal, the MEWall allows for taller heat exchangers, with elevated water temperatures, to improve performance over conventional designs. It also can separate the white space from the technical corridor, enhancing security arrangements. Most importantly, this design eliminates the need for raised floors: simplifying building design, installation and reducing costs.

Key Features & Benefits

- Eliminates the need for raised floors in your white space
- Highly efficient EC fan combined with efficient heat exchanger
- Operates at modern hyperscale conditions
- Easy to service - fully accessible from the front
- Advanced control and networking options

FAN WALL		402	462
PERFORMANCE			
COOLING CAPACITY*1	Total kW	412	435
SENSIBLE HEAT RATIO (SHR)		1.00	1.00
ENERGY EFFICIENCY RATIO (EER)*2	kW/kW	24.10	22.40
FANS			
DIRECTION		Horizontal	Horizontal
TYPE		EC	EC
QUANTITY	No.	8	8
AIRFLOW	m ³ /h	90000	100000
TOTAL POWER INPUT*3	kW	17.1	19.4
EXTERNAL STATIC PRESSURE	Pa	50	50
MAX EXTERNAL STATIC PRESSURE	Pa	197	128
CHILLED WATER CIRCUIT*1			
WATER FLOW	l/s	9.89	10.4
TOTAL PRESSURE DROP*4	kPa	46	43.5
ELECTRICAL DATA			
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50
F.L.A.	Total A	40	40
SOUND LEVEL*5			
TOTAL SOUND PRESSURE LEVEL	dB(A)	63	65
TOTAL SOUND POWER LEVEL	dB(A)	83	85
DIMENSIONS AND WEIGHT			
WIDTH	mm	3600	3600
DEPTH	mm	1600	1600
HEIGHT	mm	3500	4000
NET WEIGHT	kg	2300	2500
CONNECTIONS			
WATER*6	Inlet / Outlet DN	80	80
	Inlet / Outlet Ø inches	3	3
CONDENSATE DRAIN*7	Ø mm	22	22

Notes:

*1: Gross Total Values shown. Operating Conditions: Return Air Temperature: 37°C / Relative Humidity: 25% / Water Inlet: 20°C / Water DeltaT: 10K / Glycol: 0%.

*2: EER for indoor unit only.

*3: Corresponding to nominal external static pressure (ESP) of 50Pa.

*4: Modules are in parallel and pressure drop refers to a single module at listed flow rate only.

*5: Average sound level, at 1m distance, unit in a free field on a reflective surface according to ISO 3744.

*6: See Databook for specific details on hydraulic connection requirements.

*7: Rubber pipe - refers to internal diameter.

m-MRAC / m-MROW

R410A Multi Density Close Coupled Control System



Mitsubishi Electric's **Multi Density** systems combine the efficiency, quality and simplicity of VRF with high performance close coupled air conditioning units. Multi Density is ideal for applications where high sensible cooling and close control of temperature in high density applications is required. This system consists of multiple indoor 'coolside' close coupled air conditioners connected to a City Multi VRF outdoor unit. The result is a full inverter multi-split system, designed according to the best quality standards and dedicated to the most reliable IT environments. The range is particularly suitable for high density racks and blade server cooling in data centres, as it is able to cope with the high density of the thermal load, putting the air conditioning unit directly within the rows of racks to cool the localised heat sources (hot spots).

Key Features & Benefits

- High Efficiency - full Mitsubishi Electric inverter technology
- Small footprint
- Pipe runs up to 165m
- Trusted VRF technology

R410A

CRAC UNITS (COMPUTER ROOM AIR CONDITIONING)		m-MRAC G02 009 / M-MROW G02 009	m-MRAC G02 015 / M-MROW G02 015	m-MRAC G02 025 / M-MROW G02 025
COOLING CAPACITY (kW) ¹	Total	10.6	16.6	28.6
	Sensible	9.6	15.7	27.4
SHR ²		0.91	0.94	0.96
EC SUPPLY FAN (no.)		2	4	5
AIRFLOW (m ³ /h)		1,500	2,700	4,200
NOMINAL EXTERNAL STATIC PRESSURE (Pa)		20	20	20
MAX EXTERNAL STATIC PRESSURE (Pa)		60	60	60
POWER INPUT (kW) ³		0.18	0.34	0.85
REFRIGERANT		R410A	R410A	R410A
REFRIGERANT CIRCUITS (n ⁴)		1	1	1
AIR FILTERS	NO.	2	2	2
	Extended filtering surface (m ²)	0.35	0.35	0.35
	Efficiency [ISO EN 16890] (COARSE)	40%	40%	40%
SOUND LEVEL [ISO 3744] (dB(A)) ⁴	Pressure Level	63.5	64.5	70.5
	Power Level	79	80	86
POWER SUPPLY (V / Ph / Hz)		230 / 1 / 50	230 / 1 / 50	230 / 1 / 50
ABSORBED CURRENT (A) ⁵		0.8	1.5	4
STARTING CURRENT (A)		2.9	5.8	7.3
DIMENSIONS (mm)	Width	300	300	300
	Depth (MROW / MRAC)	1000 / 1200	1000 / 1200	1000 / 1200
	Height	2,085	2,085	2,085
NET WEIGHT (kg)	In-Row	175	190	193
	Enclosure	185	200	203
CONNECTIONS	Refrigerant pipes diameter - Gas (Ø Inch)	3/4"	7/8"	1"
	Refrigerant pipes diameter - Liquid (Ø Inch)	1/2"	5/8"	3/4"
	Condensate (Ømm) ⁵	16	16	16
	Power supply wiring cable (no. x mm ²) ⁶	3G1.5	3G1.5	3G1.5

OUTDOOR UNITS		m-MOCU G02 050	2 X m-MOCU G02 050
RATED COOLING CAPACITY	kW	50	50 x 2
SYSTEM EER ⁷	kW/kW	2.96	3.24
SOUND PRESSURE LEVEL (dB(A))	Cooling	65	68
WEIGHT (kg)		304	304 x 2
DIMENSIONS (mm)	Width x Depth x Height	1650 x 740 x 1750	1650 x 740 x 1750 [x2]
POWER SUPPLY (V / Hz)		380-415v, 50Hz	380-415v, 50Hz
PHASE		3	3
OUTDOOR POWER INPUT (kW)	Cooling (nominal)	15.2	13.7
STARTING CURRENT (A)		27.8	27.8 x 2
MAX RUNNING CURRENT (A)	Cooling	37.6	37.6 x 2
FUSE RATING (BS88) - HRC (A)		40	40 x 2
MAINS CABLE	No. Cores	5G6	5G6
MAX PIPE LENGTH (m)		165	165
MAX HEIGHT DIFFERENCE (m)		50 (40 ⁷)	50 (40 ⁷)
CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (T)	R410A (GWP 2088)	11.8 / 24.6	11.8 / 24.6 x 2
GUARANTEED OPERATING RANGE (°C)	Max Temp	45	45
	Min Temp	-15	-15

Notes:

THE COOLING CAPACITY DOES NOT CONSIDER THE SUPPLY FAN MOTOR THERMAL LOAD.

¹ All data refers to the Rating Configuration with 2x m-MROW-Z G02 F/S 025 @35°C

Outdoor Temperature and 35°C/27%rh Indoor Temperature.

² SHR = Sensible cooling capacity / Total cooling capacity.

³ Corresponding to the nominal ESP=20Pa.

⁴ Sound pressure level on air return at 1m.

⁵ Rubber pipe - refers to internal diameter.

⁶ Minimum section. It's possible to connect indoor units with a sum of sizing from 25 to 75.

⁷ When outdoor unit is below indoor unit.

These units contain <HFC R410A (GWP₁₀₀ 2088)> fluorinated greenhouse gas.

TR2-FC-G04-Z

R1234ze Free-Cooling Chiller (1,216 to 1,819kW)

The **TR2-FC-G04-Z** free-cooling chiller is more than just an additional air heat exchanger. Available as standard or as a No Glycol (-NG) version, it utilises oil-free centrifugal compressors, optimised for R1234ze, to deliver efficient mechanical cooling. The new free-cooling control logic improves the system's EER throughout the year, allowing for up to 20% annual savings compared to previous methods.

Key Features & Benefits

- New free-cooling logic to maintain highest EER throughout the year
- High leaving water temperatures and wide water delta temperatures
- Low lift pump for increased hybrid performance
- Compact design with low GWP refrigerant (GWP₁₀₀ = 1)*
- Wide set of additional options for any data centre requirement

*IPCC AR5

R1234ze



FREE-COOLING CHILLER	1232	1653	1803	1232	1653	1803		
VERSION	-	-	-	-NG	-NG	-NG		
PERFORMANCE								
MECHANICAL COOLING - GROSS VALUE*1								
COOLING CAPACITY	kW	1216	1619	1771	1249	1662	1819	
TOTAL POWER INPUT	kW	252.1	338.4	381.9	253.0	339.6	383.3	
EER	kW/kW	4.82	4.78	4.64	4.94	4.89	4.75	
FREE-COOLING @ 10°C AMBIENT - GROSS VALUE*2								
COOLING CAPACITY	kW	1178	1507	1654	1042	1341	1466	
FREE-COOLING KW / NOMINAL KW	%	97	93	93	83	81	81	
TOTAL FREE-COOLING (GROSS VALUE)*2								
TOTAL FREE-COOLING AMBIENT*3	°C	9.3	8.4	8.4	5.6	4.7	4.7	
TOTAL POWER INPUT	kW	22.4	28.0	30.8	27.9	33.5	36.3	
EER	kW/kW	54.29	57.82	57.50	44.77	49.61	50.11	
HEAT EXCHANGER IN COOLING*1								
GLYCOL	%	30	30	30	0	0	0	
WATER FLOW	User Side	l/s	26.7	35.6	38.9	25.0	33.3	36.4
PRESSURE DROP	User Side	kPa	74.8	97.5	100	71.2	88.9	94.4
ELECTRICAL DATA								
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	
F.L.A.*4	Total	A	537	787	796	537	787	796
EXCHANGERS								
MINIMUM WATER FLOW	Evaporator	l/s	16.7	20.8	22.2	16.7	20.8	22.2
MINIMUM WATER CONTENT	Plant	l	5000	5000	5000	5000	5000	5000
FANS								
QUANTITY	No.	16	20	22	16	20	22	
AIRFLOW	m³/s	78.4	104.2	113.1	78.4	104.2	113.1	
REFRIGERANT CIRCUIT								
COMPRESSORS	No.	2	3	3	2	3	3	
CIRCUITS	No.	1	1	1	1	1	1	
REFRIGERANT		R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	
REFRIGERANT CHARGE*5	kg	680	840	860	680	840	860	
SOUND LEVELS								
TOTAL SOUND PRESSURE*6	dB(A)	68	69	70	68	69	70	
TOTAL SOUND POWER LEVEL IN COOLING*7	dB(A)	101	102	103	101	102	103	
DIMENSIONS & WEIGHT*8								
WIDTH	mm	9500	11700	12800	9500	11700	12800	
DEPTH	mm	2260	2260	2260	2260	2260	2260	
HEIGHT	mm	2500	2500	2500	2500	2500	2500	
OPERATION WEIGHT	kg	10700	12700	14000	11800	14100	15400	

Notes:

*1 Plant (side) cooling exchanger water (in/out) 32°C/20°C; Source (side) heat exchanger air (in) 35°C.

*2 Plant (side) cooling exchanger water (in/out) 32°C/20°C.

*3 Maximum ambient temperature where free-cooling capacity >= nominal cooling capacity, as stated above.

*4 Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.

*5 Theoretical - refer to serial plate for actual charge volumes.

*6 Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.

*7 Sound power on the basis of measurement taken in compliance with ISO 9614. Sound power level in cooling, outdoors.

*8 Unit in standard configuration, without optional accessories.

IT Cooling Accessories / Optional Extras

DESCRIPTION

MODEL REF.

MSY-TP / MUY-TP

Air outlet guide for MUY-TP35/50VF

MAC-881SG

Standard wired remote controller

PAR-41MAA

Interface for M-NET, MA remote controller (PAR-41MAA), on/off input and run/fault output

MAC-334IF-E

Interface for connection to Wi-Fi MELCloud service

MAC-587IF-E

s-MEXT DX

s-MEXT-G00 F01 Support Frame H510 P043

s-MEXT-G00 F02 Support Frame H510 P043

s-MEXT-G00 F03 Support Frame H510 P043

s-MEXT-G00 F01 Plenum c/w 3 Grilles P013

s-MEXT-G00 F02 Plenum c/w 3 Grilles P013

s-MEXT-G00 F03 Plenum c/w 3 Grilles P013

s-MEXT-G00 Modbus serial card (RS485)

s-MEXT-G00 BACnet TCP/IP card (RJ45)

x-MEXT DX

Modbus Serial card (RS485)

BACNet TCP/IP Ethernet card (RJ45)

Floor stand with rubber holders (350-500mm)

Floor stand with rubber holders (500-750mm)

Floor stand with rubber holders (750-1000mm)

Electric heater

Steam humidifier

Air discharge plenum with 3 grilles

Inlet damper with actuator

Epoxy coated condenser coil(s)

w-MEXT / w-NEXT

Modbus Serial card (RS485)

BACNet TCP/IP Ethernet card (RJ45)

Floor stand with rubber holders (255-350mm)

Floor stand with rubber holders (355-450mm)

Floor stand with rubber holders (400-510mm)

Electric heater

Steam humidifier

Air discharge plenum with 3 grilles

Inlet damper with actuator

m-MRAC / m-MROW

Multi Density Tee & Adaptor



Residential Heating

Ecodan Residential Renewable Heating Systems



ecodan[®]
Renewable Heating Technology



Contents

Ecodan Heat Pumps - Renewable Heating Systems	3.4
PUZ-WZ50-80VAA R290 Monobloc Air Source Heat Pumps	3.6
PUZ-WM50VHA R32 Monobloc Air Source Heat Pump	3.8
PUZ-WM60-112VAA/YAA R32 Monobloc Air Source Heat Pumps	3.10
PUZ-HWM140VHA/YHA R32 Monobloc Air Source Heat Pumps	3.12
EHPT20X-MEHEW FTC7 Packaged Cylinder for R290 / R32 Ecodan Monobloc Units	3.14
EHPT15-17X-UKHLDW1S Pre-Plumbed Slimline Cylinders for R32 Ecodan Monobloc Units	3.16
EHPT15-21X-UKHDW1S Pre-Plumbed Standard Cylinders for R32 Ecodan Monobloc Units	3.18
EHPT21-30X-UKHDW1L Pre-Plumbed Standard Cylinders for R32 Ecodan Monobloc Units	3.20
EHPT18-21X-UKHLDWB Versatile Slimline Cylinders for R32 Ecodan Monobloc Units	3.22
EHPT21-30X-UKHDWB Versatile Standard Cylinders for R32 Ecodan Monobloc Units	3.24
FTC7 / FTC6 / FTC2BR Flow Temperature Controllers for use with Ecodan Monobloc Units and Third Party BEMS	3.26
Energy Monitoring Packs	3.27
MELCloud Wi-Fi Connectivity	3.28
i-LIFE2 Slim-DLMV Fan Assisted Radiator	3.30
Accessories / Optional Extras	3.32

Ecodan Heat Pumps - Renewable Heating Systems

There is now no doubt that the world is in a climate crisis and that we need to act immediately to avoid catastrophic climate change. The UK Government have reacted by being the first major economy to pass net zero (Greenhouse Gas) emission laws. Renewable technologies, such as heat pumps, have become an integral part of the solution to the problem of reducing carbon emissions generated through heating.

As a market leader in both commercial and domestic heat pumps, Mitsubishi Electric is a pioneer in the development of this renewable technology. Around the world, heat pumps have been utilised for decades and Mitsubishi Electric has refined this technology to produce Ecodan - one of the most advanced, efficient heating systems available on the market today.

The award winning Ecodan heat pumps are available from 5kW up to 960kW, making them suitable for virtually any property, from small flats to large detached houses, from an office block to a school. They are the renewable, low carbon alternative to traditional high carbon heating systems.

- Renewable heating solution capable of reducing emissions and achieving climate targets
- Highly efficient, proven and refined technology that can lower energy bills
- Range of easy to design, install and maintain systems suitable for a variety of property and application types

Ecodan heat pumps are a renewable heating technology that efficiently and reliably generates sustainable space heating and hot water all year round, delivering a level of comfort that sets the technology apart from other forms of heating.



TV presenter, architect, lecturer and writer, George Clarke is a passionate advocate of design excellence and high levels of quality in the construction industry.

“ The way we design, build, heat, power and recycle our homes needs to change, and change quickly, and renewable heating is an important part of our future.

I'm therefore delighted to associate myself with Ecodan, the market-leading brand of heat pumps built here in the UK and which can help reduce energy bills and lower emissions for almost any home. ”

George Clarke

Ecodan Brand Ambassador



Range Overview

System Type		Litres	5kW	5kW	6kW	6kW	8kW	8.5kW	11.2kW	14kW	40kW	40kW	60kW
Standalone	PAC-IF082B-E		●		●		●						
	PAC-IF072B-E			●		●		●	●	●	●	●	●
FTC7 Packaged Cylinder	EHPT20X-MEHEW	200	●	●	●	●	●	●	●	●			
Pre-Plumbed Slimline Cylinder	EHPT15X-UKHLDW1S	150		●		●		●					
	EHPT17X-UKHLDW1S	170		●		●		●					
Pre-Plumbed Standard Cylinder	EHPT15X-UKHDW1S	150		●		●		●					
	EHPT17X-UKHDW1S	170		●		●		●					
	EHPT21X-UKHDW1S	210		●		●		●					
	EHPT21X-UKHDW1L	210				●		●	●	●			
	EHPT25X-UKHDW1L	250				●		●	●	●			
Versatile Slimline Cylinder	EHPT18X-UKHLDWB	180		●		●		●	●	●			
	EHPT21X-UKHLDWB	210		●		●		●	●	●			
	EHPT21X-UKHDWB	210		●		●		●	●	●			
Versatile Standard Cylinder	EHPT25X-UKHDWB	250				●		●	●	●			
	EHPT30X-UKHDWB	300						●	●	●			
	EHPT30X-UKHDWB	300						●	●	●			
Approvals	Manufactured in the United Kingdom		●	●	●	●	●	●	●				
	Red Dot Award		●		●	●	●	●	●				
	Microgeneration Certification Scheme												●
	Keymark		●	●	●	●	●	●	●	●	●	●	
	Boiler Upgrade Scheme Product Eligibility List		●	●	●	●	●	●	●	●			●

Notes: For further information on the Ecodan QAHV, CAHV and CRHV models, please refer to the 'Commercial Heat Pumps & Chillers' section of this catalogue. Product Eligibility List from <https://www.ofgem.gov.uk/publications/boiler-upgrade-scheme-product-eligibility>.



PUZ-WZ50-80VAA

R290 Monobloc Air Source Heat Pumps



The new R290 Ecodan monobloc air source heat pumps are designed specifically to suit the demands of the UK market include 5.0, 6.0 and 8.0kW sizes.

The innovative, stylish and compact single fan outdoor unit utilises advanced technologies to deliver improved efficiencies. Designed for a wide range of applications, the market leading low noise levels virtually eliminate the need for planning permission, maximises installation options and is a viable solution for all types of domestic requirements that the UK housing market demands.

Key Features & Benefits

- A+++ heating efficiency
- Ultra quiet noise levels
- MELCloud enabled
- High water temperature of up to 75°C
- Fully electric source of heating and hot water
- Minimised energy consumption
- Flexible product placement
- Remote control, monitoring, maintenance and technical support
- Ideal for energy storage
- Zero carbon ready



Manufactured in the UK

R290

OUTDOOR UNIT		PUZ-WZ50VAA(-BS)	PUZ-WZ60VAA(-BS)	PUZ-WZ80VAA(-BS)
HEAT PUMP SPACE HEATER - 55°C	ErP Rating	A++	A++	A++
	η_s	138%	139%	140%
	SCOP (MCS)	3.53	3.56	3.56
HEAT PUMP SPACE HEATER - 35°C	ErP Rating	A+++	A+++	A+++
	η_s	182%	179%	176%
	SCOP (MCS)	4.62	4.55	4.49
HEAT PUMP COMBINATION HEATER - Large Profile ¹	ErP Rating	A+	A+	A+
	η_{wh}	143%	143%	134%
HEATING ² (A-7/W35)	Capacity (kW)	5.2	6.2	8.2
	Power Input (kW)	1.94	2.51	3.51
	COP	2.68	2.47	2.28
OPERATING AMBIENT TEMPERATURE (°C DB)		-25 ~ +46	-25 ~ +46	-25 ~ +46
MAXIMUM WATER OUTLET TEMPERATURE (°C)		75	75	75
SOUND DATA ³	Pressure Level at 1m (dBA)	40	40	40
	Power Level (dBA) ⁴	56	56	58
WATER DATA	Pipework Size (mm)	22	22	28
	Flow Rate (l/min)	14	17	23
	Water Pressure Drop (kPa)	18.16	26	32.22
DIMENSIONS (mm)	Width	1050	1050	1050
	Depth	480	480	480
	Height	1020	1020	1020
WEIGHT (kg)		89	89	117
ELECTRICAL DATA	Electrical Supply	220-240v 50Hz	220-240v 50Hz	220-240v 50Hz
	Phase	Single	Single	Single
	Nominal Running Current [MAX] (A) ⁵	13	13	22
	Fuse Rating - MCB Sizes (A) ⁶	16	16	25
REFRIGERANT CHARGE (kg) / CO ₂ EQUIVALENT (t)	R290 (GWP 3)	0.6 / 0.0018	0.6 / 0.0018	1.0 / 0.009

¹ Combination with EHPT20X-MEHEW Cylinder

² Under normal heating conditions at outdoor temp: -7°CDB / -8°CWB, outlet water temp 35°C, inlet water temp 30°C.

³ Under normal heating conditions at outdoor temp: 7°CDB / 6°CWB, outlet water temp 55°C, inlet water temp 47°C as tested to BS EN14511.

⁴ Sound power level tested to BS EN12102.


⁵ Under nominal heating conditions at outdoor temp: 7°C, outlet water temp: 35°C.

⁶ MCB Sizes BS EN60898-2 & BS EN60947-2.


η_s is the seasonal space heating energy efficiency (SSHEE) η_{wh} is the water heating energy efficiency




Front View

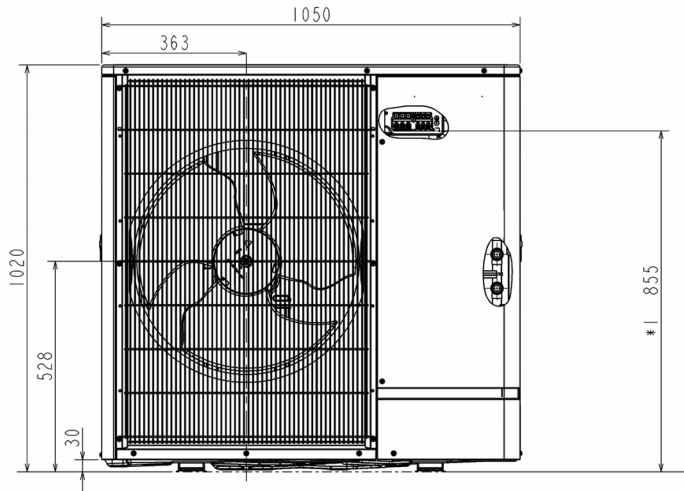


Upper View

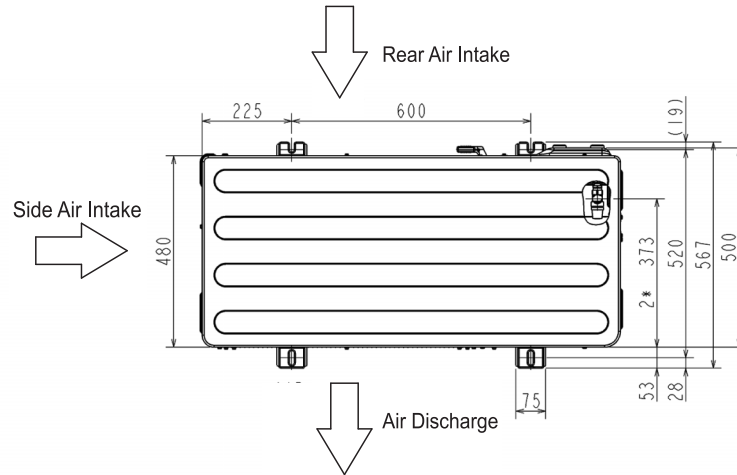

Side View


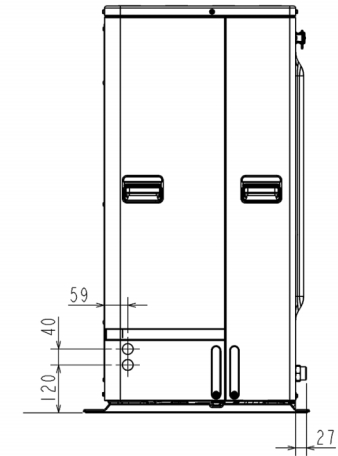


Flow Temperature

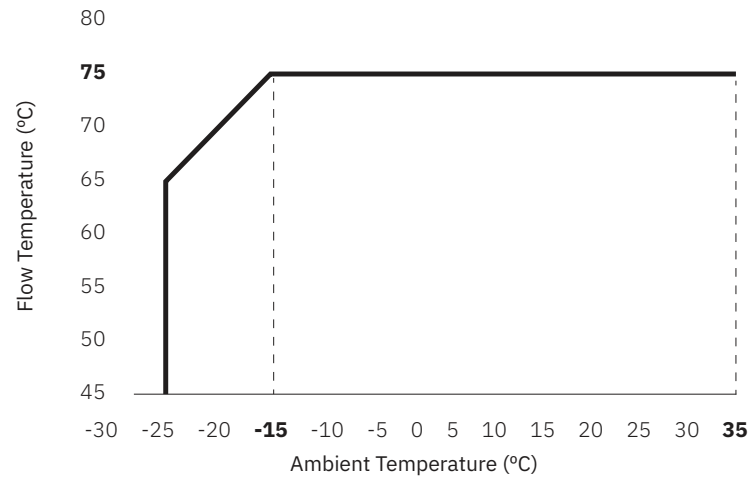

Protected Zones

No building openings, entrances to the basement, grooves or entrance into the waste-water system.
 Must not extend to adjacent buildings or public traffic areas.
 Ignition sources must not be present, either permanently or for a short period of time.

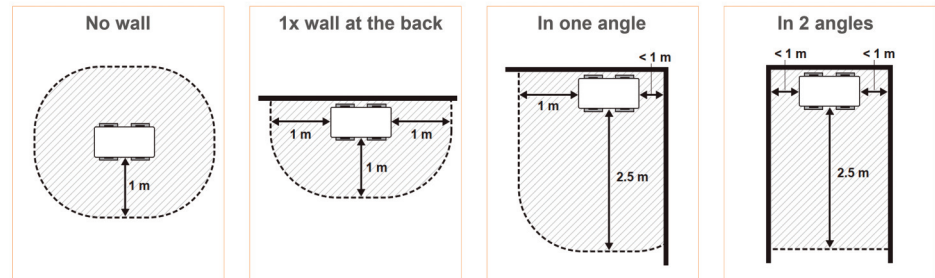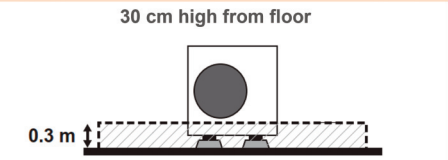



PUZ-WM50VHA

Monobloc Air Source Heat Pump



Our range of Ecodan monobloc air source heat pumps includes a 5kW size.

With enhanced performance and efficiencies of the new chassis, combined with the ability to cascade up to six units of the same output, this Ecodan monobloc system can provide a capacity range from 5 through to 30kW. Designed to suit a wide number of applications, this model offers a viable solution for all types of domestic requirements that the UK housing market demands.

Key Features & Benefits

- Self-contained unit, only requiring water and electric connections
- No need for gas supply, flues or ventilation
- Low maintenance and quiet operation
- Operates with outside temperatures as low as -20°C
- Optimised low ambient defrost control and operation down to -7°C
- Hybrid function, for use with conventional boilers
- Energy monitoring as standard
- Multiple unit cascade function



Manufactured in the UK



OUTDOOR UNIT		PUZ-WM50VHA(-BS)
HEAT PUMP SPACE HEATER - 55°C	ErP Rating	A++
	η_s	129%
	SCOP	3.33
HEAT PUMP SPACE HEATER - 35°C	ErP Rating	A+++
	η_s	183%
	SCOP	4.58
HEAT PUMP COMBINATION HEATER - Large Profile ¹	ErP Rating	A+
	η_{wh}	135%
HEATING ² (A-7/W35)	Capacity (kW)	5.0
	Power Input (kW)	1.67
	COP	3.00
OPERATING AMBIENT TEMPERATURE (°C DB)		-20 ~ +35
SOUND DATA ³	Pressure Level at 1m (dBA)	47
	Power Level (dBA) ⁴	61
WATER DATA	Pipework Size (mm)	22
	Flow Rate (l/min)	14
	Water Pressure Drop (kPa)	12.0
DIMENSIONS (mm)	Width	950
	Depth	330+30 ⁷
	Height	923
WEIGHT (kg)		71
ELECTRICAL DATA	Electrical Supply	220-240v, 50Hz
	Phase	Single
	Nominal Running Current [MAX] (A) ⁵	4.64 [13]
	Fuse Rating - MCB Sizes (A) ⁶	16
REFRIGERANT CHARGE (kg) / CO ₂ EQUIVALENT (t)	R32 (GWP 675)	2.0 / 1.35

¹ Combination with E⁺PT20X Cylinder

² Under normal heating conditions at outdoor temp: -7°CDB / -8°CWB, outlet water temp 35°C, inlet water temp 30°C.

³ Under normal heating conditions at outdoor temp: 7°CDB / 6°CWB, outlet water temp 55°C, inlet water temp 47°C as tested to BS EN14511.

⁴ Sound power level tested to BS EN12102.

⁵ Under nominal heating conditions at outdoor temp: 7°C, outlet water temp: 35°C.

⁶ MCB Sizes BS EN60898-2 & BS EN60947-2.

⁷ Grille.


η_s is the seasonal space heating energy efficiency (SSHEE) η_{wh} is the water heating energy efficiency



Product Dimensions

PUZ-WM50VHA(-BS)


All measurement in mm

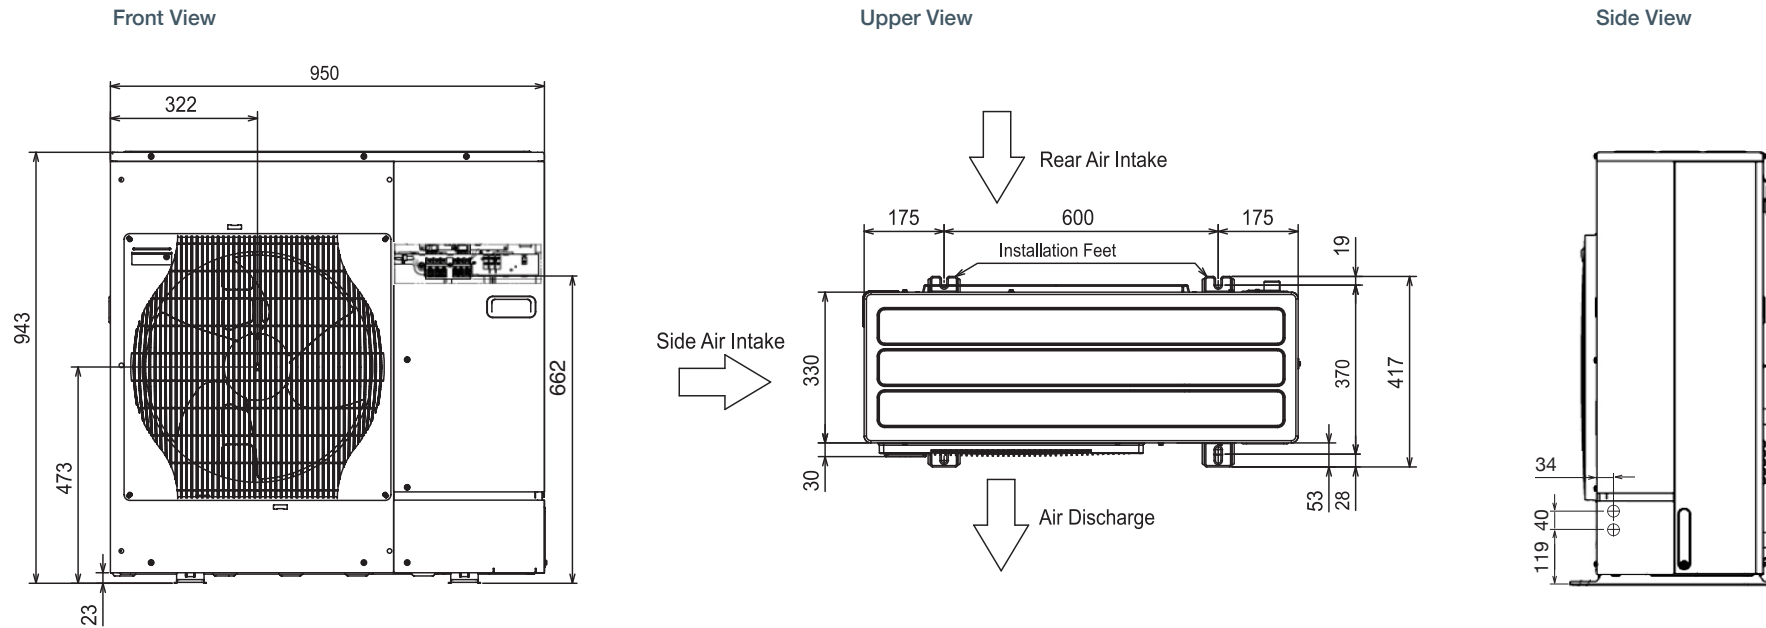

Installation Location

PUZ-WM50VHA(-BS)

All measurement in mm

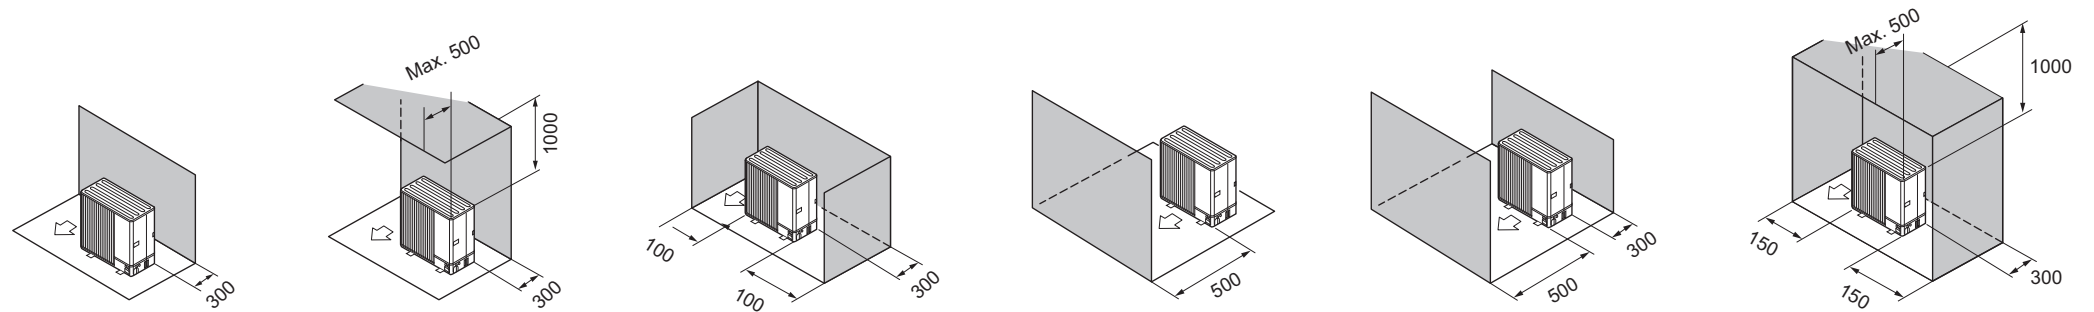

Please refer to Databook and Installation Manual for further details.



PUZ-WM60-112VAA/YAA

Monobloc Air Source Heat Pumps



The multiple award winning range of AA chassis Ecodan monobloc air source heat pumps are designed specifically to suit the demands of the UK market and includes 6.0, 8.5 and 11.2kW sizes.

The innovative, stylish and compact single fan outdoor unit utilises advanced technologies to deliver improved efficiencies. Designed for a wide range of applications, the market leading low noise levels virtually eliminate the need for planning permission, maximises installation options and is a viable solution for all types of domestic requirements that the UK housing market demands.

Key Features & Benefits

- Self-contained unit, only requiring water and electric connections
- No need for gas supply, flues or ventilation
- Low maintenance and ultra quiet operation
- Operates with outside temperatures as low as -25°C
- Optimised low ambient defrost control and operation down to -7°C
- Hybrid function, for use with conventional boilers
- Energy monitoring as standard
- Multiple unit cascade function



OUTDOOR UNIT		PUZ-WM60VAA(-BS)	PUZ-WM85VAA(-BS)	PUZ-WM85YAA(-BS)	PUZ-WM112VAA(-BS)	PUZ-WM112YAA(-BS)
HEAT PUMP SPACE HEATER - 55°C	ErP Rating	A++	A++	A++	A++	A++
	η_s	142%	139%	139%	134%	134%
	SCOP	3.30	3.50	3.47	3.45	3.434
HEAT PUMP SPACE HEATER - 35°C	ErP Rating	A+++	A+++	A+++	A+++	A+++
	η_s	190%	193%	193%	191%	191%
	SCOP	4.62	4.57	4.79	4.58	4.78
HEAT PUMP COMBINATION HEATER - Large Profile ¹	ErP Rating	A+	A+	A+	A+	A+
	η_{wh}	145%	145%	145%	148%	148%
HEATING ² (A-7/W35)	Capacity (kW)	6.0	8.5	8.5	11.2	11.2
	Power Input (kW)	1.88	3.27	3.27	3.73	3.73
	COP	3.20	2.60	2.60	3.00	3.00
OPERATING AMBIENT TEMPERATURE (°C DB)		-20 ~ +35	-20 ~ +35	-25 ~ +35	-25 ~ +35	-25 ~ +35
SOUND DATA ³	Pressure Level at 1m (dBA)	45	45	45	45	45
	Power Level (dBA) ⁴	58	58	58	60	60
WATER DATA	Pipework Size (mm)	22	28	28	28	28
	Flow Rate (l/min)	17	24	24	32	32
	Water Pressure Drop (kPa)	8.0	15.0	15.0	24.0	24.0
DIMENSIONS (mm)	Width	1050	1050	1050	1050	1050
	Depth	480	480	480	480	480
	Height	1020	1020	1020	1020	1020
WEIGHT (kg)		98	98	111	119	119
ELECTRICAL DATA	Electrical Supply	220-240v, 50Hz	220-240v, 50Hz	400v, 50Hz	220-240v, 50Hz	400v, 50Hz
	Phase	Single	Single	Three	Single	Three
	Nominal Running Current [MAX] (A) ⁵	5.68 [13]	9.1 [22]	2.9 [11.5]	10.9 [28]	3.6 [13]
	Fuse Rating - MCB Sizes (A) ⁶	16	25	16	32	16
REFRIGERANT CHARGE (kg) / CO ₂ EQUIVALENT (t)	R32 (GWP 675)	2.2 / 1.49	2.2 / 1.49	2.2 / 1.49	3.0 / 2.03	3.0 / 2.03

¹ Combination with E-PT20X Cylinder

² Under normal heating conditions at outdoor temp: -7°CDB / -8°CWB, outlet water temp 35°C, inlet water temp 30°C.

³ Under normal heating conditions at outdoor temp: 7°CDB / 6°CWB, outlet water temp 55°C, inlet water temp 47°C as tested to BS EN14511.

⁴ Sound power level tested to BS EN12102.

⁵ Under normal heating conditions at outdoor temp: 7°C, outlet water temp: 35°C.

⁶ MCB Sizes BS EN60898-2 & BS EN60947-2.

η_s is the seasonal space heating energy efficiency (SSHEE) η_{wh} is the water heating energy efficiency




Product Dimensions


PUZ-WM60-112VAA/YAA(-BS)

All measurement in mm


Front View

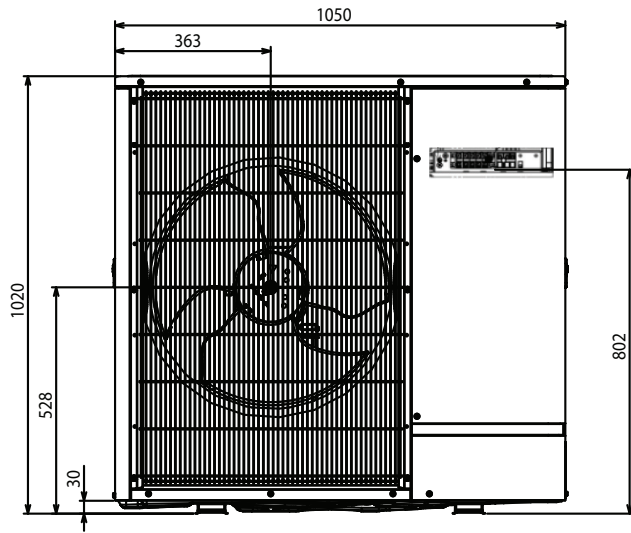

Upper View

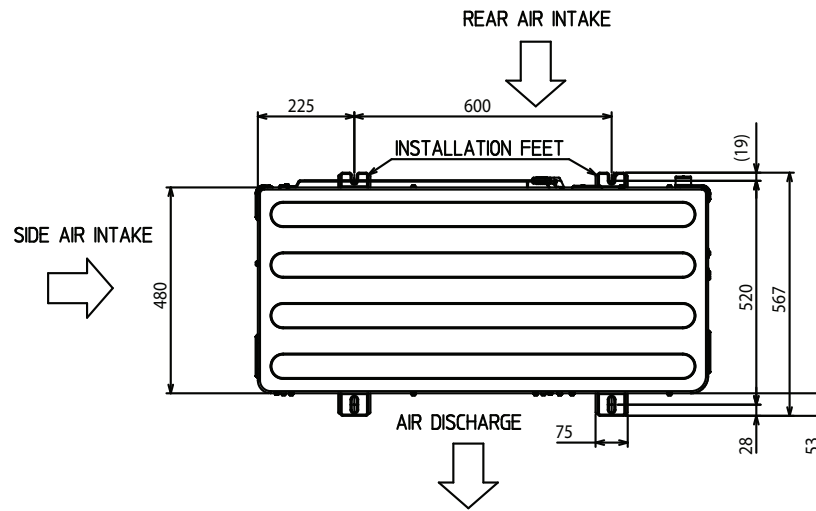


Side View

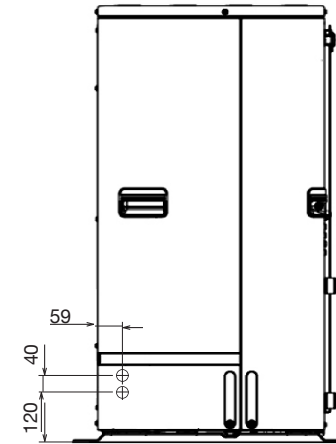

Installation Location

PUZ-WM60-112VAA/YAA(-BS)

All measurement in mm

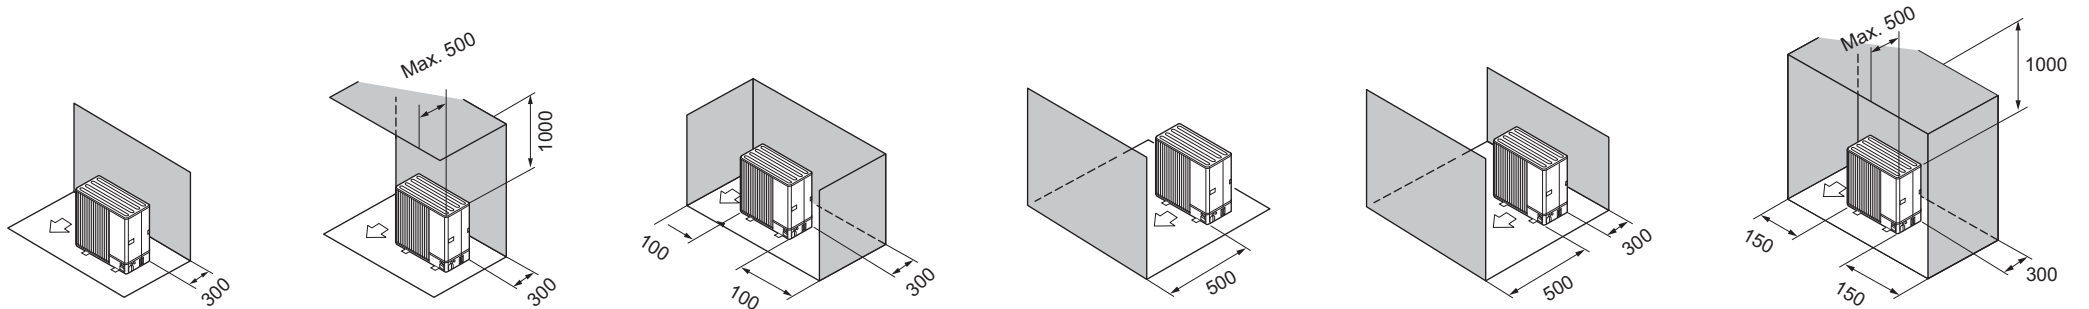

Please refer to Databook and Installation Manual for further details.



PUZ-HWM140VHA/YHA


Monobloc Air Source Heat Pumps

Our range of Zubadan chassis Ecodan monobloc air source heat pumps are suitable for properties with large space heating requirements and are available in single or three phase 14kW sizes.

With its advanced flash injection technology, this product provides a solution to low ambient capacity issues common to standard systems and is a viable solution for all types of domestic requirements that the UK housing market demands.

Key Features & Benefits

- Self-contained unit, only requiring water and electric connections
- No need for gas supply, flues or ventilation
- Low maintenance and quiet operation
- Operates with outside temperatures as low as -28°C
- Optimised low ambient defrost control and operation down to -15°C
- Hybrid function, for use with conventional boilers
- Energy monitoring as standard
- Multiple unit cascade function

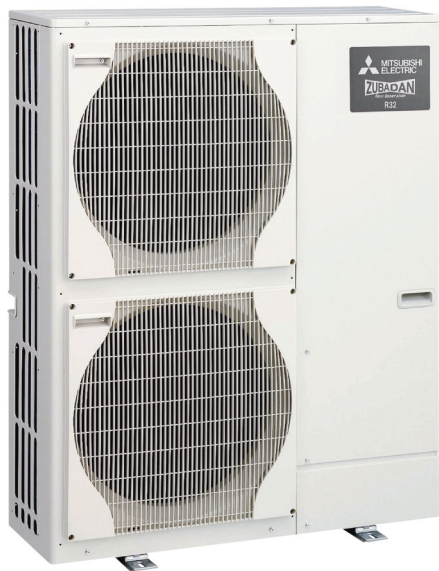

OUTDOOR UNIT		PUZ-HWM140VHA(-BS)	PUZ-HWM140YHA(-BS)
HEAT PUMP SPACE HEATER - 55°C	ErP Rating	A++	A++
	η_s	3.35	131
	SCOP	3.34	3.35
HEAT PUMP SPACE HEATER - 35°C	ErP Rating	A+++	A+++
	η_s	176	176
	SCOP	4.48	4.45
HEAT PUMP COMBINATION HEATER - Large Profile ¹	ErP Rating	A+	A+
	η_{wh}	130	130
HEATING ² (A-7/W35)	Capacity (kW)	14.0	14.0
	Power Input (kW)	5.72	5.72
	COP	2.45	2.45
OPERATING AMBIENT TEMPERATURE (°C DB)		-28 ~ +35	-28 ~ +35
SOUND DATA ³	Pressure Level at 1m (dBA)	53	53
	Power Level (dBA) ⁴	67	67
WATER DATA	Pipework Size (mm)	28	28
	Flow Rate (l/min)	40	40
	Water Pressure Drop (kPa)	20	20
DIMENSIONS (mm)	Width	1020	1020
	Depth	330+30 ⁷	330+30 ⁷
	Height	1350	1350
WEIGHT (kg)		132	143
ELECTRICAL DATA	Electrical Supply	220-240v, 50Hz	380-415v, 50Hz
	Phase	Single	3
	Nominal Running Current [MAX] (A) ⁵	xx [35]	xx [13]
	Fuse Rating - MCB Sizes (A) ⁶	40	16
REFRIGERANT CHARGE (kg) / CO ₂ EQUIVALENT (t)	R32 (GWP 675)	3.3 / 2.23	3.3 / 2.23

For information marked with a "-" please consult the databook or speak to your local sales office.

¹ Combination with E-PT20X Cylinder ² Under normal heating conditions at outdoor temp: -7°CDB / -8°CWB, outlet water temp 35°C, inlet water temp 30°C.

³ Under normal heating conditions at outdoor temp: 7°CDB / 6°CWB, outlet water temp 55°C, inlet water temp 47°C as tested to BS EN14511.

⁴ Sound power level tested to BS EN12102. ⁵ Under nominal heating conditions at outdoor temp: 7°C, outlet water temp: 35°C.

⁶ MCB Sizes BS EN60898-2 & BS EN60947-2. ⁷ Grille.

η_s is the seasonal space heating energy efficiency (SHEE) η_{wh} is the water heating energy efficiency




Product Dimensions


PUZ-HWM140VHA/YHA(-BS)

All measurement in mm

Front View

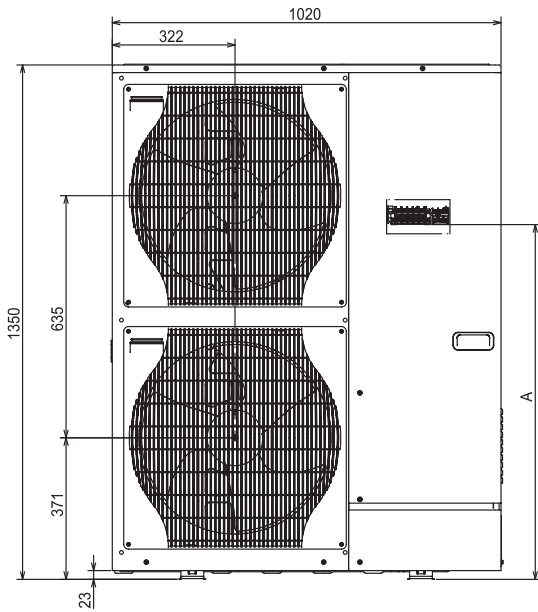


Upper View

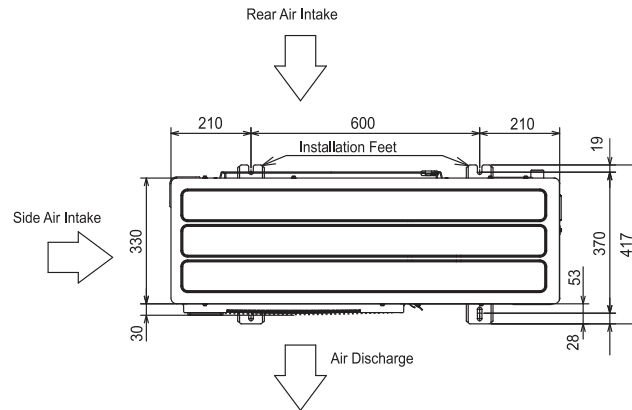

	A
VHA	1079
YHA	931


Side View

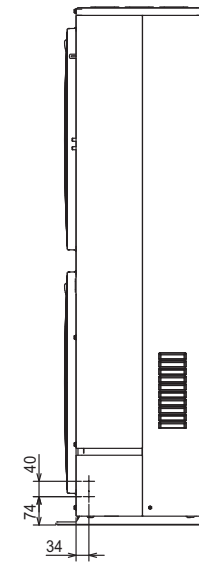

Installation Location

PUZ-HWM140VHA/YHA(-BS)

All measurement in mm

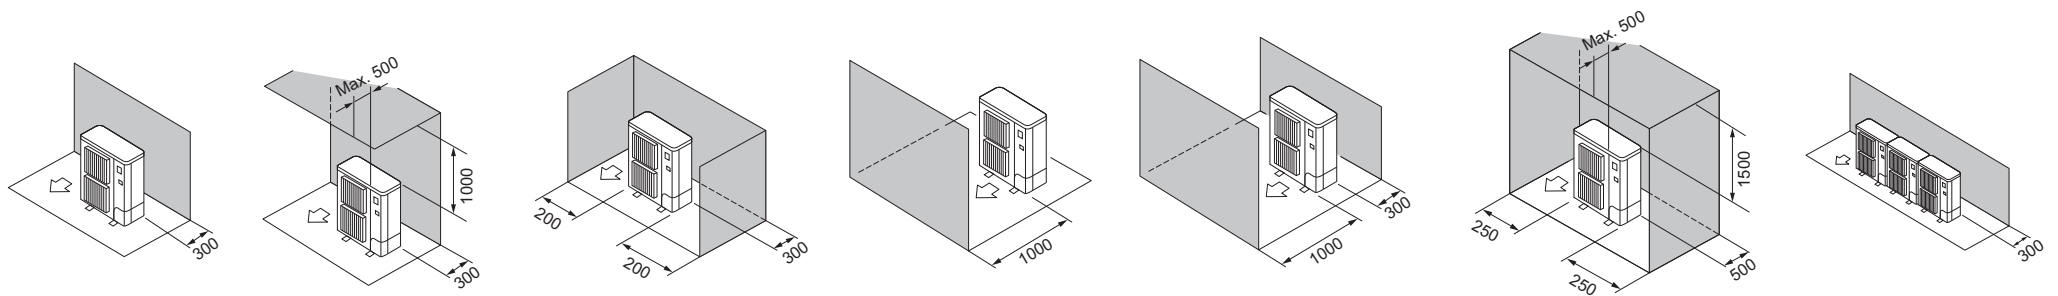

Please refer to Databook and Installation Manual for further details.



EHPT20X-MEHEW

FTC7 Packaged Cylinder for R290 / R32 Ecodan Monobloc Units



The Packaged Cylinder provides a highly adaptable heating solution for all property types.

Designed to optimise performance within a compact white goods footprint, the plug and play packaged cylinder fully integrates with the Ecodan monobloc air source heat pump range. Advanced plate heat exchanger technology delivers superior heat up times and our rapid SD card commissioning, MELCloud Wi-Fi connectivity and energy monitoring functions are also included as standard.

Key Features & Benefits

- A+ hot water efficiency
- Stylish and modern aesthetics
- Packaged hot water, heating and controls
- Colour touch screen control
- MELCloud enabled
- Minimised energy consumption
- Flexible product placement
- Plug and play simple installation
- Intuitive user friendly operation
- Remote control, monitoring, maintenance and technical support

FTC7 Controller

Mitsubishi Electric's seventh generation controller (FTC7) includes intelligent room temperature control as standard. This together with advanced weather compensation ensures the system delivers efficient, comfortable heating regardless of the season. FTC7 also includes energy monitoring showing consumed and produced energy.




R290 R32

CYLINDER		EHPT20X-MEHEW	
NOMINAL HOT WATER VOLUME (LITRES)		200	
HEAT PUMP COMBINATION HEATER - Large Profile (Average Climate)		ErP Rating	
OPERATING AMBIENT TEMPERATURE (°C DB)		A+	
SOUND PRESSURE LEVEL AT 1M (dBA)		0 ~ +35°C (RH<80%)	
WATER DATA		28	
Flow Rate (l/min) - WZ/M50 / WZ/M60 / WZ80 / WM85 / WM112 / HWM140		14 / 17 / 23 / 24 / 32 / 40	
Primary Circuit Pump		Grundfos UPM3 15-75 130	
Sanitary Hot Water Pump		Grundfos UPSO 15-60 130	
Connection Size (mm) Heating / DHW		G1 / G3/4	
WATER SAFETY DEVICES		Control Thermistor (°C)	
Heating Water Circuit		80	
Flow Sensor (minimum flow 5L/min)		Supplied	
DHW Cylinder		Control Thermistor (°C)	
Temp and Pressure Relief Valve (°C)/ (MPa) (Bar)		75	
DIMENSIONS (mm)		90 / 0.7 (7)	
Width		595	
Depth		680	
Height		1600	
WEIGHT EMPTY / FULL (kg)		81 / 287	
ELECTRICAL DATA		Electrical Supply	
Control Board - optionally powered by outdoor unit		220-240v, 50Hz	
Phase		Single	
Fuse Rating - MCB Sizes (A) ¹		10	
Immersion Heater		Electrical Supply	
Phase		220-240v, 50Hz	
Capacity (kW)		Single	
Max Running Current (A)		3	
Fuse Rating - MCB Sizes (A) ¹		13	
		16	
MECHANICAL ZONES		DHW and 1 Heating Zone ²	
OPTIONAL SIMPLIFIED WIRELESS ROOM THERMOSTAT AND WIRELESS RECEIVER		PAR-WT60R-E and PAR-WR61R-E Receiver	


¹ MCB Sizes BS EN60898-2 & BS EN60947-2. ² Optional 2 zone accessory pack available.

Notes: Notes: Cylinder includes: Flow Temperature Controller (FTC7) with Main Controller and Temperature Sensors, Pumps & Valves for Zone 1 and DHW use, Flow Sensor, Plate Heat Exchanger, Scale Trap and 3kW Immersion Heater.


Left View

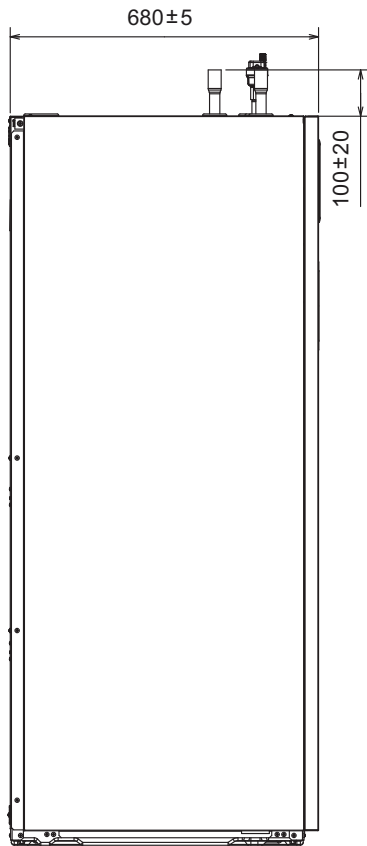


Front View

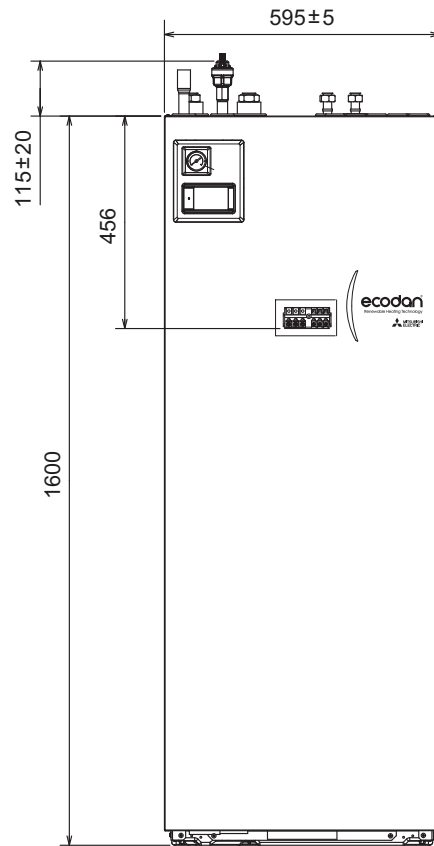

Right View

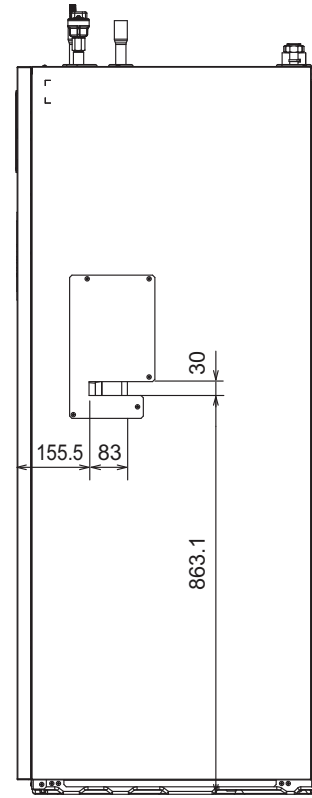

Upper View

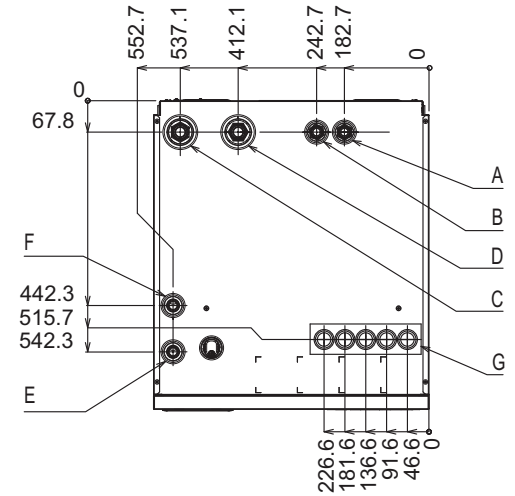

Letter	Pipe Description	Connection size/type
A	DHW outlet connection	G3/4"/Compression
B	Cold water inlet connection	G3/4"/Compression
C	Space heating return connection	G1"/Compression
D	Space heating flow connection	G1"/Compression
E	Flow from heat pump connection	G1"/Compression
F	Return to heat pump connection	G1"/Compression
G	Electrical cable inlets	

EHPT15-17X-UKHLDW1S

Pre-Plumbed Slimline Cylinders for R32 Ecodan Monobloc Units



The Pre-Plumbed Slimline Cylinder comes complete with integrated hydraulic components & advanced controls.

Designed to optimise performance and flexibility within a minimal footprint, the slimline cylinder fully integrates with the Ecodan monobloc air source heat pump range. Advanced plate heat exchanger technology delivers superior heat up times and our rapid SD card commissioning, MELCloud Wi-Fi connectivity and energy monitoring functions are also included as standard.

Key Features & Benefits

- Unvented plug & play pre-plumbed DHW cylinder
- Efficient & rapid heating
- Premium quality insulation
- Flexible 2-zone space heating control
- MELCloud enabled
- Minimal installation time
- Excellent hot water recovery times
- Reduced heat losses and running costs
- Improved comfort and reduced energy use
- Remote control, monitoring, maintenance and technical support

FTC6 Controller

Mitsubishi Electric's sixth generation controller (FTC6) includes intelligent room temperature control as standard. This together with advanced weather compensation ensures the system delivers efficient, comfortable heating regardless of the season. FTC6 now also includes energy monitoring showing consumed and produced energy.



Manufactured in the UK





CYLINDER		EHPT15X-UKHLDW1S	EHPT17X-UKHLDW1S	
NOMINAL HOT WATER VOLUME (LITRES)		150	170	
ErP RATING		C	C	
HEAT LOSS (kWh/24hrs)		1.40	1.59	
HEAT LOSS (W)		58	66	
WATER	Flow Rate (l/min) - WM 50 / 60 / 85	14 / 17 / 24	14 / 17 / 24	
	Primary Circuit Pump		Grundfos UPM3L 25-75 130AZA	
	Heating Circuit Pump		Grundfos UPM3 AUTO 25-70 130	
	Sanitary Hot Water Pump		Grundfos UPSO 15-80 CIL2	
	Connection Size (mm) Heating / DHW			
	Charge Pressure (MPa (Bar))	0.35 (3.5)	0.35 (3.5)	
WATER SAFETY	Water Circuit DHW Cylinder	Control Thermistor (°C)	80	
		DHW Expansion Vessel (Litres)	12	
		Control Thermistor	75	
		Over Temperature Cut-Out (°C)	80 ± 5	
		Temp and Pressure Relief Valve (°C) / (MPa (Bar))	90 / 1.0 (10)	
		Expansion Relief Valve (Cold) (MPa (Bar))	0.8 (8)	
DIMENSIONS (mm)	Width	676	676	
	Depth	654	654	
	Height	1516	1690	
WEIGHT EMPTY / FULL (kg)		59 / 209	63 / 233	
CYLINDER MATERIAL	Cylinder	Duplex stainless steel		
	Insulation	Insulation Type	CFC / HCFC-free flame-retardant expanded Polyurethane	
		Insulation Thickness (mm)	50	50
		GWP of Insulation	3.1	3.1
		ODP of Insulation	0	0
ELECTRICAL DATA	Control Board <i>optionally powered by outdoor unit</i>	Electrical Supply	220-240v, 50Hz	220-240v, 50Hz
		Phase	Single	Single
		Fuse Rating - MCB Sizes (A) ¹	16	16
	Immersion Heater	Electrical Supply	220-240v, 50Hz	220-240v, 50Hz
		Phase	Single	Single
		Capacity (kW)	3	3
		Max Running Current (A)	13	13
		Fuse Rating - MCB Sizes (A) ¹	16	16
MECHANICAL ZONES		DHW and 1 Heating Zone ²		
OPTIONAL SIMPLIFIED WIRELESS ROOM THERMOSTAT AND WIRELESS RECEIVER		PAR-WT60R-E Controller and PAR-WR61R-E Receiver		

¹ MCB Sizes BS EN60898-2 & BS EN60947-2. ² Optional 2 zone accessory pack available.

Notes: Cylinder includes: Flow Temperature Controller (FTC6) with Main Controller and Temperature Sensors, Magnetic Particle Filter, Pumps & Valves for Primary Circuit, Zone1 and DHW use, Flow Sensor, Plate Heat Exchanger, Scale Trap, 3kW Immersion Heater, Expansion Vessel, MELCloud Wi-Fi Interface, Diverter Valve and Low Loss Header.

Front View

Upper View

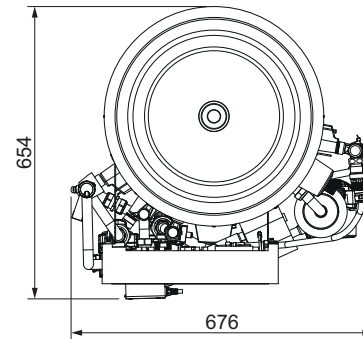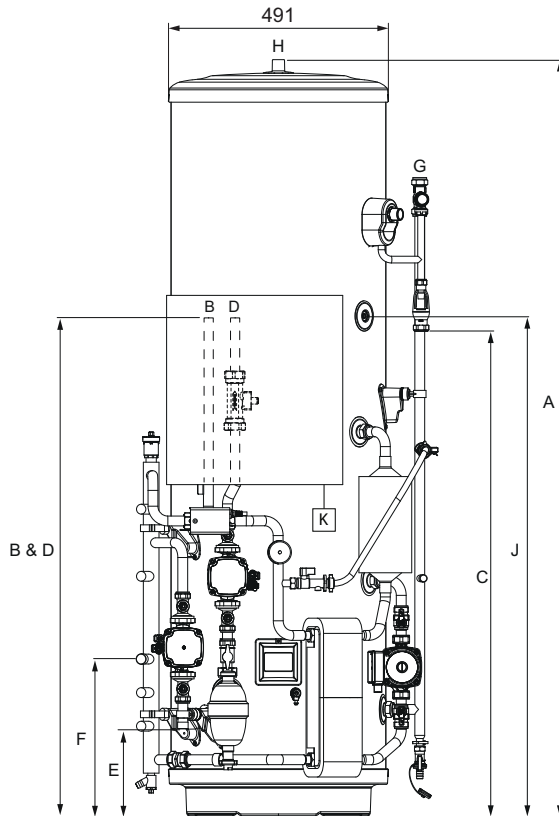


Letter	Pipe Description	Connection size/type
A	Overall height	
B	Heat pump flow	22mm O/D Copper
C	Tundish outlet	22mm Compression
D	Heat pump return	22mm O/D Copper
E	Heating zone 1 circuit flow	22mm O/D Copper
F	Heating zone 1 circuit return	22mm O/D Copper
G	Cold water inlet	22mm Compression
H	Hot water outlet	22mm Compression / 3/4" BSP M
J	THW5A sensor pocket	
K	Wi-Fi adaptor (included, installer to locate and mount)	

Capacity	150	170
A	1516	1690
B	1127	1127
C	909	1083
D	1127	1127
E	194	194
F	350	350
J	943	1117
K	Installer to locate and mount	



EHPT15-21X-UKHDW1S

Pre-Plumbed Standard Cylinders for R32 Ecodan Monobloc Units

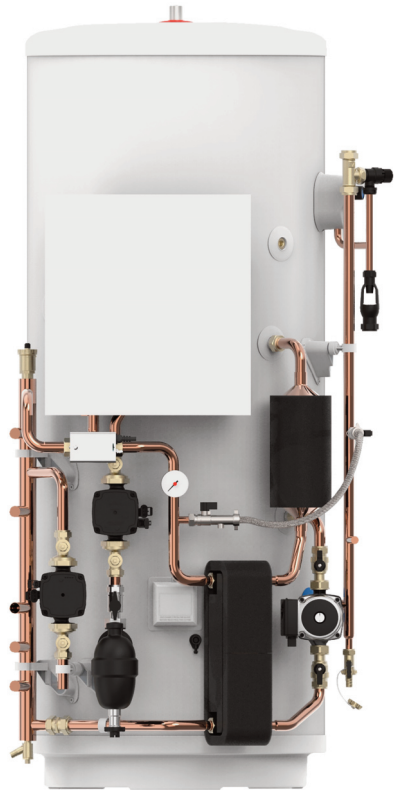

The Pre-Plumbed Standard Cylinder comes complete with integrated hydraulic components & advanced controls.

Designed to optimise performance and flexibility within an average footprint, the standard cylinder fully integrates with the Ecodan monobloc air source heat pump range. Advanced plate heat exchanger technology delivers superior heat up times and our rapid SD card commissioning, MELCloud Wi-Fi connectivity and energy monitoring functions are also included as standard.

Key Features & Benefits

- Unvented plug & play pre-plumbed DHW cylinder
- Efficient & rapid heating
- Premium quality insulation
- Flexible 2-zone space heating control
- MELCloud enabled
- Minimal installation time
- Excellent hot water recovery times
- Reduced heat losses and running costs
- Improved comfort and reduced energy use
- Remote control, monitoring, maintenance and technical support

FTC6 Controller

Mitsubishi Electric's sixth generation controller (FTC6) includes intelligent room temperature control as standard. This together with advanced weather compensation ensures the system delivers efficient, comfortable heating regardless of the season. FTC6 now also includes energy monitoring showing consumed and produced energy.



Manufactured in the UK





CYLINDER		EHPT15X-UKHDW1S	EHPT17X-UKHDW1S	EHPT21X-UKHDW1S
NOMINAL HOT WATER VOLUME (LITRES)		150	170	210
ErP RATING		B	B	C
HEAT LOSS (kWh/24hrs)		1.15	1.23	1.53
HEAT LOSS (W)		48	51	64
WATER		14/17/24	14/17/24	14/17/24
Flow Rate (l/min) - WM 50 / 60 / 85				
Primary Circuit Pump		Grundfos UPM3L 25-75 130AZA		
Heating Circuit Pump		Grundfos UPM3 AUTO 25-70 130		
Sanitary Hot Water Pump		Grundfos UPSO 15-60 CIL2		
Connection Size (mm) Heating / DHW		22 / 22		22 / 22
Charge Pressure (MPa (Bar))		0.35 (3.5)	0.35 (3.5)	0.35 (3.5)
WATER SAFETY DEVICES				
Water Circuit		80	80	
Control Thermostat (°C)				
DHW Cylinder		12	18	18
DHW Expansion Vessel (Litres)				
Control Thermostat		75	75	75
Over Temperature Cut-Out (°C)		80 ± 5	80 ± 5	80 ± 5
Temp and Pressure Relief Valve (°C) / (MPa (Bar))		90 / 1.0 (10)	90 / 1.0 (10)	90 / 1.0 (10)
Expansion Relief Valve (Cold) (MPa (Bar))		0.8 (8)	0.8 (8)	0.8 (8)
DIMENSIONS (mm)				
Width		730	730	730
Depth		756	756	756
Height		1131	1257	1509
WEIGHT EMPTY / FULL (kg)		56 / 205	58 / 228	64 / 274
CYLINDER MATERIAL			Duplex stainless steel	
Cylinder		CFC / HCFC-free flame-retardant expanded Polyurethane		
Insulation				
Insulation Type				
Insulation Thickness (mm)		60	60	60
GWP of Insulation		3.1	3.1	3.1
ODP of Insulation		0	0	0
ELECTRICAL DATA				
Control Board optionally powered by outdoor unit				
Electrical Supply		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
Phase		Single	Single	Single
Fuse Rating - MCB Sizes (A) ¹		16	16	16
Immersion Heater				
Electrical Supply		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
Phase		Single	Single	Single
Capacity (kW)		3	3	3
Max Running Current (A)		13	13	13
Fuse Rating - MCB Sizes (A) ¹		16	16	16
MECHANICAL ZONES			DHW and 1 Heating Zone ²	
OPTIONAL SIMPLIFIED WIRELESS ROOM THERMOSTAT AND WIRELESS RECEIVER			PAR-WT60R-E Controller and PAR-WR61R-E Receiver	

¹ MCB Sizes BS EN60898-2 & BS EN60947-2. ² Optional 2 zone accessory pack available.

Notes: Cylinder includes: Flow Temperature Controller (FTC6) with Main Controller and Temperature Sensors, Magnetic Particle Filter, Pumps & Valves for Primary Circuit, Zone 1 and DHW use, Flow Sensor, Plate Heat Exchanger, Scale Trap, 3kW Immersion Heater, Expansion Vessel, MELCloud Wi-Fi Interface, Diverter Valve and Low Loss Header.

Front View

Upper View

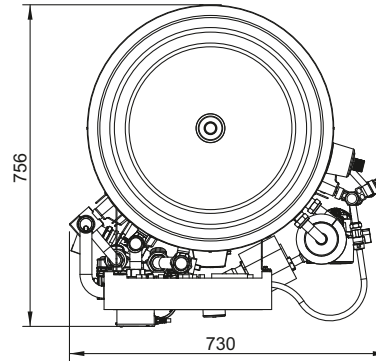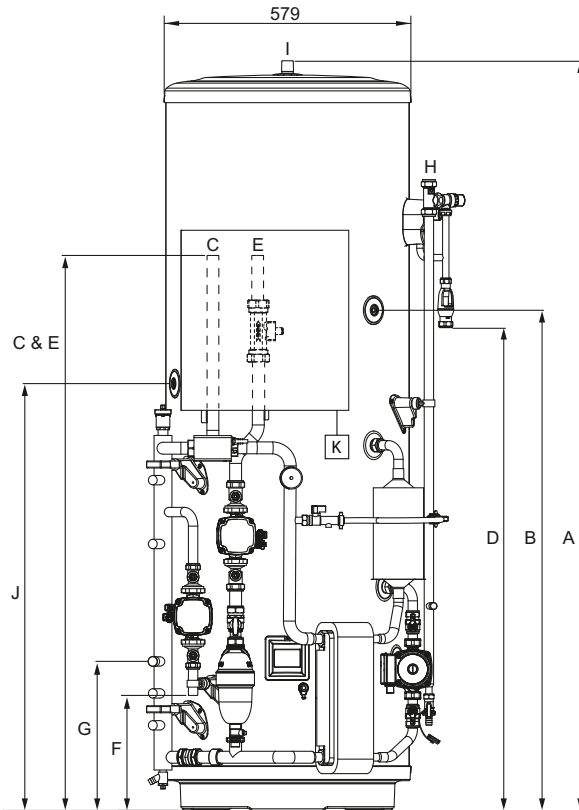

Letter	Pipe Description	Connection size/type
A	Overall height	
B	Secondary return tapping <small>(Not fitted to EHPT15X-UKHDW1S/ EHPT17X-UKHDW1S)</small>	
C	Heat pump flow	22mm O/D Copper
D	Tundish outlet	22mm Compression
E	Heat pump return	22mm O/D Copper
F	Heating zone 1 circuit flow	22mm O/D Copper
G	Heating zone 1 circuit return	22mm O/D Copper
H	Cold water inlet	22mm Compression
I	Hot water outlet	22mm Compression / 3/4" BSP M
J	THW5A sensor pocket	
K	Wi-Fi adaptor (included. installer to locate and mount)	

Capacity	150	170	210
A	1131	1257	1509
B	Not Fitted	Not Fitted	1050
C	1122	1122	1122
D	505	630	880
E	1122	1122	1122
F	194	194	194
G	350	350	350
J	675	815	925
K	Installer to locate and mount		



EHPT21-30X-UKHDW1L

Pre-Plumbed Standard Cylinders for R32 Ecodan Monobloc Units



The Pre-Plumbed Standard Cylinder comes complete with integrated hydraulic components & advanced controls.

Designed to optimise performance and flexibility within an average footprint, the standard cylinder fully integrates with the Ecodan monobloc air source heat pump range. Advanced plate heat exchanger technology delivers superior heat up times and our rapid SD card commissioning, MELCloud Wi-Fi connectivity and energy monitoring functions are also included as standard.

Key Features & Benefits

- Unvented plug & play pre-plumbed DHW cylinder
- Efficient & rapid heating
- Premium quality insulation
- Flexible 2-zone space heating control
- MELCloud enabled
- Minimal installation time
- Excellent hot water recovery times
- Reduced heat losses and running costs
- Improved comfort and reduced energy use
- Remote control, monitoring, maintenance and technical support

FTC6 Controller

Mitsubishi Electric's sixth generation controller (FTC6) includes intelligent room temperature control as standard. This together with advanced weather compensation ensures the system delivers efficient, comfortable heating regardless of the season. FTC6 now also includes energy monitoring showing consumed and produced energy.



Manufactured in the UK





CYLINDER		EHPT21X-UKHDW1L	EHPT25X-UKHDW1L	EHPT30X-UKHDW1L
NOMINAL HOT WATER VOLUME (LITRES)		210	250	300
ErP RATING		C	C	C
HEAT LOSS (kWh/24hrs)		1.53	1.80	2.09
HEAT LOSS (W)		65	75	86
WATER		17 / 24 / 32 / 40	17 / 24 / 32 / 40	24 / 32 / 40
		Flow Rate (l/min) - (H)WM 60 / 85 / 112 / 140		
		Primary Circuit Pump	Grundfos UPM3L 25-75 130AZA	
		Heating Circuit Pump	Grundfos UPM3 AUTO 25-70 130	
		Sanitary Hot Water Pump	Grundfos UPSO 15-60 CIL2	
		Connection Size (mm) Heating / DHW	28 / 22	28 / 22
		Charge Pressure (MPa (Bar))	0.35 (3.5)	0.35 (3.5)
WATER SAFETY DEVICES		Control Thermistor (°C)	80	80
		DHW Expansion Vessel (Litres)	18	24
		Control Thermistor	75	75
		Over Temperature Cut-Out (°C)	80 ± 5	80 ± 5
		Temp and Pressure Relief Valve (°C) / (MPa (Bar))	90 / 1.0 (10)	90 / 1.0 (10)
		Expansion Relief Valve (Cold) (MPa (Bar))	0.8 (8)	0.8 (8)
DIMENSIONS (mm)		Width	748	748
		Depth	755	755
		Height	1509	2075
WEIGHT EMPTY / FULL (kg)		68 / 278	74 / 324	82 / 382
CYLINDER MATERIAL		Cylinder Material	Duplex stainless steel	
		Insulation Type	CFC / HCFC-free flame-retardant expanded Polyurethane	
		Insulation Thickness (mm)	60	60
		GWP of Insulation	3.1	3.1
		ODP of Insulation	0	0
ELECTRICAL DATA		Control Board	Electrical Supply	220-240v, 50Hz
		Phase	Single	Single
		Fuse Rating - MCB Sizes (A) ¹	16	16
		Immersion Heater	Electrical Supply	220-240v, 50Hz
		Phase	Single	Single
		Capacity (kW)	3	3
		Max Running Current (A)	13	13
		Fuse Rating - MCB Sizes (A) ¹	16	16
MECHANICAL ZONES			DHW and 1 Heating Zone ²	
OPTIONAL SIMPLIFIED WIRELESS ROOM THERMOSTAT AND WIRELESS RECEIVER			PAR-WT60R-E Controller and PAR-WR61R-E Receiver	

⁻¹ MCB Sizes BS EN60898-2 & BS EN60947-2. ² Optional 2 zone accessory pack available.

Notes: Cylinder includes: Flow Temperature Controller (FTC6) with Main Controller and Temperature Sensors, Magnetic Particle Filter, Pumps & Valves for Primary Circuit, Zone 1 and DHW use, Flow Sensor, Plate Heat Exchanger, Scale Trap, 3kW Immersion Heater, Expansion Vessel, MELCloud Wi-Fi Interface, Diverter Valve and Low Loss Header.

Front View

Upper View

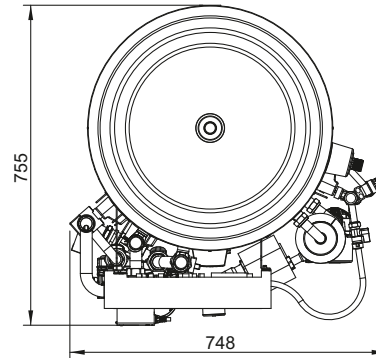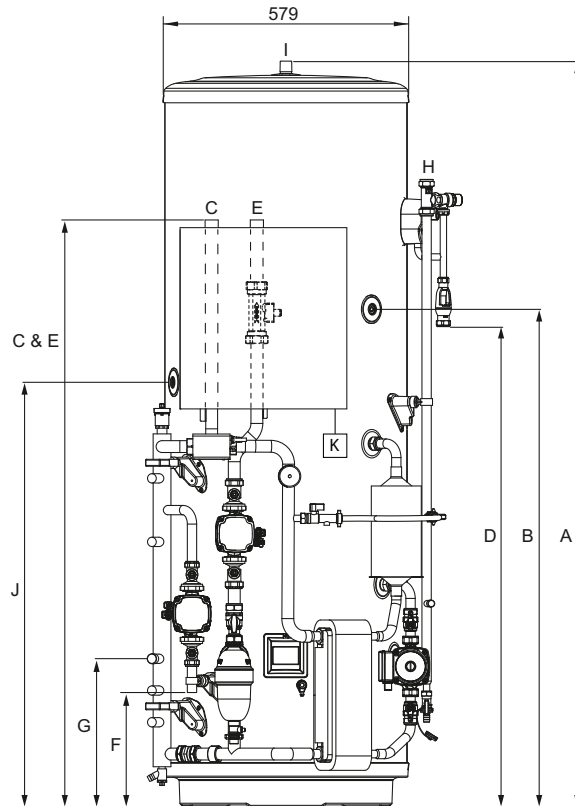

Letter	Pipe Description	Connection size/type
A	Overall height	
B	Secondary return tapping	
C	Heat pump flow	28mm O/D Copper
D	Tundish outlet	22mm Compression
E	Heat pump return	28mm O/D Copper
F	Heating zone 1 circuit flow	22mm O/D Copper
G	Heating zone 1 circuit return	22mm O/D Copper
H	Cold water inlet	22mm Compression
I	Hot water outlet	22mm Compression / 3/4" BSP M
J	THW5A sensor pocket	
K	Wi-Fi adaptor (included, installer to locate and mount)	

Capacity	210	250	300
A	1509	1761	2075
B	1050	1175	1385
C	1370	1370	1370
D	880	1136	1450
E	1370	1370	1370
F	270	270	270
G	350	350	350
J	925	1005	1193
K	Installer to locate and mount		



EHPT18-21X-UKHLDWB

Versatile Slimline Cylinders for R32 Ecodan Monobloc Units



The Versatile Slimline Cylinder comes ready to plumb into the system, containing all of the advanced controls you would expect.

It fully integrates with our Ecodan Monobloc air source heat pump range and is designed to meet the requirements of existing installations and new build applications. It has a minimal footprint and includes a coil heat exchanger, rapid SD card commissioning, MELCloud Wi-Fi connectivity and energy monitoring functions as standard.

Key Features & Benefits

- Unvented, versatile DHW cylinder
- High capacity coil heat exchanger
- Diverter valve accessory supplied
- Advanced Mitsubishi Electric controls installed
- MELCloud Enabled
- Versatile product placement
- Maximises heat transfer
- Simplified heating & hot water system installation
- Quality assurance, giving peace of mind
- Remote control, monitoring, maintenance and technical support

FTC6 Controller

Mitsubishi Electric's sixth generation controller (FTC6) includes intelligent room temperature control as standard. This together with advanced weather compensation ensures the system delivers efficient, comfortable heating regardless of the season. FTC6 now also includes energy monitoring showing consumed and produced energy.




CYLINDER		EHPT18X-UKHLDWB	EHPT21X-UKHLDWB
NOMINAL HOT WATER VOLUME (LITRES)		180	210
ErP RATING		C	C
HEAT LOSS (kWh/24hrs)		1.72	2.08
HEAT LOSS (W)		72	87
WATER		14 / 17 / 24 / 32 / 40	14 / 17 / 24 / 32 / 40
Flow Rate (l/min) - (H)WM 50 / 60 / 85 / 112 / 140			
Primary Circuit Pump			Local supply
Heating Circuit Pump			Local supply
Sanitary Hot Water Pump			N/A
Connection Size (mm) Heating / DHW		22 / 22	22 / 22
Charge Pressure (MPa (Bar))		0.30 (3.0)	0.30 (3.0)
WATER SAFETY			
Water Circuit DHW Cylinder	Control Thermistor (°C)	80	80
	DHW Expansion Vessel (Litres)	18	18
	Control Thermistor	75	75
	Over Temperature Cut-Out (°C)	80 ± 5	80 ± 5
	Temp and Pressure Relief Valve (°C) / (MPa (Bar))	90°C / 7 Bar	90°C / 7 Bar
	Expansion Relief Valve (Cold) (MPa (Bar))	6 Bar	6 Bar
DIMENSIONS (mm)			
Width		475+0.2 ³	475+0.2 ³
Depth		569.5	569.5
Height		1712	2025
WEIGHT EMPTY / FULL (kg)		45 / 225	50 / 260
CYLINDER MATERIAL			Stainless Steel
Insulation	Insulation Type		CFC / HCFC-free Polyurethane
	Insulation Thickness (mm)	50	50
	GWP of Insulation	1	1
	ODP of Insulation	0	0
	ELECTRICAL DATA		
Control Board <i>optionally powered by outdoor unit</i>	Electrical Supply	220-240v, 50Hz	220-240v, 50Hz
	Phase	Single	Single
	Fuse Rating - MCB Sizes (A) ¹	16	16
Immersion Heater	Electrical Supply	220-240v, 50Hz	220-240v, 50Hz
	Phase	Single	Single
	Capacity (kW)	3	3
	Max Running Current (A)	13	13
	Fuse Rating - MCB Sizes (A) ¹	16	16
MECHANICAL ZONES			DHW and 1 Heating Zone ²
OPTIONAL SIMPLIFIED WIRELESS ROOM THERMOSTAT AND WIRELESS RECEIVER			PAR-WT60R-E Controller and PAR-WR61R-E Receiver


¹ MCB Sizes BS EN60898-2 & BS EN60947-2. ² Optional 2 zone accessory pack available. ³ Temperature and Pressure Relief Valve.

Notes: Cylinder includes: Flow Temperature Controller (FTC6) with Main Controller and Temperature Sensors, Diverter Valve, Coil Heat Exchanger, 3kW Immersion Heater, Expansion Vessel, MELCloud Wi-Fi Interface, Drain Valve, Tunish and Cold Water Combination Valve.

Front View

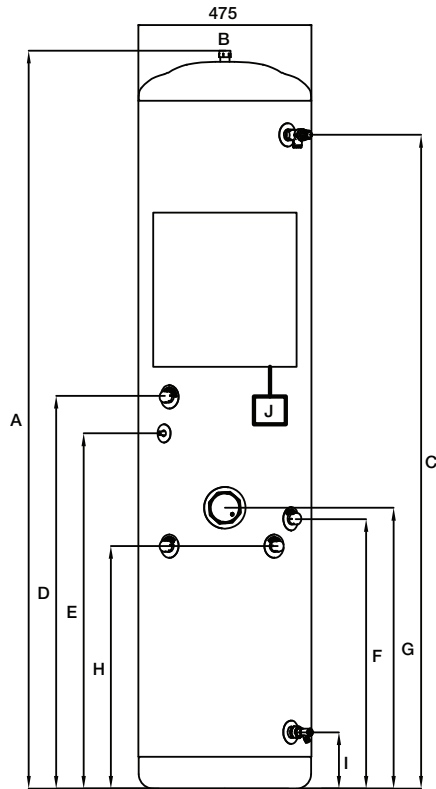

Upper View



Letter	Pipe Description	Connection size/type
A	Overall height	
B	Hot Water Outlet	22mm Compression (3/4" Male BSP)
C	Temperature & Pressure Relief Valve	
D	Secondary Return Tapping	22mm Compression (3/4" Male BSP)
E	THW5A Sensor Pocket	
F	Cold Water Inlet	22mm Compression (3/4" Male BSP)
G	Immersion heater	
H	Heat Pump Flow & Return Coil Connections	22mm Compression (3/4" Male BSP)
I	Drain Valve	22mm Compression (3/4" Male BSP)
J	Wi-Fi Adaptor (Installer to locate and mount)	

Capacity	180	210
A	1712	2025
C	1479	1795
D	N/A	1078
E	862	1020
F	726	726
G	756	769
H	668	668
I	158	158
J	Installer to locate and mount	



EHPT21-30X-UKHDWB

Versatile Standard Cylinders for R32 Ecodan Monobloc Units



The Versatile Standard Cylinder comes ready to plumb into the system, containing all of the advanced controls you would expect.

It integrates with our Ecodan Monobloc air source heat pump range and is designed to meet the requirements of existing installations and new build applications. It has a standard footprint and includes a coil heat exchanger, rapid SD card commissioning, MELCloud Wi-Fi connectivity and energy monitoring functions as standard.

Key Features & Benefits

- Unvented, versatile DHW cylinder
- High capacity coil heat exchanger
- Diverter valve accessory supplied
- Advanced Mitsubishi Electric controls installed
- MELCloud Enabled
- Versatile product placement
- Maximises heat transfer
- Simplified heating & hot water system installation
- Quality assurance, giving peace of mind
- Remote control, monitoring, maintenance and technical support

FTC6 Controller

Mitsubishi Electric's sixth generation controller (FTC6) includes intelligent room temperature control as standard. This together with advanced weather compensation ensures the system delivers efficient, comfortable heating regardless of the season. FTC6 now also includes energy monitoring showing consumed and produced energy.




CYLINDER		EHPT21X-UKHDWB	EHPT25X-UKHDWB	EHPT30X-UKHDWB	
NOMINAL HOT WATER VOLUME (LITRES)		210	250	300	
ErP RATING		C	C	C	
HEAT LOSS (kWh/24hrs)		1.79	2.02	2.24	
HEAT LOSS (W)		75	84	93	
WATER	Flow Rate (l/min) - (H)WM 50 / 60 / 85 / 112 / 140	14 / 17 / 24 / 32 / 40	17 / 24 / 32 / 40	24 / 32 / 40	
	Primary Circuit Pump		Local supply		
	Heating Circuit Pump		Local supply		
	Sanitary Hot Water Pump		N/A		
	Connection Size (mm) Heating / DHW	22 / 22	22 / 22	22 / 22	
	Charge Pressure (MPa (Bar))	0.30 (3.0)	0.30 (3.0)	0.30 (3.0)	
WATER SAFETY DEVICES	Water Circuit Control Thermistor (°C)	80	80	80	
	DHW Cylinder DHW Expansion Vessel (Litres)	18	18	24	
	Control Thermistor	75	75	75	
	Over Temperature Cut-Out (°C)	85 ± 5	85 ± 5	85 ± 5	
	Temp and Pressure Relief Valve (°C) / (MPa (Bar))	90°C / 7 Bar	90°C / 7 Bar	90°C / 7 Bar	
	Expansion Relief Valve (Cold) (MPa (Bar))	6 Bar	6 Bar	6 Bar	
DIMENSIONS (mm)	Width	550	550	550	
	Depth	651	651	651	
	Height	1495	1745	2058	
WEIGHT EMPTY / FULL (kg)		55 / 265	57 / 307	62 / 362	
CYLINDER MATERIAL	Cylinder	Stainless Steel			
	Insulation	Insulation Type	CFC / HCFC-free Polyurethane		
		Insulation Thickness (mm)	50	50	50
		GWP of Insulation	1	1	1
		ODP of Insulation	0	0	0
ELECTRICAL DATA	Control Board <i>optionally powered by outdoor unit</i>	Electrical Supply	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
		Phase	Single	Single	Single
		Fuse Rating - MCB Sizes (A) ¹	16	16	16
	Immersion Heater	Electrical Supply	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
		Phase	Single	Single	Single
		Capacity (kW)	3	3	3
		Max Running Current (A)	13	13	13
		Fuse Rating - MCB Sizes (A) ¹	16	16	16
MECHANICAL ZONES		DHW and 1 Heating Zone ²			
OPTIONAL SIMPLIFIED WIRELESS ROOM THERMOSTAT AND WIRELESS RECEIVER		PAR-WT60R-E Controller and PAR-WR61R-E Receiver			


¹ MCB Sizes BS EN60898-2 & BS EN60947-2. ² Optional 2 zone accessory pack available.

Notes: Cylinder includes: Flow Temperature Controller (FTC6) with Main Controller and Temperature Sensors, Diverter Valve, Coil Heat Exchanger, 3kW Immersion Heater, Expansion Vessel, MELCloud Wi-Fi Interface, Drain Valve, Tundish and Cold Water Combination Valve.

Front View

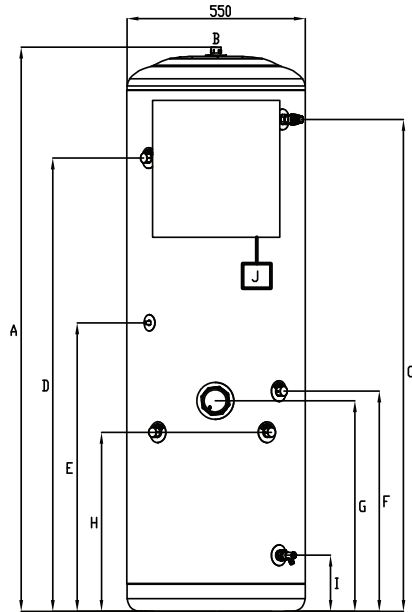

Upper View



Letter	Pipe Description	Connection size/type
A	Overall height	
B	Hot Water Outlet	22mm Compression (3/4" Male BSP)
C	Temperature & Pressure Relief Valve	
D	Secondary Return Tapping	22mm Compression (3/4" Male BSP)
E	THW5A Sensor Pocket	
F	Cold Water Inlet	22mm Compression (3/4" Male BSP)
G	Immersion heater	
H	Heat Pump Flow & Return Coil Connections	22mm Compression (3/4" Male BSP)
I	Drain Valve	22mm Compression (3/4" Male BSP)
J	Wi-Fi Adaptor (Installer to locate and mount)	

Capacity	210	250	300
A	1495	1745	2058
C	1273	1523	1836
D	1150	1400	1600
E	768	893	1050
F	680	680	680
G	584	654	654
H	558	558	558
I	173	173	173
J	Installer to locate and mount		



FTC7 / FTC6 / FTC2BR Flow Temperature Controllers

For use with Ecodan
Monobloc Units and
Third Party BEMS



FTC7



FTC6



The FTC7 / FTC6 Flow Temperature Controller is designed specifically by Mitsubishi Electric to integrate with the Ecodan PUZ monobloc air source heat pump range and a third party cylinder.

The FTC2BR has been developed to allow the Ecodan PUZ-(H)WM range to interface with third party or BEMS (Building Energy Management System) controls. A combination of volt free and voltage inputs allow the Ecodan PUZ-(H)WM monobloc range to be used in applications where only simple on/off and temperature control is required.

Functions that can be controlled and monitored by third party controls:

Controlled

- On/Off heating mode
- On/Off heating ECO mode
- On/Off hot water mode
- On/Off holiday mode
- On/Off legionella mode
- Change water flow temperature

Monitored

- Unit running
- Error
- Defrost

The ability to interface with third party controls opens up a huge number of application opportunities. Many processes simply require a heat source that provides hot water, without polished end user controls. The FTC2BR controller allows the Ecodan PUZ to be used in these applications. FTC2BR inputs and outputs can be used in conjunction with local BEMS.

R290 R32

FLOW TEMPERATURE CONTROLLERS		FTC7 (PAC-IF082B-E)	FTC6 (PAC-IF072B-E)	FTC2BR (PAC-IF033B-E)
COMPATIBILITY	PUZ-WZ50VAA(-BS)	✓		
	PUZ-WZ60VAA(-BS)	✓		
	PUZ-WZ80VAA(-BS)	✓		
	PUZ-WM50VHA(-BS)		✓	✓
	PUZ-WM60VAA(-BS)		✓	✓
	PUZ-WM85V(Y)AA(-BS)		✓	✓
	PUZ-WM112V(Y)AA(-BS)		✓	✓
	PUZ-HWM140V(Y)HA(-BS)		✓	✓
BUILT-IN FEATURES	Initial Setting Wizard	✓	✓	
	Commissioning Aide	✓	✓	
	Smart Grid Ready	✓	✓	
	PV Connection	✓	✓	
	Energy Monitoring	✓	✓	
	Dual Set-Point DHW	✓	✓	
	Flow Rate Control Logic	✓		
	Quiet Mode	✓	✓	
	Cascade*1	✓	✓	
	Hybrid	✓	✓	
MELCloud ENABLED*2		✓	✓	
BEMS INTERFACE				
DIMENSIONS (MM)	Width	393	393	336
	Depth	86.7	86.7	69
	Height	422	422	278
WEIGHT (kg)		4.2	4.1	3.2
OPERATING AMBIENT TEMPERATURE (°C) / HUMIDITY		0~ +35°C (RH<80%)	0~ +35°C (RH<80%)	0~ +35°C (RH<80%)
ELECTRICAL DATA	Electrical Supply	Via Outdoor Unit or Independent Source (230v)	Via Outdoor Unit or Independent Source (230v)	Via Outdoor Unit or Independent Source (230v)
	Phase	Single	Single	Single


*1 Requires additional optional part(s) PAC-IF072B-E or PAC-IF082B-E. Please contact your regional sales office technical team. *2 Requires Wi-Fi interface MAC-5871F-EH.



Energy Monitoring Packs

All Ecodan Flow Temperature Control systems come with free energy monitoring as standard. System users are able to measure both consumed electrical energy and produced heat energy to the nearest kWh.

In addition to the basic system functionality features, i.e. hot water and heating status, the system's energy performance can also now be viewed. Historic energy consumption, heat production and run cost reports are available via the main controller, SD card or MELCloud.

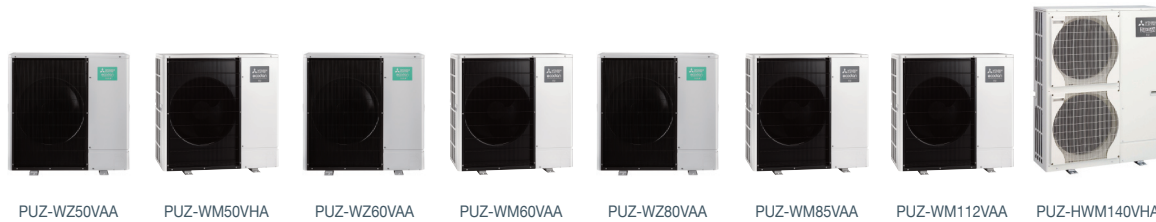

PACK	5kW	5kW	6kW	6kW	8kW	8.5kW	11.2kW	14kW
EMP1	✓	✓	✓	✓	✓	✓	✓	✓
EMP2	✓	✓	✓	✓	✓	✓	✓	✓
EMP3-M-1PH	✓	✓	✓	✓	✓	✓	✓	✓
EMPH-M-1PH	✓	✓	✓	✓	✓	✓	✓	✓

DESCRIPTION	ELECTRIC METER	HEAT METER	DATA STORAGE
Energy input & output estimation included as standard			
Electrical energy measurement consumption pack	2 x ACC-EM-EML-1PH System Electricity Meter		
MMSP compliant electrical energy consumption and heat generation pack with cloud data storage	2 x ACC-EM-EML-1PH System Electricity Meter	1 x ACC-HM-449-G25 Glycol Mono System	ACC-RES-DSV-1Y
Electrical energy consumption and heat generation pack for hybrid systems	2 x ACC-EM-EML-1PH System Electricity Meter	1 x ACC-HM-749-G25 Glycol Mono Hybrid System	ACC-RES-DSV-1Y



MELCloud Wi-Fi Connectivity



Featuring the award-winning



MELCloud is a cloud based solution for controlling your Mitsubishi Electric Ecodan heating system either locally or remotely by PC, Mac, Tablet or Smartphone via the internet.

The set up and remote operation of your Ecodan heating system via MELCloud is simple and straight forward. All you need is a wireless connection where the Ecodan is located and an internet connection on your mobile or fixed device. To set up the system, the router and the Ecodan Wi-Fi interface need pairing and this is done simply and quickly via the WPS button found on all mainstream routers, or using access point pairing via a mobile phone.

Key Features & Benefits

- Access to remote maintenance and technical support
- View and control your heating and hot water from anywhere in the world
- Reports on energy use, temperature history and more
- Live weather feed at location of Ecodan
- Share / restrict access and control of the Ecodan system
- Compatible with Amazon Alexa or Google Assistant-enabled devices
- Available for any FTC6 based system, new or retrofit using a MAC-587IF-EH interface



MELConsole



Once connected, you can also enjoy the benefits of **MELConsole** which provides **remote maintenance & technical support** reducing the need of a visit from an engineer.

To find out more, scan the QR Code or call the Ecodan Helpdesk:
0161 866 6064



24/7 Technical Support





For a demonstration of Mitsubishi Electric's MELCloud, scan the QR Code or visit our website melcloud.com



Available for PC, Mac, Tablet or Smartphone

Supported Ecodan Models

All **Ecodan FTC7 / FTC6** systems have energy monitoring functionality as standard and the ability to connect to MELCloud. A MAC-5871F-EH Wi-Fi Interface is required to use MELCloud.

Wi-Fi Interface		MAC-5871F-EH
DESCRIPTION		Wi-Fi Interface
CONNECT TO		Indoor Unit
MAX NUMBER OF UNITS		1
COMPATIBILITY		Ecodan FTC7 / FTC6
POWER SUPPLY		From indoor unit
DIMENSIONS (WxDxH) mm		73.5 x 18.5 x 41.5
CONTROL	On/Off	✓
	Mode	✓
	Heating Setpoint	✓
	Hot Water Boost	✓
	2-Zone Control	✓
	Holiday Mode	✓
	Timer	✓
	Frost Protection	✓
MONITOR	On/Off	✓
	Mode	✓
	Heating Setpoint	✓
	Tank Temperature	✓
	Tank Target Temperature	✓
	Outside Temperature	✓
	Fault Codes	✓
	Consumed Electrical Energy	✓
	Produced Heat Energy	✓

Supported Hardware / Software

Tablets (Apps or Web Client)

Apple iPad / iPad mini
 Samsung Galaxy Tab / Note
 Google Nexus
 Dell Latitude 10
 Microsoft Surface
 BlackBerry PlayBook

Smartphones (Apps or Web Client)

Apple iPhone
 Samsung Galaxy S
 Google Nexus
 Nokia Lumia
 BlackBerry Z10

Operating Systems

Android™
 Apple iOS / OS
 Microsoft Windows
 BlackBerry

Internet Browsers (Web Client only)

Microsoft Internet Explorer
 Google Chrome
 Apple Safari
 Mozilla Firefox
 Opera

Please Note:

This is not definitive list of all compatible devices, other similar devices which use supported Operating Systems or Internet Browsers should also work either via dedicated Apps or via Web Browser / Web Client options. Please note that user experience may vary slightly depending on hardware and software combination. Google, Android, Google Play, Google Chrome and other marks are trademarks of Google LLC.

i-LIFE2 Slim

Fan Assisted Radiator

The i-Life2 Slim Fan Assisted Radiator is designed to work seamlessly with existing heating or renewable technologies.

Key Features & Benefits

- **Stylish** - At only 13cm deep, the sleek and elegant satin-white, wall mounted cabinet is designed to blend seamlessly into any setting
- **Flexible** - Packed with advanced controls and functions, the i-Life2 Slim will work with traditional heating or renewable systems such as heat pumps
- **Easy to Use** - Airflow is managed by deflectors at the top of the unit, which open and close automatically, ensuring fast and even heat distribution



MODEL		i-LIFE2 SLIM DLMV 80	i-LIFE2 SLIM DLMV 170
CAPACITY (W) ^{2 *8}		500 / 780 / 880	1060 / 1660 / 2130
ELECTRICAL DATA	Electrical Supply	230v, 50Hz	230v, 50Hz
	Phase	Single	Single
	Fan Power Input (W) - (Lo-Mi-Hi) ^{1 *8}	0.7 / 4.6 / 10.7	1.62 / 10.1 / 19.0
WATER DATA	Water Flow Rate (l/min) - (Lo-Mi-Hi) ²	1.2 / 2.4 / 2.4	3 / 4.8 / 6
	Water Pressure Drop (kPa) - (Lo-Mi-Hi) ^{2 *8}	3 / 6 / 8	2 / 5 / 8
AIR DATA	Air Flow Rate (m3/h) - (Lo-Mi-Hi) ¹	51 / 93 / 125	122 / 221 / 277
SOUND DATA	Sound Pressure (dB(A)) - (Lo-Mi-Hi) ³	24 / 35 / 41	26 / 36 / 42
	Sound Power (dB(A)) - (Lo-Mi-Hi) ^{4 *7 *8}	33 / 44 / 50	35 / 45 / 51
DIMENSIONS (mm) ⁵	Width	737	937
	Depth	131	131
	Height	579	579
WEIGHT (kg) ⁵		17	20


 i-Life2 Slim units are managed by a variable speed fan motor that continuously modulates the fan speed

1. Room temperature 27°C d.b./19°C w.b.; Chilled water (in/out) 7/12°C.
2. Room temperature 20°C d.b.; Hot water (in/out) 45/40 °C.
3. Sound pressure level in free field on a reflective surface, 1m from fan front and 1m from the ground. Non-binding value obtained from sound power level.
4. Sound power on the basis of measurements made in compliance with ISO 374 and Eurovent 8/2.
5. Unit in standard configuration/execution, without optional accessories.
6. Values in compliance with EN14511-3:2013.
7. Values in compliance with [REGULATION (UE) N.2016/2281].
8. Certified data in EUROVENT.

Product Dimensions

i-LIFE2 SLIM DLMV 80 & i-LIFE2 SLIM DLMV 170


All measurement in mm

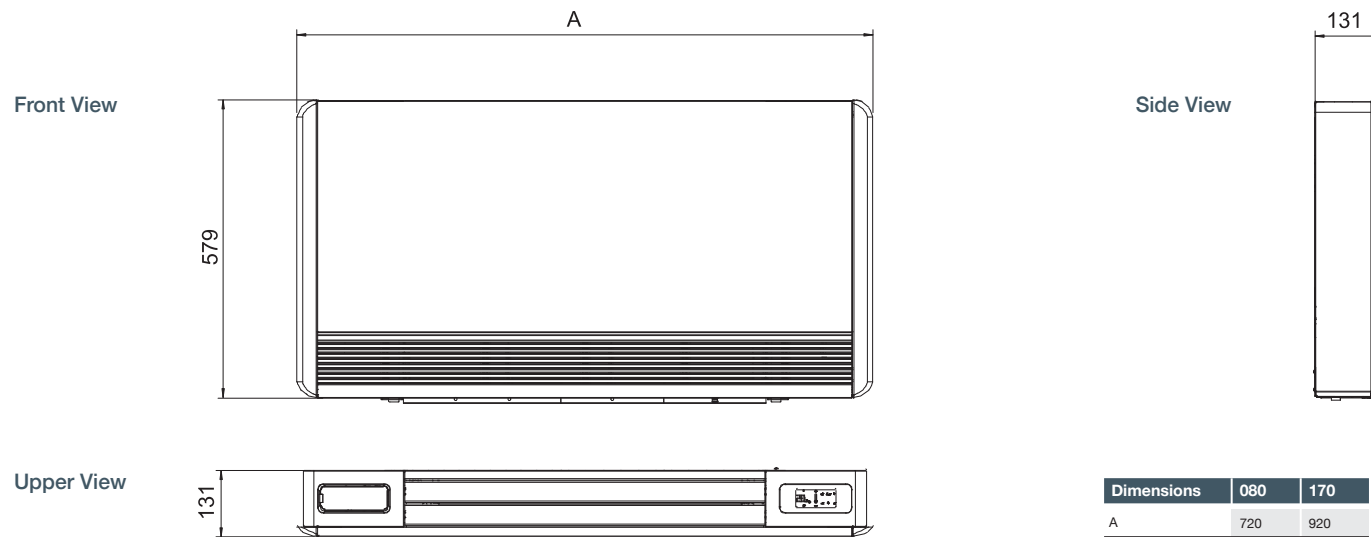

Installation Location

i-LIFE2 SLIM DLMV 80 & i-LIFE2 SLIM DLMV 170

All measurement in mm

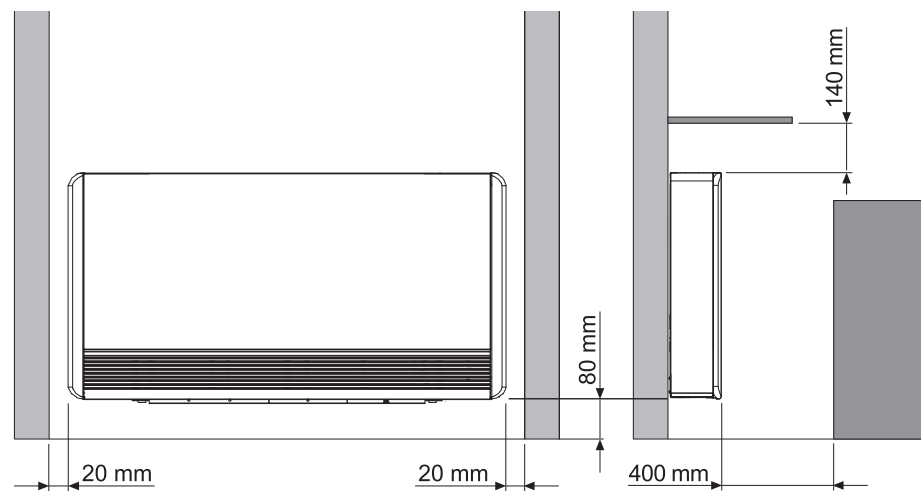



Accessories / Optional Extras



PAR-WT60R-E
FTC Wireless Controller Transmitter

DESCRIPTION	MODEL REF.
PUZ	
FTC Wireless Controller Transmitter	PAR-WT60R-E
FTC Wireless Controller Receiver 2m Cable	PAR-WR61R-E
Modbus CN105 Interface	ACC-BEMS-A1MR5
Isolator 20A IP65	ACC-ISO-020
Isolator 32A IP65	ACC-ISO-032
Isolator 40A IP65	ACC-ISO-040
FTC6 High Temperature Sensor 5m Cable	PAC-TH012HT-E
FTC6 High Temperature Sensor 30m Cable	PAC-TH012HTL-E
FTC6 Flow and Return Temperature Sensors 5m Cable	PAC-TH011-E
FTC6 Cylinder DHW Temp Sensor 5m Cable	PAC-TH011TK2-E
FTC6 Cylinder DHW Temp Sensor 30m Cable	PAC-TH011TKL2-E
FTC Service Diagnostic Tool	PAC-SK52ST
Ecodan Anti-Vibration Fix-It-Foot 600mm Kit	ACC-AVM-001
Ecodan Reinforced Lightweight Slab +Anti-Vibration Fix-It-Foot Kit	ACC-AVS-001
Compatible Drain Socket Kit	PAC-SH71DS-E
10L Anti Freeze	ACC-AFZ-010A
20L Anti Freeze	ACC-AFZ-020A
Insulated Through Wall Sleeve Kit (85mm)	ACC-FCP-TW1
External Pipework Trunking Length (1m x 140mm Black x2)	ACC-TRU-LE1
External Pipework Trunking Length (2m x 140mm Black x1)	ACC-TRU-LE2
External Pipework Trunking Length Connector (140mm Black)	ACC-TRU-JO1
External Pipework Trunking Wall Cover (140mm Black)	ACC-TRU-CO1
External Pipework Trunking Elbow (140mm Black)	ACC-TRU-EL1
External Pipework Trunking External Corner (140mm Black)	ACC-TRU-EC1
External Pipework Trunking Internal Corner (140mm Black)	ACC-TRU-IC1
Pack for 2 Zone Systems with Equal Temperatures	ACC-2ZP-K01
Pack for 2 Zone Systems with Different Temperatures	ACC-2ZP-K02
Flow Balancing Valve	ACC-FBV-40L
Insulated Flexible Connection Pipes (22mm x 500mm) Standard Pair	ACC-FCP-S22
Insulated Flexible Connection Pipes (28mm x 500mm) Standard Pair	ACC-FCP-S28
Insulated Flexible Connection Pipes (28mm x 300mm) Elbow Pair	ACC-FCP-E28
MELCloud Wi-Fi Interface	MAC-5871F-EH

Ventilation

Fresh Air Ventilation Range





Contents

LGH-RVX3-E Commercial Lossnay	4.6
LGH-RVXT-E Commercial Lossnay	4.8
LGH-RVS-E Commercial Lossnay	4.10
VL-100EU₅-E Wall Mounted Lossnay	4.12
VL-CZPVU-R/L-E Residential Lossnay	4.14
GUF-RD4 Lossnay Outdoor Air Processing Unit	4.16
s-AIRME-G07 HR-P C Air Handling Unit	4.18
Accessories / Optional Extras	4.20

Fresh Air Ventilation Range

Why Do We Need **Fresh Air Ventilation**?

The build-up of health damaging pollutants, mould and rot are all attributed to poor indoor air quality and the lack of effective ventilation.

With highly airtight buildings on the rise, alongside increasingly strict legislation on air quality, the need is growing for an effective solution such as mechanical ventilation, which is also energy efficient. Mitsubishi Electric systems are perfectly placed to address this need and are the ideal solution to provide fresh air.

Our range includes single and multi-room Mechanical Ventilation with Heat Recovery (MVHR) units and medium to large scale ventilation solutions including Air Handling Units (AHUs). All systems have been designed to provide the best ventilation solution for the chosen application, by delivering the required amount of fresh air, whilst extracting the right amount of stale air, in the most energy efficient way possible.



Fresh air benefits include:

- A healthy and better maintained building
- Improved air quality for occupants
- Improved comfort via the recovery of heat to incoming fresh air



Fresh Air Ventilation Range


Excellent Air Quality and Heat Exchange Efficiency

How Lossnay Works

Our Lossnay systems have perfected the recovery of energy that would have otherwise been wasted. They do this by either warming or cooling incoming air, a feature which makes Mitsubishi Electric MVHR units extremely energy efficient.

Heat Recovery is made possible via the unique Lossnay ultra-thin paper core technology, which is constructed in a corrugated form and layered in alternative directions.

This design allows a cross airflow to maximise heat recovery without the supply and exhaust air mixing, ensuring only fresh air is introduced to the building.

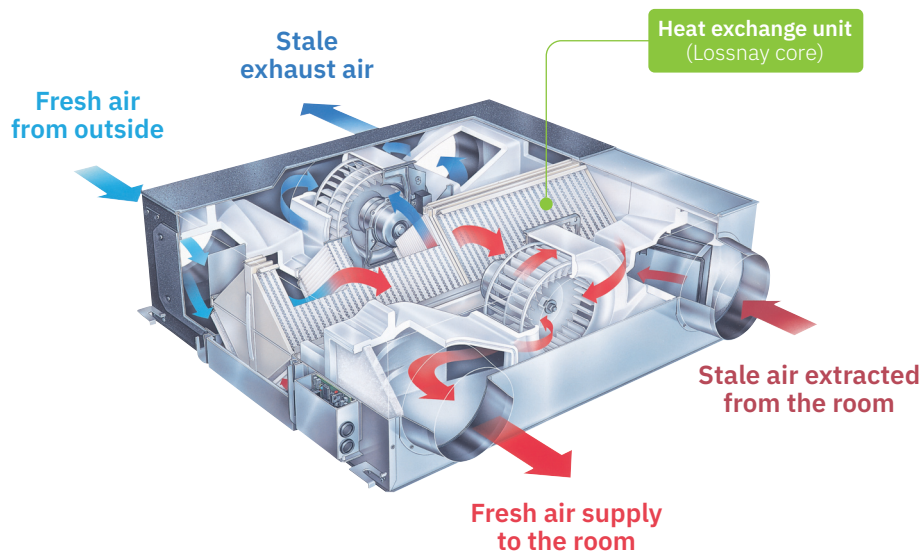

How Air Handling Units work

Packaged Air Handling Units (AHUs) are designed to provide a tempered fresh air supply into commercial buildings. They work in conjunction with the building's air conditioning system to provide occupants with a fresh and comfortable environment.



The Mitsubishi Electric AIRME Compact Air Handling Units incorporate a frameless structure to achieve a line-up of units that are as compact as possible, maximising air tightness and improving thermal properties.

The s-AIRME-G07 HR-P range of AHU's utilises a combination of Mr Slim R32 Power Inverter heat pump technology, energy efficient plate heat exchanger heat recovery technology, and an integrated control system.



LGH-RVX3-E

Commercial Lossnay

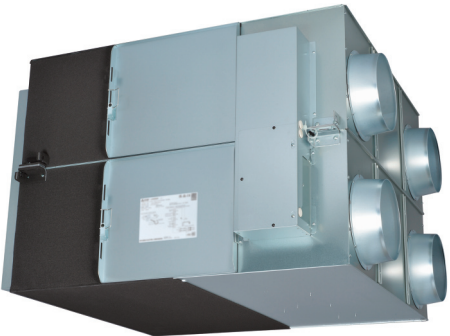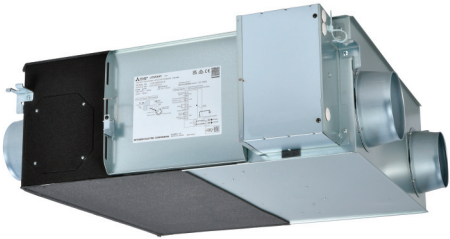

CO₂ LEVELS
LOW MID HIGH



Compatible with Mitsubishi Electric
plug-and-play CO₂ sensor
(powered by the Lossnay unit)

The new Lossnay **LGH-RVX3-E** Mechanical Ventilation Heat Recovery (MVHR) systems are designed to supply clean, fresh air into any commercial building, whilst simultaneously extracting stale air, ensuring good indoor air quality for occupant wellbeing. These units are also able to recover valuable heat energy from inside the building, maximising energy efficiency and reducing running costs.

Key Features & Benefits

- Lossnay paper core enables total heat exchange (sensible and latent) to achieve higher levels of heat recovery, resulting in both cost and energy savings
- Flexible supply and exhaust fan commissioning in 5% increments, offering low running costs and easier compliance with Part L
- Optional Mitsubishi Electric energy saving CO₂ sensor allows automatic incremental fan control for a healthy indoor environment
- Full airflow in bypass mode, promoting good indoor air quality during free cooling
- Dual-Barrier coating on the fan prevents dust and grease accumulation, ensuring long-term efficient operation
- Lightweight structure ideal for easy ceiling installation
- Vertical installation available for flexibility of application
- Control compatibility with Mr Slim and City Multi air conditioning systems for a complete and highly effective system operation

MODEL		LGH-15RVX3-E	LGH-25RVX3-E	LGH-35RVX3-E	LGH-50RVX3-E	LGH-65RVX3-E	LGH-80RVX3-E	LGH-100RVX3-E	LGH-160RVX3-E	LGH-200RVX3-E	
25% (Default speed 1)	Air Volume	m ³ /h	38	63	88	125	163	200	250	400	500
		l/s	10	17	24	35	45	56	69	111	139
	External Static Pressure	Pa	8	8	10	10	10	11	12	11	11
	Temperature Exchange Efficiency	Heating %	81.5	88.0	82.0	75.0	82.0	80.0	83.5	80.0	83.5
		Cooling %	78.0	85.0	79.0	73.0	80.0	78.0	82.5	78.0	82.5
	Enthalpy Exchange Efficiency	Heating %	80.5	84.0	80.0	73.0	80.0	73.5	75.5	73.5	76.0
		Cooling %	73.0	75.0	74.5	68.0	74.0	70.5	73.5	70.5	71.0
	Specific Fan Power	W/(l/s)	0.96	0.63	0.62	0.43	0.44	0.41	0.39	0.41	0.41
	Input Power	W	10	11	15	15	20	23	27	45	57
	Sound Pressure Level	dB(A)	17.0	17.0	17.0	17.0	17.5	18.0	18.5	18.0	18.0
50% (Default speed 2)	Air Volume	m ³ /h	75	125	175	250	325	400	500	800	1000
		l/s	21	35	49	69	90	111	139	222	278
	External Static Pressure	Pa	30	30	40	38	38	43	48	43	43
	Temperature Exchange Efficiency	Heating %	78.0	81.0	79.0	73.5	78.5	78.0	79.5	78.0	79.5
		Cooling %	73.5	79.0	74.0	71.0	74.5	75.5	77.0	75.5	76.0
	Enthalpy Exchange Efficiency	Heating %	76.5	75.5	77.5	72.0	76.5	70.5	68.5	70.5	67.5
		Cooling %	66.0	68.0	68.5	63.0	66.5	65.0	66.0	65.0	65.0
	Specific Fan Power	W/(l/s)	0.72	0.60	0.60	0.49	0.56	0.58	0.60	0.58	0.59
	Input Power	W	15	21	29	34	51	64	83	128	163
	Sound Pressure Level	dB(A)	18.0	19.5	19.0	21.0	24.0	25.0	27.0	26.0	27.5
75% (Default speed 3)	Air Volume	m ³ /h	113	188	263	375	488	600	750	1200	1500
		l/s	31	52	73	104	135	167	208	333	417
	External Static Pressure	Pa	68	68	90	85	85	96	107	96	96
	Temperature Exchange Efficiency	Heating %	75.5	78.5	77.0	71.5	75.0	76.5	77.0	76.5	77.5
		Cooling %	70.5	76.5	71.0	67.0	70.0	70.0	72.0	70.0	71.5
	Enthalpy Exchange Efficiency	Heating %	73.5	72.0	74.5	69.5	72.0	65.0	63.0	65.0	64.0
		Cooling %	62.0	63.5	64.5	58.0	60.0	58.5	61.0	58.5	60.0
	Specific Fan Power	W/(l/s)	0.96	0.81	0.84	0.78	0.89	0.96	1.01	0.97	1.00
	Input Power	W	30	42	61	81	120	160	210	324	416
	Sound Pressure Level	dB(A)	22.0	25.0	24.5	27.0	31.5	33.5	35.0	35.0	36.0
100% (Default speed 4)	Air Volume	m ³ /h	150	250	350	500	650	800	1000	1600	2000
		l/s	42	69	97	139	181	222	278	444	556
	External Static Pressure	Pa	120	120	160	150	150	170	190	170	170
	Temperature Exchange Efficiency	Heating %	73.5	75.5	75.0	70.5	72.5	75.0	75.5	75.0	76.5
		Cooling %	65.5	70.5	66.5	63.5	65.0	65.0	67.5	65.0	66.5
	Enthalpy Exchange Efficiency	Heating %	70.5	69.0	72.0	68.5	69.5	62.0	60.5	62.0	60.5
		Cooling %	58.0	59.0	60.0	53.5	55.5	54.5	55.5	54.5	57.0
	Specific Fan Power	W/(l/s)	1.32	1.08	1.23	1.33	1.36	1.54	1.58	1.55	1.54
	Input Power	W	55	75	120	185	245	343	438	687	855
	Sound Pressure Level	dB(A)	27.0	30.5	30.5	35.0	37.5	39.0	40.0	41.0	41.5
DUCT SIZE	mm	100	150	150	200	200	250	250	(SA-PA)250 (OA-EA)270 x 700	(SA-PA)250 (OA-EA)270 x 700	
WEIGHT	kg	20	22	30	33	41	47	53	96	108	
DIMENSIONS	Width x Depth x Height	mm	780 x 610 x 289	780 x 735 x 289	888 x 874 x 331	888 x 1016 x 331	908 x 954 x 404	1144 x 1004 x 404	1144 x 1231 x 404	1144 x 1004 x 808	1144 x 1231 x 808
ELECTRICAL POWER SUPPLY						220-240V, 50Hz					
MAXIMUM CURRENT	A	0.57	0.88	1.37	1.86	2.37	3.23	3.77	4.74	5.40	
FUSE RATING (BS88) – HRC (A)	A	6	6	6	6	6	6	6	10	10	
HEAT EXCHANGER						Paper with specially treated Cellulose Membrane					
STANDARD FILTER						ISO 16890 Coarse 60% ^{*1}					

Notes: Running current, power consumption, recovery efficiency, and sound levels are based on the above default airflow rates at 25%, 50%, 75%, and 100%. Specific duty point data is available upon request. Supply and exhaust fan speeds can be individually commissioned between 25% and 100% in 5% increments. Sound Pressure Level measured at 1.5m under the centre of the bottom panel. Air flow rates, external static pressure and specific fan powers tested to BS EN13053: 2019. Energy recovery efficiencies tested to BS EN308: 2022.

*1: EN 779 G4 equivalent according to 'REHVA Filter Class Conversion between EN 779 and EN ISO 16890-1'.

Accessories

Controls

PZ-62DR-EB

Lossnay remote controller for LGH-RVX3-E

PZ-4GS-E

External signal relay for LGH-RVX3-E

Filters

PZ-15RF3-E

Standard replacement filter (Coarse 60%) for LGH-15RVX3-E

PZ-25RF3-E

Standard replacement filter (Coarse 60%) for LGH-25RVX3-E

PZ-35RF3-E

Standard replacement filter (Coarse 60%) for LGH-35RVX3-E

PZ-50RF3-E

Standard replacement filter (Coarse 60%) for LGH-50RVX3-E

PZ-65RF3-E

Standard replacement filter (Coarse 60%) for LGH-65RVX3-E

PZ-80RF3-E

Standard replacement filter (Coarse 60%) for LGH-80RVX3-E / LGH-160RVX3-E (2 sets required)

PZ-100RF3-E

Standard replacement filter (Coarse 60%) for LGH-100RVX3-E / LGH-200RVX3-E (2 sets required)

PZ-15RFP3-E

ePM₁ 75% grade filter for LGH-15RVX3-E

PZ-25RFP3-E

ePM₁ 75% grade filter for LGH-25RVX3-E

PZ-35RFP3-E

ePM₁ 75% grade filter for LGH-35RVX3-E

PZ-50RFP3-E

ePM₁ 75% grade filter for LGH-50RVX3-E

PZ-65RFP3-E

ePM₁ 75% grade filter for LGH-65RVX3-E

PZ-80RFP3-E

ePM₁ 75% grade filter for LGH-80RVX3-E / LGH-160RVX3-E (2 sets required)

PZ-100RFP3-E

ePM₁ 75% grade filter for LGH-100RVX3-E / LGH-200RVX3-E (2 sets required)

CO₂ Sensors

PZ-70CSW-E

Wall mounted plug and play CO₂ sensor with traffic light signals for LGH-RVX3-E

PZ-70CSD-E

Duct mounted plug and play CO₂ sensor for LGH-RVX3-E

Vertical Mounting Brackets

PZ-1VS-E

Vertical mounting bracket for LGH-15-50RVX3-E

PZ-2VS-E


Vertical mounting bracket for LGH-65-100RVX3-E

Weather Proof Housings

Weather proof housings are also available

Product Dimensions


LGH-15RVX3-E

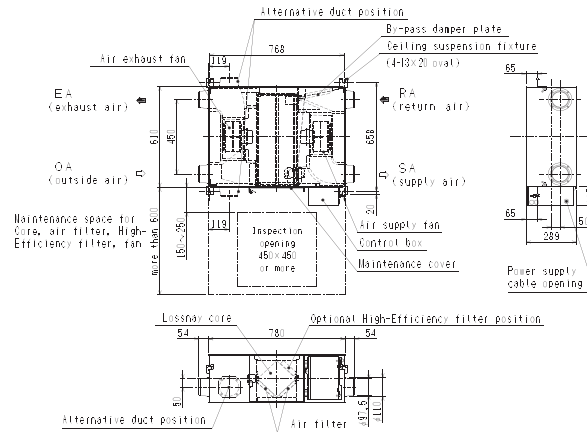

MODEL REFERENCE	DIMENSIONS			CEILING SUSPENSION FIXTURE PITCH		NOMINAL DUCT DIAMETER
	A	B	C	D	E	
LGH-25RVX3-E	780	735	289	768	782	150
LGH-35RVX3-E	888	874	331	875	921	150
LGH-50RVX3-E	888	1016	331	875	1063	200
LGH-65RVX3-E	908	954	404	895	1001	200
LGH-80RVX3-E	1144	1004	404	1131	1051	250
LGH-100RVX3-E	1144	1231	404	1131	1278	250


Product Dimensions

LGH-160RVX3-E

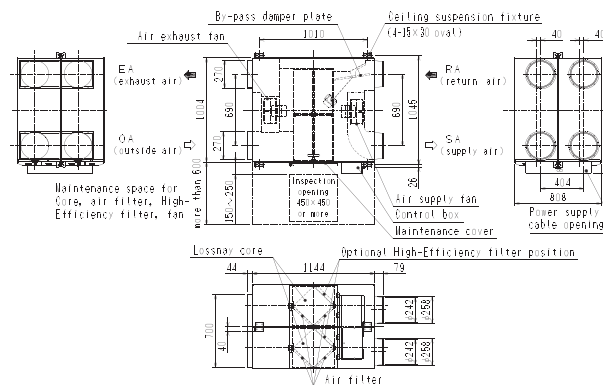


Product Dimensions

LGH-25-100RVX3-E

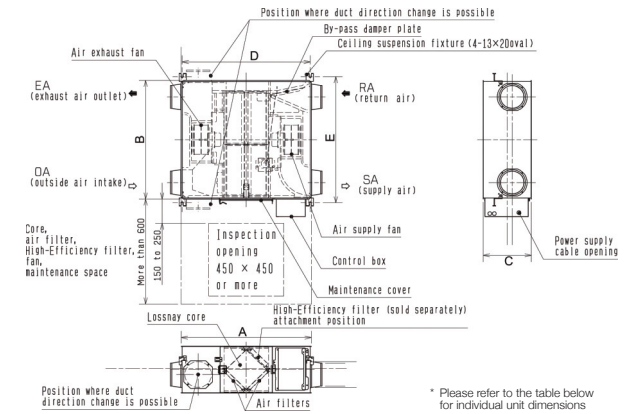

Product Dimensions

LGH-200RVX3-E

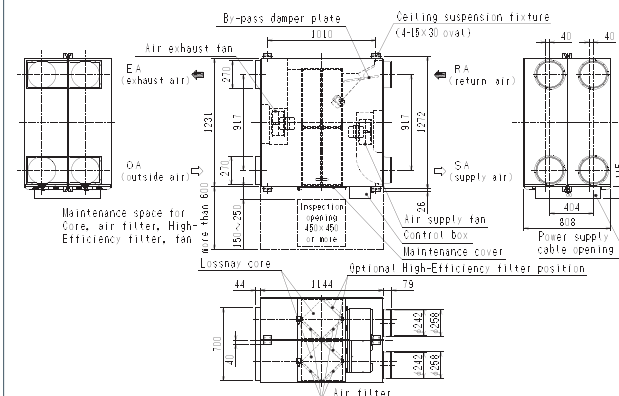

LGH-RVXT-E

Commercial Lossnay

Lossnay **LGH-RVXT-E** Mechanical Ventilation Heat Recovery (MVHR) systems are designed to supply clean, fresh air into any commercial building, whilst simultaneously extracting stale air, ensuring good indoor air quality for occupant wellbeing. Offering a significantly reduced height, whilst maintaining a large airflow, these units are designed for installation in ceiling voids within commercial properties.

Key Features & Benefits

- Lossnay paper core enables total heat exchange (sensible and latent) to achieve higher levels of heat recovery, resulting in both cost and energy savings
- Lightweight structure, ideal for ceiling installation
- No condensate drain requirement
- Unit height of 500mm for ease of application
- Compatible with Mr Slim and City Multi air conditioning systems, creating a complete and highly effective system



MODEL		LGH-150RVXT-E	LGH-200RVXT-E	LGH-250RVXT-E	
ELECTRICAL POWER SUPPLY		220-240V, 50Hz			
RUNNING CURRENT (A)	SP1	0.36	0.39	0.57	
	SP2	1.10	1.10	1.40	
	SP3	2.40	2.70	3.60	
	SP4	4.30	5.40	7.60	
INPUT POWER (W)	SP1	48	56	82	
	SP2	176	197	244	
	SP3	421	494	687	
	SP4	792	1000	1446	
AIRFLOW (m ³ /h) ²	SP1	375	500	625	
	SP2	750	1000	1250	
	SP3	1125	1500	1875	
	SP4	1500	2000	2500	
AIRFLOW (l/s) ²	SP1	104	139	174	
	SP2	208	278	347	
	SP3	313	417	521	
	SP4	417	556	694	
SPECIFIC FAN POWER (W/(l/s))	SP1	0.46	0.40	0.47	
	SP2	0.85	0.71	0.70	
	SP3	1.35	1.18	1.32	
	SP4	1.90	1.80	2.08	
EXTERNAL STATIC PRESSURE (Pa)	SP1	11	11	11	
	SP2	44	44	44	
	SP3	98	98	98	
	SP4	175	175	175	
SOUND PRESSURE LEVEL (dBA)	SP1	22	22	24	
	SP2	29.5	28	32	
	SP3	35.5	35.5	39	
	SP4	39.5	39.5	43	
TEMPERATURE EXCHANGE EFFICIENCY (%)	SP1	81.5	84	82.5	
	SP2	81	82.5	80.5	
	SP3	80.5	81	79	
	SP4	80	80	77	
ENTHALPY EXCHANGE EFFICIENCY (%)	Heating	SP1	75	83	79
		SP2	73	77	74
		SP3	71	73.5	71.5
		SP4	70	72.5	68
	Cooling	SP1	74	80.5	76.5
		SP2	72	74.5	71.5
		SP3	70	71	69
		SP4	69	70	65.5
WEIGHT (kg)		156	159	198	
DIMENSIONS (mm) Width x Depth x Height		1980 x 1500 x 500	1980 x 1500 x 500	1980 x 1500 x 500	
DUCT SIZE (mm)		250 x 750	250 x 750	250 x 750	
STANDARD FILTER ¹		EU-G3	EU-G3	EU-G3	
FUSE RATING (BS88) – HRC (A)		10	10	10	

Notes: Running Current, Input Power and Recovery Efficiency are based on the above airflow rate, power supply 240v, 50Hz. Sound Pressure Level measured at 1.5m under the centre of panel.

¹: M6 medium efficiency filter and F8 high efficiency filter available as optional parts. ²: Airflow tested to Japan industrial standard JIS B 8628. SP1, SP2, SP3 & SP4 relate to the fan speeds of the Lossnay RVXT units i.e. fanspeed 1, 2, 3 & 4.

Accessories

Remote Controllers

PZ-62DR-EB

Lossnay remote controller for LGH-RVXT-E

Filters

PZ-M6RTFM-E

ePM₁₀ 75% / M6 filter for LGH-RVXT-E


PZ-F8RTFM-E

ePM₁ 65% / F8 filter for LGH-RVXT-E


Product Dimensions

LGH-150/200/250RVXT-E


Left Side View

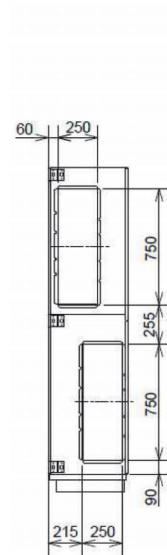


Upper View

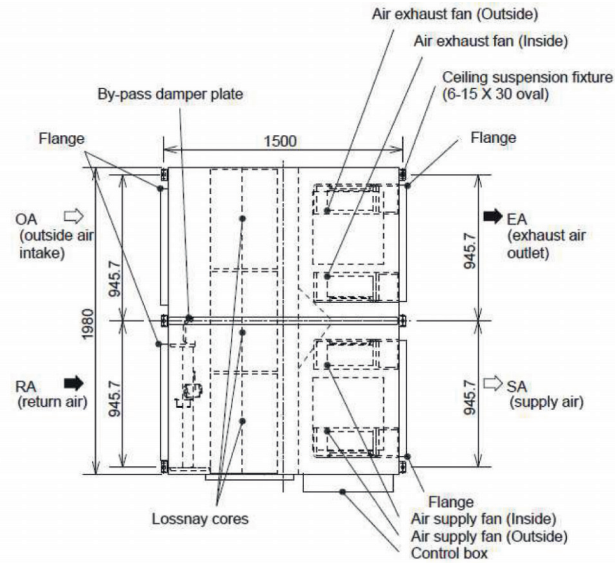

Right Side View

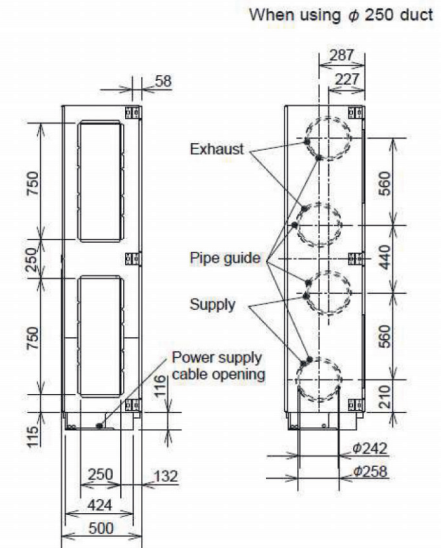

Front View





LGH-RVS-E

Commercial Lossnay

The **LGH-RVS-E** is designed to simultaneously extract stale air from a commercial building and supply fresh filtered air. Whilst doing this the Lossnay units also recover valuable heat energy for maximum efficiency.

Key Features & Benefits

- Fresh air ventilation with energy efficient heat recovery
- Plastic heat exchanger - perfect for higher humidity environments
- Optional plug and play CO₂ sensor control including power
- Digital commissioning of fan speed increments
- Easy control interlock with Mr Slim and City Multi air conditioning systems
- M-NET connection for centralised control
- Integrated bypass damper for free cooling
- In-built condensate drainage traps

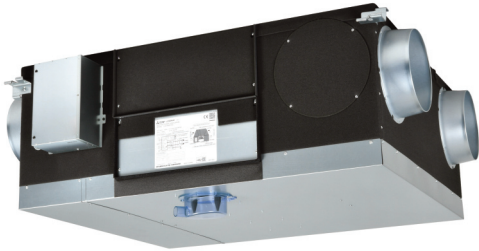

Compatible with Mitsubishi Electric
plug-and-play CO₂ sensor
(powered by the Lossnay unit)

MODEL			LGH-50RVS-E	LGH-80RVS-E	LGH-100RVS-E
25%	Air Volume	l/s	35	56	69
		m ³ /hr	125	200	250
	External Static Pressure	Pa	9	11	12
	Temperature Exchange Efficiency	%	93	90	90
	Specific Fan Power	W/(l/s)	0.72	0.58	0.5
	Input Power	W	25	32	35
	Sound Pressure Level	dB(a)	18	18	18
50%	Air Volume	l/s	69	111	139
		m ³ /hr	250	400	500
	External Static Pressure	Pa	38	43	48
	Temperature Exchange Efficiency	%	91	86	86
	Specific Fan Power	W/(l/s)	0.86	0.77	0.72
	Input Power	W	60	85	100
	Sound Pressure Level	dB(a)	22	25	24
75%	Air Volume	l/s	104	167	208
		m ³ /hr	375	600	750
	External Static Pressure	Pa	84	96	107
	Temperature Exchange Efficiency	%	89	84	84
	Specific Fan Power	W/(l/s)	1.06	1.05	1.08
	Input Power	W	110	175	225
	Sound Pressure Level	dB(a)	27	30	32
100%	Air Volume	l/s	139	222	278
		m ³ /hr	500	800	1000
	External Static Pressure	Pa	150	170	190
	Temperature Exchange Efficiency	%	87	82	82
	Specific Fan Power	W/(l/s)	1.37	1.46	1.6
	Input Power	W	190	325	445
	Sound Pressure Level	dB(a)	33	36	37
DUCT SIZE	mm	200	250	250	
WEIGHT	(with full condensate drain) kg	55 (67)	63 (77)	73 (89)	
DIMENSIONS	Width x Depth x Height mm	974 x 946 x 465	1185 x 997 x 465	1185 x 1224 x 465	
ELECTRICAL POWER SUPPLY		220-240V, 50Hz	220-240V, 50Hz	220-240V, 50Hz	
MAXIMUM RUNNING CURRENT	A	2.2	3.7	4.2	
FUSE RATING (BS88) - HRC (A)	A	6	6	6	
HEAT EXCHANGER			Plastic Counter Flow		
CONDENSATE CONNECTION	mm	32	32	32	
STANDARD FILTER	ISO 16890:2016 / EN779:2012		Coarse 35% / G3		
OPTIONAL FILTER(S)	ISO 16890:2016 / EN779:2012		ePM ₁ 65%, ePM _{2.5} 75%, ePM ₁₀ 90% / F8 ePM ₁₀ 80% / M6		

Notes: Airflow rate, static pressure, power input, running current, and heat exchange efficiency tested to ISO 16494 (winter condition), 230v 50Hz. A-Weighted Sound Pressure Level measured at 1.5m under the centre of the unit in an anechoic chamber.

Accessories

Controls

PZ-62DR-EB

Lossnay remote controller for LGH-RVS-E

PZ-4GS-E

External signal relay for LGH-RVS-E

Filters

PZ-S50RF-E

Replacement Coarse 35% / G3 filter for LGH-50RVS-E

PZ-S80RF-E

Replacement Coarse 35% / G3 filter for LGH-80RVS-E

PZ-S100RF-E

Replacement Coarse 35% / G3 filter for LGH-100RVS-E

PZ-S50RFM-E

ePM₁₀ 80% / M6 filter for LGH-50RVS-E

PZ-S80RFM-E

ePM₁₀ 80% / M6 filter for LGH-80RVS-E

PZ-S100RFM-E

ePM₁₀ 80% / M6 filter for LGH-100RVS-E

PZ-S50RFH-E

ePM₁ 65% / F8 filter for LGH-50RVS-E

PZ-S80RFH-E

ePM₁ 65% / F8 filter for LGH-80RVS-E

PZ-S100RFH-E

ePM₁ 65% / F8 filter for LGH-100RVS-E

CO₂ Sensors

PZ-70CSW-E


Wall mounted plug and play CO₂ sensor with traffic light signals for LGH-RVS-E

PZ-70CSD-E

Duct mounted plug and play CO₂ sensor for LGH-RVS-E

Product Dimensions

LGH-50/80/100RVS-E

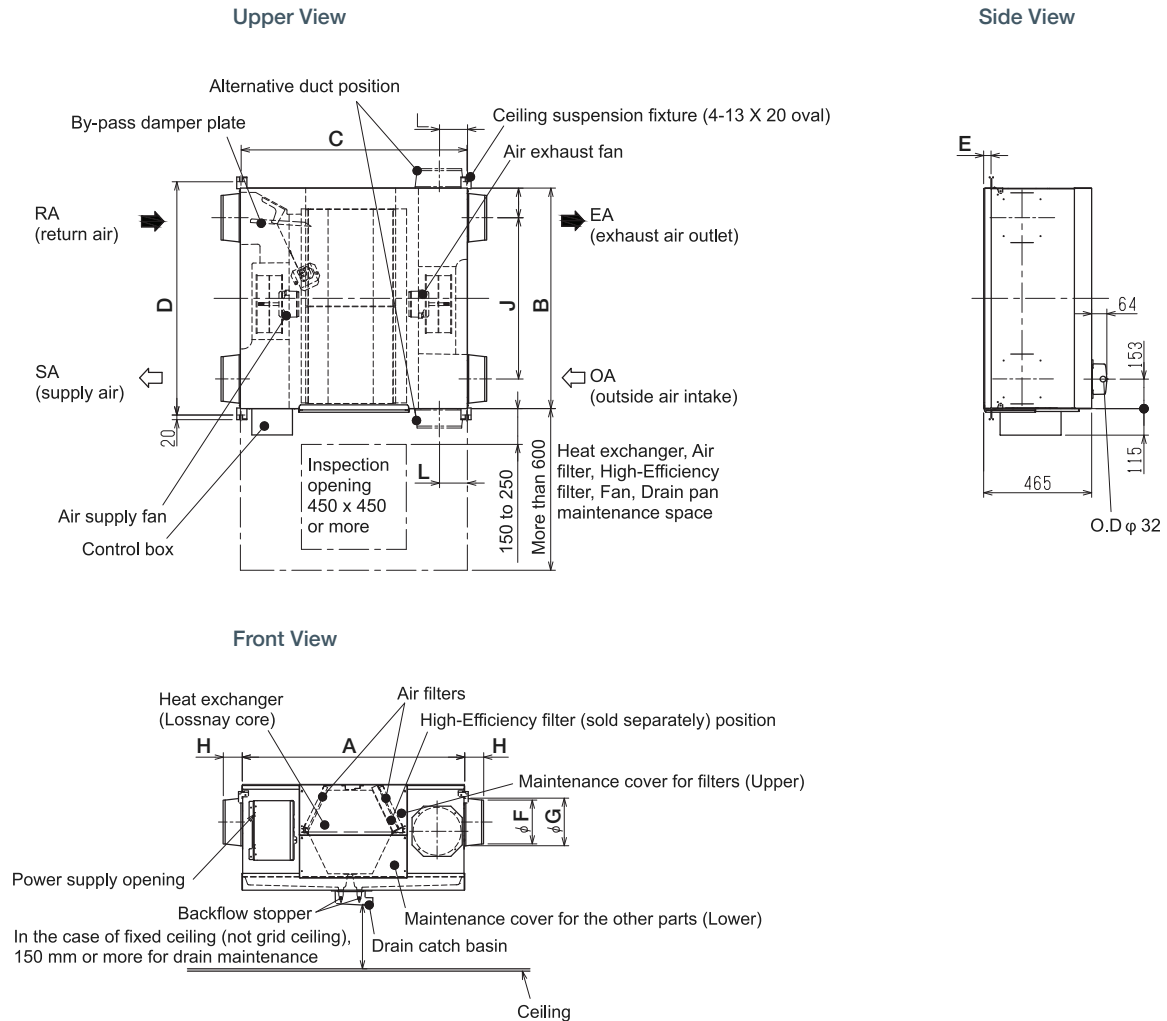

	A	B	C	D	E	F	G	H	J	L
LGH-50RVS-E	974	946	969	1001	32	192	208	83	692	120
LGH-80RVS-E	1185	997	1179	1051	55	242	258	82	683	161
LGH-100RVS-E	1185	1224	1179	1279	55	242	258	82	910	161

VL-100EU₅-E

Wall Mounted Lossnay

The **VL-100** wall mounted Lossnay supplies fresh air into a room, simultaneously extracting stale air in an energy efficient manner. The recovery of both latent heat and sensible heat ensures a comfortable internal environment, minimising heat loss and saving both energy and costs. Easy to install, this compact unit is ideal for single room applications, such as small offices, bedrooms, and spaces where a ducted system is not an option.

Key Features & Benefits

- Effective fresh air ventilation for improved air quality
- Lossnay paper core enables total heat exchange (sensible and latent) to achieve higher levels of heat recovery, resulting in both cost and energy savings
- Simple installation
- Optional extension pipe kit and joint available



MODEL		VL-100EU ₅ -E
ELECTRICAL POWER SUPPLY		220-240V, 50Hz
PHASE		Single
POWER CONSUMPTION (W)	Low	17
	High	34
AIRFLOW (m ³ /h)	Low	61
	High	106
SOUND PRESSURE LEVEL (dBA)	Low	27
	High	38
TEMPERATURE EXCHANGE EFFICIENCY (%)	Low	79
	High	72
WEIGHT (kg)		7.5
DIMENSIONS (mm)	Width	620
	Depth	200
	Height	265
DUCT SIZE (mm)		2 x Ø75
FUSE RATING (BS88) - HRC (A)		6
MAINS CABLE No. Cores		3
CONTROL ON/OFF		Field Supplied

Notes: The VL-100EU₅-E includes the option to fit a field supplied external wall switch.

Accessories

Filters

P-100HF₅-E

M6 filter for VL-100EU₅-E

Extension Pipe Kits

P-100P-E

Extension pipe for VL-100EU₅-E (300mm)


P-100PJ-E

Extension pipe joint for VL-100EU₅-E (300mm)


Product Dimensions

VL-100EU₅-E


Front View

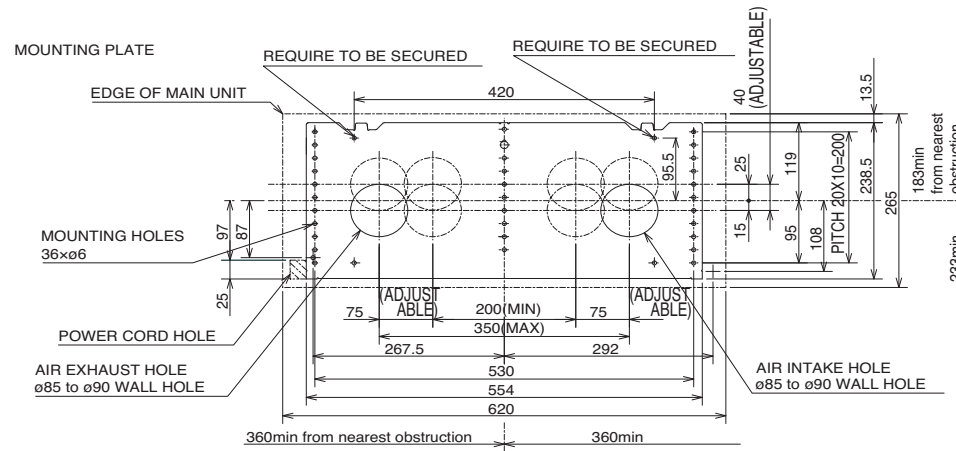

Upper View

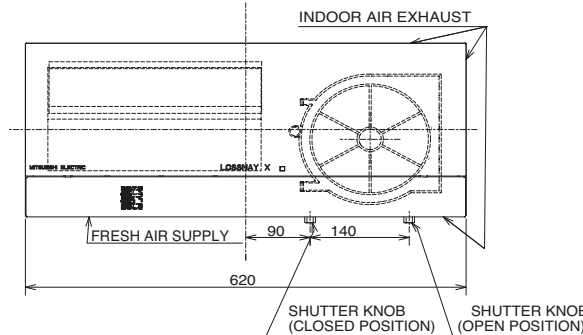

Side View

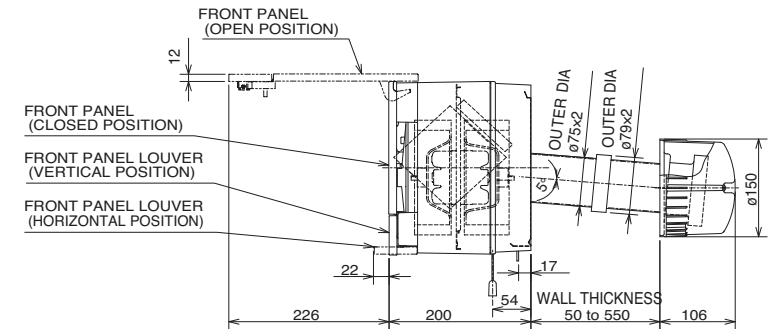

Unit: mm

VL-CZPVU-R/L-E

Residential Lossnay

The **VL-CZPVU-R/L-E** residential Lossnay range of Mechanical Ventilation with Heat Recovery (MVHR) units create an environment of constant clean and healthy air at home. These systems are designed to continuously extract from bathrooms, kitchens, toilets and utility rooms where air can become polluted, whilst supplying a balanced flow of fresh air from outside to spaces such as bedrooms and living rooms. The Lossnay unit minimises the energy lost by recovering the heat from the extracted air, transferring this to the supplied fresh air.

Key Features & Benefits

- Ultra quiet noise levels
- Optional filters placed within the MVHR unit for particulate matter and NOx
- Full summer bypass function with auto mode and settable temperature parameters
- Digital controller included for ease of commissioning and use
- Boost signal via live switch or volt free contact, with settable delay and overrun timers
- Cloud control
- Suitable for use in individual houses or in multi-residential apartment applications



MODEL		VL-250CZPVU-R/L-E	VL-350CZPVU-R/L-E	VL-500CZPVU-R/L-E
DIMENSIONS (mm)	Width x Depth x Height	595 x 386 x 565	658 x 462 x 623	725 x 586 x 632
WEIGHT (kg)		26	32	39
ELECTRICAL POWER SUPPLY		220-240V 50Hz	220-240V 50Hz	220-240V 50Hz
MAX RUNNING CURRENT (A)		1.0	1.32	2.3
SUMMER BYPASS		Full Bypass	Full Bypass	Full Bypass
SPIGOT DIAMETER (mm)		125	150	160 / 180
STANDARD FILTER (ISO 16890:2016/EN779:2012)	Outside Air	Coarse 55% / G3	Coarse 55% / G3	Coarse 55% / G3
	Return Air	Coarse 55% / G3	Coarse 55% / G3	Coarse 55% / G3
OPTIONAL FILTER(S)	Supply Air	NOx 90%	NOx 90%	NOx 90%
	Outside Air	ePM2.5 50%	ePM2.5 50%	ePM2.5 50%

SAP 2012 PCDB DATA	SFP W/(l/s)	HEAT EXCHANGE EFFICIENCY (%)	SFP W/(l/s)	HEAT EXCHANGE EFFICIENCY (%)	SFP W/(l/s)	HEAT EXCHANGE EFFICIENCY (%)
K + 1 (21 l/s)	0.62	90	0.86	90	0.80	91
K + 2 (29 l/s)	0.67	89	0.80	90	0.72	90
K + 3 (37 l/s)	0.79	88	0.84	89	0.74	90
K + 4 (45 l/s)	1.00	87	0.96	89	0.82	89
K + 5 (53 l/s)	1.19	87	1.08	88	0.91	88
K + 6 (61 l/s)	-	-	1.28	87	1.09	88
K + 7 (69 l/s)	-	-	-	-	1.24	88

Accessories

Remote Controllers

P-RCC-E

Remote controller cover and 1m cable with noise filter for VL-CZPVU-E

Filters

P-250F-E

Replacement Coarse 55% / G3 filter for VL-250CZPVU-E

P-350F-E

Replacement Coarse 55% / G3 filter for VL-350CZPVU-E

P-500F-E

Replacement Coarse 55% / G3 filter for VL-500CZPVU-E

P-250PF-E

ePM_{2.5} 50% / M6 filter for VL-250CZPVU-E

P-350PF-E

ePM_{2.5} 50% / M6 filter for VL-350CZPVU-E

P-500PF-E

ePM_{2.5} 50% / M6 filter for VL-500CZPVU-E

P-250NF-E

NOx 90% supply air filter for VL-250CZPVU-E

P-350NF-E

NOx 90% supply air filter for VL-350CZPVU-E

P-500NF-E

NOx 90% supply air filter for VL-500CZPVU-E

Noise Attenuators

P-250SB-E

Acoustic top box for VL-250CZPVU-E

P-350SB-E


Acoustic top box for VL-350CZPVU-E

P-500SB-E

Acoustic top box for VL-500CZPVU-E


Product Dimensions

VL-250CZPVU-R/L-E

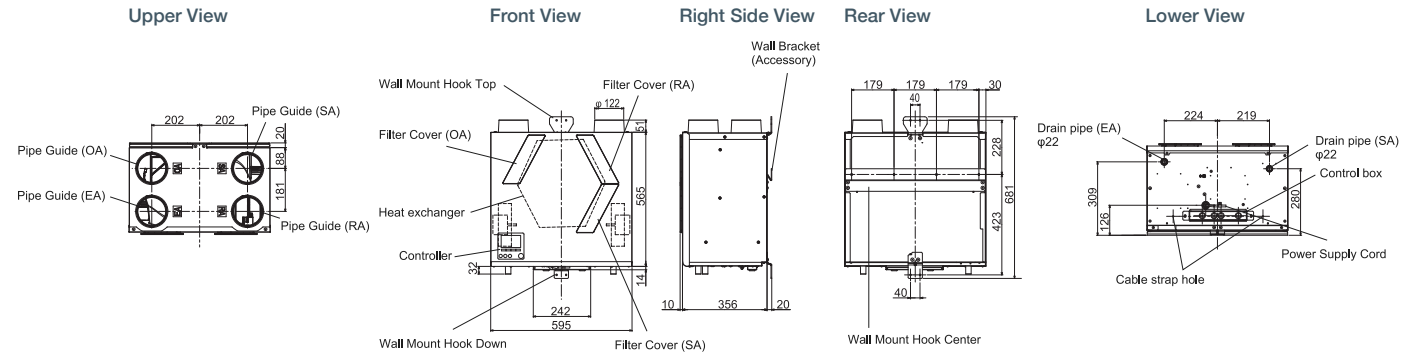


Product Dimensions

VL-350CZPVU-R/L-E

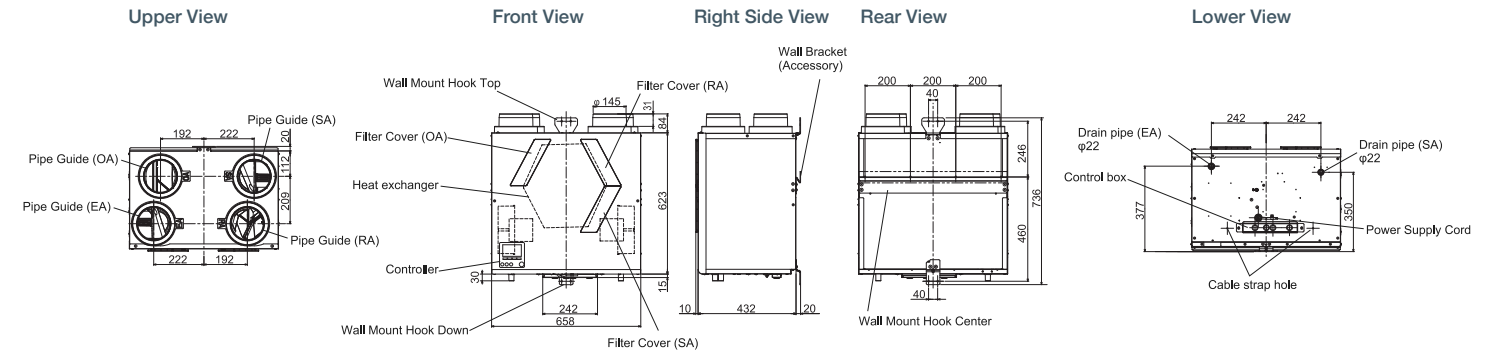

Product Dimensions

VL-500CZPVU-R/L-E

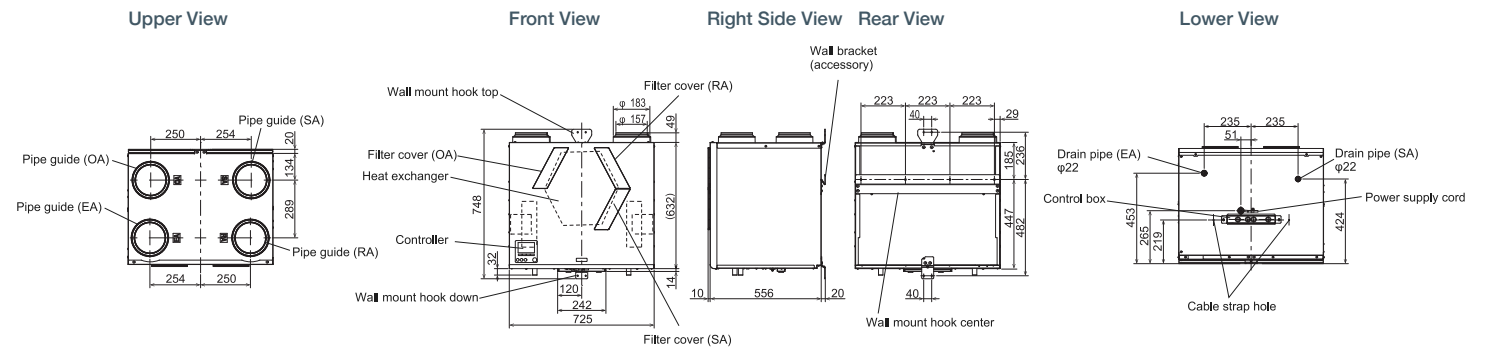

Notes: The above dimensional drawings are for a left sided unit. For the right sided unit dimensional drawings, please see the databook.

GUF-RD4


Lossnay Outdoor Air Processing Unit

The **GUF-RD4** fresh air processing units combine a Lossnay Mechanical Ventilation with Heat Recovery (MVHR) unit with a DX coil connectable to a VRF system, to heat and cool the supply air delivered to the space. The combination of these technologies provides effective tempering of fresh air entering commercial spaces, taking the load off other cooling/heating services, and eliminating any chance of draughts.

Key Features & Benefits

- Smart combination of a Lossnay & City Multi indoor unit, integrated into one model
- Single unit saves on space and installation costs
- Uses heat recovery technology for maximum energy efficiency
- Heating / cooling with no recirculation of extracted air in the space
- Benefits from free cooling when ambient conditions allow

R410A

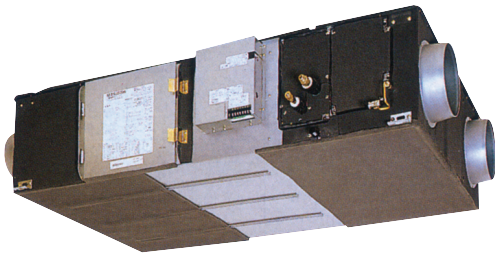


MODEL		GUF-50RD4	GUF-100RD4
CAPACITY (kW)	Heating (nominal)	6.21 (2.04)	12.56 (4.26)
	Cooling (nominal)	5.57 (1.94)	11.44 (4.12)
	UK Heating (High Performance)	6.42 (2.25)	13.00 (4.70)
	UK Heating (COP Priority)	5.93 (2.08)	12.01 (4.34)
	UK Total Cooling	5.03 (1.58)	10.27 (3.32)
POWER INPUT (kW)	Lo-Hi	0.150 / 0.265	0.370 / 0.505
AIRFLOW (m³/h)	Lo-Hi	400-500	800-1000
EXTERNAL STATIC PRESSURE (Pa)	Lo-Hi	90 - 140	90 - 140
TEMPERATURE EXCHANGE EFFICIENCY (%)	Lo-Hi	80 - 77.5	81.5 - 79.5
SOUND PRESSURE LEVEL (dBA)	Lo-Hi	29.5 - 34.5	34 - 39
WEIGHT (kg)		54	92
DIMENSIONS (mm)	Width	1016	1231
	Depth	1288	1580
	Height	317	398
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single
RUNNING CURRENT (A)	Lo-Hi	0.70-1.15	1.73-2.20
FUSE RATING (BS88) - HRC (A)		6	6
MAINS CABLE No. Cores		3	3

Notes: The figures in () indicate the heat recovery at Lossnay core. Total value is capacity of Lossnay core and refrigerant coil. The current and input are based on the above air volume. The sound pressure at the air outlets (45° angle 1.5m ahead) is about 6dBA greater than the indicated value (high speed). Specifications may be subject to change without notice.


Side View

Upper View

Side View

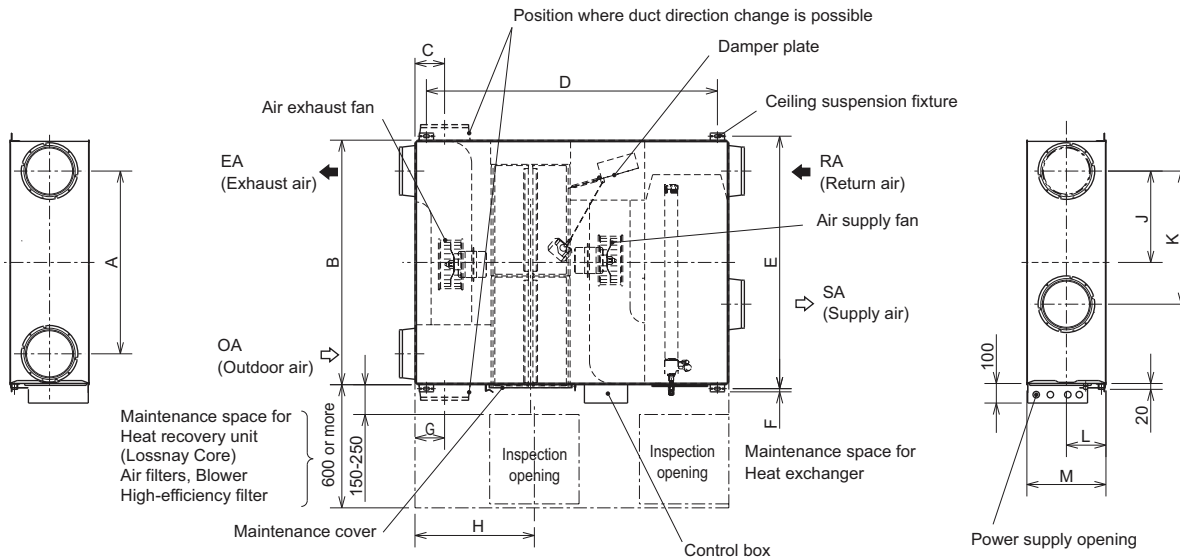

Front View

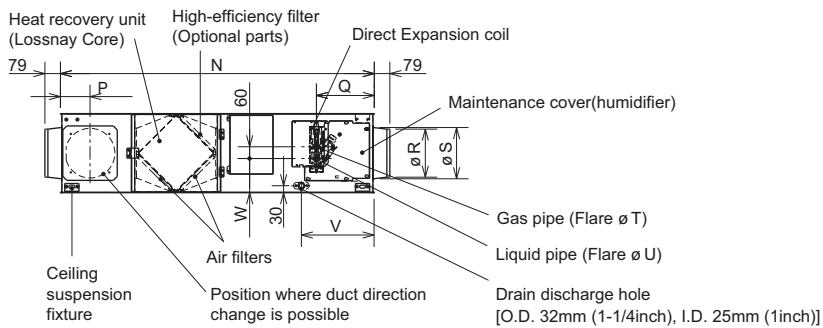

Model	A	B	C	D	E	F	G	H	J	K	L
GUF-50RD4	745	1,016	124	1,185	1,048	22	124	450	372.5	435	158.5
GUF-100RD4	920	1,231	149	1,465	1,271	16	149	600	460	670	199
Model	M	N	P	Q	R	S	T	U	V	W	Y
GUF-50RD4	317	1,288	124	266	192	208	12.7	6.35	347	99	135
GUF-100RD4	398	1,580	149	280	242	258	15.88	9.52	361	110	169

s-AIRME-G07 HR-P C

Air Handling Unit

The Mitsubishi Electric AIRME Compact Air Handling Units (AHU's) incorporate a frameless structure to achieve a line-up of units that are as compact as possible, maximising air tightness and improving thermal properties.

The **s-AIRME-G07 HR-P** range of AHU's utilises a combination of Mr Slim R32 Power Inverter heat pump technology, energy efficient plate heat exchanger heat recovery technology, and an integrated control system. This integration of technologies results in highly advanced, efficient systems that are easy to install and commission, making them ideal for offices, shopping centres, theatres and other large, open spaces.

Key Features & Benefits

- Mr Slim R32 Power Inverter heat pump technology enables energy efficient tempering of fresh air
- Plate heat exchanger for effective heat recovery
- Self-supporting, one-piece construction for maximum air tightness and minimal thermal bridging
- Constant volume EC plug fans for greater efficiency and cost savings
- Easy air flow commissioning with selectable target air volume control
- Fully integrated controls and single point power supply, regardless of accessories, for ease of installation
- Wide range of optional accessories, making these units a perfect solution for a variety of applications




MODEL	s-AIRME-G07 HR-P C 3000	s-AIRME-G07 HR-P C 5000	s-AIRME-G07 HR-P C 7500	s-AIRME-G07 HR-P C 10000	s-AIRME-G07 HR-P C 12500	s-AIRME-G07 HR-P C 15000
RATED AIR VOLUME (m ³ /s)	0.83	1.38	2.08	2.77	3.47	4.16
AIR VOLUME RANGE (m ³ /s)	0.56 - 0.83	0.91 - 1.38	1.19 - 2.08	1.73 - 2.77	2.19 - 3.47	2.35 - 4.16
EXTERNAL STATIC PRESSURE (Pa)	Standard fans 500	Standard fans 300	Standard fans 500	Standard fans 300 / 500 ¹	Standard fans 300	Standard fans 500
	Up-rated fans -	Up-rated fans 500	Up-rated fans -	Up-rated fans 500	Up-rated fans 500	Up-rated fans -
COOLING CAPACITY (kW)	DX Coil Capacity 19.5	DX Coil Capacity 31.5	DX Coil Capacity 43.5	DX Coil Capacity 63.4	DX Coil Capacity 77.9	DX Coil Capacity 87.5
	Heat Recovery Capacity 8.89	Heat Recovery Capacity 14.8	Heat Recovery Capacity 22.7	Heat Recovery Capacity 30	Heat Recovery Capacity 37.3	Heat Recovery Capacity 44.5
	Total Capacity 28.39	Total Capacity 46.3	Total Capacity 66.2	Total Capacity 93.4	Total Capacity 115.2	Total Capacity 132
HEATING CAPACITY (kW)	DX Coil Capacity 16.7	DX Coil Capacity 27.2	DX Coil Capacity 36.6	DX Coil Capacity 53.5	DX Coil Capacity 66.8	DX Coil Capacity 73.2
	Heat Recovery Capacity 20.6	Heat Recovery Capacity 34.3	Heat Recovery Capacity 53.1	Heat Recovery Capacity 70.1	Heat Recovery Capacity 87.2	Heat Recovery Capacity 110
	Total Capacity 37.3	Total Capacity 61.5	Total Capacity 89.7	Total Capacity 123.6	Total Capacity 154	Total Capacity 183.2
HEAT RECOVERY EFFICIENCY (%)	Cooling 73.8	Cooling 73.5	Cooling 75.3	Cooling 74.6	Cooling 74.3	Cooling 73.9
	Heating 72.7	Heating 72.7	Heating 74.6	Heating 74	Heating 73.6	Heating 73.9
SPECIFIC FAN POWER (SFP _{int}) (W/(l/s))	0.775	0.936	0.812	0.736	0.81	0.691
SOUND POWER LEVEL (dB(A))	Fresh/Outdoor 82	Fresh/Outdoor 89	Fresh/Outdoor 85	Fresh/Outdoor 85	Fresh/Outdoor 86	Fresh/Outdoor 88
	Supply 82	Supply 89	Supply 85	Supply 85	Supply 86	Supply 88
	Return 80	Return 88	Return 84	Return 85	Return 86	Return 87
	Exhaust 80	Exhaust 88	Exhaust 84	Exhaust 85	Exhaust 86	Exhaust 87
	Breakout 64	Breakout 74	Breakout 67	Breakout 67	Breakout 71	Breakout 70
UNIT DIMENSIONS (WxDxH) (mm)	2950 x 1385 x 1675	2950 x 1785 x 1675	3200 x 1885 x 2200	3650 x 2185 x 2280	3775 x 2385 x 2480	3946 x 2585 x 2480
BASE WEIGHT (kg)	750	950	1250	1600	1750	2100
STANDARD FILTRATION	Fresh air 1st stage Fresh air 2nd stage Return air	ISO Coarse 50% / G4 ISO ePM1 50% / F7 Bag Filter ISO Coarse 50% / G4				
CONSTRUCTION	Panels Insulation	60mm sandwich panels with thermal break, galvanised steel sheets with a pre-painted external finish 45 kg/m ³ density polyurethane foam				
EN1886 ACHIEVED CLASSES (Deflection/Leakage/Thermal transmittance/Thermal bridging/Filter bypass leakage)	D1(M) / L1(M) / T2 / TB2 / F9(M)					
ELECTRICAL POWER REQUIREMENTS	400VAC / 3ph+Positive Earth / 50Hz					
REQUIRED OUTDOOR UNITS	Power Inverter (R32)	1 x PUZ-ZM200	1 x PUZ-ZM125 1 x PUZ-ZM200	1 x PUZ-ZM200 1 x PUZ-ZM250	2 x PUZ-ZM200 1 x PUZ-ZM250	4 x PUZ-ZM200 2 x PUZ-ZM250
OUTDOOR UNIT PIPE RUN (m)		30	30	30	30	30



Note: Please refer to Mr Slim section for outdoor unit specification data. The specification data is based on the rated conditions below, at the rated air flows. *1 300Pa for the supply fan, 500Pa for the return fan.

RATED CONDITIONS	SUMMER		WINTER	
INDOOR	23°C DB	50% RH	21°C DB	50% RH
OUTDOOR	35°C DB	50% RH	-5°C DB	85% RH

Front View

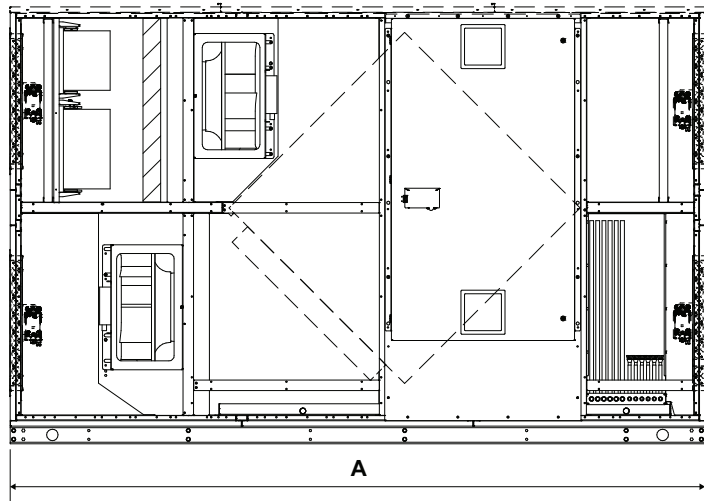


Side View

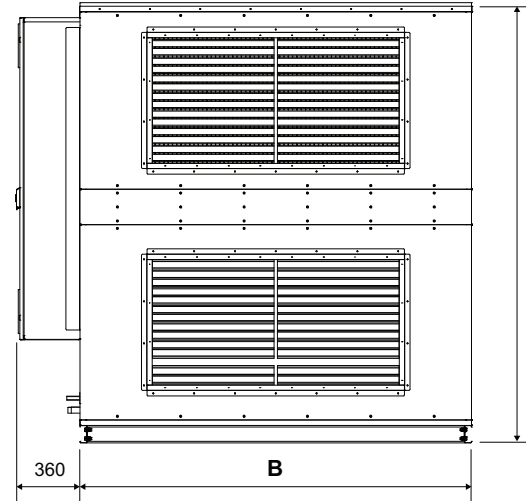

POST HEATING OPTION

Upper View

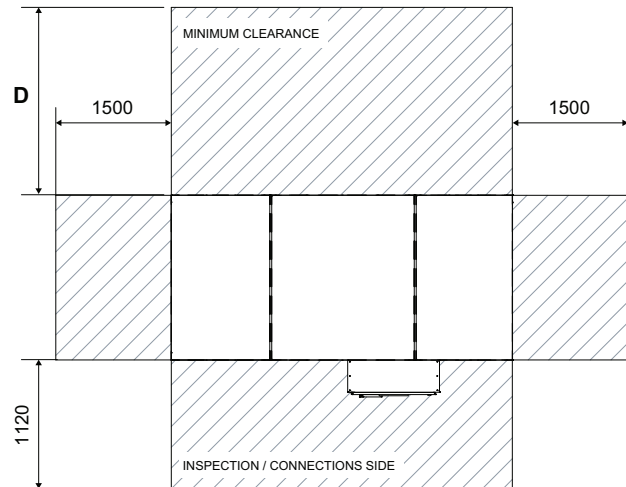

Model	A (mm)	B (mm)	C (mm)	D (mm)
3000	2950	1025	1675	1225
5000	2950	1425	1675	1625
7500	3200	1525	2200	1725
10000	3650	1825	2280	2025
12500	3755	2025	2480	2225
15000	3946	2225	2480	2425

Note: Base unit. Options may change dimensions and/or weight.

Ventilation Accessories / Optional Extras

DESCRIPTION	MODEL REF.
Remote Controllers	
Lossnay Remote Controller for LGH-RVX3-E, LGH-RVXT-E and LGH-RVS-E	PZ-62DR-EB
LGH-RVX3-E	
Standard replacement filter (Coarse 60%) for LGH-15RVX3-E	PZ-15RF3-E
Standard replacement filter (Coarse 60%) for LGH-25RVX3-E	PZ-25RF3-E
Standard replacement filter (Coarse 60%) for LGH-35RVX3-E	PZ-35RF3-E
Standard replacement filter (Coarse 60%) for LGH-50RVX3-E	PZ-50RF3-E
Standard replacement filter (Coarse 60%) for LGH-65RVX3-E	PZ-65RF3-E
Standard replacement filter (Coarse 60%) for LGH-80RVX3-E / LGH-160RVX3-E (2 sets required)	PZ-80RF3-E
Standard replacement filter (Coarse 60%) for LGH-100RVX3-E / LGH-200RVX3-E (2 sets required)	PZ-100RF3-E
ePM ₁ 75% grade filter for LGH-15RVX3-E	PZ-15RFP3-E
ePM ₁ 75% grade filter for LGH-25RVX3-E	PZ-25RFP3-E
ePM ₁ 75% grade filter for LGH-35RVX3-E	PZ-35RFP3-E
ePM ₁ 75% grade filter for LGH-50RVX3-E	PZ-50RFP3-E
ePM ₁ 75% grade filter for LGH-65RVX3-E	PZ-65RFP3-E
ePM ₁ 75% grade filter for LGH-80RVX3-E / LGH-160RVX3-E (2 sets required)	PZ-80RFP3-E
ePM ₁ 75% grade filter for LGH-100RVX3-E / LGH-200RVX3-E (2 sets required)	PZ-100RFP3-E
Wall mounted plug and play CO ₂ sensor with traffic light signals for LGH-RVX3-E	PZ-70CSW-E
Duct mounted plug and play CO ₂ sensor for LGH-RVX3-E	PZ-70CSD-E
Vertical mounting bracket for LGH-15-50RVX3-E	PZ-1VS-E
Vertical mounting bracket for LGH-65-100RVX3-E	PZ-2VS-E
External signal relay for LGH-RVX3-E	PZ-4GS-E
LGH-RVXT-E	
ePM ₁₀ 75% / M6 filter for LGH-RVXT-E	PZ-M6RTFM-E
ePM ₁ 65% / F8 filter for LGH-RVXT-E	PZ-F8RTFM-E
LGH-RVS-E	
Replacement Coarse 35% / G3 filter for LGH-50RVS-E	PZ-S50RF-E
Replacement Coarse 35% / G3 filter for LGH-80RVS-E	PZ-S80RF-E
Replacement Coarse 35% / G3 filter for LGH-100RVS-E	PZ-S100RF-E
ePM ₁₀ 80% / M6 filter for LGH-50RVS-E	PZ-S50RFM-E
ePM ₁₀ 80% / M6 filter for LGH-80RVS-E	PZ-S80RFM-E
ePM ₁₀ 80% / M6 filter for LGH-100RVS-E	PZ-S100RFM-E
ePM ₁ 65% / F8 filter for LGH-50RVS-E	PZ-S50RFH-E
ePM ₁ 65% / F8 filter for LGH-80RVS-E	PZ-S80RFH-E
ePM ₁ 65% / F8 filter for LGH-100RVS-E	PZ-S100RFH-E
Wall mounted plug and play CO ₂ sensor with traffic light signals for LGH-RVS-E	PZ-70CSW-E
Duct mounted plug and play CO ₂ sensor for LGH-RVS-E	PZ-70CSD-E
External signal relay for LGH-RVS-E	PZ-4GS-E
VL-100EU₅-E	
ePM ₁₀ 70% / M6 filter for VL-100EU ₅ -E	P-100HF5-E
Extension pipe for VL-100EU ₅ -E	P-100P-E
Extension pipe joint for VL-100EU ₅ -E	P-100PJ-E
VL-CZPVU-E	
Replacement Coarse 55% / G3 filter for VL-250CZPVU-E	P-250F-E
Replacement Coarse 55% / G3 filter for VL-350CZPVU-E	P-350F-E
Replacement Coarse 55% / G3 filter for VL-500CZPVU-E	P-500F-E
ePM _{2.5} 50% / M6 filter for VL-250CZPVU-E	P-250PF-E
ePM _{2.5} 50% / M6 filter for VL-350CZPVU-E	P-350PF-E
ePM _{2.5} 50% / M6 filter for VL-500CZPVU-E	P-500PF-E
NOx 90% supply air filter for VL-250CZPVU-E	P-250NF-E
NOx 90% supply air filter for VL-350CZPVU-E	P-350NF-E
NOx 90% supply air filter for VL-500CZPVU-E	P-500NF-E
Acoustic top box for VL-250CZPVU-E	P-250SB-E
Acoustic top box for VL-350CZPVU-E	P-350SB-E
Acoustic top box for VL-500CZPVU-E	P-500SB-E
Remote controller cover and 1m cable with noise filter for VL-CZPVU-E	P-RCC-E
Weather Proof Housings	
Lossnay weather proof housings are also available for LGH-RVX3-E	

Ventilation Accessories / Optional Extras

DESCRIPTION	MODEL REF.
s-AIRME-G07 HR-P C	
Fans & Airflow	
High static pressure supply fan (500 Pa)	B503
High static pressure exhaust fan (500 Pa)	B513
Night Purge	B931
Dampers	
Fresh Air	B551
Supply Air	B561
Return Air	B571
Exhaust Air	B581
Pre/Post Heating	
Pre-heating electric coil	B531
Post-heating electrical coil*1	1333
Pre-heating water coil	B532
Post-heating water coil*1	1331
Filters	
Bag Filters F9 ePM1 85%	2521A
Activated charcoal filters	2529
Connectivity and Integration	
Modbus connection for BEMS	4181
Bacnet TCP-IP connection for BEMS	4185
Fan operation output signal	3591
Remote keyboard - wiring up to 200m	C9261063
Remote keyboard - wiring up to 500m	C9261064
Structural	
Weather canopy for outdoor installation	B541
Weather protection grille on fresh air intake	B621
Left handed configuration	2963

Note: *1 Post heating elements increase unit length size.

Controls

Control Solutions





culture hub
newsroom
the observer
sport

lifts
toilets



Contents

The Importance of Controls	5.4
Which Controls Product for Which Application?	5.7
Which Controls Product for Which Function?	5.8
Centralised Controllers	5.10
Remote Controllers	5.16
Solution Interfaces	5.22
Simple Interfaces	5.26
Advanced Interfaces	5.30
BEMS Interfaces	5.36
Screen Examples	5.41
How to Quote	5.43

The Importance of Controls

Time to take control

Operating an air conditioning, ventilation or heating system without effective controls can be costly in more ways than one. Not only are you likely to face higher monthly energy bills, it will also lead to an increase in carbon emissions - something that will become ever more important as businesses strive to keep up with tougher environmental legislation.

The right controls take building performance to the next level. With them, building systems become more responsive, easier to automate, monitor and maintain, and less costly to operate in the long-term.

The right controls can deliver a cost-effective solution that helps manage, monitor and report on the performance of all building services systems.

In order to achieve the UK's national objective of net-zero carbon emissions by 2050, commercial buildings will have to become much more energy efficient, and building controls will have a significant part in ensuring that happens.

Control technology is now widely available for buildings of all sizes, so it is possible to access the benefits whatever the scale or scope of your project.



Mitsubishi Electric technology


Mitsubishi Electric has been dedicated to producing energy efficient technology for over ninety years. Controls are an essential part of that. Mitsubishi Electric has long heritage in factory automation where the company leads the field in providing controls that enhance productivity, efficiency and energy use.

We have taken this extensive knowledge and experience and transferred it to the heart of our building services equipment.

We were also one of the first manufactures to provide an open gateway to our products to make integration easier for our customers. This enables direct connection of equipment into many common building energy management system (BEMS) platforms.

Mitsubishi Electric now offer the MELCloud platform to help you control, monitor and service your HVAC equipment. This includes performance and energy monitoring, as well as remote management of one or multiple systems, in order to save energy, cost and downtime.

From a simple hand-held controller to a centralised BEMS, Mitsubishi Electric puts its customers in control.

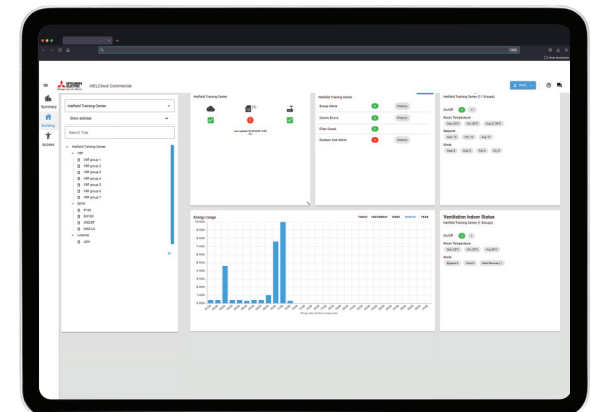

The European Standard EN 15232

“Energy Performance of Buildings - Impact of Building Automation, Controls and Building Management” was compiled in conjunction with the Europe-wide implementation of the directive for energy efficiency in buildings (Energy Performance of Buildings Directive EPBD) 2002/91/EG.

The Standard is incorporated into UK law and describes methods for evaluating the influence of building automation and technical building management on the energy consumption of buildings.

Four efficiency classes A to D have been introduced to this purpose. After a building has been equipped with building automation and control systems, it will be assigned one of these classes. The potential savings for thermal and electrical energy can be calculated for each class based on the building type and building purpose. The values of the energy class C are used as the reference for comparing the efficiency.

The diagram on the right, shows the differences in energy consumption for three building types in the energy efficiency classes A, B and D relative to the basis values in rating C. For example, by using class A, 30 % of the thermal energy can be saved in offices.

BS EN 15232: Function list and assignment to energy performance classes

	Heating / Cooling Control	Ventilation / Air Conditioning Control	Lighting	Sun Protection
A	<ul style="list-style-type: none"> Individual room control with communication between controllers Indoor temperature control of distribution network water temperature Total interlock between heating and cooling control 	<ul style="list-style-type: none"> Demand or presence dependent air flow control at room level Variable set point with load dependant compensation of supply temperature control Room or exhaust or supply air humidity control 	<ul style="list-style-type: none"> Automatic daylight control Automatic occupancy detection manual on / auto off Automatic occupancy detection manual on / dimmed Automatic occupancy detection auto on / auto off Automatic occupancy detection auto on / dimmed 	<ul style="list-style-type: none"> Combined light / blind / HVAC control
B	<ul style="list-style-type: none"> Individual room control with communication between controllers Indoor temperature control of distribution network water temperature Partial interlock between heating and cooling control (dependent on HVAC system) 	<ul style="list-style-type: none"> Time dependent air flow control at room level Variable set point with outdoor temperature compensation of supply temperature control Room or exhaust or supply air humidity control 	<ul style="list-style-type: none"> Manual daylight control Automatic occupancy detection manual on / auto off Automatic occupancy detection manual on / dimmed Automatic occupancy detection auto on / auto off Automatic occupancy detection auto on / dimmed 	<ul style="list-style-type: none"> Motorised operation with automatic blind control
C	<ul style="list-style-type: none"> Individual room control with communication between controllers Indoor temperature control of distribution network water temperature Partial interlock between heating and cooling control (dependent on HVAC system) 	<ul style="list-style-type: none"> Time dependent air flow control at room level Constant set point of supply temperature control Supply air humidity limitation 	<ul style="list-style-type: none"> Manual daylight control Manual on / off switch + additional sweeping extinction signal Manual on / off switch 	<ul style="list-style-type: none"> Motorised operation with manual blind control
D	<ul style="list-style-type: none"> No automatic control No control of distribution network water temperature No interlock between heating and cooling control 	<ul style="list-style-type: none"> No air flow control at room level No supply temperature control No air humidity control 	<ul style="list-style-type: none"> Manual daylight control Manual on/off switch + additional sweeping extinction signal Manual on/off switch 	<ul style="list-style-type: none"> Manual operation for blinds

Section from table 1 of the BSEN 15232:2007 [D]

Building Automation and Control (BAC) efficiency classes to EN 15232

	Efficiency factor for thermal energy			Efficiency factor for electrical energy		
	Office	School	Hotel	Office	School	Hotel
A High energy performance building automation and control system (BACS) and technical building management (TBM)	0.70	0.80	0.68	0.87	0.86	0.90
B Advanced BACS and TBM	0.80	0.88	0.85	0.93	0.93	0.95
C Standard BACS	1	1	1	1	1	1
D Non energy efficient BACS	1.51	1.20	1.31	1.10	1.07	1.07

The Importance of Controls


The Internet of Things

The Internet of Things (or IoT) describes the revolution already under way, with a growing number of internet-enabled devices that can network and communicate with each other and with other web-enabled devices.

Mitsubishi Electric is at the forefront of this revolution and all our products are now connectable to the internet using the following solutions^{*1}.



Features	MELCloud	MELCloud Commercial
----------	----------	---------------------

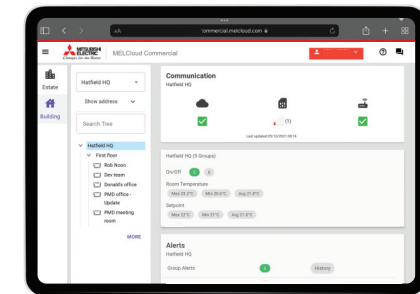

Connect to	Wi-Fi	Ethernet or Cellular
Compatibility	Air Conditioning, Ventilation and Heating	Air Conditioning and Ventilation
Third party control	X	✓ (with option PAC-YG60/63MCA/66DCA)
SIM card provided	X	✓ (eSIM)
Smartphone application	✓	✓
Tablet application	✓	✓
Web portal	✓	✓

*1 VL-100 is not connectable to the Internet

Which Controls Product for Which Application?

Good controls will benefit any application. With a wide portfolio of control products, it is important to select the right control solution for each application.



APPLICATION	SIZE	TYPICAL PRODUCT INSTALLED	CONTROL SOLUTIONS	CASE STUDY
OFFICE	SMALL	City Multi VRF Systems Mr Slim Split-Systems Mr Slim IT Room Applications	PAR-41MAA AE-C400E or AT-50B PAC-YG66DCA or PAC-YG60MCA MELCloud Commercial MELCOBEMS SIP+	Wholesaler PACAIR uses a Mitsubishi Electric Centralised Controller to provide complete control of the office air conditioning. The 10.4" touch screen controller and easy to use interface gives PACAIR the ability to set up a weekly time schedule, as well as offering a host of energy saving features.
	LARGE	City Multi VRF Systems City Multi Air Curtains City Multi PWFY Heat Pumps	PAR-41MAA AE-C400E or AT-50B MELCloud Commercial MELCOBEMS SIP+	Mitsubishi Electric's Hatfield headquarters has been updated to new AE-C400E / EW-C50E controls to monitor and control all of the air conditioning equipment across 3 floors and 2 wings. This enables the system to operate as efficiently as possible, incorporating easy to use controls and allows for fully programmable scheduling that accommodates flexible working patterns.
HOTEL	SMALL	City Multi VRF Systems	PAR-CT01MAA-S/PB AE-C400E MELCloud Commercial MELCOBEMS SIP+	The luxury 4-star Kingsmills Hotel provides a chic and contemporary venue for discerning Highlands travellers and focuses on relaxation, revitalisation and calm. The centralised controller delivers the efficiency and flexibility that both the hotel and its guests need, with air conditioning integrated with the room key card system combined with simple to use room controllers.
	LARGE	City Multi VRF Systems	PAR-CT01MAA-S/PB AE-C400E MELCOTEL2™ MELCloud Commercial MELCOBEMS SIP+	The Premier Inn Hotel, Leicester uses the MELCOTEL2™ control interface to efficiently and effectively control air conditioning that provides heating and cooling to 135 bedrooms, the bar, restaurant and back offices. A variety of control strategies were implemented and monitored and analysed, resulting in a 30% decrease in average monthly system running costs and CO ₂ emissions.
RETAIL	SMALL	Mr Slim Split-System Mr Slim Air Curtains	MELCORETAIL MINI MELCloud Commercial MELCOBEMS SIP+	Costa Coffee was one of the first to make use of the MELCORETAIL MINI to capitalise on its energy saving feature whilst ensuring that customers and staff were comfortable in the overall coffee shop environment. Across a year of monitoring the MELCORETAIL MINI helped achieve a 20% reduction in energy use, giving it a payback period of less than 2 months.
	LARGE	City Multi VRF Systems City Multi Air Curtains	MELCloud Commercial MELCOBEMS SIP+	A pilot site for a major high street retail chain has demonstrated how connecting MELCloud Commercial to air conditioning can highlight ways of reducing energy or identify unnecessary use. Significant savings throughout the store were made by employing MELCloud Commercial, providing a consistent return on investment on a monthly basis.
LEISURE	SMALL	Mr Slim Split-System Mr Slim Air Curtains	MELCOBEMS MINI (A1M+) MELCloud Commercial MELCOBEMS SIP+	The Castle golf course at St Andrews need a heating and cooling system that was as controllable and efficient as possible. The M2M interface controls and monitors the air conditioning to make sure it maximises energy saving, whilst allowing for continuous fine-tuning according to the golf clubs needs.
	LARGE	Mr Slim Split-System Mr Slim Air Curtains City Multi VRF Systems City Multi Air Curtains	MELCOBEMS MELCloud Commercial MELCOBEMS SIP+	Fitness First uses monitoring BEMS to communicate with the air conditioning using Modbus, across its UK network. Dedicated Modbus Interfaces offer complete monitoring and control of the system and highlights the flexibility and potential for reducing running costs that our control systems have when working in conjunction with third party BEMS.
RESIDENTIAL	SMALL	Ecodan	MELCloud	A WW2 veteran has shown the way to a sustainable future with the installation of a hybrid Ecodan air source heat pump to work alongside his existing gas boiler. The hybrid system is designed specifically to work in conjunction with conventional boilers and the MELCloud Wi-Fi system also allows the heat pump to be monitored and controlled remotely
	LARGE	Ecodan	MELCloud AE-C400E	The renewable heating system for St Mungo's in Lewisham needs to cope with different heating loads and deal effectively with regular changes in tenancy and occupied hours. It also had to offer tenants the ability to alter the temperature of their individual flats, whilst allowing the charity full central control of the system.

Which Controls Product for Which Function?

With a wide portfolio of control products, many functions are available. It is important to select the right control solution for each function.

FUNCTION	SYSTEM SIZE					NOTES
	SMALL OPTION 1	OPTION 2	OPTION 3	OPTION 4	LARGE OPTION 5	
Remote On/Off or fire alarm	PAC-SA89TA	KTR-53A	MELCORETAIL MINI	AT-50B and PAC-YT51HAA	AE-C400E and PAC-YG10HA	On/Off remote controller button lock except KTR-53A
Monitor run and faults	PAC-SA88HA	MELCORETAIL MINI	AT-50B and PAC-YT51HAA	AE-C400E / EW-C50E and PAC-YG10HA	-	Relays or power supply may be required
Window interlocking	PAC-SA89TA	KTR-53A	-	-	-	Controller will be centrally controlled when window opened
Setpoint limit	PAR-41MAA	PAR-U02MEDA	AT-50B	AE-C400E / EW-C50E	AE-C400E	Available in Heat, Cool and Auto modes
Weekly timer	PAR-41MAA PAR-U02MEDA	AT-50B	AE-C400E / EW-C50E	AE-C400E	-	Setpoint, On/Off can be reset
Night set back	KTR-53A	PAR-41MAA PAR-U02MEDA	AE-C400E / EW-C50E / AT-50B	AE-C400E	-	KTR-53A requires thermostat, time switch, 12/24v AC/DC power supply
Energy monitoring	AE-C400E / EW-C50E Total Energy Measurement	AE-C400E / EW-C50E PAC-YG60MCA Total Energy Management	AE-C400E and EW-C50E Energy Apportioning	AE-C400E / EW-C50E PAC-YG60MCA Energy Apportioning	-	Different options for each choice. Meters required
Load shedding	EW-C50E and PAC-YG60MCA	AE-C400E and PAC-YG60MCA	-	-	-	Energy meters required
Trend logging	EW-C50E and PAC-YG60MCA	AE-C400E	-	-	-	CSV data available on a spreadsheet

Notes: The PAC-SA89TA is also known as a 3 wire adaptor and the PAC-SA88HA is also known as a 5 wire adaptor. Disclaimer: These options are for guidance only.

Which Controls Product for Which Function?

With a wide portfolio of control products, many functions are available. It is important to select the right control solution for each function.

FUNCTION	SYSTEM SIZE			NOTES
	SMALL OPTION 1	OPTION 2	LARGE OPTION 3	
Night mode	PAC-SA89TA	EW-C50E	AE-C400E	PAC-SA89TA requires a third party timer
Ambient tracking	AE-C400E and PAC-YG63MCA	MELCOBEMS MINI (A1M+)	AE-C400E	Option 1 is only available in cooling mode
Key card interlock for hotel	AE-C400E and PAC-SA89TA	AE-C400E / EW-C50E, MELCOTEL2™ and PAC-SA89TA	-	Volt free contact for key card normally open
Window sensor interlock for hotel	AE-C400E and PAC-SA89TA	AE-C400E / EW-C50E, MELCOTEL2™ and PAC-SA89TA	-	Volt free contact for window sensor normally closed
2 setpoints (1 for cool and 1 for heat)	-	MELCOMMS MINI	AE-C400E	For instance, 19°C heat and 23°C cool. Fan only in between
Duty / Standby	PAR-41MAA	MELCOMMS MINI MELCOBEMS MINI (A1M+)	-	Backup, rotate, join in and high temperature function
A/C faults via Modbus and BACnet	MELCOBEMS MINI (A1M+)	-	-	SIM card not supplied
Optimised start	AE-C400E	-	-	-
Mini BEMS	MELCOBEMS MINI (A1M+)	AE-C400E	-	-
Occupancy sensor	PAR-U02MEDA	-	-	-

Notes: The PAC-SA89TA is also known as a 3 wire adaptor and the PAC-SA88HA is also known as a 5 wire adaptor. Disclaimer: These options are for guidance only.

Centralised Controllers

A wide range of centralised controllers are available to monitor and control our equipment efficiently. Some of our centralised controllers can also be used to monitor and control third party equipment.

Key Features & Benefits

AT-50B



- 5" basic touch screen
- Centralised controller
- Monitor and control up to 50 indoor units
- Monitor and control general equipment

AE-C400E



- 12.1" capacitive touch screen, including high sensitivity, multi-touch support, better durability and improved clarity
- Centralised controller
- Monitor and control up to 50 indoor units (or up to 400 with EW-C50E*)
- Designed for cloud connectivity - MELCloud ready
- USB C port
- Browser based
- 4G Ready - SIM or Antenna
- 3rd party energy meter inputs
- BMS connection ready - fixed IP address
- WEB-USER Pin code pre-installed

*400 expansion from autumn 2024, up till then expansion is 200 indoor units.

EW-C50E



- Extends capability of AE-C400E
- Web based controller
- Monitor and control up to 50 indoor units
- Monitor and control general equipment
- Energy monitoring, load shedding
- Onboard web browser
- Optional direct BACnet connection
- USB C port

PAC-SC51KUA



- M-NET power supply





PAC-SF46EPA



- M-NET transmission booster

Centralised Controllers

Technical Specification

CENTRALISED CONTROLLERS	AT-50B	AE-C400E	KS10-RFFI	PAC-YK92TB-J
				
Description	5" Touch Screen Controller	12.1 Capacitive Touch Screen Controller	AE-C400E Interface	AE-C400E Plastic Wall Mounted Box
Connect to	M-NET Network	M-NET Network	AE-C400E and EW-C50E	-
Max Number of Units	50	50 and 4 Pulse Meters	-	-
Compatibility	M Series, Mr Slim, City Multi and Lossnay	M Series, Mr Slim, City Multi, Lossnay, e-Series, MEHITS Chillers ¹ and Ecodan QAHV/CAHV/CRHV ²	-	AE-C400E
Power Supply	Via PAC-SC51KUA	220-240v, 50Hz	220-240v, 50Hz	-
Dimensions (mm) (WxDxH)	180 x 30 x 120	306 x 71.8 x 211	130 x 30 x 80	304 x 94 x 209
Control				
On/Off	✓	✓	-	-
Mode	✓	✓	-	-
Setpoint	✓	✓	-	-
Fan Speed	✓	✓	-	-
Air Direction	✓	✓	-	-
Permit/Prohibit	✓	✓	-	-
Filter Sign	✓	✓	-	-
Monitor				
On/Off	✓	✓	✓	-
Mode	✓	✓	-	-
Setpoint	✓	✓	-	-
Fan Speed	✓	✓	-	-
Air Direction	✓	✓	-	-
Permit/Prohibit	✓	✓	-	-
Filter Sign	✓	✓	-	-
Fault Codes	✓	✓	✓	-
Room Temperature	✓	✓	-	-
Weekly Schedule	✓	✓	-	-
Annual Schedule	x	✓	-	-
Night Set Back	✓	✓	-	-
Web Pages	x	✓	-	-
Optimised Start	x	✓	-	-
Automatic Setpoint Adjustment	x	✓	-	-
Load Shedding	x	✓	-	-
Occupied / Unoccupied Settings Reset	x	x	-	-
Remote Monitoring with M2M	x	✓	-	-
Simple Energy Monitoring	x	✓	-	-
Advanced Energy Monitoring	x	✓	-	-

Notes: *1 MEHITS adaptor required. *2 End of 2025.




PIN CODES:

AE-C400E-ENERGY

AE-C400E-BACNET

Centralised Controllers

Technical Specification

CENTRALISED CONTROLLERS	EW-C50E	PAC-SC51KUA	PAC-SF46EPA
			
Description	Web Interface and AE-C400E expansion controller	M-NET Power Supply	M-NET Transmission Booster
Connect to	M-NET Network	M-NET Network	M-NET Network
Max Number of Units	50 and 4 Pulse Meters	50	-
Compatibility	M Series, Mr Slim, City Multi, Lossnay, e-Series, MEHITS Chillers ^{*1} and Ecodan QAHV/CAHV/CRHV ^{*2}	AT-50B, EW-C50E and AE-C400E	M Series, Mr Slim and City Multi
Power Supply	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
Dimensions (mm) (WxDxH)	185 x 60.3 x 278	271 x 72 x 169	360 x 59 x 340
Control	On/Off ✓ Mode ✓ Setpoint ✓ Fan Speed ✓ Air Direction ✓ Permit/Prohibit ✓ Filter Sign ✓	-	-
Monitor	On/Off ✓ Mode ✓ Setpoint ✓ Fan Speed ✓ Air Direction ✓ Permit/Prohibit ✓ Filter Sign ✓ Fault Codes ✓ Room Temperature ✓	-	-
Weekly Schedule	✓	-	-
Annual Schedule	✓	-	-
Night Set Back	✓	-	-
Web Pages	✓	-	-
Optimised Start	✓	-	-
Automatic Setpoint Adjustment	✓	-	-
Load Shedding	✓	-	-
Occupied / Unoccupied Settings Reset	x	-	-
Remote Monitoring with M2M	✓	-	-
Simple Energy Monitoring	✓	-	-
Advanced Energy Monitoring	✓	-	-


Notes: *1 MEHITS adaptor required. *2 End of 2025.

PIN CODES:


AE-C400E-ENERGY

AE-C400E-BACNET


System Diagram AT-50B

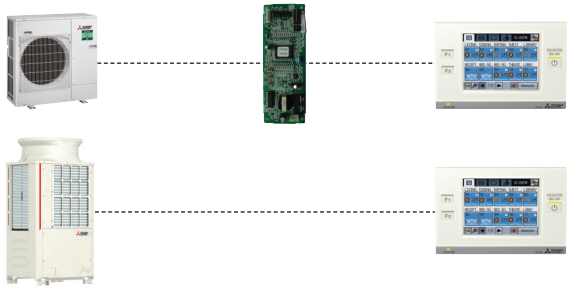


System Diagram AE-C400E

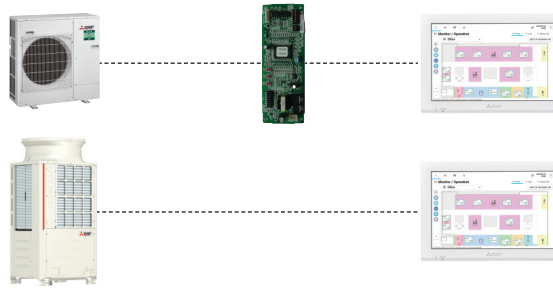


System Diagram EW-C50E

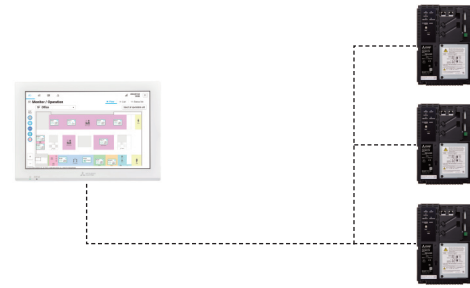

System Diagram EW-C50E

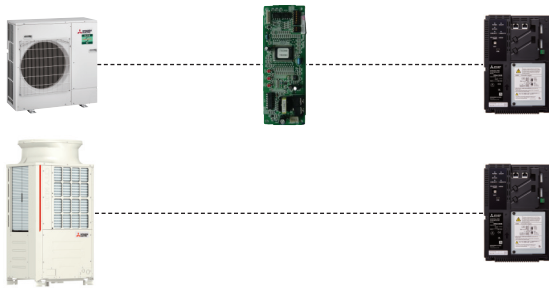


System Diagram PAC-SC51KUA




System Diagram PAC-SF46EPA



Product Dimensions AT-50B

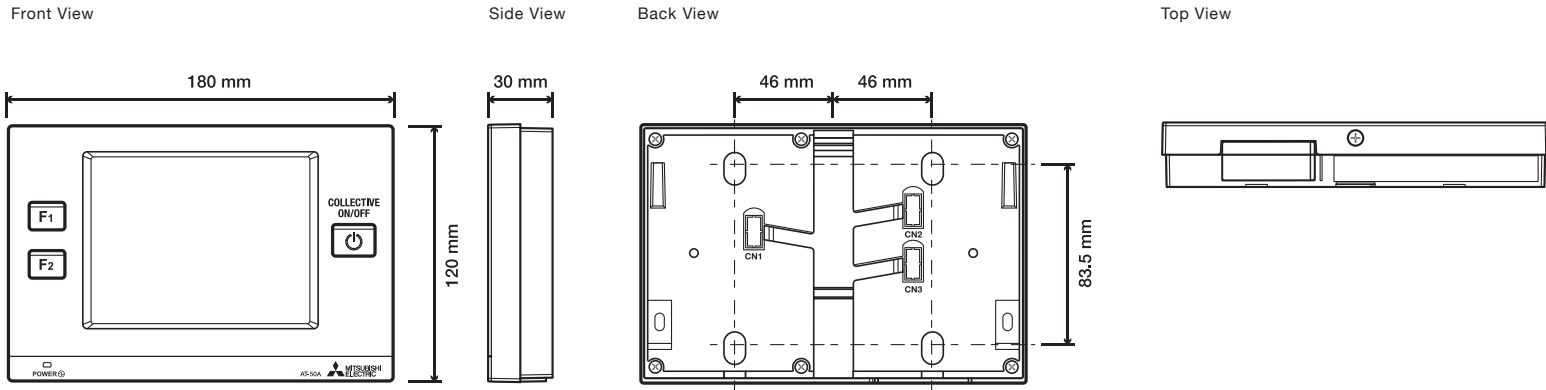


Product Dimensions AE-C400E

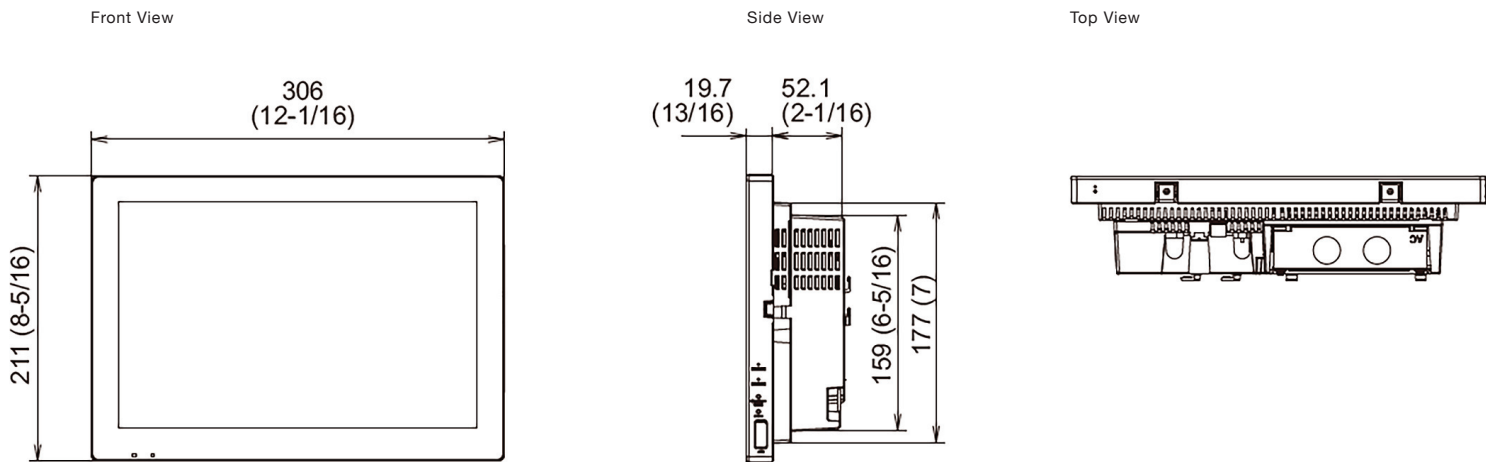


Product Dimensions

PAC-YK92TB-J

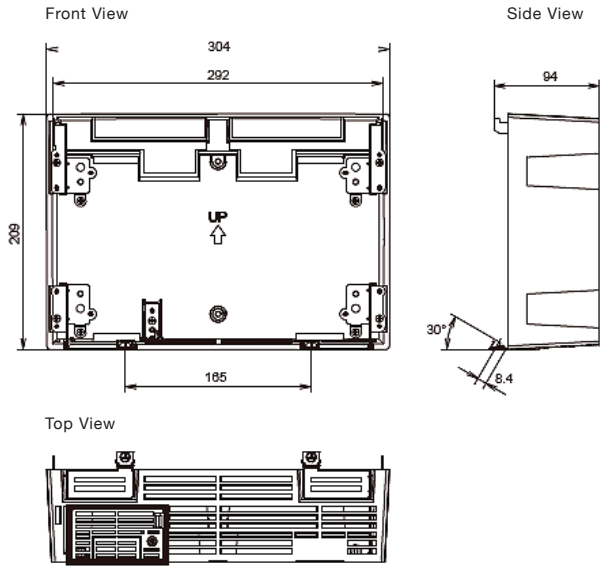


Product Dimensions

EW-C50E

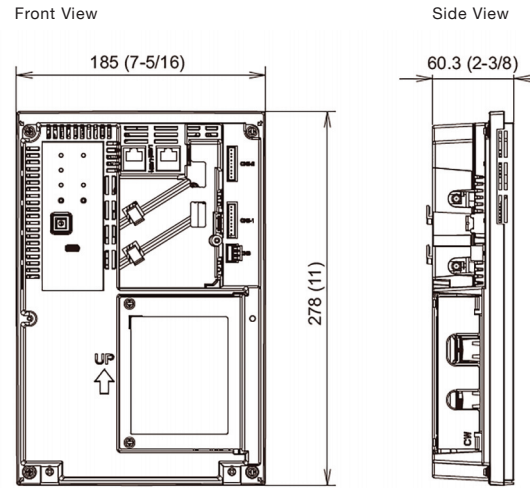


Product Dimensions

PAC-SC51KUA

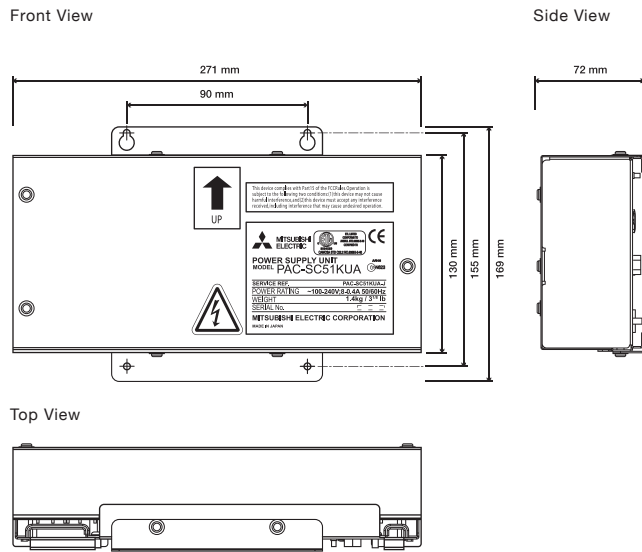

Product Dimensions

PAC-SF46EPA

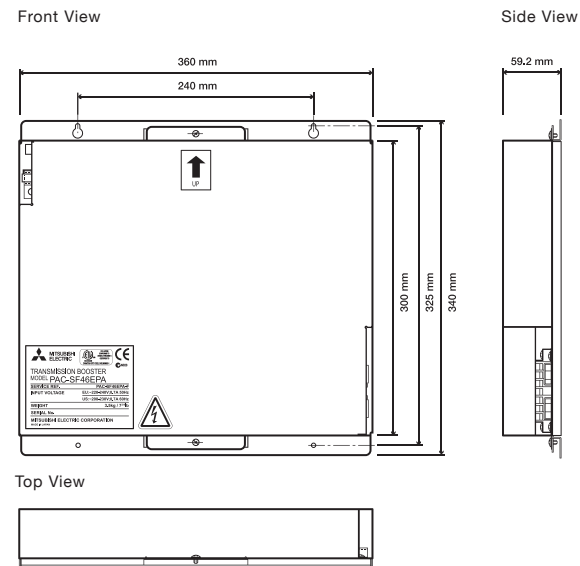

Remote Controllers

From a simplified controller perfect for hotel applications to a full backlight touch screen controller, we have the right remote controller to choose from.


Key Features & Benefits

PAR-CT01MAA-SB / PAR-CT01MAA-PB



- Simple to use
- Touch screen
- 180 colour screen
- 180 colour font display
- Backlight
- Fully configurable via smartphone App
- Customisable display
- Ability to display customer logos

PAR-U02MEDA



- Touch screen M-Net Controller
- Night set back, scheduling, setpoint limitation
- Built in occupancy/brightness sensor
- Backlight
- 0.5°C Set Point adjustment
- Dual Set Point

PAR-41MAA



- Displays model name and serial number on Mr Slim
- Night set back, scheduling, setpoint limitation
- 0.5°C Set Point adjustment
- Dual Set Point
- Run/Standby for Mr Slim
- Contact number under fault condition
- Backlight (White / Black options)
- Daylight saving function

PAR-FL / FA32MA



- Infrared solution
- Controller and receiver
- Controller able to control more than one receiver

PZ-62DR-EB




- Dedicated Lossnay controller
- Night set back, scheduling
- Flexible night purge
- Backlight

PAR-SL101A-E



- Wireless controller
- Weekly timer
- 3D Total Airflow for PLA-ZM/M
- 14°C cooling
- Individual vane setting for PLA-ZM/M/SM
- Dual Set Point
- Backlight

PAR-W31MAA / PAR-W21MAA




- Dedicated remote controller (see technical specification on page 7.18)
- Button lock
- Contact number under fault condition
- Fault codes

PAR-WT60R-E / PAR-WR61R-E



- Ecodan wireless controller
- New sleek flat panel design
- Backlight
- Ecodan receiver







PAC-IF082B-E / PAC-IF072B-E



- Ecodan controller
- Touch Screen (PAC-IF082B-E)
- Backlight (PAC-IF072B-E)

Remote Controllers








Technical Specification

REMOTE CONTROLLERS	PAR-CT01MAA-SB	PAR-CT01MAA-PB	PAR-U02MEDA	PAR-41MAA	PAR-FL32MA	PAR-FA32MA	PZ-62DR-EB	
								
Description	Simplified Touch Screen Wired Remote Controller	Simplified Touch Screen Wired Remote Controller (Premium Finish)	Touch Screen Remote Controller	Standard Wired Remote Controller	Infrared Remote Controller	Infrared Receiver	Lossnay Wired Remote Controller	
Connect to	Indoor	Indoor	M-NET Network	Indoor	-	Indoor	Indoor	
Max Number of Units	16	16	16	16	-	16	15	
Compatibility	Mr Slim, City Multi and M Series via MAC-497IF-E	Mr Slim, City Multi and M Series via MAC-497IF-E	City Multi (M Series and Mr Slim via A2M adaptor)*1	Mr Slim, City Multi and M Series via MAC-497IF-E or MAC-334IF-E	Mr Slim, City Multi and M Series via MAC-497IF-E	Mr Slim, City Multi and M Series via MAC-497IF-E	Lossnay LGH-RVX3(T)-E LGH-RVS-E	
Dimensions (mm) (WxDxH)	65 x 14.1 x 120	65 x 14.1 x 120	140 x 25 x 120	120 x 14.5 x 120	57 x 18 x 157	70 x 18 x 120	120 x 19 x 120	
Control	On/Off Mode Setpoint Fan Speed Air Direction Permit/Prohibit Filter Sign	✓ ✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ (0.5°C) ✓ ✓ ✓ ✓	✓ ✓ ✓ (0.5°C) ✓ ✓ ✓ ✓	✓ ✓ ✓ (0.5°C) ✓ ✓ ✓ ✓	✓ - - - - x x	- - - - - - -	✓ ✓ - ✓ - - ✓
Monitor	On/Off Mode Setpoint Fan Speed Air Direction Permit/Prohibit Filter Sign Fault Codes Room Temperature	✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ (0.5°C) ✓ ✓ ✓ ✓ ✓ ✓ (0.5°C)	✓ ✓ ✓ (0.5°C) ✓ ✓ ✓ ✓ ✓ ✓ (0.5°C)	✓ ✓ ✓ (0.5°C) ✓ ✓ ✓ x x	- - - - - - - LED -	✓ ✓ - x - - ✓ - -	
Backlight	✓	✓	✓	✓	x	-	✓	
Setpoint Limitation	✓	✓	✓	✓	x	-	-	
Independent Vane Control	x	x	x	✓	x	-	-	
Contact Number under Fault Condition	x	x	x	✓	x	-	x	
Scheduling	✓	✓	Weekly	Weekly	x	-	Weekly	
Night Set Back	x	x	✓	✓	x	-	-	
Button Lock	✓	✓	✓	✓	x	-	✓	
Easy Maintenance with Mr Slim	x	x	x	✓	x	-	-	
Run / Standby with Mr Slim	x	x	x	✓	x	-	-	
Silent Mode with Mr Slim	x	x	x	✓	x	-	-	
Energy Saving with Mr Slim	x	x	x	✓	x	-	-	
Occupancy Sensor (PIR)	x	x	✓	x	x	-	-	
3D Total Airflow with Mr Slim	x	x	x	✓	x	-	-	
Model Name and Serial Number Display with Mr Slim	x	x	x	✓	x	-	-	
Energy Consumption Monitoring with Mr Slim	x	x	x	✓	x	-	-	
2+1 Backup Rotation with Mr Slim	x	x	x	✓	x	-	-	
Smart Defrost with Mr Slim	x	x	x	✓	x	-	-	
14°C Cooling with Mr Slim	x	x	x	✓	x	-	-	

Notes: Permit/Prohibit is via Centralised Controllers. ✓ = Yes, x = No, - = Not applicable. *1 M-NET Power Supply Required via PAC-SC51KUA for M Series & Mr Slim


Remote Controllers

Technical Specification

REMOTE CONTROLLERS	PAR-SL101A-E	PAR-W31MAA	PAR-W21MAA	PAR-WT60R-E	PAR-WR61R-E	PAC-IF082B-E	PAC-IF072B-E
							
Description	Wireless Remote Controller	Standard Wired Remote Controller	Standard Wired Remote Controller	Wireless Remote Controller Transmitter	Wireless Remote Controller Receiver	Flow Temperature Controller FTC7	Flow Temperature Controller FTC6
Connect to	-	e-Series and Ecodan QAHV	PWFY, Mr Slim Air Curtains and Ecodan CAHV / CRHV	Ecodan PUZ	Ecodan PUZ	Ecodan PUZ-WZ	Ecodan PUZ-(H)WM
Max Number of Units	-	6 (depends on unit connected)	16	8	1	1	1
Compatibility	Mr Slim PLA-ZM/M/SM PKA-M	e-Series and Ecodan CAHV/QAHV	PWFY and Ecodan CRHV	Ecodan PUZ	Ecodan PUZ	Ecodan PUZ-WZ	Ecodan PUZ-(H)WM
Dimensions (mm) (WxDxH)	66 x 22 x 188	120 x 19 x 120	130 x 19 x 120	100 x 23 x 100	100 x 30 x 80	120 x 14.1 x 65	120 x 19 x 120
Control							
On/Off	✓	✓	✓	x	-	✓	✓
Mode	✓	✓	✓	✓	-	✓	✓
Setpoint	✓	✓	✓	✓	-	✓	✓
Fan Speed	✓	x	x	x	-	x	x
Air Direction	✓	x	x	x	-	x	x
Permit/Prohibit	x	x	-	x	-	x	x
Filter Sign	x	x	x	x	-	x	x
Monitor							
On/Off	✓	✓	✓	✓	-	✓	✓
Mode	✓	✓	✓	✓	-	✓	✓
Setpoint	✓	✓	✓	✓	-	✓	✓
Fan Speed	✓	x	x	x	-	x	x
Air Direction	✓	x	x	x	-	x	x
Permit/Prohibit	✓	✓	x	x	-	x	x
Filter Sign	x	x	x	x	-	x	x
Fault Codes	x	✓	✓	x	-	✓	✓
Room Temperature	x	x	x	✓	-	✓	✓
Backlight	✓	✓	x	✓	-	x	✓
Setpoint Limitation	x	x	✓	✓	-	x	x
Independent Vane Control	✓	x	x	x	-	x	x
Contact Number under Fault Condition	x	✓	✓	x	-	x	x
Scheduling	Weekly	Weekly	Weekly	Weekly	-	Weekly	Weekly
Night Set Back	x	x	x	✓	-	✓	✓
Button Lock	x	x	✓	x	-	✓	✓
Easy Maintenance with Mr Slim	x	x	x	-	-	-	-
Run / Standby with Mr Slim	x	x	x	-	-	-	-
Silent Mode with Mr Slim	x	x	x	-	-	-	-
Energy Saving with Mr Slim	x	x	x	-	-	-	-
Occupancy Sensor (PIR)	x	x	x	-	-	-	-
3D Total Airflow with Mr Slim	✓	x	x	-	-	-	-
14°C Cooling with Mr Slim	✓	x	x	-	-	-	-

Notes: Prohibit is via Centralised Controllers. ✓ = Yes, x = No, - = Not applicable.

System Diagram PAR-CT01MAA-SB / PAR-CT01MAA-PB

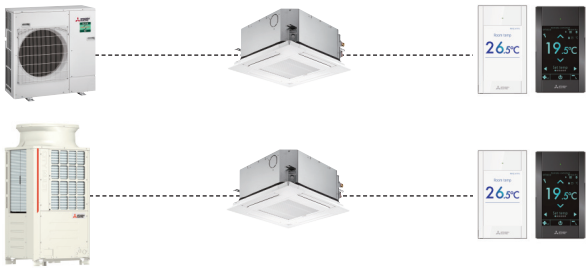


System Diagram PAR-U02MEDA




System Diagram PAR-SL101A-E




System Diagram PAR-FL / FA32MA

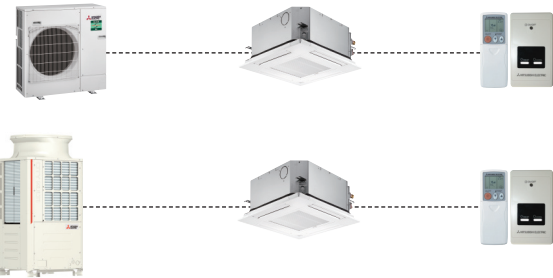

System Diagram PZ-62DR-EB



System Diagram PAC-IF082B-E

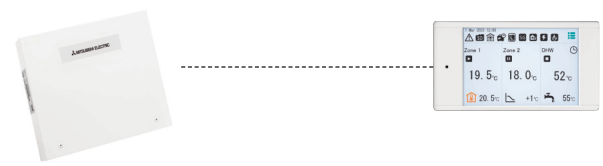

System Diagram PAR-W31MAA



System Diagram PAR-WT60R-E / PAR-WR61R-E




System Diagram PAC-IF072B-E




System Diagram PAR-W21MAA




System Diagram PAR-41MAA

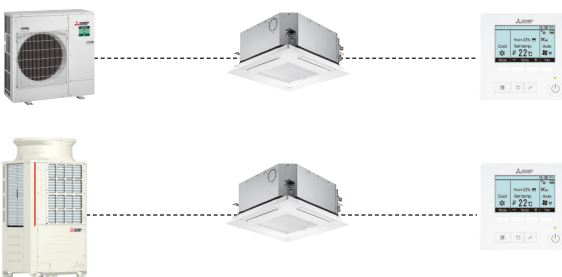


Product Dimensions PAR-CT01MAA-SB / PAR-CT01MAA-PB

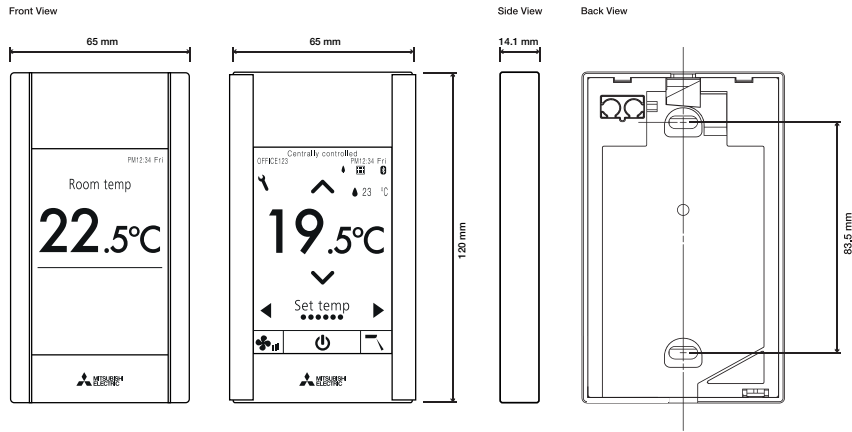


Product Dimensions PAR-U02MEDA

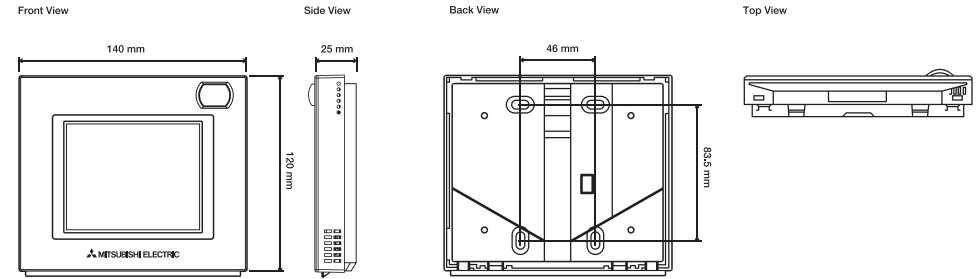


Product Dimensions PAR-41MAA

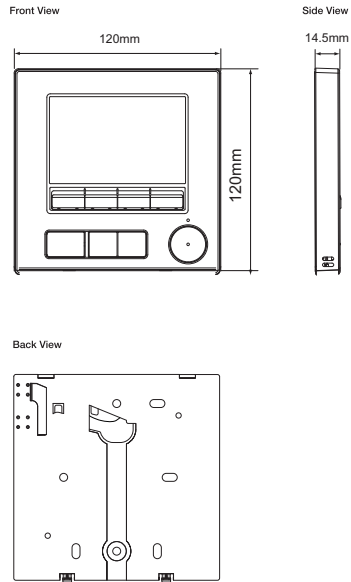


Product Dimensions PAR-FL32MA

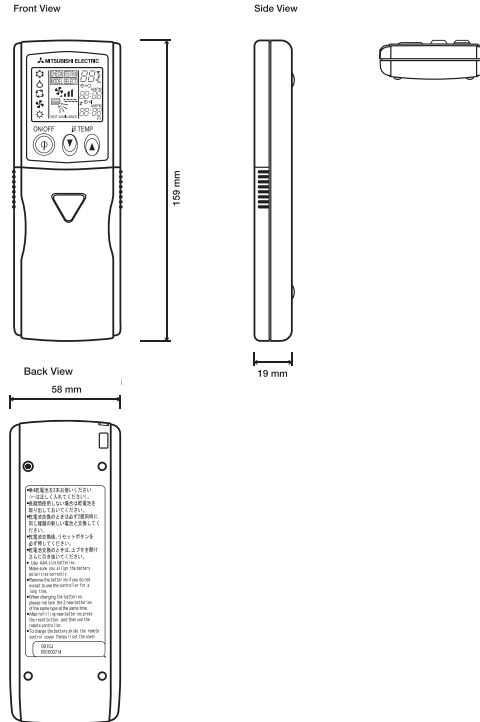


Product Dimensions PAR-FA32MA

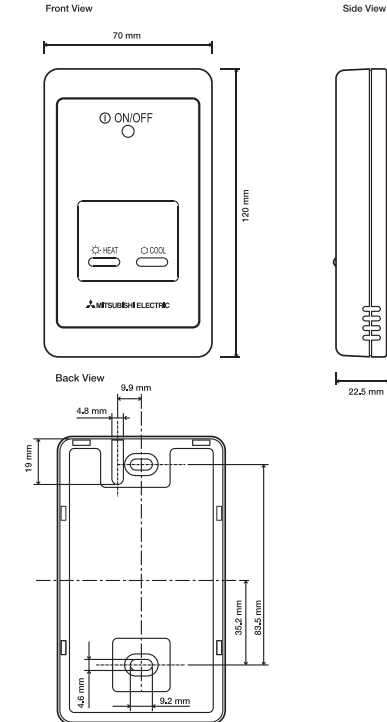


Product Dimensions PZ-62DR-EB / PAR-W31MAA

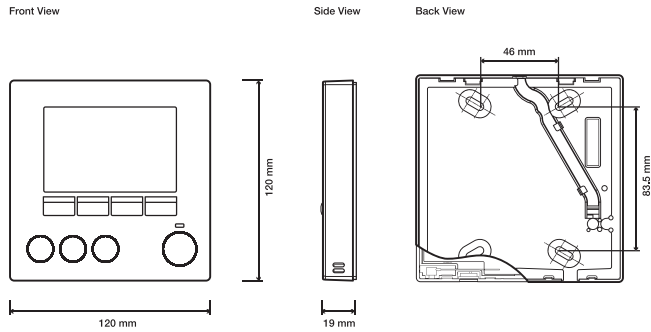


Product Dimensions PAR-SL101A-E

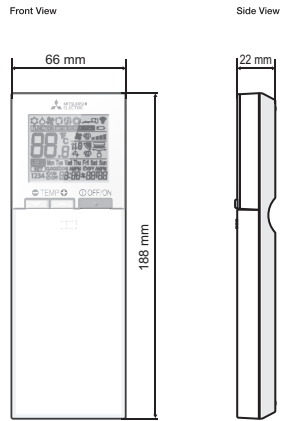


Product Dimensions PAR-W21MAA

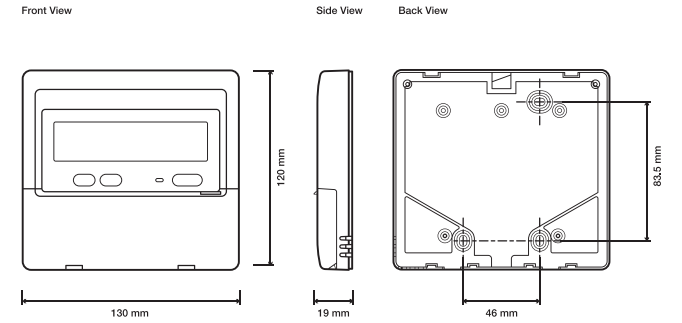


Product Dimensions PAR-WT60R-E

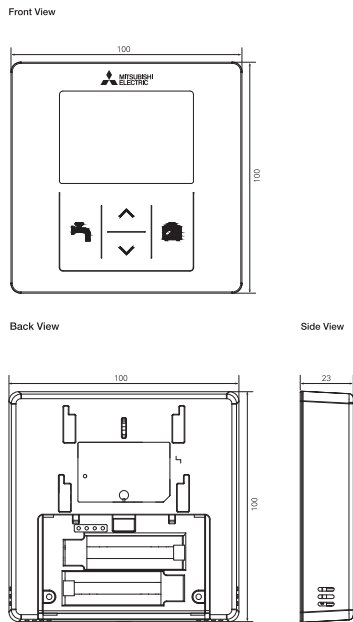


Product Dimensions PAR-WR61R-E

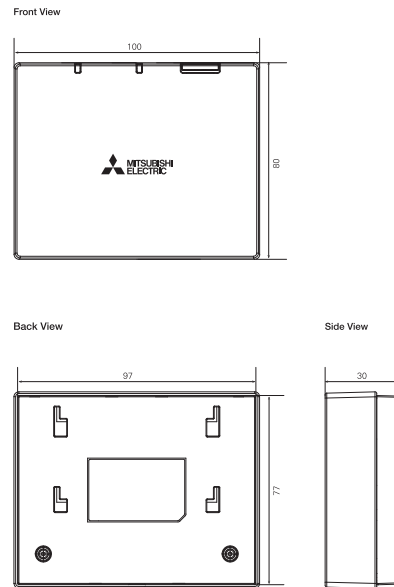

Product Dimensions PAC-IF082B-E

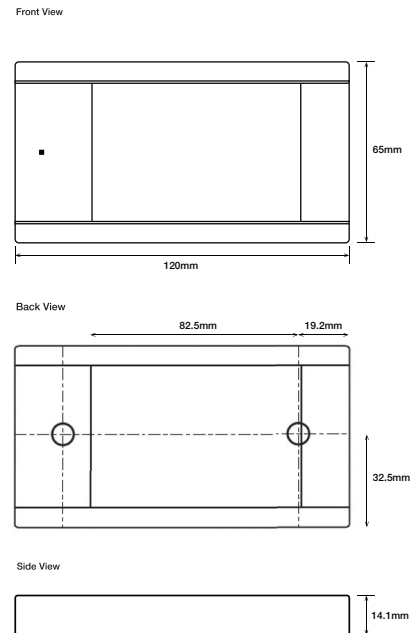

Product Dimensions PAC-IF072B-E

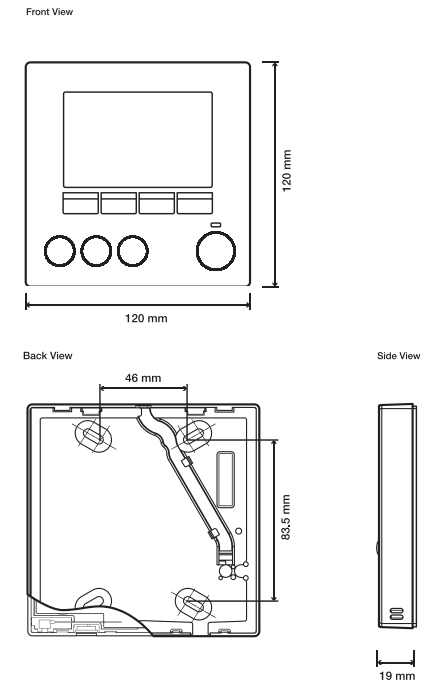

Solution Interfaces

Our dedicated solution interfaces now include new sector specific products such as our new **MELCloud Commercial** offering.

Key Features & Benefits

MELCLOUD COMMERCIAL



- Advanced remote control of indoor units across one or multiple sites
- Smart monitoring of outdoor unit performance for one or multiple buildings
- Energy monitoring via in-built CT Clamps or Modbus Energy Meters, for improved energy consumption & cost savings
- Real-time system data of indoor and outdoor units facilitates performance analysis, service, and ongoing maintenance
- Choice of subscription packages to meet customer requirements

MCC-50E



- Compatible with M Series, Mr Slim, City Multi and Lossnay ranges
- Cloud system connection device - MELCloud Commercial IoT platform
- 4G or LAN connection
- Remote access to control, monitor and provide service & maintenance for up to 50 indoor units

MELCLOUD-CL-HA1-A1



- IoT Interface - MELCloud Home and MELCloud Commercial*
- LAN or Cellular options. Cellular and MELCloud Home option includes data plan** via eSIM
- Remotely control indoor and outdoor units
- Remote service and maintenance*
- Update interface software OTA (over the air)
- Wall mountable - bracket supplied

MELCOMMS MINI



- Monitor and control up to 8 indoor units
- Run / Standby panel
- Includes 2 x MELCOBEMS MINI (A1M+) Interfaces

MELCOTEL2



- Monitor and control up to 200 indoor units
- Dedicated hotel interface
- Key card and non key card integration
- Automatic Setpoint adjustment
- Occupied / Unoccupied Settings Reset

Solution Interfaces

Technical Specification

SOLUTION INTERFACES	MELCLOUD COMMERCIAL	MCC-50E	MELCLOUD-CL-HA1-A1	MELCOMMS MINI	MELCOTEL2
---------------------	---------------------	---------	--------------------	---------------	-----------




Description	IoT Platform and Application	MELCloud IoT Gateway	MELCloud Interface Cellular/LAN	Run Standby Panel	AE-C400E Hotel Interface and display
Connect to	Web based (MCC-50E Required)	M-NET Network	CN105 (1.5m cable provided)	MELCOBEMS MINI (A1M+)	AE-C400E and EW-C50E
Max Number of Units	50	50 Indoor / 50 Outdoor / 4 Energy Meters	1 per Indoor Unit	8	200
Compatibility	M Series, Mr Slim, City Multi and Lossnay	M Series, Mr Slim, and City Multi	M Series, Mr Slim, City Multi, Lossnay, Ecodan, Air purifier, MELCloud Home, MELCloud Commercial	M Series and Mr Slim	City Multi
Power Supply	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz (Power is taken from the indoor unit)	220-240v, 50Hz	220-240v, 50Hz
Dimensions (mm) (WxDxH)	-	172 x 100 x 209	165 x 218 x 55	253 x 90 x 180	350 x 80 x 400
Ethernet Capabilities	✓	1x Ethernet Port	1x Ethernet Port	x	x
SIM Card Provided	✓	Sold separately	On board eSIM	x	x
Inputs	✓ Digital (via PAC-YG66)	USB / RJ45 / RS485	RJ45	x	x
Outputs	✓ Digital (via PAC-YG66)	Data output via MELCloud Commercial platform	Data output via MELCloud Home and Commercial ² platforms	✓ 1 Digital (Fault)	x
Network	-	IoT (MELCloud Commercial) / LAN / 4G	LAN or Cellular (LTE-M, 2G)	-	-
Control	On/Off ✓ Mode ✓ Setpoint ✓ Fan Speed ✓ Air Direction - Permit/Prohibit ✓ Schedule - Filter Sign ✓ Frost Protection - Holiday Mode -	DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ DI ✓	DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ DI ✓	✓ ✓ ✓ x x x x x x x	✓ ✓ ✓ x x x x x x x
Monitor	On/Off ✓ Mode ✓ Setpoint ✓ Fan Speed ✓ Air Direction - Permit/Prohibit ✓ Cloud Communication - Filter Sign ✓ Fault Code Alerts ✓ Room Temperature ✓ Daily kWh Energy - Monthly kWh Energy - Comfort Data - Building Status ✓	DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓	DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓	✓ ✓ ✓ x x x x x x x x x x x x	✓ ✓ ✓ x x x x x x x x x x x x
Flexible Schedule Options	✓	Via MELCloud Commercial Platform	Via MELCloud Home / Commercial ² Platform	x	x
Night Setback	-	-	✓	x	✓
Web Pages	✓	MELCloud Commercial Platform	MELCloud Home / MELCloud Commercial ² Platform	x	x
Optimised Start	✓	-	✓ ²	x	x
Automatic Setpoint Adjustment	-	-	✓ ²	x	✓
Load Shedding	-	-	-	x	x
Occupied / Unoccupied Settings Reset	-	-	-	x	✓
Advanced Energy Monitoring ¹	✓	Via MELCloud Commercial Platform	-	x	x

Key:
DI = Digital Input.
DO = Digital Output.
AI = Analogue Input.
AO = Analogue Output.

Notes:
¹ Advanced Energy Monitoring: Energy status shows kWh consumed, including comparisons of individual buildings. With the addition of the PAC-YG***CA interfaces, third party equipment can also be monitored.


² MELCloud Commercial compatibility expected end 2025.

System Diagram MELCLOUD COMMERCIAL

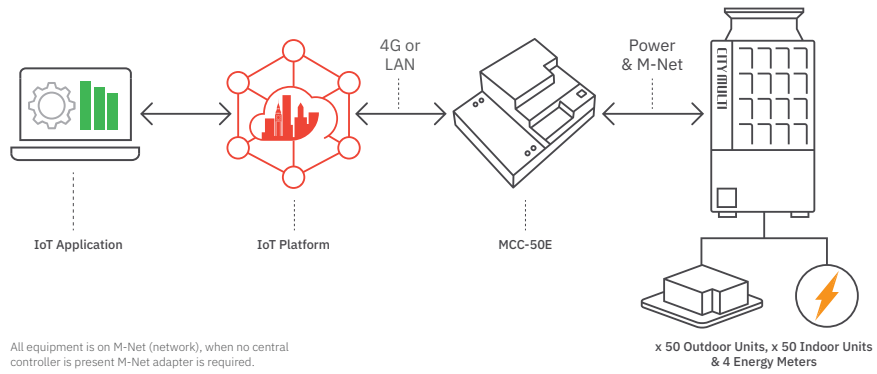


All equipment is on M-Net (network), when no central controller is present M-Net adapter is required.

System Diagram MCC-50E

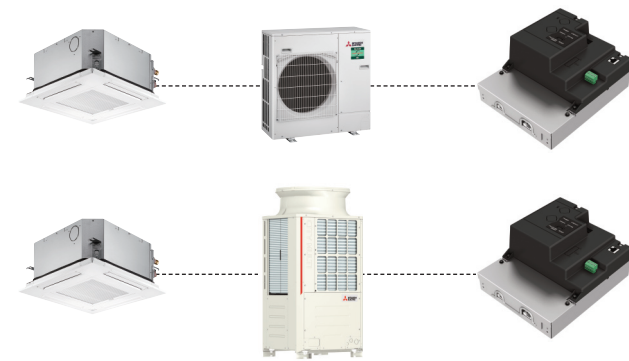

System Diagram MELCLOUD-CL-HA1-A1

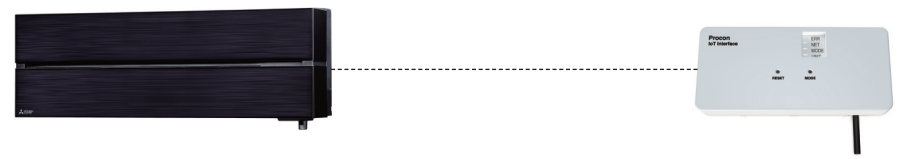

System Diagram MELCOMMS MINI




System Diagram MELCOTEL2



Product Dimensions

MCC-50E

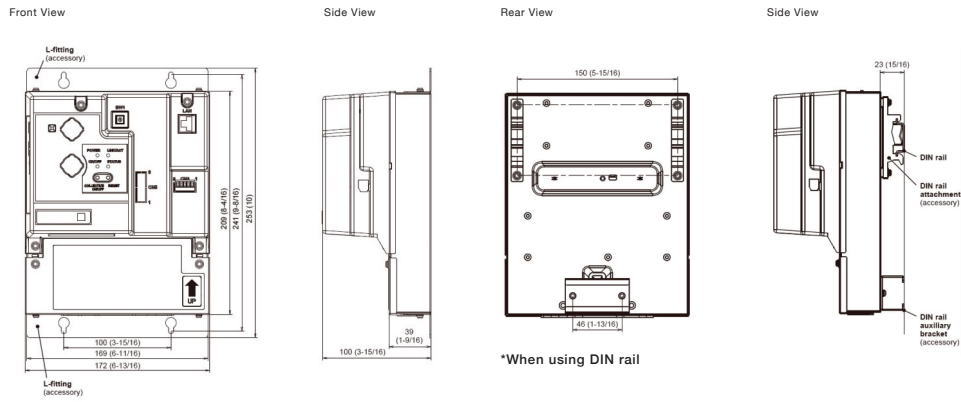


*When using DIN rail

*When using L-fittings


Product Dimensions

MELCLOUD-CL-HA1-A1

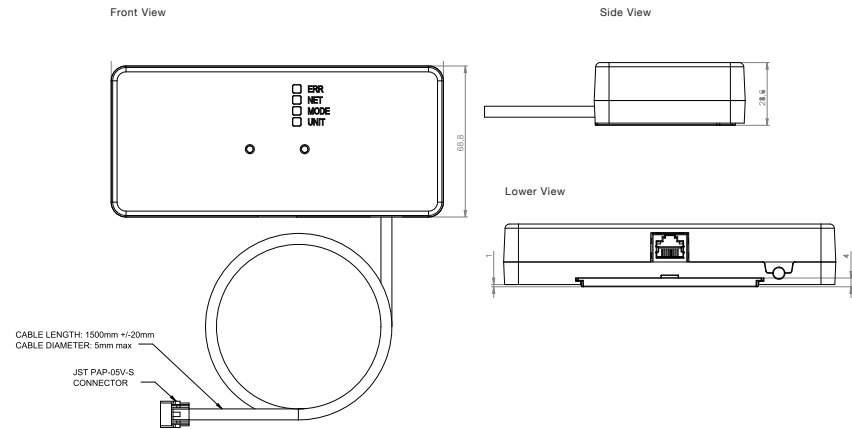


Product Dimensions

MELCOMMS MINI

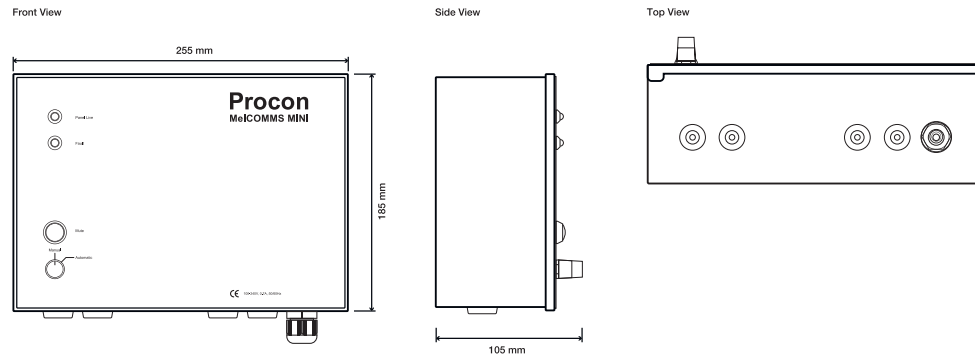

Product Dimensions

MELCOTEL2

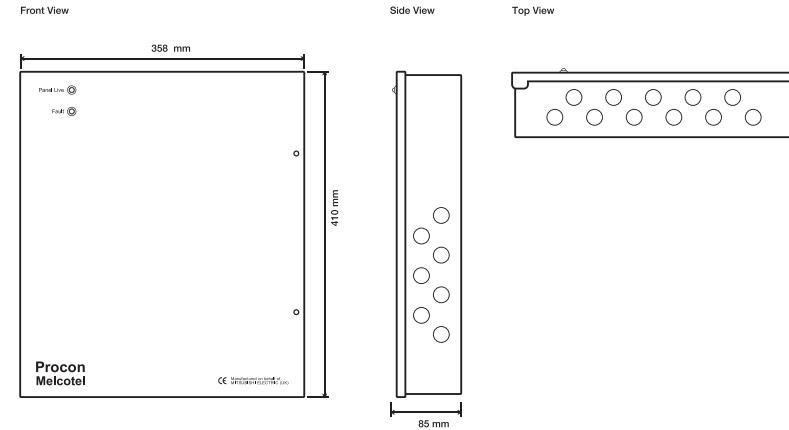

Simple Interfaces

A wide range of interfaces are available to allow third party equipment to monitor and control our units. Some interfaces are also available to monitor and control third party equipment from our centralised controllers.

Key Features & Benefits

PAC-SA89TA



- Also known as 3 wire adaptor
- Remote on/off
- Fire alarm input
- Night mode
- Demand control

PAC-SA88HA



- Heating and cooling signal
- Run and fault signal

PAC-YT51HAA



- Remote on/off
- Fire alarm input
- Common run and fault signal

PAC-YG10HA



- Remote on/off
- Fire alarm input
- Common run and fault signal

PAC-SJ95MA-E



- Adaptor to connect Mr Slim units to M-NET










PAC-SK15MA-E



- Adaptor to connect Mr Slim PUZ-ZM35/50 units to M-NET


Simple Interfaces

Technical Specification


SIMPLE INTERFACES	PAC-SA89TA	PAC-SA89TA	PAC-SA88HA	PAC-SA88HA	PAC-SA88HA	PAC-YT51HAA	PAC-YG10HA	PAC-SJ95MA-E	PAC-SK15MA-E
									
Description	On/Off Adaptor (3 wire adaptor)	Night Mode and Demand Control (3 wire adaptor)	Run and Fault Adaptor (5 wire adaptor)	Heat and Cool Adaptor (5 wire adaptor)	Run and Fault Adaptor (5 wire adaptor)	On/Off Run and Fault Adaptor	On/Off Run and Fault Adaptor (9 wire adaptor)	M-NET Converter	M-NET Converter
Connect to	Indoor	Outdoor	Indoor	Indoor	Outdoor	AT-50B	AE-C400E and EW-C50E	Outdoor	Outdoor
Max Number of Units	1	1	1	1	1	1	1	1	1
Compatibility	Mr Slim and City Multi	Mr Slim and City Multi	Mr Slim and City Multi	City Multi	City Multi	AT-50B	AE-C400E and EW-C50E	Mr Slim Outdoor ¹	Mr Slim PUZ-ZM35/50 Outdoor
Dimensions (mm) (WxDxH)	-	-	-	-	-	-	-	140 x 15 x 50	120 x 44 x 321
Control									
On/Off	✓	✓	x	x	x	✓	✓	-	-
Mode	x	x	x	x	x	x	x	-	-
Setpoint	x	x	x	x	x	x	x	-	-
Fan Speed	x	x	x	x	x	x	x	-	-
Air Direction	x	x	x	x	x	x	x	-	-
Permit/Prohibit	x	x	x	x	x	x	x	-	-
Filter Sign	x	x	x	x	x	x	x	-	-
Monitor									
On/Off	x	x	✓	x	✓	✓	✓	-	-
Mode	x	x	x	✓	x	x	x	-	-
Setpoint	x	x	x	x	x	x	x	-	-
Fan Speed	x	x	x	x	x	x	x	-	-
Air Direction	x	x	x	x	x	x	x	-	-
Permit/Prohibit	x	x	x	x	x	x	x	-	-
Filter Sign	x	x	x	x	x	x	x	-	-
Fault Codes	x	x	✓	✓	✓	✓	✓	-	-
Room Temperature	x	x	x	x	x	x	x	-	-
Fire Alarm	✓	✓	x	x	x	✓	✓	-	-
On/Off but Centrally Controlled	VFC	x	x	x	x	VFC	Via 24VDC	-	-
On/Off but NOT Centrally Controlled	x	x	x	x	x	x	x	-	-
Run and Fault Output	x	x	12VDC	x	12VDC	Via 24VDC	Via 24VDC	-	-
Heat and Cool Output	x	x	x	12VDC	x	x	x	-	-
Night Mode and Demand Control	x	VFC	x	x	x	x	x	-	-
Connect Mr Slim to M-NET	-	-	-	-	-	-	-	✓	✓

Notes: VFC: Volt free contact. ¹ PAC-SJ95MA-E M-NET adaptor for PUZ-ZM60-250, PUZ-M100-250, PUZ-SM100-140.
 ✓ = Yes, x = No, - = Not applicable.

System Diagram PAC-SA89TA

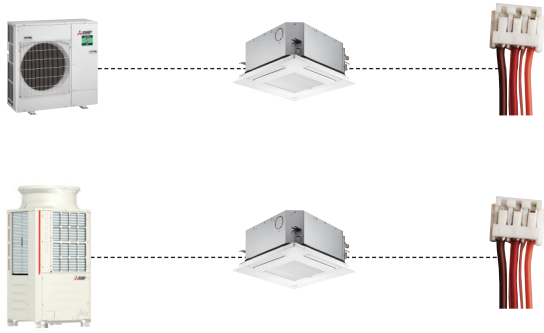

System Diagram PAC-SA88HA

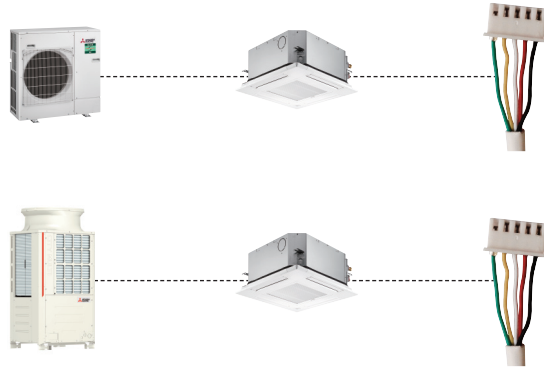

System Diagram PAC-YT51HAA



System Diagram PAC-YG10HA




System Diagram PAC-SJ95MA-E



System Diagram PAC-SK15MA-E



Wiring Diagram PAC-SA89TA

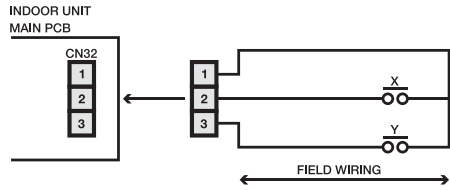


- NOTE**
- ON / OFF BUTTON ON THE REMOTE CONTROLLER NOT AVAILABLE
 - ADAPTER WIRE COLOURS MAY VARY
 - RELAYS NOT SUPPLIED

OPERATION

- X AND Y CLOSED TO START UNIT

Wiring Diagram PAC-SA88HA

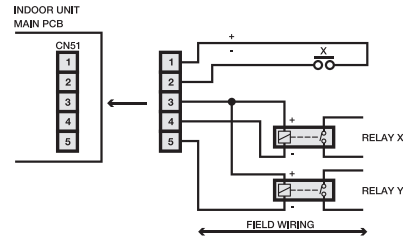


- NOTE**
- RELAYS NOT SUPPLIED
 - X REQUIRES A PULSE SIGNAL TO START / STOP UNIT


OPERATION

- RELAY X SUPPLIED WITH 12V DC WHEN UNIT IS ON
- RELAY Y SUPPLIED WITH 12V DC WHEN UNIT IN FAULT


Wiring Diagram PAC-YT51HAA

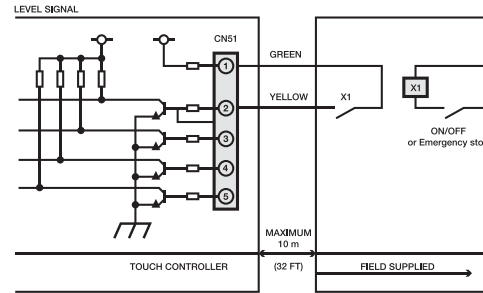

Wiring Diagram PAC-YG10HA

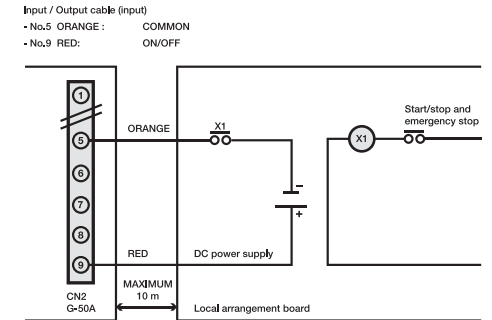


Wiring Diagram PAC-SA89TA



- NOTE**
- X : Low noise mode or demand
 - Y : Demand
 - X, Y : Relay
- Contact rating voltage $\geq 15VDC$
 Contact rating current $\geq 0.1A$
 Minimum applicable load $\leq 1mA$ at DC

Wiring Diagram PAC-SA88HA

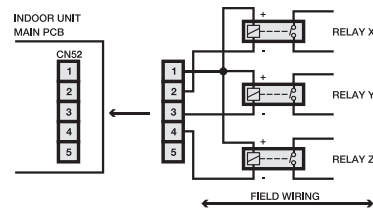


- NOTE**
- RELAYS NOT SUPPLIED


OPERATION

- RELAY X SUPPLIED WITH 12V DC WHEN FAN IS RUNNING
- RELAY Y SUPPLIED WITH 12V DC WHEN UNIT IS IN COOLING MODE AND THE REMOTE CONTROLLER IS ON OR OFF
- RELAY Z SUPPLIED WITH 12V DC WHEN UNIT IS IN HEATING MODE AND THE REMOTE CONTROLLER IS ON OR OFF


Wiring Diagram PAC-YT51HAA

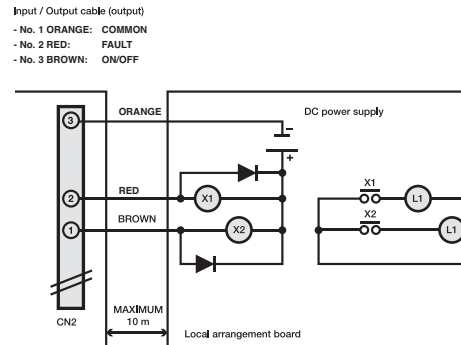


Wiring Diagram PAC-YG10HA

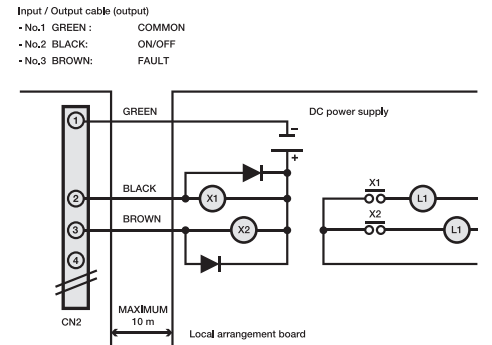

Product Dimensions PAC-SJ95MA-E

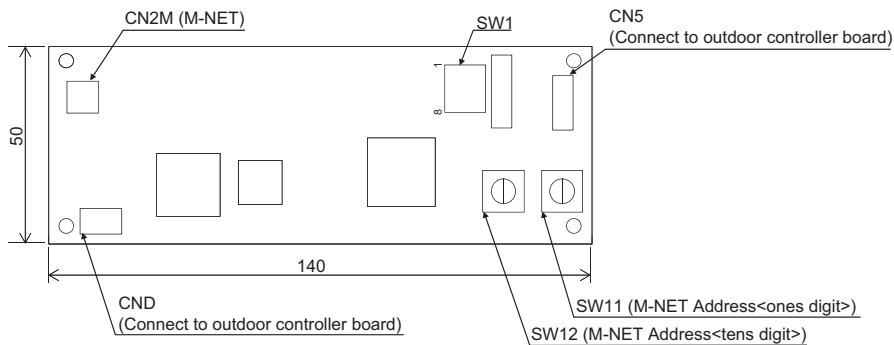

Product Dimensions PAC-SK15MA-E

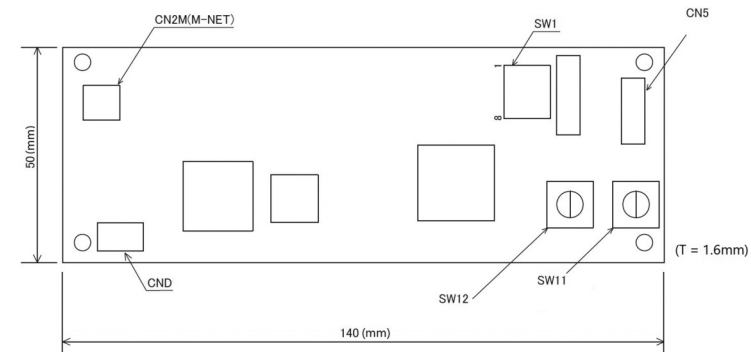

Notes: Dimensional drawing of board, for cover dimensions please see page 6.27

Advanced Interfaces

A wide range of interfaces are available to allow third party equipment to monitor and control our units. Some interfaces are also available to monitor and control third party equipment from our centralised controllers.

Key Features & Benefits

KTR-53A



- Remote on/off
- Run and fault volt free outputs

MELCORETAIL MINI



- On/off, fire alarm and lock input
- Setpoint and fan speed input
- Run, fault, heat and cool output
- 2 energy saving features

PAC-YG60MCA



- Monitor up to 4 energy meters

PAC-YG63MCA



- Monitor up to 2 temperature sensors

PAC-YG66DCA



- Monitor and control up to 2 pieces of general equipment

MAC-497IF-E




- Adaptor to connect remote controller to M Series
- Adaptor to connect M Series to M-NET

MAC-334IF-E



- Adaptor to connect remote controller to M Series
- Adaptor to connect M Series to M-NET
- 3rd party heating interlock






MAC-587IF-E



- Wi-Fi Interface for MELCloud solution
- ATA, Lossnay and ATW support
- WPS and Wi-Fi pin pairing
- WPS Push mode
- Setting via PAR-41MAA / PAR-SL101A-E

Advanced Interfaces

Technical Specification

ADVANCED INTERFACES	KTR-53A	MELCORETAIL MINI	PAC-YG60MCA	PAC-YG63MCA	PAC-YG66DCA
					
Description	On/Off and Run/Fault Adaptor	Retail Control and Input / Output Interface	Pulse Meter Interface	Temperature and Humidity Interface	Third Party Control and Interface
Connect to	Indoor	Indoor	M-NET Network	M-NET Network	M-NET Network
Max Number of Units	1	1	4 Pulse Meters	1 PT100, 1 Humidity Sensor	2 General Equipment
Compatibility	Mr Slim and City Multi	M Series and Mr Slim	AE-C400E and EW-C50E	AE-C400E and EW-C50E	AE-C400E and EW-C50E
Power Supply	12/24VAC/DC	-	24VDC	24VDC	24VDC
Dimensions (mm) (WxDxH)	130 x 30 x 80	173 x 19 x 51	200 x 45 x 120	200 x 45 x 120	200 x 45 x 120
Control					
On/Off	✓	VFC	-	-	✓
Mode	-	0 to 10VDC	-	-	x
Setpoint	-	0 to 10VDC	-	-	x
Fan Speed	-	0 to 10VDC	-	-	x
Air Direction	-	-	-	-	x
Permit/Prohibit	-	VFC	-	-	x
Filter Sign	-	-	-	-	x
Monitor					
On/Off	✓	VFC	-	-	✓
Mode	-	VFC	-	-	x
Setpoint	-	-	-	-	x
Fan Speed	-	-	-	-	x
Air Direction	-	-	-	-	x
Permit/Prohibit	-	-	-	-	x
Filter Sign	-	-	-	-	x
Fault Codes	✓	VFC	-	-	✓
Room Temperature	-	-	-	-	x
On/Off but Centrally Controlled	Option Lock/Unlock	VFC	x	-	-
On/Off but NOT Centrally Controlled	12/24VAC/DC	VFC	x	-	-
Run Output	x	VFC	x	-	-
Fault Output	x	VFC	x	-	-
Energy Saving	x	VFC	x	-	-
Heat / Cool / Thermo Output	x	VFC	x	-	-
Pulse Weight	x	x	0.1, 1.0 and 10	-	-

Notes: VFC: Volt free contact. ✓ = Yes, x = No, - = Not applicable.

Advanced Interfaces

Technical Specification

ADVANCED INTERFACES	MAC-497IF-E	MAC-334IF-E	MAC-587IF-E
---------------------	-------------	-------------	-------------




			AIR CONDITIONING	ECODAN*
Description	Interface for MA Remote Controller	Interface for M-NET, MA Remote Controller, On/Off Input, Run/Fault Output and 3rd Party Heating Interlock (M Series)	MELCloud Wi-Fi Interface	MELCloud Wi-Fi Interface
Connect to	Indoor	Indoor	Indoor	Indoor
Max Number of Units	1	1	1	1
Compatibility	M Series and Mr Slim (SUZ)	M Series and Mr Slim (SUZ)	M Series, Mr Slim, City Multi and Lossnay	Ecodan FTC7 / FTC6
Power Supply	-	-	-	-
Dimensions (mm) (WxDxH)	128 x 30 x 76	160 x 55 x 70	41.5 x 18.5 x 73.5	41.5 x 18.5 x 73.5
Control				
On/Off	x	✓	✓	✓
Mode	x	x	✓	✓
Setpoint	x	x	✓	✓
Fan Speed	x	x	✓	x
Air Direction	x	x	✓	x
Monitor				
On/Off	x	✓	✓	✓
Mode	x	x	✓	✓
Setpoint	x	x	✓	✓
Fan Speed	x	x	✓	✓
Air Direction	x	x	✓	✓
Filter Sign	x	x	✓	✓
Fault Codes	x	✓	✓	✓
Room Temperature	x	x	✓	✓
On/Off but Centrally Controlled	x	x	-	-
On/Off but NOT Centrally Controlled	x	✓	-	-
Heat / Cool / Thermo Output	x	✓	-	-
Set-Up of Room Temperature	✓	✓	-	-
Detector Position				

Notes: VFC: Volt free contact. ✓ = Yes, x = No, - = Not applicable. *For further technical specification on the MAC-587IF-E for Ecodan please refer to the Residential Heating Section of the Product Catalogue.

System Diagram KTR-53A



System Diagram MELCORETAIL MINI

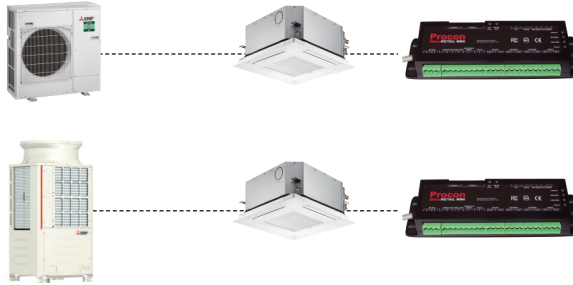

System Diagram PAC-YG60MCA



System Diagram PAC-YG63MCA



System Diagram PAC-YG66DCA




System Diagram MAC-497IF-E




System Diagram MAC-334IF-E



System Diagram MAC-334IF-E Heating Interlock

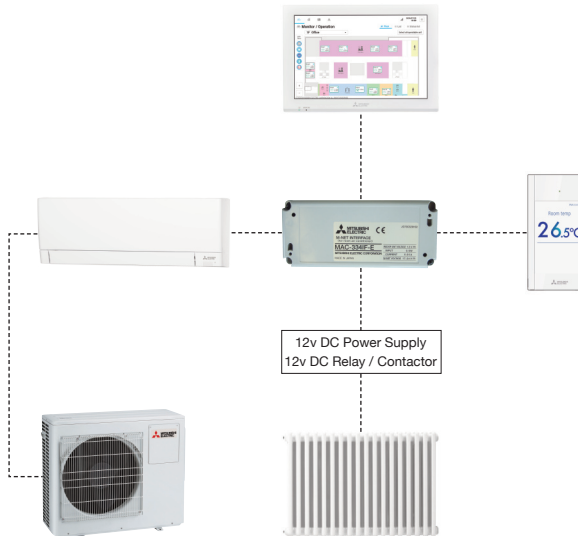


System Diagram MAC-587IF-E

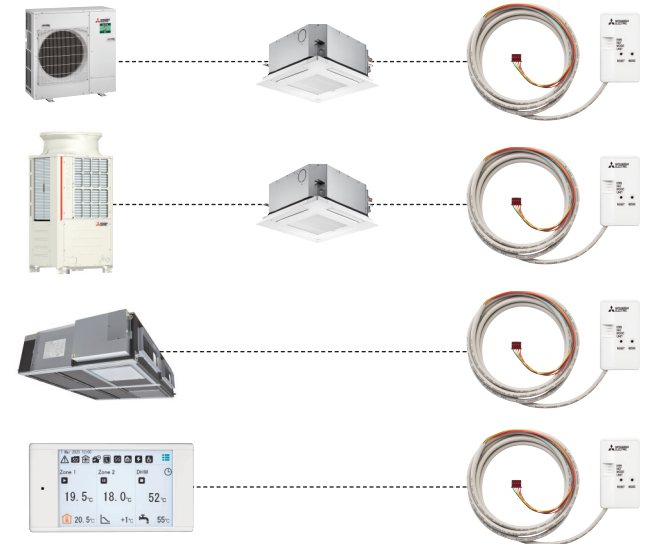


Product Dimensions

KTR-53A

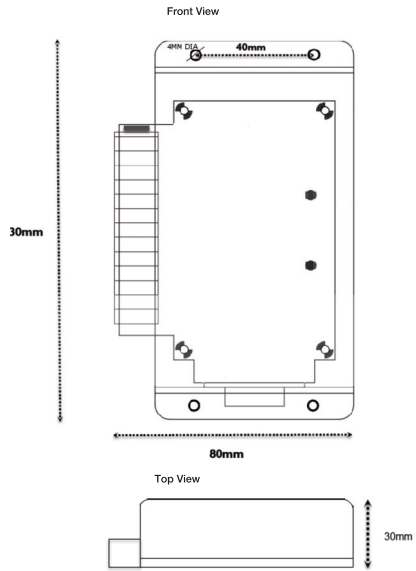


Product Dimensions

MELCORETAIL MINI

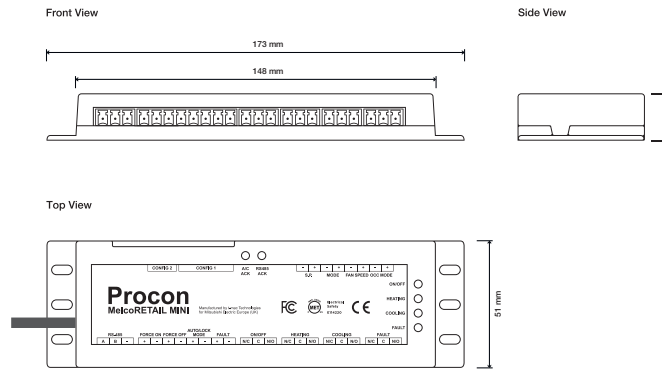


Product Dimensions

PAC-YG60MCA

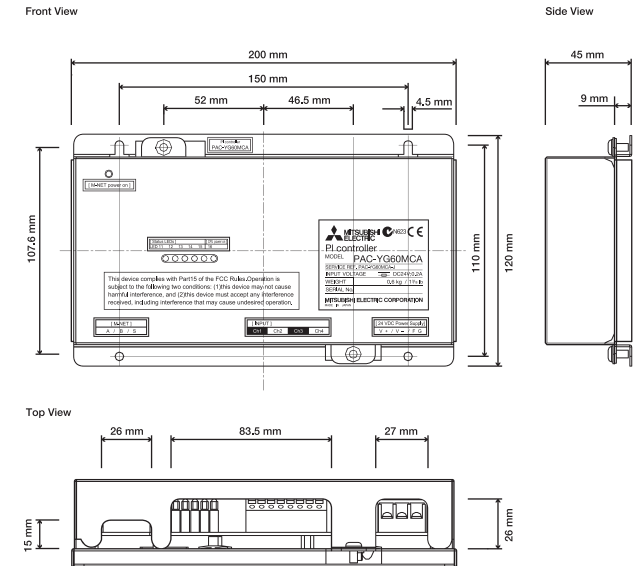


Product Dimensions

PAC-YG63MCA

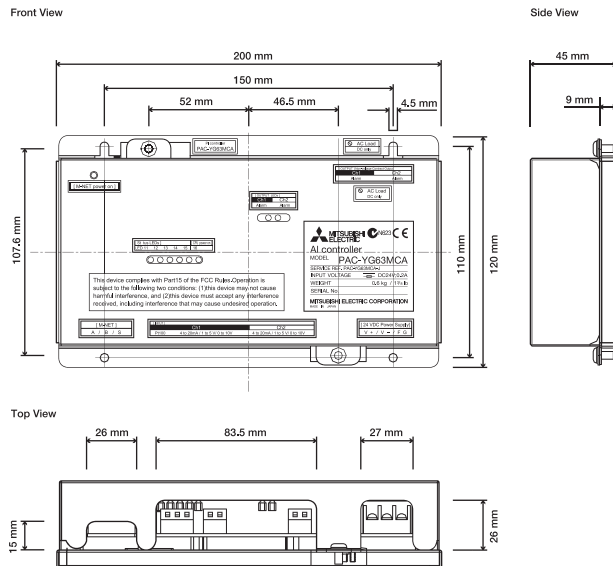

Product Dimensions


PAC-YG66DCA

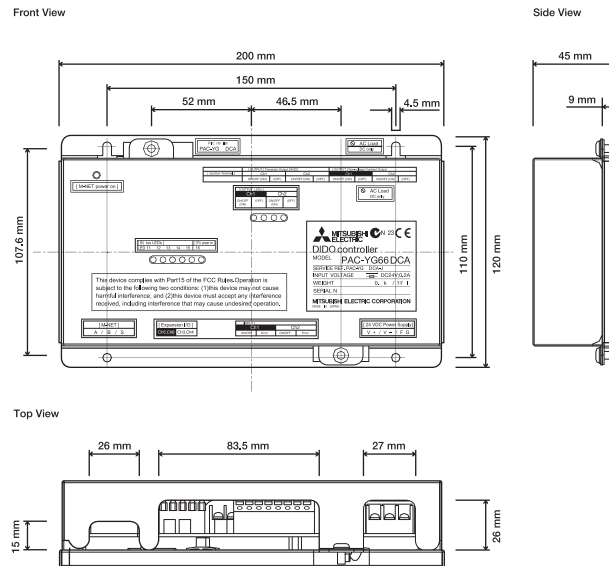


Product Dimensions

MAC-497IF-E


Top View



Front View

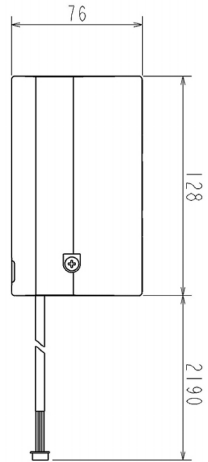


Side View




Product Dimensions

MAC-334IF-E


Top View



Front View

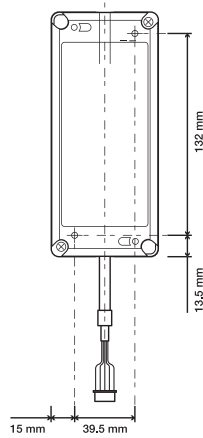

Side View

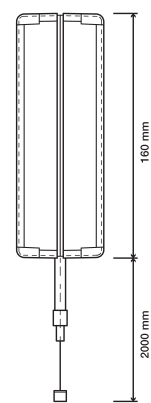


Product Dimensions

MAC-587IF-E


Top View




Front View

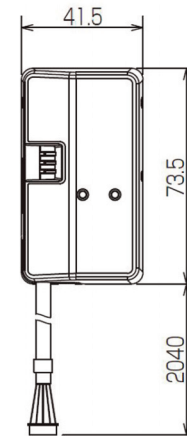

Side View

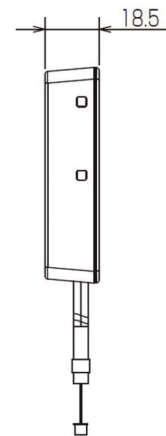

Rear View



BEMS Interfaces

Building Energy Management Systems (BEMS) will allow a building to run efficiently. A wide range of interfaces are available to connect our systems simply to a BEMS.

Key Features & Benefits

MELCOBEMS MINI (A1M+)



- BACnet / Modbus IP
- Configuration via onboard webpage (local network)
- Firmware update over Ethernet (local network)
- Individually monitor and control indoor and outdoor unit (1 x A1M+ per unit)
- DIN rail mount option

MELCOBEMS



- Monitor and control up to 50 indoor units
- Modbus and BACnet interface
- Energy monitoring

MELCOBEMS SIP+



- Control and Monitor up to 50 indoor units (up to 200 with EW-C50E)
- Multiprotocol, allowing data to be disseminated to one or many BMS, EMS & IoT systems
- Energy Monitoring

IQ4 XNC



- Monitor and control up to 50 indoor units
- Trend interface




MELCOJACE-8000



- Monitor and control up to 50 / 100 / 200 indoor units
- Tridium Niagara 4 compatible
- Built in HTML5 web page for plug & play
- On-board library Modbus & BACnet MSTP for Procon MELCOBEMS MINI (A1M+)
- No additional interface required, direct plug & play to centralised controllers
- On-board Wi-Fi application to allow commissioning by PC, tablet or smartphone
- BACnet
- Modbus

BEMS Interfaces

Technical Specification

BEMS INTERFACES		MELCOBEMS MINI (A1M+)	MELCOBEMS	MELCOBEMS SIP+
				
Description		Air to Air Splits Modbus/BACnet Interface. Air (Water) to Water & Lossnay Modbus/BACnet Interface	AE-C400E, EW-C50E Modbus BACnet Interface	Multiprotocol Gateway
Connect to		Indoor, Outdoor or Ecodan PCB	AE-C400E and EW-C50E*2	AE-C400E and EW-C50E*2
Max Number of Units		1	50	200
Compatibility		M Series, Mr Slim, City Multi, Ecodan FTC7 ³ /6/5/4, e-Series, Ecodan QAHV/CAHV/CRHV and Lossnay (LGH models)	M Series, Mr Slim and City Multi	M Series, Mr Slim, City Multi, e-Series, Lossnay and Ecodan
Power Supply		-	24VDC	24VDC
Dimensions (mm) (WxDxH)		95 x 22.7 x 78.6	102 x 32 x 180	108 x 60 x 90
Network		Modbus / BACnet IP / RS485*1. KNX*2	Modbus / BACnet RS485 and TCP/IP	Bacnet IP / Modbus Sub TCP/IP and Serial / MQTT and REST (IoT protocols)
BEMS Compatibility		Cylon, Satchwell, Crestron, Invensys, Interactive Homes, North BT, Andover, Siemens, WEMS, RDM	Cylon, Satchwell, Crestron, Invensys, Interactive Homes, North BT, Andover, Siemens, WEMS, Andover Controls, York BMS, Siemens, Priva Building Intelligence, Delta Controls, RDM	Trend, Cylon, Satchwell, Crestron, Invensys, Interactive Homes, North BT, Andover, Siemens, WEMS, Andover Controls, York BMS, Siemens, Priva Building Intelligence, Delta Controls, RDM
Control		Air to Air Splits and Lossnay	Air (Water) to Water	
	On/Off	DI	AI	DI
	Mode	AI	AI	AI
	Setpoint	AI	AI	AI
	Fan Speed	AI	-	AI
	Air Direction	AI	-	AI
	Permit/Prohibit	x	AI	DI
	Filter Sign	DI	-	DI
Monitor	On/Off	DO	DO	DO
	Mode	AO	AO	AO
	Setpoint	AO	AO	AO
	Fan Speed	AO	-	AO
	Air Direction	AO	-	AO
	Permit/Prohibit	x	AO	DO
	Filter Sign	DO	-	DO
	Fault Codes	AO	AO	AO
	Room Temperature	AO	AO	AO
	Daily kW Energy	-	AO	With EW-C50E
	Monthly kW Energy	-	AO	With EW-C50E



Key: DI = Digital Input. DO = Digital Output. AI = Analogue Input. AO = Analogue Output.

Notes: *1 Function only available on M Series, Mr Slim and City Multi. *2 ETA end 2024. *3 ETA 2025.

The MELCOBEMS can monitor indoor daily and monthly kWh when used in conjunction with AE-C400E, EW-C50E, PAC-YG60MCA on third party energy meters.

BEMS Interfaces

Technical Specification

BEMS INTERFACES	IQ4 XNC	MELCOJACE-8000	
			
Description	AE-C400E and EW-C50E Trend Interface ¹	AE-C400E and EW-C50E Tridium Niagara Interface ²	
Connect to	AE-C400E and EW-C50E ⁴	AE-C400E and EW-C50E ⁴	
Max Number of Units	50	50 / 100 / 200	
Compatibility	M Series, Mr Slim, City Multi and Lossnay	M Series, Mr Slim, City Multi and Lossnay	
Power Supply	220-240v, 50Hz	24v, AC/DC	
Dimensions (mm) (WxDxH)	263 x 46 x 150	171 x 61 x 110	
Network	Trend	Niagara	
BEMS Compatibility	Trend	Any Niagara compatible BEMS	
Control	On/Off Mode Setpoint Fan Speed Air Direction Permit/Prohibit Schedule Filter Sign	DI AI AI AI AI DI - DI	✓ ✓ ✓ ✓ ✓ ✓ - ✓
Monitor	On/Off Mode Setpoint Fan Speed Air Direction Permit/Prohibit Cloud Communication Filter Sign Fault Codes Room Temperature Daily kWh Energy Monthly kWh Energy Comfort Data	DO AO AO AO AO DO - DO AO AO - - - -	✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ³ ✓ ³ -

Key: DI = Digital Input. DO = Digital Output. AI = Analogue Input. AO = Analogue Output.

Notes: The PAC-YG***CA are not compatible with MELCOBEMS and IQ4 XNC.


¹ Synapsys Solutions Ltd, 1 Woodlands Court, Albert Drive, Burgess Hill, West Sussex, RH15 9TN, Telephone 0845 680 0303

² The MELCOJACE-8000 range is only available from Forest Rock Systems Ltd, Charmwood Building, Holywell Park, Ashby Road, Loughborough, LE11 3AQ. Telephone: 0845 5197958


³ The MELCOJACE-8000 can monitor indoor daily and monthly kWh when used in conjunction with AE-C400E, EW-C50E, PAC-YG60MCA on third party energy meters.

⁴ ETA end 2024.

System Diagram MELCOBEMS MINI (A1M+)

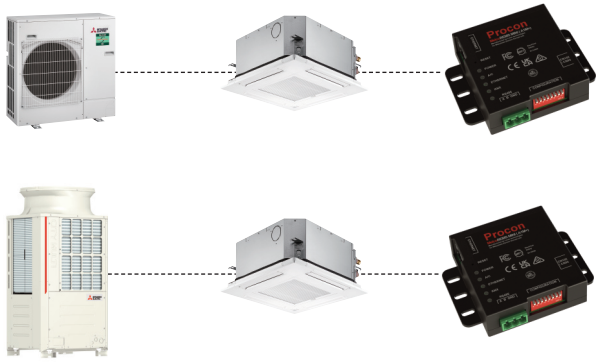


System Diagram MELCOBEMS

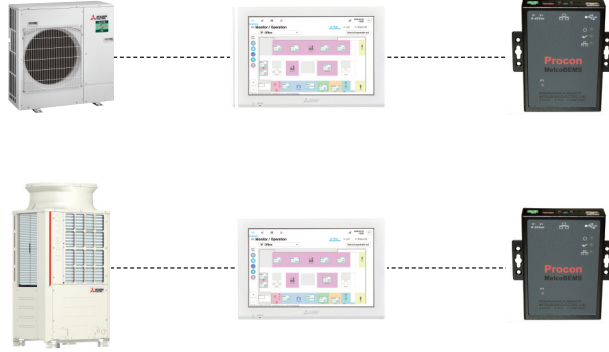


System Diagram MELCOBEMS SIP+




System Diagram IQ4 XNC

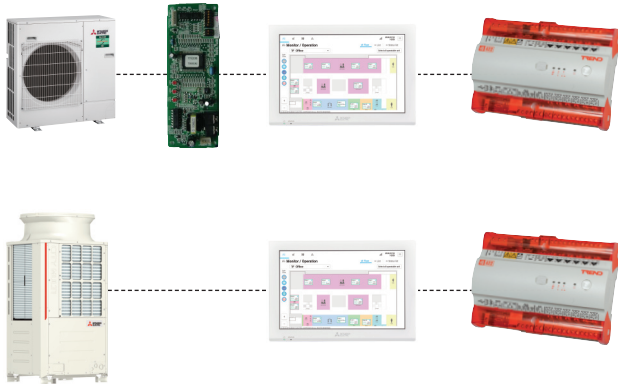


System Diagram MELCOJACE-8000

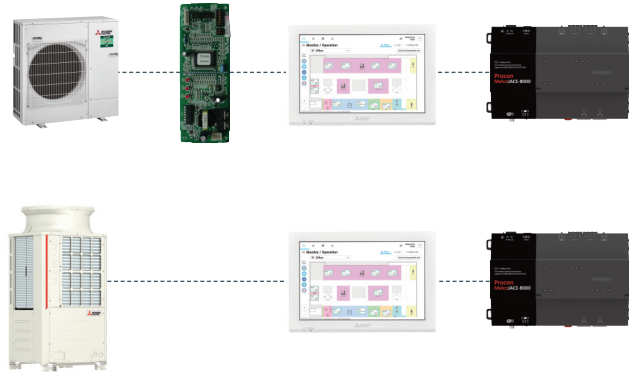


Product Dimensions MELCOBEMS MINI (A1M+)

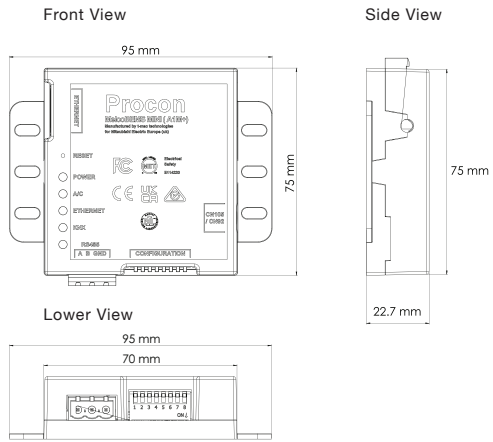


Product Dimensions MELCOBEMS

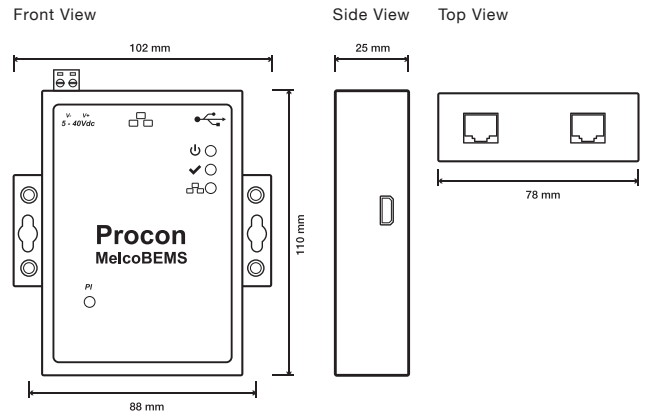


Product Dimensions MELCOBEMS SIP+

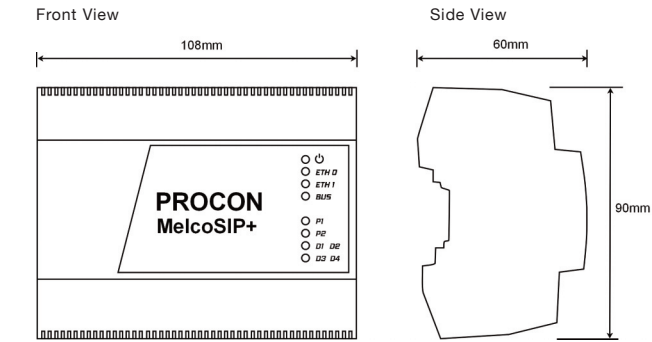

Product Dimensions IQ4 XNC

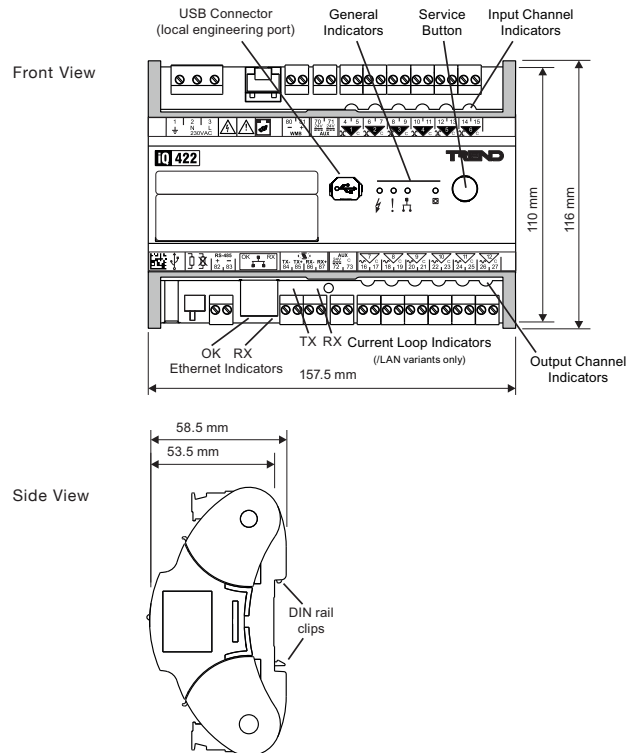


Product Dimensions MELCOJACE-8000

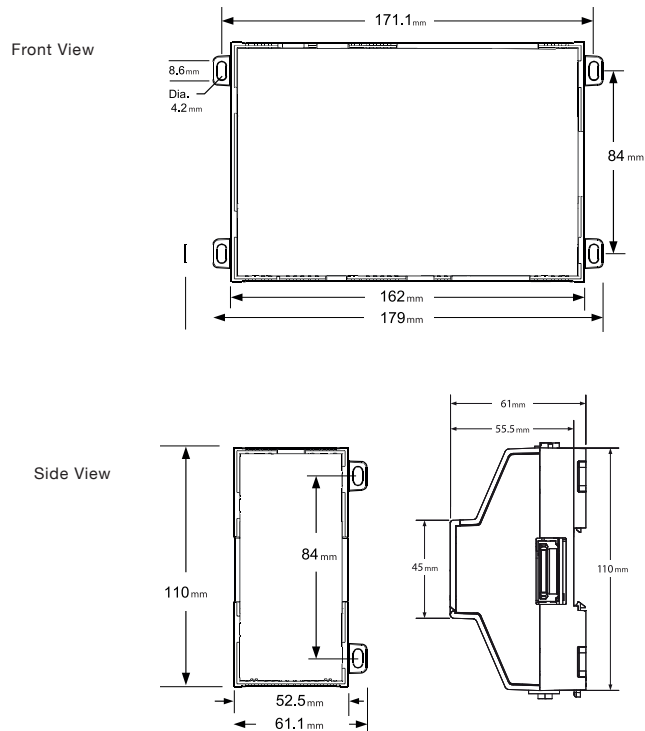


MELCloud Commercial

Monitor & Control App Screen Examples


Estate View

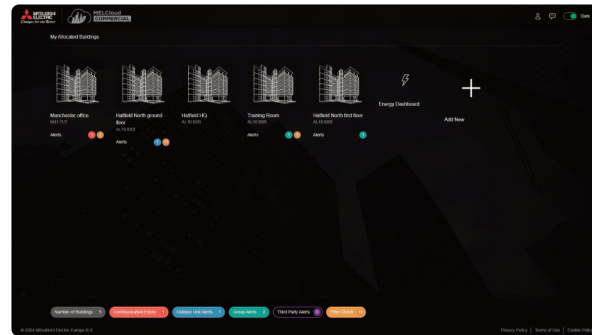


Building Level Monitoring & Energy Consumption

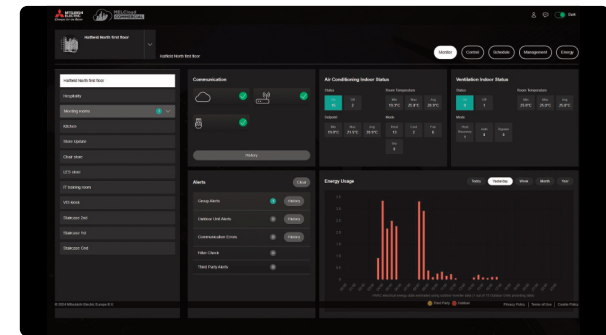


Room (Group) Level Monitoring

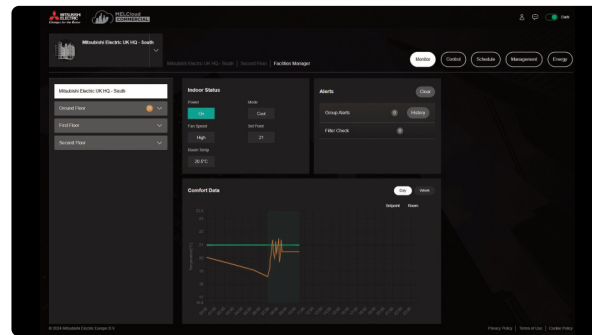


Building Level Control

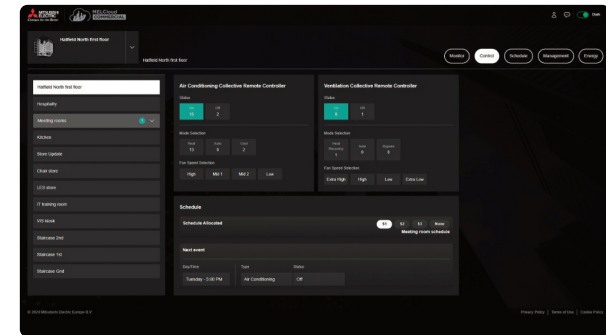

Room (Group) Level Monitoring

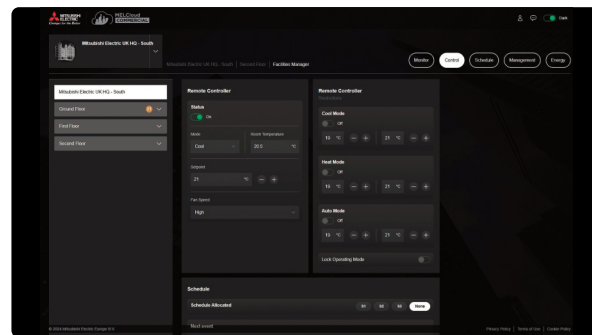


Building Level Scheduling

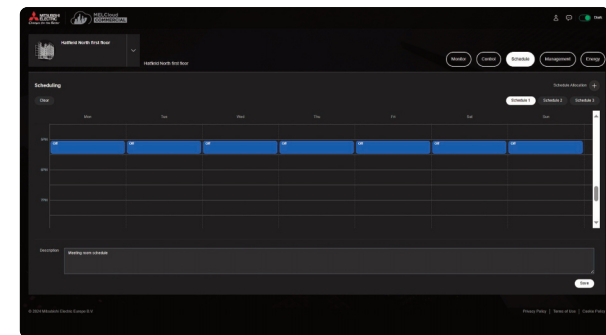


MELCloud Commercial

Advanced Energy Monitoring App Screen Examples


Estate Level Energy Monitoring

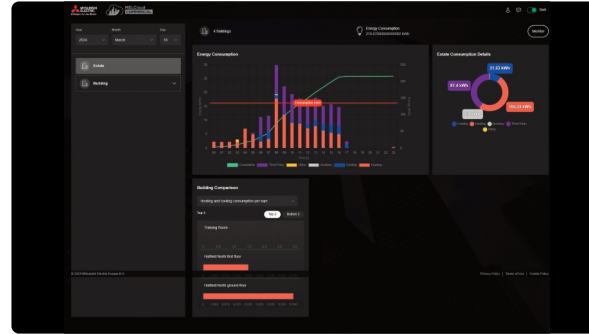


Building Level Energy Monitoring

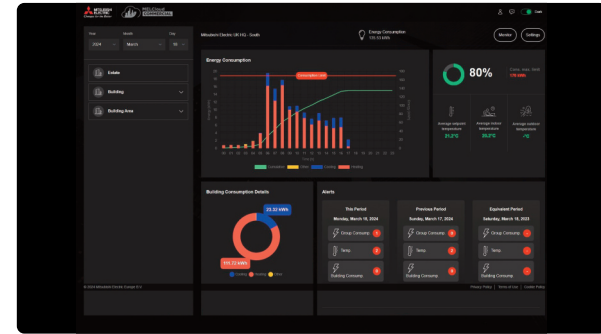

Room (Group) Level Energy Monitoring

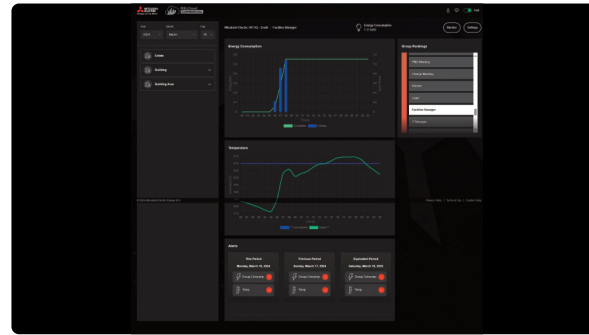


Room (Group) Level Temperature and Energy Limit Setting

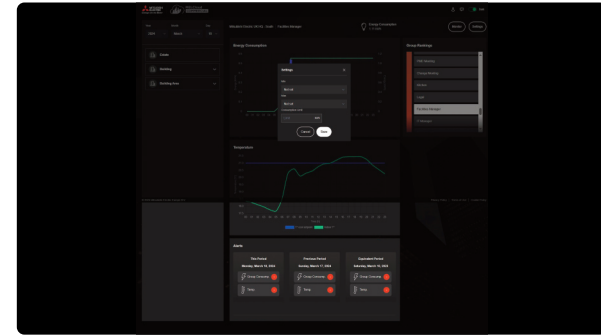

MELCloud Commercial

Service & Maintenance App Screen Examples


Service & Maintenance - System Diagram

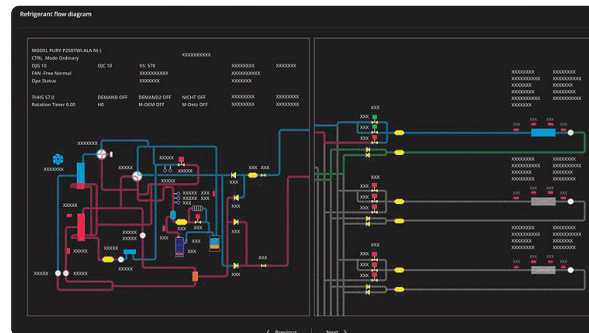

How to Quote

How to quote an AE-C400E System Controller with Energy Monitoring

How to quote Basic Energy Measurement

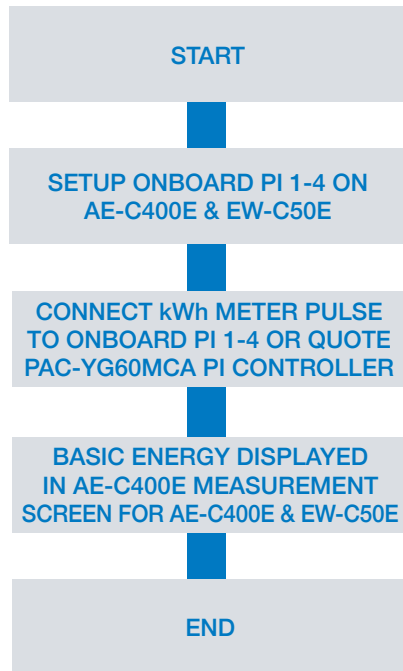


Setup on AE-C400E screen kWh pulse weight and onboard PI 1-4 inputs or PAC-YG60MCA PI inputs

Connect 1no kWh meter per AE-C400E & EW-C50E onboard PI port or to PAC-YG60MCA PI Ports

Only total energy displayed on AE-C400E screen

How to quote Energy Apportioning

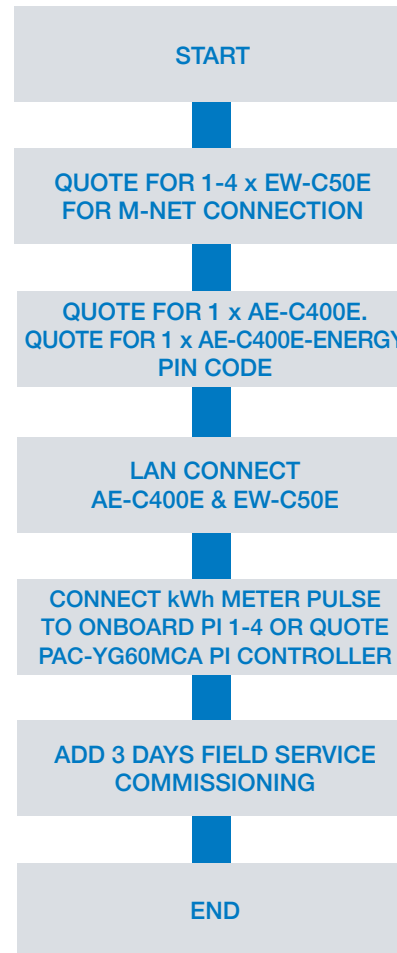

Only EW-C50E can be used for M-NET connection

All control available via AE-C400E screen

LAN connect all centralised controllers together with CAT5/6 cable - max 100m distance from each AE-C400E / EW-C50E to Hub/Switch


Connect 1 x kWh meter per AE-C400E / EW-C50E onboard PI port or to PAC-YG60MCA PI Ports

Quote for 3 x days field service commissioning

Apportioned energy displayed on AE-C400E screen and via web page (if set up)

How to Quote

How to quote an AE-C400E System Controller & BACnet Option

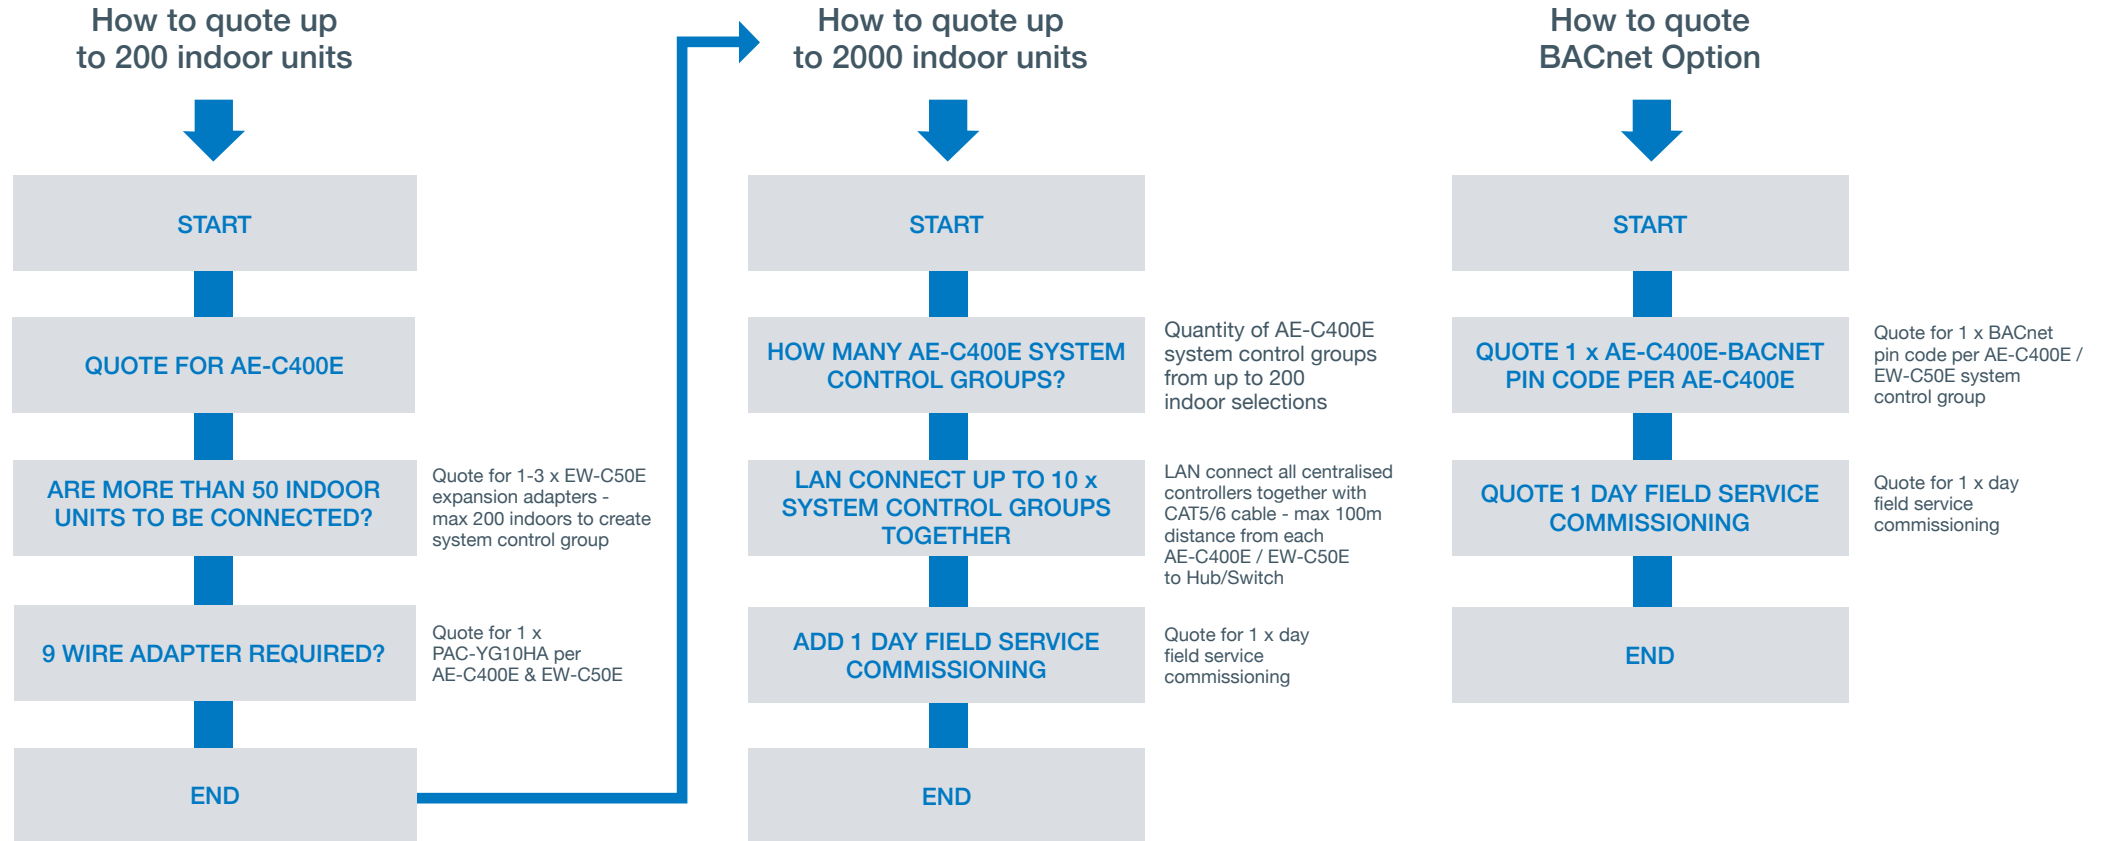

Services

Support at every step of the way





Support at every step of the way

At Mitsubishi Electric, we have not only developed an innovative range of cooling, heating, ventilation and control solutions, we have also examined how we support the market throughout the complete lifecycle of our products - from cradle to grave.

Whether in pre-sales design and specification, installation, or service and maintenance support, right through to our recycling programme, we can offer solutions that deliver the quality and excellence you would expect to make a world of difference.

Contents

MELServe Technical Services	6.4
MELServe Chiller Service and Maintenance for Central Plant and IT Cooling	6.9
Mitsubishi Electric Product Training	6.10
Mitsubishi Electric Design and Consulting Services	6.11
Mitsubishi Electric Partner Programme	6.12
Mitsubishi Electric Deliveries	6.14
Mitsubishi Electric Website, Document Library and The Hub	6.15
Mitsubishi Electric CPD Information Guides	6.15

MELServe Technical Services

Advanced, reliable technical support at every step of the way

Meeting today's energy challenges for our commercial premises demands more integrated thinking from everyone involved in the design, supply, installation, commissioning and maintenance of essential building services - whether it is for an individual property or a national estate.

Ever increasing energy bills, the need to reduce carbon emissions and a raft of challenging legislation are driving the demand for increased energy efficiency and control in the cooling, heating, ventilation and associated technologies that we use.

As a manufacturer, we realise that product development alone is not enough. To keep our products working at their optimum, we have developed the MELServe approach to ensure our customers are able to maximise the energy efficiency of their building's services right from the start.

MELServe offers a range of support that includes:

- Site Services
- 24/7/365 Technical Help Desk
- Spare Parts, Warranty & Returns
- CPD Accredited Technical Product Training


Whatever the challenge, we're here to help you meet it.

MELServe Customer Services & Support

Telephone: 0161 866 6089

Option 2 followed by:

- Option 1 - Technical Support
- Option 2 - Spares
- Option 3 - Warranty
- Option 4 - Site Visits
- Option 5 - Product Training

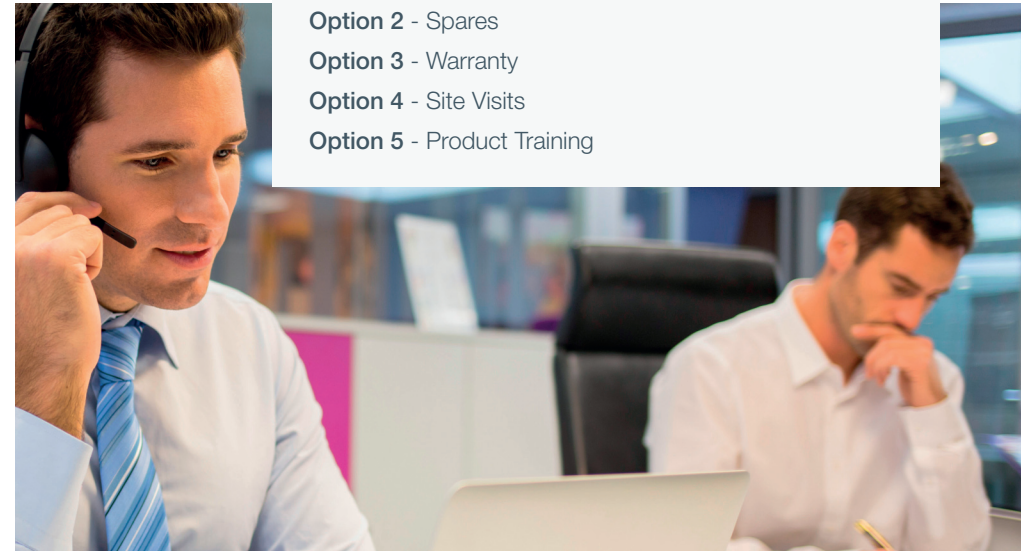

Commissioning

Our assisted commissioning service is aimed at both new and existing customers; the objective is to demonstrate how to commission our systems effectively, so that customers can carry out these tasks unassisted in the future.

Our commissioning service is available across our full product range including: **Air Conditioning, Controls, Hybrid VRF, e-Series Chillers and Commercial Heating products.**

During the commissioning process, our engineers will carry out the following tasks:

- Comprehensive inspection of the installed system to ensure the system meets Mitsubishi Electric specification
- Check the system addressing and advise on any incorrect settings
- For systems other than controls we will operate in both cooling and heating modes where applicable and record temperatures, pressures and water flow rates for the system
- Supervise the completion of commissioning logbooks



Type of Commissioning	Detail	Control System	Commissioning Days	Charge Pin Codes	BACnet Pin Code
Air Conditioning	Max 2 City Multi systems per day	1 x AE-C400E + 1-4 EW-C50E	1 day	1 - 5	1 - 5
Controls	1 x AE-C400E and up to 4 x EW-C50E per day	2 x AE-C400E + 1-4 EW-C50E	2 days	1 - 10	1 - 10
Hybrid VRF	½ day pre installation visit ½ day mid installation visit 2 day commissioning visit	3 x AE-C400E + 1-4 EW-C50E	3 days	1 - 15	1 - 15
e-Series	Max 2 chillers per day	4 x AE-C400E + 1-4 EW-C50E	4 days	1 - 20	1 - 20
Commercial Heating	Ecodan CAHV - Max 2 units per day* Ecodan QAHV - 2 day commissioning visit (includes 1/2 day mid-install visit)*	5 x AE-C400E + 1-4 EW-C50E	5 days	1 - 25	1 - 25

Whilst our engineer will supervise the successful completion of all tasks and address any questions or skill gaps that present themselves, it is the responsibility of the installing contractor under supervision to carry out all of the listed tasks. Whilst our engineer will supervise the successful completion of the commissioning logbooks, it is the responsibility of the customer to complete and submit the commissioning logbooks to Mitsubishi Electric unless specified.

For BACnet and/or Energy commissioning, the above times are guidance only and may differ based on quantity of units/systems.

*Transit bolts must be removed before we arrive on site. If transit bolts are not removed additional time and cost may be incurred.

Services and Support

MELSERVE
By Mitsubishi Electric

Fault Finding

Our Fault Finding service is carried out on new and existing installations to identify problems and offer resolutions to ensure the system is returned to a fully operational condition in the shortest possible timeframe.

Our Fault Finding service is available across our entire product range. During the Fault Finding process, our engineers will carry out assessments of the following to determine a resolution:

- System design, application and specification
- Standard of installation
- Operational performance of equipment
- Current and historic fault codes

Product

Detail

Air Conditioning

One day per reported fault

Controls

One day per reported fault

Hybrid VRF

One day per reported fault

e-Series Chillers

One day per reported fault

Commercial Heating

One day per reported fault

Note: Whilst our engineers will carry out a thorough assessment of the system and provide recommendations to rectify any issues, they do not carry spare parts and cannot provide a same day resolution in the event of part failure. If equipment failure due to manufacturing is discovered, no cost will be raised and the visit will be carried out F.O.C. It is the responsibility of the customer to provide access to all of the affected equipment on site. Whilst our engineer will identify any installation and setup issues that are affecting performance, it is the responsibility of the contractor to rectify any problems.



Health Checks

Our Health Check service is carried out on existing installations to ensure that the system is operating within our design parameters. The service is available to both new and existing customers and the objective is to establish a fully operational system.

Our Health Check service is available for the following product ranges: Air Conditioning including Hybrid VRF, e-Series Chillers and Commercial Heating products. During the Health Check process, our engineers will carry out the following tasks:

- Comprehensive visual inspection of the installed system to ensure the system meets Mitsubishi Electric specification
- Check the system addressing and advise on any incorrect settings
- Full operation in both cooling and heating modes where applicable
- Record operating data including temperatures, pressures and water flow rates of outdoor units, BC Boxes and indoor units to determine the correct operation







Product	Detail
Air Conditioning	Up to 3 systems per day
Hybrid VRF	Up to 2 systems per day
e-Series Chillers	Up to 4 systems per day
Commercial Heating	Up to 3 systems per day

Note: Whilst our engineer will ensure the successful completion of all tasks and address any questions or skill gaps that present themselves, it is the responsibility of the contractor to provide access to all equipment. Whilst our engineer will identify any installation and setup issues that are affecting performance, it is the responsibility of the contractor to rectify any problems.



City Multi Stripdown

For installations where the City Multi outdoor unit(s) cannot be moved to the final location, Mitsubishi Electric offer a City Multi strip down service. Other products are available on request, please contact us for further information should you have a specific strip down requirement.

Product Range	Model Reference	Product Range	Model Reference
	<p>PURY-EM/EP YNW-A1/2 PURY-M/P YNW-A1/2 Small Module PUHY-M/P YNW-A1/2</p>		<p>PURY-EM/EP YNW-A1/2 PURY-M/P YNW-A1/2 Extra Large Module PUHY-P YNW-A2</p>
	<p>PURY-EM/EP YNW-A1/2 PURY-M/P YNW-A1/2 Large Module PUHY-P YNW-A2</p>		<p>PQRY-P YLM-A1 PQHY-P YLM-A1</p>

Chiller Service and Maintenance for Central Plant and IT Cooling

We are now able to bring Mitsubishi Electric quality to your service and maintenance contract, using the very latest technology for in-field reporting and diagnostics. Our highly trained and qualified chiller service and maintenance engineers are based nationwide, operating from our network of service offices. Our engineers are experienced in the servicing, maintenance and repair of chiller systems across the industry.

What we do:

- Comprehensive service and maintenance plans
- National coverage (four dedicated service centres)
- Fast response times
- Reactive-response and call-out service
- Spare parts
- F-Gas and REFCOM Elite accredited engineers
- 24/7 365 emergency call out service
- Service and maintenance for all manufacturers' applied products
- Commissioning / Start-up
- System checks
- Fault finding
- Extended warranties
- Strip-downs (model / application specific)



For further information and Service & Maintenance enquiries:

Telephone: 01707 278650

- Option 1 - Scotland
- Option 2 - London & South
- Option 3 - Manchester & North
- Option 4 - Midlands & Wales
- Option 5 - Applied Spares

Regional Office Emails:

- melservice.south@meuk.mee.com
- melservice.north@meuk.mee.com
- melservice.midlands@meuk.mee.com
- melservice.scotland@meuk.mee.com

Existing Customer Email: melservice.renewals@meuk.mee.com

New Customer Email: melservice@meuk.mee.com

Spare Parts Enquiries (CV/RC IT products) Email: melservice.appliedspares@meuk.mee.com

Services and Support



Product Training


Mitsubishi Electric provide specific, in-depth training at our state-of-the-art training centres across the UK, or via our award-winning online training, covering all aspects of installation, from design through to maintenance.

Providing product training for all levels of expertise, our courses are taught by experienced engineers, with a wealth of knowledge and are all CPD accredited. In addition to the CPD courses, we can also now offer LCL Level 3 Regulated Quality Framework (RQF) qualifications for heat pumps.



For bookings please telephone
0161 866 6089 (Option 2, Option 5)

Product Range	Course	Reference
City Multi (VRF)	Design and Application	CMDA
City Multi (Hybrid VRF)	Hybrid VRF Design, Application, Installation and Commissioning	HVRF
City Multi	Installation and Commissioning	CMPT1
City Multi	Service and Fault Finding	CMPT2
City Multi	Monitor Tool	MT
M Series and Mr Slim	Installation, Service and Fault Finding	MPISF
M Series and Mr Slim	M&P Hands On	HO M&P
Ecodan	Design and Application Part 1	ED&A
Ecodan	Installation and Commissioning Part 2	EI&C
Ecodan	Service and Fault Finding Part 3	ES&FF
Ecodan	Hands-on	EHO
Ecodan	Commercial Heating (CAHV)	CH
Lossnay	Design, Application, Installation and Commissioning	LOSSNAY
LCL Award L3 (RQF)	Low Temperature Heating and Hot Water Systems in Dwellings	LCL LTHWS
LCL Award L3 (RQF)	Installation and Maintenance of Air Source Heat Pump Systems (non-refrigerant circuits)	LCL ASHPS

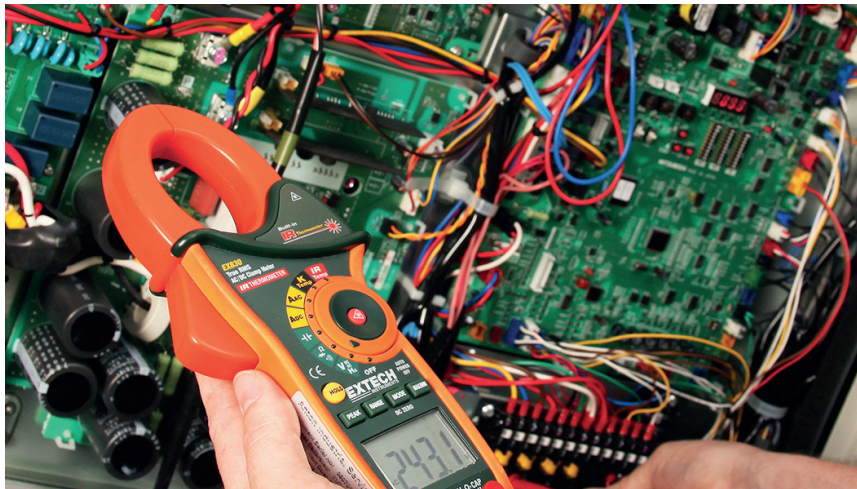

Design and Consulting Services

As part of the Mitsubishi Electric commitment to supporting robust application of our leading technologies, a team of consultant sales professionals work nationally with mechanical building services specifiers and consultants to achieve early engagement in project design.

Clients are able to apply cooling, heating, ventilation and controls confidently within their individual projects, with the emphasis on a solution-based philosophy to support 'as-designed' performance and efficiencies.

This approach helps projects realise 'as-specified' performance and efficiency levels - all designed to achieve the most efficient and cost-effective outcome for the building operator, whilst reducing the overall environmental impact.

As initial designs move from the drawing board through planning, procurement, installation and commissioning, to on-going operation and use, we work closely with our customers to balance capital expenditure, system efficiencies, installation costs, control strategies and running costs.



Working in the real world

At Mitsubishi Electric, we understand the real-world pressures of delivering commercial projects for your clients. Our dedicated team can support M&E contractors and help you tackle the challenges associated with a range of projects, including change of building layout (design evolution) without compromising the original design or performance criteria.

We also understand the link between effective design and achieving the best outcomes for building owners, operators, and users. The goal of our team is therefore to ensure robust design and implementation; every step of the way, from concept to commissioning.

Getting the right balance between capital cost, system efficiencies, installation costs and operating costs are key areas where we can support you. Each Business Development Manager has extensive product knowledge and application experience and is here to help with everything, including guidance on new and changing legislation.



Mitsubishi Electric Partner Programme


The Mitsubishi Electric Partner Programme is inclusive and open to all qualifying air conditioning and heating installation companies, large or small.

Using the world-renowned Mitsubishi Electric brand, we will train, support and promote all qualifying companies as part of our aim to drive the industry forwards. Mitsubishi Electric recognises the importance of forging lasting relationships with professional companies who install our equipment. Our Partner Programme enables us to do just that.

Established in 2005 and designed to raise industry standards, our industry leading Partner Programme assures end users of a consistently high level of installation and after sales service that supports our systems. To be eligible to join our scheme in the first instance, prospective installation partners must comply with the necessary building regulations and meet specific industry, programme and CSR standards.

All partners are reviewed on a regular basis to ensure they continue to meet the required standards that makes them eligible to be part of the Mitsubishi Electric Partner Programme.

How to apply for the Partner Programme: Speak to your Mitsubishi Electric Representative or email partner@meuk.mee.com

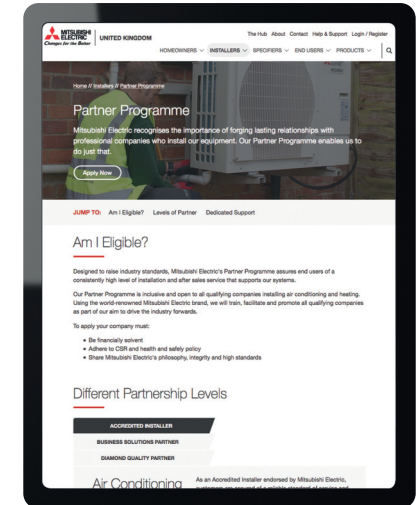

Partner Programme Benefits

■ Dedicated Partner Programme Team

Our dedicated Partner Programme Team are on hand to give Partners the support they need.

■ Mitsubishi Electric Customer Portal

We have developed our Customer Portal to help our Partners grow their business by enhancing their online presence on channels such as social media and via their own website. Product images, social media copy, easy to follow strategy guides and marketing training videos are just a few examples of free content that can be downloaded.

Take a look today and see how you can use this to grow your business:

les.mitsubishielectric.co.uk/customer-portal

■ Joint Marketing / Relationship Development Fund (RDF)

We will work with Partners to promote our relationship and generate awareness of the unique business benefits of the Partner Programme to end-users. We operate a Partner Programme Relationship Development Fund (RDF) allocated in relation to their commercial activities with Mitsubishi Electric.

You can submit your claims forms and check your RDF balance online at:

les.mitsubishielectric.co.uk/customer-portal/make-a-claim

■ Digital Marketing Packages

We're able to offer an exclusive and flexible digital marketing package for our partners, using their RDF to increase their brand awareness.

■ Online Workwear and Promotional Goods Portal

Partners can take advantage of their RDF to enhance their company image with dual branded work wear and promotional items.

les.mitsubishielectric.co.uk/customer-portal/promotional-goods

■ Product and Industry Training

Our Partners receive a free allocation of training courses and additional courses can be funded from the Relationship Development Fund.



Grow Your Business
with Mitsubishi Electric



■ Committed Carbon Reduction Partner (CCRP)

Partners have access to a new accreditation reflecting a commitment towards sustainable practices. The CCRP accreditation will provide a competitive advantage for our Partners, showcasing a proven dedication to reducing the operational carbon footprint through an annually calculated reduction plan, helping them on the road to Net Zero.

■ Carbon Footprint Calculation

Partners are invited to use their RDF to conduct a Carbon Footprint Calculation of their business, a crucial step on the road to net zero.

■ 24hr Technical Support

To assist our Partners in the maintenance of our equipment, we have a dedicated technical support team who will endeavour to speedily diagnose faults and offer solutions to the problems our Partners may encounter.

■ Find An Installer

Mitsubishi Electric works to promote our partners through our 'Find an installer' web page, highlighting specific Partners to contact, depending on the type of project a consumer has.

■ Extended Warranty

We will offer all Partners who adhere to our standards exclusive extended product warranties.

■ Business Support Tools

We have made it easier to do business with Mitsubishi Electric through the introduction of new technologies and our business tools available to Partners.

■ Factory Visits & Events

Our Partners and their clients will have the opportunity to witness first-hand the manufacture of air conditioning and Ecodan units at our manufacturing facility in Scotland. We organise regular factory visits to our manufacturing facility in Scotland, along with other events designed to develop our Partners expertise and support them in growing their business.

Services and Support

Mitsubishi Electric Deliveries

At Mitsubishi Electric, we realise that our customers' businesses can depend on getting the right equipment on site at the right time.

That's why we have developed a comprehensive and flexible delivery programme with one of the longest delivery windows in the industry. With the ability to offer timed, weekend and Public Holiday deliveries, coupled with free 'Text Ahead' and 'Ring Ahead' functions, we aim to keep our customers informed every step of the way.

Delivery Notes

- Cut off for next day deliveries is 1.00pm on the working day prior to delivery, or 2.30pm for orders placed via e-shop
- Standard weekday delivery is between 8.00am and 5.30pm for pallet deliveries, and 7.00am and 7.00pm for parcel deliveries
- AM / PM / Timed / Weekend / Public Holiday deliveries are all available (additional notice needed and charges will apply - please refer to full delivery guidelines for further details)
- Standard delivery will normally be made on an 18T rigid lorry equipped with a tail lift and a single driver with a pump truck
- Other vehicle types will be utilised dependant on any site access issues and delivery size
- If there are access restrictions at your nominated delivery point and a vehicle other than an 18T lorry is required, this will need to be booked in advance and a charge may apply
- Our 'Text Ahead' and 'Ring Ahead' functions are available on most deliveries. For parcel providers, we offer 'Text Ahead' only
- Deliveries available via HIAB (Flatbed vehicle with crane) / with chapter 8 signage - require 48 hours' notice and extra charges may apply
- We offer a 2-man delivery service, removal of packaging and a stair walker - these require 48 hours' notice and extra charges will apply
- Mitsubishi Electric is an Associate Member of the Fleet Operator Recognition Scheme (FORS) and our dedicated fleet vehicles are FORS accredited to Bronze level
- Collection is also available from our Milton Keynes warehouse - this must be pre-arranged and require at least 3 hours' notice
- Returns to be notified within 30 working days - Terms and Conditions apply
- MEHITS product deliveries are subject to alternate delivery arrangements - Terms and Conditions apply
- Please ensure shortages or damages are marked on the delivery note and notified within 3 working days

Mitsubishi Electric Website, Document Library and The Hub

Website

For further information on any of our products and services please visit our website: les.mitsubishielectric.co.uk which has been designed to provide a detailed overview of the energy saving solutions we can provide you.

Document Library

Our website: library.mitsubishielectric.co.uk features all current operating and installation manuals, as well as product literature, case studies, CPD guides and more. There is no requirement for visitors to login to our sites to download the latest product and technical information. A document library app is also available allowing visitors to access this information simply from their tablet or smart phone.

The Hub - online content portal

The Hub is a new approach from Mitsubishi Electric which offers useful and informative comments and articles from both leading independent editors and technical experts on the issues affecting the built environment, please visit: thehub.mitsubishielectric.co.uk

e-Shop

Online ordering is available to all credit account customers across both Finished Goods (M Series and Mr Slim) and Spare Parts.

CPD Information Guides

Mitsubishi Electric is accredited by the Construction CPD Certification Service in many different areas, aimed at enhancing the knowledge of its customers and providing a view of the key issues facing our industry today. We have produced a number of Industry Information Guides that are available to download from our Document Library. We also run a number of CPD seminars and training courses across the UK. **To find out more, simply contact your local Mitsubishi Electric sales office.**



Sales Contacts



Corporate Sales
Tel: 0870 3000 070

Birmingham
Tel: 0121 329 1970

Bristol
Tel: 01454 202050

Wakefield
Tel: 01924 241120

London North & East Anglia
Tel: 01707 282480

London South
Tel: 01737 387170

Manchester
Tel: 0161 866 6060

Scotland
Tel: 01506 444960

Ireland
Tel: +353 (0)1 419 8800



Telephone: 01707 282880

MELServe Customer Services & Support: 0161 866 6089

Option 1 - Homeowners

Option 2 - Commercial Products

Option 3 - Residential Ecodan Installer
or Service Provider

Commercial Product Options (following Option 2)

Option 1 - Technical Support

Option 2 - Spares

Option 3 - Warranty

Option 4 - Site Visits

Option 5 - Training

Middlesex: 020 8783 1008

Scotland: 01786 450 348

email: livingenvironmentalsystems@meuk.mee.com

website: les.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division
Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England
General Enquiries Telephone: 01707 282880

IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland
Telephone: Dublin (01) 419 8800 International code: (003531)

Country of origin: United Kingdom – Japan – Thailand – Malaysia. ©Mitsubishi Electric Europe 2024. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only and please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R290 (GWP:3), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R454C (GWP:148), R1234ze (GWP:7) or R1234yf (GWP:4). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP:1975), R32 (GWP:550), R407C (GWP:1650) or R134a (GWP:1300).



www.greengateway.mitsubishielectric.co.uk

Mitsubishi Electric UK's commitment
to the environment



Follow us @meuk_les
Follow us @green_gateway



Mitsubishi Electric
Cooling and Heating UK



Mitsubishi Electric
Living Environmental Systems UK



Mitsubishi Electric
Living Environmental Systems UK



[mitsubishielectricuk_les](https://www.instagram.com/mitsubishielectricuk_les)



thehub.mitsubishielectric.co.uk