

PCFY-WL-VKM-E

Ceiling Suspended Indoor Unit

CITY MULTI

Designed for ultra-quiet operation and easy maintenance, the **PCFY-WL-VKM-E** provides comfortable air conditioning for a wide range of applications where floor or wall space cannot be used practically.

Key Features & Benefits:

- Indoor unit designed for direct ceiling suspension
- Flush to wall installation for concealment of service connections
- Drain piping can be connected from left or right for flexible installation




PCFY-WL-VKM-E
Ceiling Suspended Indoor Unit




INDOOR UNITS		PCFY-WL40VKM-E	PCFY-WL63VKM-E	PCFY-WL80VKM-E
CAPACITY (kW)	Heating (nominal)	5.0	8.0	10.0
	Cooling (nominal)	4.5	7.1	9.0
	UK Heating	5.0	8.0	10.0
	UK Total Cooling - Hi (Sensible)	4.00 (3.00)	6.4 (4.80)	8.1 (6.10)
	UK Total Cooling - Mi2	3.93	6.22	7.97
	UK Total Cooling - Mi1	3.82	3.09	7.78
	UK Total Cooling - Lo	3.69	5.93	7.40
POWER INPUT (kW)	Heating (nominal)	0.04	0.06	0.08
	Cooling (nominal)	0.04	0.06	0.08
AIRFLOW (l/s)	Lo-Mi2-Mi1-Hi	167-183-200-217	233-250-267-300	350-400-433-467
SOUND PRESSURE LEVEL (dBA)	Lo-Mi2-Mi1-Hi	32-35-37-39	34-37-40-43	39-40-42-44
WEIGHT (kg)		25	32	39
DIMENSIONS (mm)	Width	960	1280	1600
	Depth	680	680	680
	Height	230	230	230
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single
RUNNING CURRENT (A)	Heating / Cooling	0.34 / 0.34	0.52 / 0.52	0.69 / 0.69
FUSE RATING (BS88) - HRC (A)		6	6	6
MAINS CABLE No. Cores		3	3	3
WATER PIPE CONNECTION		20 mm I.D	30 mm I.D	30 mm I.D

Notes: HVRF indoor units can only be configured with the CMB-WM HBC (HVRF) and PURY-(EIM YNW-A1 or PQRY-P YLM-A1 outdoor units.


DIMENSIONS **PCFY-WL40VKM-E**

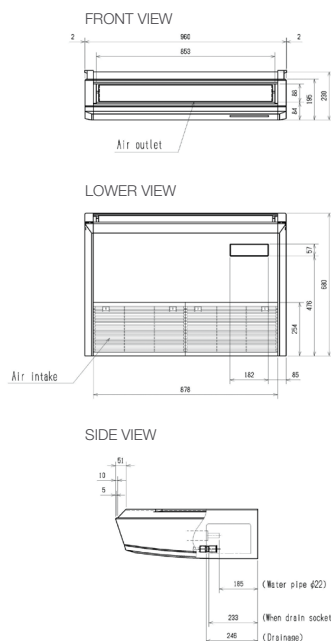



DIMENSIONS PCFY-WL63VKM-E

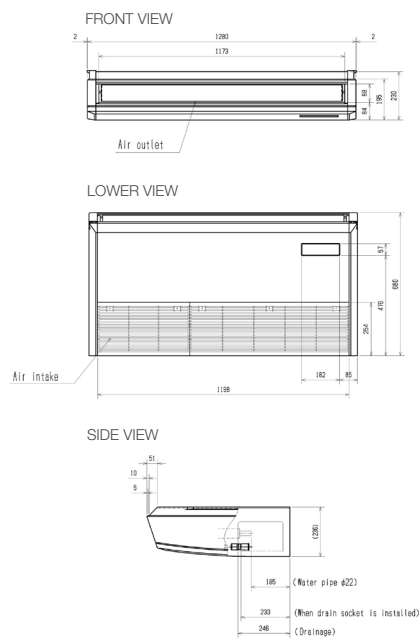

DIMENSIONS PCFY-WL80VKM-E

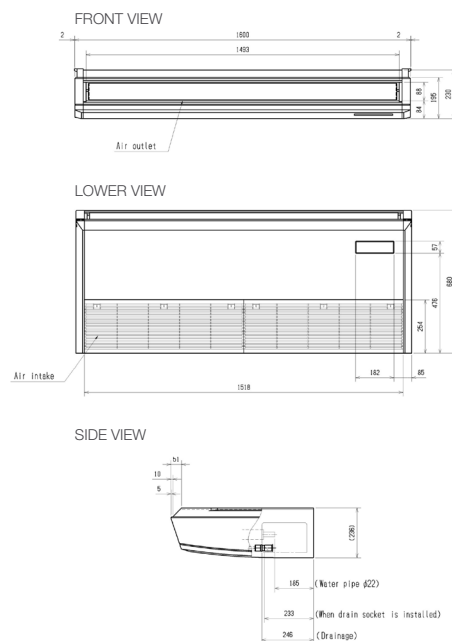

Telephone: 01707 282880
email: air.conditioning@meuk.mee.com
les.mitsubishielectric.co.uk



UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880

IRELAND Mitsubishi Electric Europe, Plunkett House, Grange Castle Business Park, Nangor Road, Dublin 22, Ireland. Telephone: (00353) 1 4198800 Email: sales.info@meir.mee.com Web: les.mitsubishielectric.ie

Country of origin: United Kingdom - Italy - Turkey - Japan - Korea - Thailand - Malaysia. © Mitsubishi Electric Europe 2024. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only and please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size, fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP=2088), R290 (GWP=3), R32 (GWP=675) and R407C (GWP=1774), R134a (GWP=1430), R513A (GWP=631), R454B (GWP=466), R454C (GWP=148), R1234ze (GWP=7), or R1234yf (GWP=4). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows, R410A (GWP=1975), R32 (GWP=550), R407C (GWP=1650) or R134a (GWP=1300).

Effective as of November 2024

