

2026

# Product Catalogue

Market leading solutions to **cool, heat, ventilate & control** the nation's buildings

## M&E Edition

[les.mitsubishielectric.co.uk](https://les.mitsubishielectric.co.uk)



# Welcome to **Mitsubishi Electric**

Mitsubishi Electric is a market leader in providing solutions to cool, heat, ventilate and control our buildings.

As a major manufacturer of some of these pivotal technologies, we hold the UK's energy challenges close to our heart. We want to help the nation achieve its climate goals; we want to help individuals and businesses reduce the energy consumption of their buildings, whilst also helping to reduce their annual running costs.

At Mitsubishi Electric, we are constantly evolving and today our areas of expertise go way beyond the advanced air conditioning systems that formed the foundation of our business. Here in the UK, we provide advanced solutions that cool, heat, ventilate and control buildings in the most energy efficient and cost-effective ways possible. Through technical expertise, experience and an innovative product range, we enable buildings everywhere to significantly improve energy efficiency, reduce running costs and adhere to increasingly tough legislation. **We also provide a variety of additional services and benefits to our customers which include:**

- Product training and technical support
- Contractor Partner Programme
- CPD guides and presentations
- Design and consultancy services
- Apps and tools

## Working towards a better use of energy in buildings

Mitsubishi Electric's global framework for realising a sustainable planet - **Environmental Sustainability Vision 2050** - is translated in the UK into our **Green Gateway philosophy**, which is central to the way we do business. With this initiative, we are seeking to use our position as a manufacturer of key technologies to increase awareness and improve energy use in the built environment.

By constantly challenging everyone involved to combat the issues we all face and encouraging constructive dialogue throughout the industry, we aim to help everyone address their energy use and to work towards a more sustainable future. Working within the construction industry in this way we are continually developing energy efficient cooling, heating and ventilation solutions - all managed by the most advanced control systems available.



# Contents



Commercial Heat Pumps  
& Chillers 1

IT Cooling 2

Refrigeration 3

Residential Heating 4

Ventilation 5

Controls 6

Services 7



# Commercial Heat Pumps & Chillers

A new generation of energy saving  
and innovative technology





# Contents

<b>Commercial Heat Pumps - An Overview</b>	<b>1.4</b>	<b>Chillers - An Overview</b>	<b>1.42</b>
<b>Ecodan Hydrodan EHWT17D-MHEDW</b> R32 Water to Water Heat Pump	<b>1.6</b>	<b>e-Series EACV</b> R32 Modular Air Cooled Chiller	<b>1.44</b>
<b>e-Series EAHV</b> R32 Modular Air Source Heat Pump	<b>1.8</b>	<b>MECH-iB-G07</b> R32 Air Cooled Chiller	<b>1.46</b>
<b>Ecodan CAHV-Z</b> R290 Air Source Heat Pump	<b>1.10</b>	<b>MECH-iF-G05</b> R513A High Performance Air Cooled Chiller	<b>1.48</b>
<b>Ecodan CAHV-R</b> R454C Air Source Heat Pump	<b>1.12</b>	<b>MECH-iF-G04</b> R1234ze High Performance Air Cooled Chiller	<b>1.49</b>
<b>Ecodan QAHV</b> R744 Air Source Heat Pump	<b>1.14</b>	<b>NX2-G06</b> R454B Air Cooled Chiller	<b>1.50</b>
<b>NX2-N-G06</b> R454B Air Source Heat Pump	<b>1.16</b>	<b>i-FX2-G05</b> R513A Air Cooled Chiller	<b>1.54</b>
<b>i-FX-N-G05</b> R513A Air Source Heat Pump	<b>1.19</b>	<b>i-FX2-G04</b> R1234ze Air Cooled Chiller	<b>1.56</b>
<b>NX2-W-G06-H</b> R454B Water-to-Water Heat Pump	<b>1.21</b>	<b>FX2-G05</b> R513A Air Cooled Chiller	<b>1.60</b>
<b>EW-HT-G05</b> R513A Water-to-Water Heat Pump	<b>1.22</b>	<b>FX2-G04</b> R1234ze Air Cooled Chiller	<b>1.63</b>
<b>EW-HT</b> R134a Water-to-Water Heat Pump	<b>1.23</b>	<b>Accessories / Optional Extras</b>	<b>1.64</b>
<b>TX2-W-G04 /H</b> R1234ze Water-to-Water Heat Pump	<b>1.24</b>		
<b>INTEGRA Simultaneous Heating and Cooling - An Overview</b>	<b>1.26</b>		
<b>i-NX-Q</b> R410A Air Source Polyvalent Unit	<b>1.28</b>		
<b>NX-Q-G06</b> R454B Air Source Polyvalent Unit	<b>1.30</b>		
<b>NX2-Q-G06</b> R454B Air Source Polyvalent Unit	<b>1.35</b>		
<b>i-FX-Q2-G05</b> R513A Air Source Polyvalent Unit	<b>1.38</b>		
<b>i-FX-WQ-G05</b> R513A Water Source Polyvalent Unit	<b>1.41</b>		

## Commercial Heat Pumps & Chillers

# The Innovative Commercial Heat Pump & Chiller Range

Mitsubishi Electric has developed a range of heat pumps and chillers specifically designed for heating and cooling commercial buildings.

The Ecodan® range provides renewable heating, challenging traditional heating solutions, whilst meeting the energy and carbon reduction demands of today and beyond. At the same time the e-Series modular chiller range provides a low-carbon, flexible and cost effective option, allowing up to six individual units to be connected together to provide a system capacity from 150kW to 1,080kW, in either cooling only or heat pump options.

In 2015 Mitsubishi Electric purchased Climaveneta, enhancing our product line up and marking our full scale entry into the chiller market.

Climaveneta is a strong European brand, supported by 45 years of customer trust and high quality production. Its range of energy-saving, low-noise and innovative heat pump and chiller technology further expands the application and customisation capabilities we are now able to offer.

Through our technical expertise, long experience and innovative product range, we enable building operators everywhere to significantly improve energy efficiency, reduce running costs and adhere to increasingly tough legislation.

**We believe that global climate challenges need local solutions.  
Our aim is to help individuals and businesses reduce the energy consumption of their buildings and their running costs.**



**ecodan**<sup>®</sup>  
Renewable Heating Technology

**e-series**

**INTEGRA**

**CLIMAVENETA**

## Commercial Heat Pumps & Chillers

### Our Commercial Heating range at a glance


The range of heat pumps on the market is now wider than it ever has been. This means it's possible to select exactly the right equipment for the specific application. Our commercial heat pumps fall into three broad ranges:



**Mitsubishi Electric** - Modular heat pumps manufactured to the highest quality standard, and suitable for a range of different applications.

**Climaveneta** - Commercial heat pumps that use a wide range of low and lower GWP refrigerants, alongside the latest fixed speed/inverter scroll and screw compressors.

**Ecodan** - A range of renewable heat pumps that efficiently and reliably generate sustainable space heating and hot water all year round.

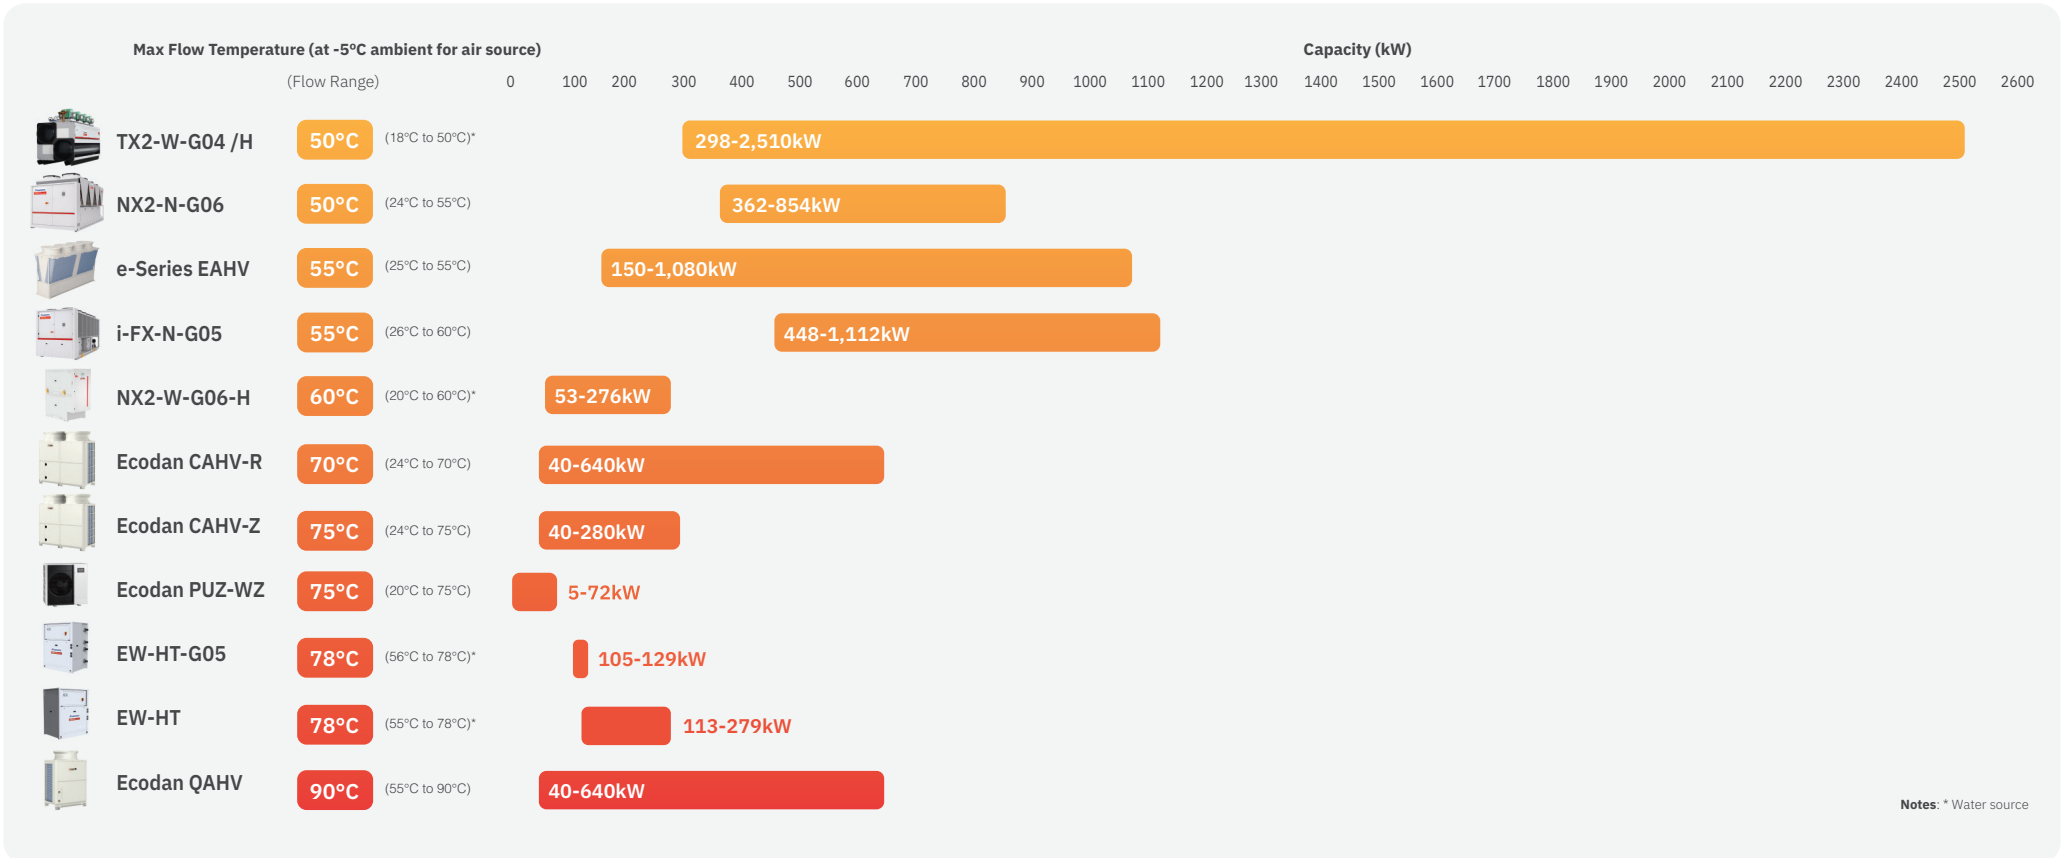



# Hydrodan EHWT17D-MHEDW R32 Water to Water Heat Pump



The **Ecodan Hydrodan** is a water to water heat pump, designed to produce heating and hot water in residential apartments, and connect to a 5th generation ambient temperature heat network deployed throughout the building. The use of these networks helps to reduce overheating in apartments and also produces negligible distribution losses. The local heat network can be maintained at ambient temperature by a Mitsubishi Electric commercial heat pump, environmental source or connected to a district heat network.

## Key Features & Benefits

- Removable heat pump module - simple for repairs
- Highly efficient heating and hot water production - low running costs for owners
- Low quantity R32 refrigerant - low environmental impact
- PIC valve network control - simple pressure balancing and flow control
- Ultra-low noise output - no disturbance for owners




MODEL		EHWT17D-MHEDW	
CAPACITY INFORMATION	L20 / W35	Heating Capacity (min-max)	kW 1.2 - 8.0
		Power Input (min-max)	kW 0.3 - 1.0
		COP (Nom.)	- 9.2
	L20 / W45	Heating Capacity (min-max)	kW 1.1 - 7.5
		Power Input (min-max)	kW 0.5 - 1.3
		COP (Nom.)	- 6.3
	L20 / W55 (DHW)	Heating Capacity (DHW)	kW 6.3
		Power Input (DHW)	kW 1.3
		COP (DHW)	- 5.0
	L25 / W35	Heating Capacity (min-max)	kW 1.5 - 9.3
		Power Input (min-max)	kW 0.2 - 1.0
		COP (Nom.)	- 11.3
	L25 / W45	Heating Capacity (min-max)	kW 1.3 - 8.5
		Power Input (min-max)	kW 0.4 - 1.3
COP (Nom.)		- 7.8	
L25 / W55 (DHW)	Heating Capacity (DHW)	kW 6.8	
	Power Input (DHW)	kW 1.5	
	COP (DHW)	- 5.4	
Heating Circuit Flow Rate (min - max)		l/min	7.1 - 27.7
LOOP INFORMATION	Control Type		PICV + Actuator
	Inlet Temperature Range (min - max)		°C 10 - 30
	Flow Rate (min - max)		l/min 7.2 - 24
	Maximum Loop Pressure Rating		bar 10
	Pipe Connection Size		mm 28
ELECTRICAL INFORMATION	Voltage/Phase/Frequency		230v/1ph/50Hz
	Fuse Rating - Heat Pump/Immersion Heater		A 16/20
	Number of Connections		- 2
	Immersion Rating (Tank)		kW 3
GENERAL INFORMATION	Start up Current		A 3.1
	Unit Dimensions (WxDxH)		mm 595 x 680 x 1750
	Compressor Type		- Rotary compressor
	Domestic Hot Water Tank Volume (net)		l 170
	Weight (empty)		kg 166
	Weight (full)		kg 345
	Refrigerant		- R32
	Volume of Refrigerant		kg 0.9
	Heating Temperature Range		°C 20 - 60
	Hot Water Temperature Range		°C 40 - 60
	Internal Water Volume Loop Side / Heating Side		l 3.16 / 5.47
	Sound Power Level		dBA 38
Sound Pressure Level @1m		dBA 27	




Certificate Number: 037-0101-22  
Product (Type): Heat Pumps (Water/Water)  
Product Reference: EHWT17D-MHEDW


Rear View

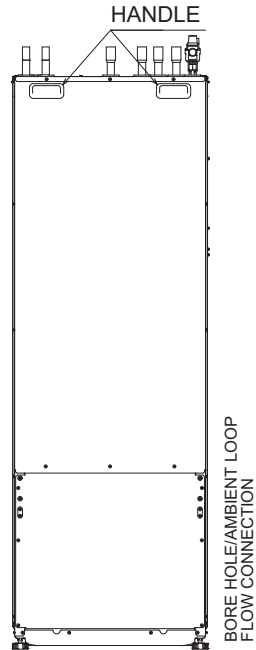


Left Side View

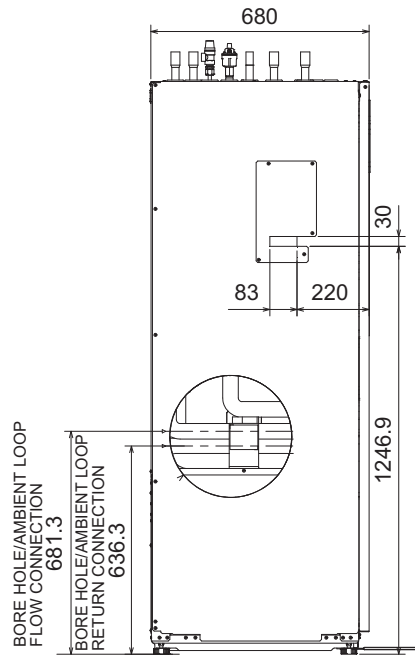


Front View

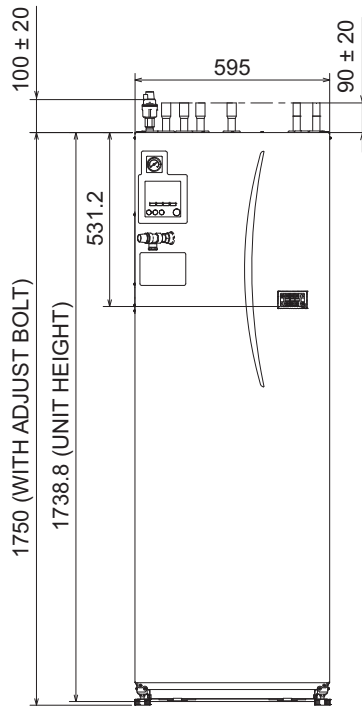

Right Side View

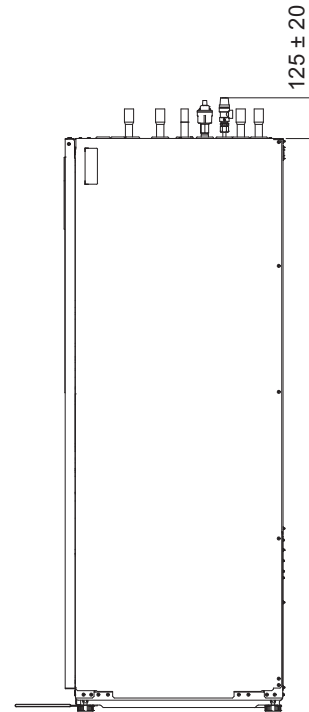

Upper View

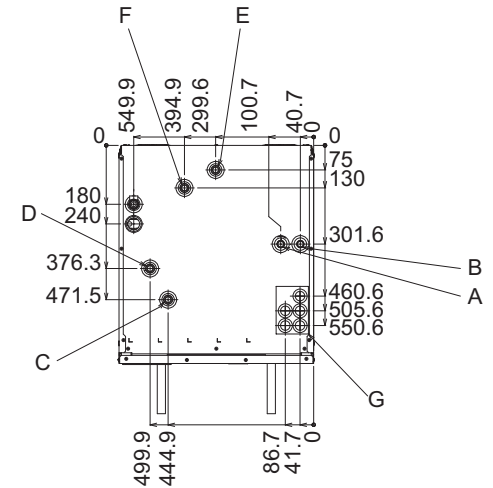

Letter	Pipe description	Connection size/type
A	DHW outlet connection	22 mm/Compression
B	Cold water inlet connection	22 mm/Compression
C	Space heating return connection	28 mm/Compression
D	Space heating flow connection	28 mm/Compression
E	Ambient loop return connection	28 mm/Compression
F	Ambient loop flow connection	28 mm/Compression
G	Electrical cable inlets	For inlets 1 and 2, run low-voltage wires including external input wires and thermistor wires. For inlets 3, 4 and 5, run high-voltage wires including power cable, and external output wires. *For a wireless receiver (option) cable and ecodan Wi-Fi interface (option) cable, use inlet 1.

e-series

# EAHV R32 Modular Air Source Heat Pump

(150 to 1,080kW)

The R32 e-Series **EAHV** range allows for up to 6 individual units to be connected together to provide a system capacity from 150kW to 1,080kW. Using this modular approach reduces space requirements and simplifies lifting and installation.

## Key Features & Benefits

- Highly efficient inverter scroll compressors
- Modular to maximise space saving
- Y-shaped heat exchangers allow for a greater surface area, maximising efficiency, whilst also keeping the units much narrower than conventional heat pumps

R32



MODEL		EAHV-M1500YCL-N	EAHV-M1800YCL-N
POWER SOURCE		3-phase 4-wire 380-400-415v 50/60Hz	
COOLING CAPACITY <sup>1</sup>		150	180
	Power Input	kW	44.73
	EER		3.35
	IPLV <sup>6</sup>		6.42
	Water Flow Rate	m <sup>3</sup> /h	25.8
COOLING CAPACITY (EN14511) <sup>2</sup>		149.18	178.80
	Power Input	kW	45.55
	EER		3.28
	Eurovent Efficiency Class		A
	SEER		5.52
	Performance (η <sub>s,c</sub> )	%	217.8
	Water Flow Rate	m <sup>3</sup> /h	25.8
HEATING CAPACITY <sup>3</sup>		150	180
	Power Input	kW	42.61
	COP		3.52
	Water Flow Rate	m <sup>3</sup> /h	25.8
HEATING CAPACITY (EN14511) <sup>4</sup>		150.82	181.20
	Power Input	kW	43.43
	COP		3.47
	SCOP Low/Medium <sup>7</sup>		3.31/2.88
	Water Flow Rate	m <sup>3</sup> /h	25.8
CURRENT INPUT		76 - 72 - 69	96 - 91 - 88
	Cooling Current 380-400-415V <sup>1</sup>	A	
	Heating Current 380-400-415V <sup>3</sup>	A	
	Maximum Current	A	120
WATER PRESSURE DROP <sup>1</sup>		56	79
	Standard Piping	kPa	
	Inside Header Piping	kPa	134
TEMP RANGE		Outlet water 4~30	Outlet water 4~30
	Cooling	°C	
	Heating	°C	Outlet water 25~55
	Outdoor (Cooling)	°C	-15~52
	Outdoor (Heating)	°C	-20~43
CIRCULATING WATER VOLUME RANGE		12.9~43.0	12.9~43.0
SOUND PRESSURE LEVEL (Measured in anechoic room) at 1m <sup>1</sup>		65	67
SOUND POWER LEVEL (Measured in anechoic room) <sup>1</sup>		83	85
DIAMETER OF WATER PIPE (Standard piping)		Inlet	65A (2 1/2B) housing type joint
		Outlet	65A (2 1/2B) housing type joint
DIAMETER OF WATER PIPE (Inside header piping)		Inlet	150A (6B) housing type joint
		Outlet	150A (6B) housing type joint
EXTERNAL FINISH		Polyester powder coating steel plate	
EXTERNAL DIMENSION		W x D x H	3400 x 1080 x 2350
NET WEIGHT		Standard Piping	1280 (2822)
		Inside Header Piping	1307 (2881)
DESIGN PRESSURE		R32	4.15
		Water	1.0
HEAT EXCHANGER		Water Side	Stainless steel plate and copper brazing
		Air Side	Salt-resistant cross fin & aluminium tube
COMPRESSOR		Type	Inverter scroll hermetic compressor
		Starting Method	Inverter
		Quantity	4
FAN		Motor Output	11.5 x 4
		Air Flow Rate	m <sup>3</sup> /min
			270 x 4
			L/s
			4500 x 4
			cfm
			9534 x 4
		Type, Quantity	Propeller fan x 4
		Starting Method	Inverter
		Motor Output	0.92 x 4
		External Static Pressure	Pa
			20
REFRIGERANT		Type x Charge	R32 x 11.5 (kg) x 4 <sup>5</sup>
		Control	LEV

### Notes:

- Under normal cooling conditions at outdoor temp 35°CDB/24°CWB (95°FDB / 75.2°FWB) outlet water temp 7°C (44.6°F) inlet water temp 12°C (53.6°F). Pump input is not included in cooling capacity and power input.
- Under normal cooling conditions at outdoor temp 35°CDB/24°CWB (95°FDB/75.2°FWB) outlet water temp 7°C (44.6°F) inlet water temp 12°C (53.6°F). Pump input is included in cooling capacity and power input based on EN14511.
- Under normal heating conditions at outdoor temp 7°CDB/6°CWB (44.6°FDB/42.8°FWB) outlet water temp 45°C (113°F) inlet water temp 40°C (104°F). Pump input is not included in heating capacity and power input.
- Under normal heating conditions at outdoor temp 7°CDB/6°CWB (44.6°FDB/42.8°FWB) outlet water temp 45°C (113°F) inlet water temp 40°C (104°F). Pump input is included in heating capacity and power input based on EN14511.
- The unit is delivered fully charged with refrigerant. No additional refrigerant is required.
- IPLV is calculated in accordance with AHRI 550-590.
- This value is not certified by Eurovent.
- \*Please don't use the steel material for the water piping.
- \*Please always make water circulate, or pull the circulation water out completely when not in use.
- \*Please do not use groundwater or well water in direct.
- \*The water circuit must be closed circuit.
- \*Due to continuous improvement, the above specifications may be subject to change without notice.
- \*This model doesn't equip with a pump.



# CAHV-Z

## R290 Air Source Heat Pump



The Mitsubishi Electric Ecodan **CAHV-Z** delivers powerful, low-carbon heating and hot water using ultra-low R290 GWP refrigerant.

Perfect for a wide range of commercial applications such as schools and hospitals, it can operate as a standalone unit or in scalable multi-unit systems. In a multi-unit setup, units cascade and rotate to meet demand, with a 7-unit system delivering up to 280kW\* of efficient, reliable heating and hot water all year round.

\* At nominal conditions A7W45

### Key Features & Benefits

- Ultra-Low GWP R290 Refrigerant - Reduces embodied carbon, helping future-proof projects and support ambitious CSR and sustainability targets
- High-Temperature Heating Performance - Delivers water temperatures up to 75°C, even at -15°C ambient, ensuring reliable comfort in demanding conditions
- Scalable Cascade Control - Multiple units can be combined and managed in cascade, providing maximum design freedom for a wide range of applications
- Wide Water Temperature Range Without Boost Heaters - Supplies 24°C -75°C flow temperatures without electric boosters, reducing energy consumption, running costs, and system complexity
- Rapid Defrost Operation - Minimises system downtime during defrost, helping maintain consistent heating performance in cold conditions
- Integrated R290 Safety Features - Built-in leak detection and an explosionproof relay support safe, compliant operation alongside peace of mind
- Quiet, Adaptable Operation - Low Noise Mode that minimises sound levels, and External Static Pressure Control allows flexible system design
- Anti-Simultaneous Defrost Control - Prevents full system shutdown during defrost cycles, ensuring continuous heating delivery

# R290

MODEL		CAHV-Z450YA-HPB(-BS)	
POWER SOURCE		3-phase 4-wire 380-400-415v, 50/60Hz	
CAPACITY(EN14511) <sup>1</sup>		40	
	Power input	kW	12.62
	Current input	A	21.3-20.2-19.5
	COP (kW/kW)		3.17
	SCOP Low/Medium		4.12 / 3.25
	Water Flow Rate	m <sup>3</sup> /h	6.88
CAPACITY <sup>2</sup>		37.5	
	Power input	kW	18.39
	Current input	A	31.1-29.5-28.4
	COP (kW/kW)		2.04
MAXIMUM CURRENT INPUT		A	
WATER PRESSURE DROP <sup>3</sup>		kPa (psi)	
			10.2 (1.47)
TEMPERATURE RANGE <sup>4</sup>		°C	
	Outlet water temperature		24 ~ 75
	Outdoor temperature		-25 ~ 43
CIRCULATING WATER VOLUME RANGE <sup>5</sup>		m <sup>3</sup> /h	
			4.0 ~ 7.0
SOUND PRESSURE LEVEL (measured 1m below the unit in an anechoic room) <sup>6</sup>		dB (A)	
			65
SOUND PRESSURE LEVEL (measured 1m below the unit in an anechoic room) <sup>6,7</sup>		dB (A)	
			72
WATER PIPE DIAMETER AND TYPE		mm (in)	
	Inlet		40A, Rc 1-1/2B
	Outlet		40A, Rc 1-1/2B
EXTERNAL FINISH		Acrylic painted steel sheet <Munsell 5Y 8/1 or similar>	
EXTERNAL DIMENSIONS (Width x Depth x Height)		mm	
			1750 x 740 x 1710
NET WEIGHT		kg	
			363
DESIGN PRESSURE		MPa	
	R290		3.85
	Water		1.0
HEAT EXCHANGER		Copper brazed stainless steel sheet Plate fins and copper tubes	
COMPRESSOR		Inverter scroll hermetic compressor Mitsubishi Electric Corporation	
	Type		Inverter
	Manufacturer		
	Starting method		Inverter
	Motor output	kW	10.8
	Lubricant		PZ46M
FAN		2500 x 2	
	Air flow rate	L/s	
	External static pressure / External static pressure mode		10 Pa (1 mm H2O) / 40 Pa (4 mm H2O)
	Type and quantity		Propeller fan x 2
	Control and driving mechanism		Inverter control, direct driven by motor
	Motor output	kW	0.92 x 2
HIC (Heat Inter-Changer) CIRCUIT		Copper pipe	
PROTECTION DEVICES		High-pressure sensor and switch set at 3.85 MPa Overheat and overcurrent protection Overheat protection Thermal switch	
	High pressure		
	Inverter circuit		
	Compressor		
	Fan motor		
DEFROSTING METHOD		Auto-defrost mode (Reversed refrigerant cycle)	
REFRIGERANT		R290, 4.8 kg	
	Type and factory charge	kg	
	Flow and temperature control		LEV and HIC circuit


#### Notes:

<sup>1</sup> Under normal heating conditions at the outdoor temperature of 7°CDB/6°CWB, the outlet water temperature of 45°C, and the inlet water temperature of 40°C.

<sup>2</sup> Under normal heating conditions at the outdoor temperature of -5°CDB/-6°CWB and the outlet water temperature of 55°C.

<sup>3</sup> Under normal heating conditions at the outdoor temperature of 7°CDB/6°CWB through the dry NC-contact.

<sup>4</sup>



a: Outlet water temp. (°C)

b: Outdoor temp. (°C)


Keep inlet water temp. of 19°C or higher during the unit operation.

<sup>5</sup> The unit can operate at the water volume range of 1.5 - 4.0m<sup>3</sup>/h if the water volume exceeds 4.0m<sup>3</sup>/h during defrost cycle. The defrost signal is output from the terminal block of the unit.


<sup>6</sup> SPL is the value measured in an anechoic room at 1m away from the unit and 1.5m above the floor.

<sup>7</sup> Under conditions with maximum compressor frequency and fan rotated speed.


Upper View

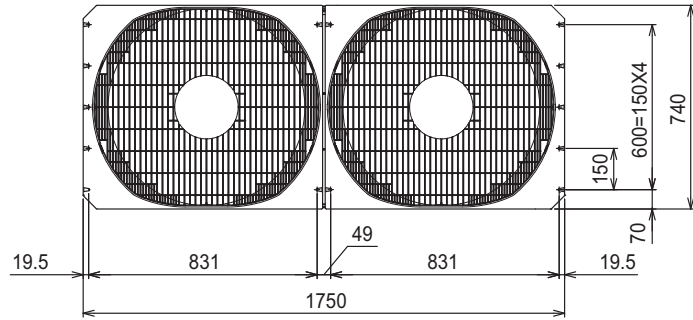

Front View

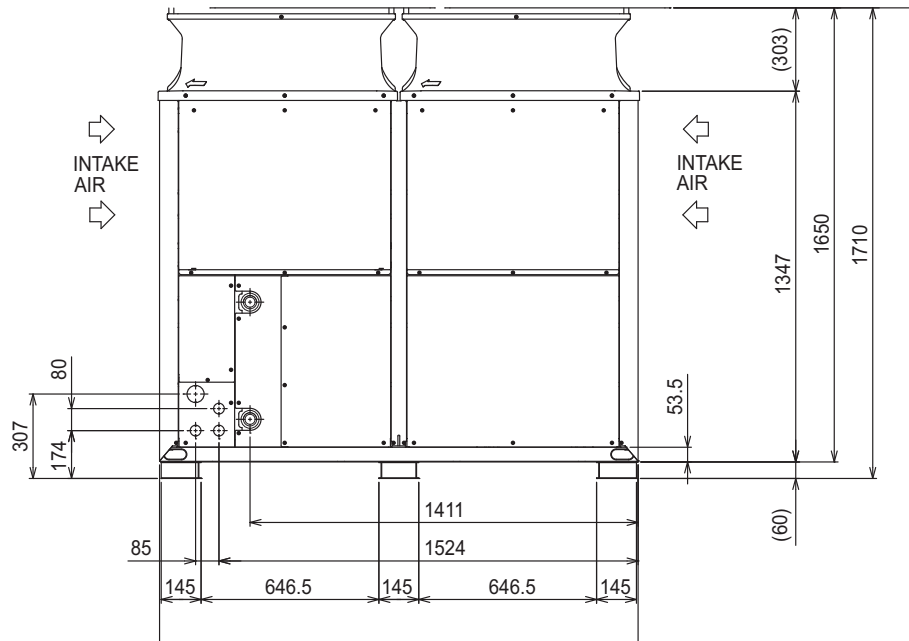

Side View

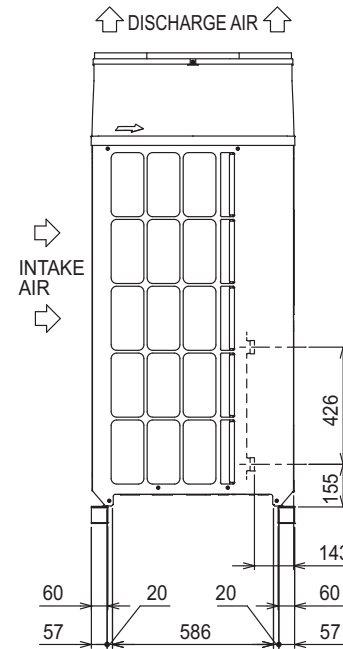

# CAHV-R R454C Air Source Heat Pump




Certificate Number: 037-0113-23  
Product (Type): Outdoor Air/Water  
Product Reference: CAHV-R450YA-HPB



Certificate Number: 037-0113-23  
Product Type: Air Source Heat Pump  
Product Reference: CAHV-R450YA-HPB(-BS)

#### Notes:

- Under normal heating conditions at the outdoor temperature of 7°CDB/6°CWB, the outlet water temperature of 45°C, and the inlet water temperature of 40°C.
- Under normal heating conditions at the outdoor temperature of -5°CDB/-6°CWB and the outlet water temperature of 55°C.
- Under normal heating conditions at the outdoor temperature of 7°CDB/6°CWB when the unit is set to the "Capacity Priority" mode through the dry NC-contact.
- The sound pressure level is a value measured in an anechoic room in accordance with the conventional method in JRA4060.
- 



Outdoor temp. -20°CDB/Outlet water temp. 45-65°C  
Outdoor temp. -20°CDB/Outlet water temp. 35-70°C  
Outdoor temp. 40°CDB/Outlet water temp. 24-70°C

- 4.0 - 15.0 m<sup>3</sup>/h under the following conditions:
  - When the outdoor temperature is below 0°C,
  - When the outlet water temperature is 30°C or below AND the outdoor temperature is 6°C or below.

The Mitsubishi Electric Ecodan **CAHV-R** air source heat pump utilises low GWP R454C refrigerant, offering a robust, low carbon system for the provision of sanitary hot water and space heating. This innovative heat pump solution can operate as a single system or form part of a multiple unit system, making it suitable for a wide range of commercial applications, including schools and hospitals.

A multiple unit system has the ability to cascade available units on and off to meet the load requirements of a building. As an example of this unique modulation, a 16 unit system allows 0.5kW increments of capacity, from 7.9kW all the way up to 640kW\*. With cascade and rotation built in as standard, the Ecodan CAHV-R is perfectly set up to reliably generate sustainable space heating and hot water all year round.

\* At nominal conditions A7W45


## Key Features & Benefits

- Low GWP R454C refrigerant and reduced embodied carbon helps achieve CSR targets
- Achieves 70°C outlet temperature down to -20°C ambient temperature for continuous heating provision
- Multiple unit cascade control from 7.8kW to 640kW\* capacity provides design flexibility
- Water flow temperatures from 24°C to 70°C without boost heaters, results in cost and energy savings
- Advanced heat exchange design combined with the properties of R454C refrigerant enables a shorter defrost time


# R454C

MODEL		CAHV-R450YA-HPB(-BS)	
POWER SOURCE		3-phase 4-wire 380-400-415V 50/60 Hz	
CAPACITY(EN14511) <sup>1</sup>		40	
	Power input	kW	14.03
	Current input	A	23.7-22.5-21.7
	COP (kW/kW)		2.85
	SCOP Low/Medium		3.57/3.24
CAPACITY <sup>2</sup>		33.4	
	Power input	kW	16.6
	Current input	A	28.0-26.6-25.7
	COP (kW/kW)		2.01
MAXIMUM CURRENT INPUT		A	
WATER PRESSURE DROP <sup>1</sup>		10.2 kPa (1.47 psi)	
TEMPERATURE RANGE <sup>5</sup>		24 - 70°C	
	Outlet water temperature		
	Outdoor temperature	D.B.	-25 - 43°C
CIRCULATING WATER VOLUME RANGE <sup>5</sup>		m <sup>3</sup> /h	
SOUND PRESSURE LEVEL (measured 1m below the unit in an anechoic room) <sup>11,4</sup>		dB(A)	
SOUND PRESSURE LEVEL (measured 1m below the unit in an anechoic room) <sup>13,4</sup>		dB(A)	
WATER PIPE DIAMETER AND TYPE		mm (in)	
	Inlet		38.1 (1 1/2"), housing type joint
	Outlet		38.1 (1 1/2"), housing type joint
EXTERNAL FINISH		Acrylic painted steel sheet <Munsell 5Y 8/1 or similar>	
EXTERNAL DIMENSIONS (Width x Depth x Height)		mm	
NET WEIGHT		kg	
DESIGN PRESSURE		MPa	
	R454C		3.85
	Water		1.0
HEAT EXCHANGER		Copper brazed stainless steel sheet Plate fins and copper tubes	
COMPRESSOR		Inverter scroll hermetic compressor MITSUBISHI ELECTRIC CORPORATION	
	Type		
	Manufacturer		
	Starting method		Inverter
	Motor output	kW	12.1
	Lubricant		FVC32EA
FAN		2500 × 2	
	Air flow rate	L/s	
	External static pressure		10 Pa (1mm H2O)
	Type and quantity		Propeller fan × 2
	Control and driving mechanism		Inverter control, direct driven by motor
	Motor output	kW	0.92 × 2
HIC (HEAT INTER-CHANGER) CIRCUIT		Copper pipe	
PROTECTION DEVICES		High-pressure sensor and switch set at 3.85 MPa (643 psi)	
	High pressure		
	Inverter circuit		Overheat and overcurrent protection
	Compressor		Overheat protection
	Fan motor		Thermal switch
DEFROSTING METHOD		Auto-defrost mode (Reversed refrigerant cycle)	
REFRIGERANT		R454C, 9.0 kg	
	Type and factory charge	kg	
	Flow and temperature control		LEV and HIC circuit


Upper View

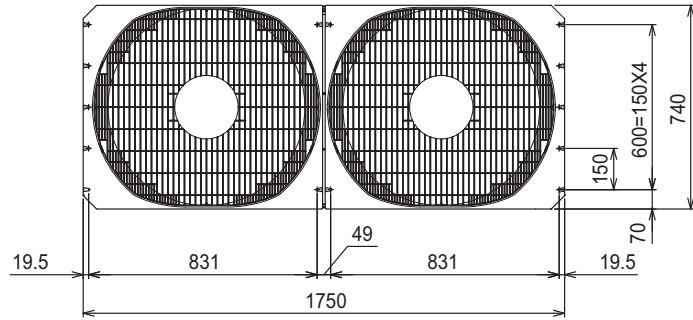

Front View

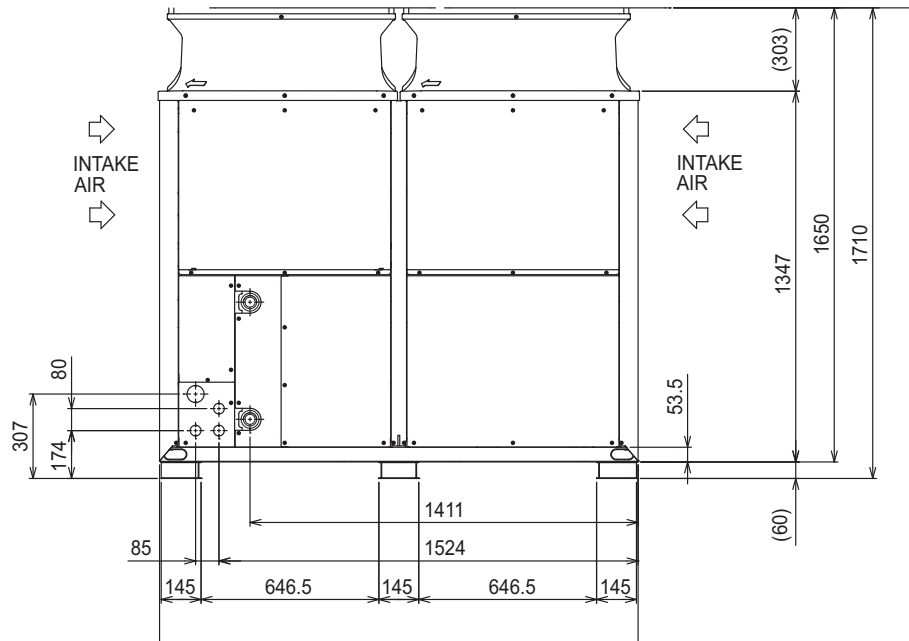

Side View

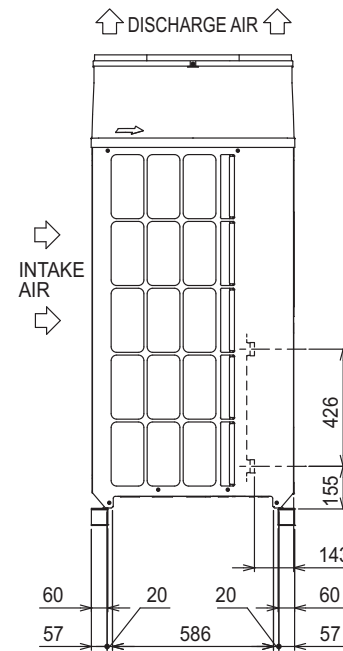



# QAHV R744 Air Source Heat Pump



Specifically designed for commercial sanitary hot water application, where gas boilers, combined heat and power systems (CHP) or electric water heating have been traditionally utilised, the 40kW Ecodan **QAHV** provides a low carbon solution for hotels, apartment blocks, leisure centres, hospitals, care homes, restaurants and education.

Utilising the natural and stable refrigerant CO<sub>2</sub> (R744), the environmentally clean solution enables compliance to strict local planning laws and boosts BREEAM points. With the increasing decarbonisation of the electrical grid, the QAHV provides a high efficiency, low carbon hot water delivery solution with leaving water temperature up to 90°C.

## Key Features & Benefits

- High efficiency at high flow temperatures
- Utilises CO<sub>2</sub> refrigerant which has a GWP of 1
- Uses a unique twisted and spiral gas cooler to enhance energy efficiency
- Full heating capacity down to -3°C outdoor temperature and operates down to -25°C
- Super low noise levels
- Able to utilise with an indirect system

# R744


MODEL		QAHV-N560YA-HPB
WATER HEATING 65°C <sup>1</sup>	CAPACITY (kW)	40
	POWER INPUT (kW)	10.31
	CURRENT INPUT (A)	16.3
	COP	3.88
WATER HEATING 65°C <sup>2</sup>	CAPACITY (kW)	40
	POWER INPUT (kW)	10.97
	CURRENT INPUT (A)	18.3
	COP	3.65
WATER HEATING 65°C <sup>3</sup>	CAPACITY (kW)	40
	POWER INPUT (kW)	11.6
	CURRENT INPUT (A)	18.7
	COP	3.44
WATER HEATING ENERGY EFFICIENCY CLASS TEMPERATURE RANGE	FOR MEDIUM TEMPERATURE APPLICATION	A
	INLET WATER TEMPERATURE (°C)	5 ~ 63
	OUTLET WATER TEMPERATURE (°C)	55 ~ 90
	OUTDOOR TEMPERATURE (°C)	-25~43
ELECTRICAL	MAX CURRENT INPUT (A)	33.8
	ELECTRICAL SUPPLY (V / Hz)	380-415v, 50Hz
	PHASE	3
	FUSE RATING - MCB SIZES (A) <sup>5</sup>	40
WATER DETAIL	INLET / OUTLET (mm (in.))	19.05 (Rc 3/4") / 19.05 (Rc 3/4")
	ALLOWABLE EXTERNAL PUMP HEAD (kPa)	77
DIMENSIONS (mm)	WIDTH	1220
	DEPTH	760
	HEIGHT	1837 (1777 without legs)
WEIGHT (kg)		400
NOISE LEVEL	SOUND PRESSURE <sup>4</sup> (dB(A))	56
REFRIGERANT	TYPE	R744 (GWP 1)
	REFRIGERANT CHARGE (kg) / CO <sub>2</sub> EQUIVALENT (t)	6.5 / 0.0065

### Notes:


1. Under Normal heating conditions at the outdoor temp, 16°CDB/12°CWB, the outlet water temperature 65°C, and the inlet water temperature 17°C
2. Under Normal heating conditions at the outdoor temp, 7°CDB/6°CWB, the outlet water temperature 65°C, and the inlet water temperature 9°C
3. Under Normal heating conditions at the outdoor temp, 7°CDB/6°CWB, the outlet water temperature 65°C, and the inlet water temperature 15°C
4. Measured 1m from the front of the unit in an anechoic room
5. MCB Sizes BS EN60898-2 & BS EN60947-2




Upper View

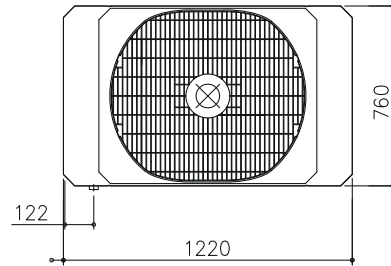

Front View

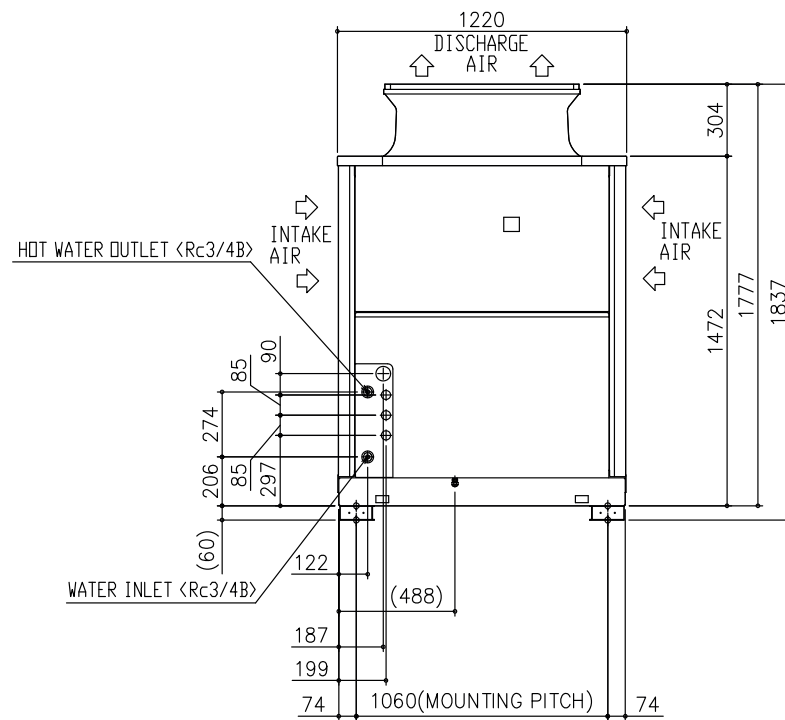

Side View

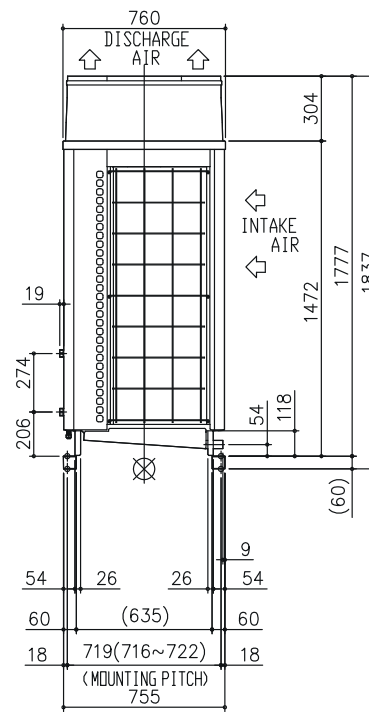

# NX2-N-G06 R454B Air Source Heat Pump

(365 to 580kW)

Standard Version (/K)



**CLIMVENETA**

Mitsubishi Electric's **NX2-N-G06** is our flexible air source heat pump, using rotary scroll compressors, axial-flow fans, shell and tubes exchanger and an electronic expansion valve as standard.

## Key Features & Benefits

- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors in a multi-circuit configuration
- EC fans available as an option for improved efficiency
- Low GWP refrigerant R454B

**R454B**

MODEL		0344	0364	0404	0446	0506	0526	0546
<b>PERFORMANCE - HEATING ONLY<sup>2, 3</sup></b>								
TOTAL HEATING CAPACITY	kW	365.2	387.0	415.4	470.0	513.3	560.7	580.5
COP	kW/kW	3.02	3.06	3.04	2.98	3.00	3.05	3.07
<b>SEASONAL PERFORMANCE HEATING (EN14825 VALUE) - LOW TEMPERATURE<sup>11</sup></b>								
RATED HEAT OUTPUT AT Tdesign, h	kW	268.0	294.0	323.0	369.0	388.0	363.0	373.0
SCOP		3.60	3.70	3.73	3.66	3.53	3.49	3.53
SEASONAL SPACE HEATING EFFICIENCY	%	141	145	146	143	138	137	138
<b>PERFORMANCE - COOLING ONLY<sup>1, 2</sup></b>								
COOLING CAPACITY	kW	334.3	354.7	382.0	430.2	475.1	515.9	533.1
EER	kW/kW	2.69	2.78	2.67	2.62	2.68	2.78	2.79
<b>SEASONAL EFFICIENCY IN COOLING (REG.EU 2016/2281)<sup>12</sup></b>								
Prated,C	kW	334.3	354.7	382.0	430.2	475.1	515.9	533.1
SEER		3.93	4.04	4.07	4.01	3.93	4.07	4.10
<b>ELECTRICAL DATA</b>								
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
MAX F.L.A. <sup>10</sup>	Total A	257	270	297	333	365	392	405
<b>EXCHANGERS</b>								
MINIMUM WATER FLOW	l/s	10.58	11.31	12.33	13.89	13.89	17.50	17.50
MINIMUM WATER CONTENT	l/s	27.58	26.72	29.92	36.11	36.11	38.89	38.89
<b>REFRIGERANT CIRCUIT</b>								
COMPRESSORS	No.	4	4	4	6	6	6	6
CIRCUITS	No.	2	2	2	3	3	3	3
THEORETICAL REFRIGERANT CHARGE	kg	65	68	68	84	87	98	113
<b>NOISE LEVELS</b>								
TOTAL SOUND PRESSURE <sup>5</sup>	dB(A)	76	76	76	76	76	76	76
TOTAL SOUND POWER LEVEL IN COOLING <sup>6, 7</sup>	dB(A)	96	96	96	96	97	97	97
TOTAL SOUND POWER LEVEL IN HEATING <sup>6, 8</sup>	dB(A)	96	96	96	96	97	97	97
<b>SIZE AND WEIGHT<sup>9</sup></b>								
WIDTH	mm	3905	3905	3905	4515	5690	5690	5690
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2450	2450	2450	2450	2450	2450	2450
OPERATION WEIGHT	kg	3030	3110	3150	4040	4400	4530	4600

### Notes:

1. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C.

2. Values in compliance with EN14511.

3. Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C; Source (side) heat exchanger air (in) 7.0°C - 87% R.H.

4. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C; Plant (side) heat exchanger recovery water (in/out) 40.00°C/45.00°C.

5. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.

6. Sound power on the basis of measurements taken in compliance with ISO 9614.

7. Sound power level in cooling, outdoors.

8. Sound power level in heating, outdoors.

9. Unit in standard configuration, without optional accessories.

10. Values calculated referring to the version with the maximum number of fans working at the max absorbed current. Safety values to be considered when cabling the unit for power supply and line-protections. Data valid for standard units without any additional option.

11. Seasonal space heating energy efficiency class LOW TEMPERATURE [REGULATION (EU) N. 813/2013].

12. Parameter calculated according to [REGULATION (EU) N. 2016/2281].

■ Eurovent Certified Data

# NX2-N-G06 R454B Air Source Heat Pump

(362 to 569kW)

Super-Low Noise Version (/SL)



Mitsubishi Electric's **NX2-N-G06** is our flexible air source heat pump, using rotary scroll compressors, axial-flow fans, shell and tubes exchanger and an electronic expansion valve as standard.

## Key Features & Benefits

- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors in a multi-circuit configuration
- EC fans available as an option for improved efficiency
- Low GWP refrigerant R454B

# R454B

MODEL		0344	0364	0404	0446	0506	0526	0546
PERFORMANCE - HEATING ONLY <sup>2, 3</sup>								
TOTAL HEATING CAPACITY	kW	362.5	379.6	420.6	471.4	511.7	552.6	569.4
COP	kW/kW	3.13	3.11	3.16	3.09	3.11	3.13	3.12
SEASONAL PERFORMANCE HEATING (EN14825 VALUE) - LOW TEMPERATURE <sup>11</sup>								
RATED HEAT OUTPUT AT Tdesign, h	kW	227.0	252.0	319.0	294.0	390.0	356.0	378.0
SCOP		3.67	3.71	3.78	3.67	3.80	3.73	3.72
SEASONAL SPACE HEATING EFFICIENCY	%	144	145	148	144	149	146	146
PERFORMANCE - COOLING ONLY <sup>1, 2</sup>								
COOLING CAPACITY	kW	316.0	336.4	370.2	409.0	443.6	486.1	505.7
EER	kW/kW	2.44	2.51	2.54	2.38	2.38	2.49	2.51
SEASONAL EFFICIENCY IN COOLING (REG.EU 2016/2281) <sup>12</sup>								
Prated,C	kW	316.0	336.4	370.2	409.0	443.6	486.1	505.7
SEER		4.10	4.13	4.23	4.14	4.10	4.19	4.19
ELECTRICAL DATA								
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
MAX F.L.A. <sup>10</sup>	Total A	257	270	297	333	365	392	405
EXCHANGERS								
MINIMUM WATER FLOW	l/s	10.58	11.31	12.33	13.89	13.89	17.50	17.50
MINIMUM WATER CONTENT	l/s	27.58	26.72	29.92	36.11	36.11	38.89	38.89
REFRIGERANT CIRCUIT								
COMPRESSORS	No.	4	4	4	6	6	6	6
CIRCUITS	No.	2	2	2	3	3	3	3
THEORETICAL REFRIGERANT CHARGE	kg	72	74	85	96	106	112	113
NOISE LEVELS								
TOTAL SOUND PRESSURE <sup>5</sup>	dB(A)	68	68	68	68	68	69	69
TOTAL SOUND POWER LEVEL IN COOLING <sup>6, 7</sup>	dB(A)	88	88	88	89	89	90	90
TOTAL SOUND POWER LEVEL IN HEATING <sup>6, 8</sup>	dB(A)	89	89	89	90	90	91	91
SIZE AND WEIGHT <sup>9</sup>								
WIDTH	mm	4515	5080	5080	5690	5690	6865	7430
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2450	2450	2450	2450	2450	2450	2450
OPERATION WEIGHT	kg	3330	3460	3630	4640	4750	5050	5170

### Notes:

1. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C; Source (side) heat exchanger air (in) 7.0°C - 87% R.H.
4. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C; Plant (side) heat exchanger recovery water (in/out) 40.00°C/45.00°C.
5. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
6. Sound power on the basis of measurements taken in compliance with ISO 9614.
7. Sound power level in cooling, outdoors.
8. Sound power level in heating, outdoors.
9. Unit in standard configuration, without optional accessories.
10. Values calculated referring to the version with the maximum number of fans working at the max absorbed current. Safety values to be considered when cabling the unit for power supply and line-protections. Data valid for standard units without any additional option.
11. Seasonal space heating energy efficiency class LOW TEMPERATURE (REGULATION (EU) N. 813/2013).
12. Parameter calculated according to [REGULATION (EU) N. 2016/2281].

■ Eurovent Certified Data

# NX2-N-G06 R454B Air Source Heat Pump

(376 to 854kW)

High Efficiency Version (/A)



Mitsubishi Electric's **NX2-N-G06** is our flexible air source heat pump, using rotary scroll compressors, axial-flow fans, shell and tubes exchanger and an electronic expansion valve as standard.

## Key Features & Benefits

- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors in a multi-circuit configuration
- EC fans available as an option for improved efficiency
- Low GWP refrigerant R454B

# R454B

MODEL		0344	0364	0404	0446	0506	0526	0546	0606	0708	0738	0768	0808
PERFORMANCE - HEATING ONLY <sup>2, 3</sup>													
TOTAL HEATING CAPACITY	kW	376.8	397.7	427.2	493.1	531.6	574.2	596.6	640.6	753.4	795.3	826.0	854.1
COP	kW/kW	3.19	3.19	3.20	3.17	3.19	3.20	3.20	3.26	3.26	3.28	3.26	3.26
SEASONAL PERFORMANCE HEATING (EN14825 VALUE) - LOW TEMPERATURE <sup>11</sup>													
RATED HEAT OUTPUT AT Tdesign, h	kW	271.0	296.0	321.0	368.0	386.0	356.0	371.0	-	-	-	-	-
SCOP		3.76	3.83	3.79	3.90	3.81	3.80	3.83	-	-	-	-	-
SEASONAL SPACE HEATING EFFICIENCY	%	147	150	149	153	149	149	150	-	-	-	-	-
PERFORMANCE - COOLING ONLY <sup>1, 2</sup>													
COOLING CAPACITY	kW	344.9	361.1	399.3	446.0	499.5	525.3	543.0	598.8	696.0	724.2	761.4	798.6
EER	kW/kW	2.92	2.95	2.96	2.90	2.92	2.94	2.95	3.01	3.01	3.01	3.03	3.02
SEASONAL EFFICIENCY IN COOLING (REG.EU 2016/2281) <sup>12</sup>													
Prated,C	kW	344.9	361.1	399.3	446.0	499.5	525.3	543.0	598.8	696.0	724.2	761.4	798.6
SEER		4.28	4.39	4.44	4.36	4.28	4.37	4.37	4.56	4.56	4.56	4.58	4.56
ELECTRICAL DATA													
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
MAX F.L.A. <sup>10</sup>	Total A	265	278	305	344	377	404	417	443	511	537	564	590
EXCHANGERS													
MINIMUM WATER FLOW	l/s	10.58	11.31	12.33	13.89	13.89	17.50	17.50	17.50	21.14	22.67	23.72	24.69
MINIMUM WATER CONTENT	l/s	27.58	26.72	29.92	36.11	36.11	38.89	38.89	41.67	51.72	56.67	56.67	60.36
REFRIGERANT CIRCUIT													
COMPRESSORS	No.	4	4	4	6	6	6	6	6	8	8	8	8
CIRCUITS	No.	2	2	2	3	3	3	3	3	4	4	4	4
THEORETICAL REFRIGERANT CHARGE	kg	81	86	87	109	112	124	133	133	162	173	174	176
NOISE LEVELS													
TOTAL SOUND PRESSURE <sup>5</sup>	dB(A)	77	77	77	76	77	77	77	78	77	78	78	78
TOTAL SOUND POWER LEVEL IN COOLING <sup>6, 7</sup>	dB(A)	97	97	97	97	98	98	98	99	99	100	100	100
TOTAL SOUND POWER LEVEL IN HEATING <sup>6, 8</sup>	dB(A)	97	97	97	97	98	98	98	-	-	-	-	-
SIZE AND WEIGHT <sup>9</sup>													
WIDTH	mm	5080	5080	5080	6255	7430	7430	7430	7430	9780	9780	9780	9780
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450
OPERATION WEIGHT	kg	3350	3440	3480	4650	4900	5060	5140	5200	6580	6760	6800	6840

### Notes:

1. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C.

2. Values in compliance with EN14511.

3. Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C; Source (side) heat exchanger air (in) 7.0°C - 87% R.H.

4. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C; Plant (side) heat exchanger recovery water (in/out) 40.00°C/45.00°C.

5. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.

6. Sound power on the basis of measurements taken in compliance with ISO 9614.

7. Sound power level in cooling, outdoors.

8. Sound power level in heating, outdoors.

9. Unit in standard configuration, without optional accessories.

10. Values calculated referring to the version with the maximum number of fans working at the max absorbed current. Safety values to be considered when cabling the unit for power supply and line-protections. Data valid for standard units without any additional option.

11. Seasonal space heating energy efficiency class LOW TEMPERATURE [REGULATION (EU) N. 613/2013].

12. Parameter calculated according to [REGULATION (EU) N. 2016/2281].

 Eurovent Certified Data

# i-FX-N-G05 R513A Air Source Heat Pump

(453 to 1,112kW)

High Efficiency Version (/A)



#### Notes:

- Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C.
- Values in compliance with EN14511
- Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C; Source (side) heat exchanger air (in) 7.0°C - 87% R.H.
- Seasonal space heating energy efficiency class [REGULATION (EU) N. 813/2013] - Average Weather Conditions. Calculation with variable water flow and variable temperature.
- Parameter calculated according to [REGULATION (EU) N. 2016/2281] - EN14825.
- Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
- Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
- Sound power level on the basis of measurement taken in compliance with ISO 9614.
- Sound power level in cooling, outdoors.
- Sound power level in heating, outdoors.
- Unit in standard configuration, without optional accessories.

Eurovent Certified Data

Mitsubishi Electric's **i-FX-N-G05** is our high performance reversible air source heat pump, complete with Variable Speed Drive (VSD) screw compressors and EC fans as standard.

## Key Features & Benefits

- Very high seasonal efficiency in a compact footprint, offering full inverter technology
- High efficiency inverter screw compressors providing a dual refrigeration circuit resulting in lower running costs and resilient operation
- EC Fans supplied as standard
- Available options include; inbuilt hydronic pumps (fixed speed or inverter), thermal and energy meters, Smart LAN functions and many more
- Cu/Al Auxiliary Heat Exchangers supplied as standard, other protection coatings are available
- Smart defrost to increase operation time, increase COP and minimise impact on leaving water temperature

# R513A

MODEL		0472	0512	0572	0602	0652	0772	0902	1002	1152
<b>PERFORMANCE - HEATING ONLY <sup>2 3</sup></b>										
TOTAL HEATING CAPACITY	kW	453.2	506.8	547.9	575.7	664.3	748.1	872.0	1007	1112
COP	kW/kW	3.23	3.29	3.26	3.27	3.26	3.32	3.31	3.39	3.36
<b>SEASONAL EFFICIENCY IN HEATING - LOW TEMPERATURE <sup>4</sup></b>										
RATED HEAT OUTPUT AT Tdesign, h	kW	348.0	384.0	-	-	-	-	-	-	-
SCOP		4.00	4.03	-	-	-	-	-	-	-
<b>PERFORMANCE - COOLING ONLY <sup>1 2</sup></b>										
COOLING CAPACITY	kW	464.6	517.4	549.4	590.4	669.4	763.6	898.8	1033	1153
EER	kW/kW	2.78	2.88	2.80	2.78	2.79	2.85	2.84	2.91	2.93
<b>SEASONAL EFFICIENCY IN COOLING <sup>5</sup></b>										
Prated,C	kW	464.6	517.4	549.4	590.4	669.4	763.6	898.8	1033	1153
SEER		4.74	4.78	4.83	4.84	4.76	4.82	4.83	4.79	4.84
PERFORMANCE $\eta_s$	%	187	188	190	190	188	190	190	189	191
<b>ELECTRICAL DATA</b>										
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
MAX F.L.A. <sup>6</sup>	Total A	354	384	407	429	482	531	632	749	821
<b>EXCHANGERS</b>										
MINIMUM WATER FLOW	l/s	11.67	14.69	14.69	14.25	15.50	18.06	22.22	22.22	27.78
MINIMUM WATER CONTENT	System l	1630	1800	1920	2070	2340	2670	3150	3620	4040
<b>REFRIGERANT CIRCUIT</b>										
COMPRESSORS	No.	2	2	2	2	2	2	2	2	2
CIRCUITS	No.	2	2	2	2	2	2	2	2	2
THEORETICAL REFRIGERANT CHARGE	kg	233	259	253	276	288	391	495	518	618
<b>NOISE LEVELS</b>										
TOTAL SOUND PRESSURE <sup>7</sup>	dB(A)	80	81	81	81	81	81	81	82	82
TOTAL SOUND POWER LEVEL IN COOLING <sup>8 9</sup>	dB(A)	100	102	102	102	102	103	103	105	105
TOTAL SOUND POWER LEVEL IN HEATING <sup>8 10</sup>	dB(A)	101	103	103	103	103	104	104	106	106
<b>SIZE AND WEIGHT <sup>11</sup></b>										
WIDTH	mm	4900	5800	5800	5800	7000	7900	10000	11800	11800
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2580	2580	2580	2580	2580	2580	2580	2580	2580
OPERATION WEIGHT	kg	6400	6894	7033	7256	7518	8551	9835	11578	12651

# i-FX-N-G05 R513A Air Source Heat Pump

(448 to 1,101kW)

Super-Low Noise, High Efficiency  
Version (/SL-A)



**CLIMVENETA**

#### Notes:

1. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C.
2. Values in compliance with EN14511
3. Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C; Source (side) heat exchanger air (in) 7.0°C - 87% R.H.
4. Seasonal space heating energy efficiency class [REGULATION (EU) N. 813/2013] - Average Weather Conditions. Calculation with variable waterflow and variable temperature.
5. Parameter calculated according to [REGULATION (EU) N. 2016/2281] - EN14825.
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
8. Sound power level on the basis of measurement taken in compliance with ISO 9614.
9. Sound power level in cooling, outdoors.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

 Eurovent Certified Data

Mitsubishi Electric's **i-FX-N-G05** is our high performance reversible air source heat pump, complete with Variable Speed Drive (VSD) screw compressors and EC fans as standard.

## Key Features & Benefits

- Very high seasonal efficiency in a compact footprint, offering full inverter technology
- High efficiency inverter screw compressors providing a dual refrigeration circuit resulting in lower running costs and resilient operation
- EC Fans supplied as standard
- Available options include; inbuilt hydronic pumps (fixed speed or inverter), thermal and energy meters, Smart LAN functions and many more
- Cu/Al Auxiliary Heat Exchangers supplied as standard, other protection coatings are available
- Smart defrost to increase operation time, increase COP and minimise impact on leaving water temperature

**R513A**

MODEL		0472	0512	0572	0602	0652	0772	0902	1002	1152
<b>PERFORMANCE - HEATING ONLY <sup>2 3</sup></b>										
TOTAL HEATING CAPACITY	kW	448.6	500.4	542.4	568.3	657.9	740.6	863.2	997.3	1101
COP	kW/kW	3.24	3.30	3.28	3.28	3.27	3.34	3.32	3.42	3.38
<b>SEASONAL EFFICIENCY IN HEATING - LOW TEMPERATURE <sup>4</sup></b>										
RATED HEAT OUTPUT AT Tdesign, h	kW	347.0	383.0	-	-	-	-	-	-	-
SCOP		4.02	4.03	-	-	-	-	-	-	-
<b>PERFORMANCE - COOLING ONLY <sup>1 2</sup></b>										
COOLING CAPACITY	kW	443.6	497.1	531.4	570.3	648.7	740.2	869.6	997.3	1113
EER	kW/kW	2.62	2.77	2.67	2.61	2.67	2.74	2.73	2.79	2.79
<b>SEASONAL EFFICIENCY IN COOLING <sup>5</sup></b>										
Prated,C	kW	443.6	497.1	531.4	570.3	648.7	740.2	869.6	997.3	1113
SEER		4.71	4.77	4.81	4.80	4.74	4.80	4.82	4.78	4.82
PERFORMANCE $\eta_s$	%	185	188	190	189	187	189	190	188	190
<b>ELECTRICAL DATA</b>										
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
MAX F.L.A. <sup>6</sup>	Total A	354	384	407	429	482	531	632	749	821
<b>EXCHANGERS</b>										
MINIMUM WATER FLOW	l/s	11.67	14.69	14.69	14.25	15.50	18.06	22.22	22.22	27.78
MINIMUM WATER CONTENT	System l	1630	1800	1920	2070	2340	2670	3150	3620	4040
<b>REFRIGERANT CIRCUIT</b>										
COMPRESSORS	No.	2	2	2	2	2	2	2	2	2
CIRCUITS	No.	2	2	2	2	2	2	2	2	2
THEORETICAL REFRIGERANT CHARGE	kg	243	271	285	307	317	391	541	536	598
<b>NOISE LEVELS</b>										
TOTAL SOUND PRESSURE <sup>7</sup>	dB(A)	72	73	73	73	73	73	73	74	74
TOTAL SOUND POWER LEVEL IN COOLING <sup>8 9</sup>	dB(A)	92	94	94	94	94	95	95	97	97
TOTAL SOUND POWER LEVEL IN HEATING <sup>8 10</sup>	dB(A)	93	95	95	95	95	96	96	98	98
<b>SIZE AND WEIGHT <sup>11</sup></b>										
WIDTH	mm	4900	5800	5800	5800	7000	7900	10000	11800	11800
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2580	2580	2580	2580	2580	2580	2580	2580	2580
OPERATION WEIGHT	kg	6672	7155	7307	7550	7791	8921	10101	11840	15158

# NX2-W-G06-H R454B Water-to-Water Heat Pump

(53 to 276kW)

Designed to accommodate a variety of applications, Climaveneta's **NX2-W-G06-H** is a compact and flexible water-to-water heat pump, which is reversible on the hydraulic side.

## Key Features & Benefits

- Exceptional SEER and SCOP performance
- Rotary Scroll compressors with IDV technology
- Up to 60°C supply water temperature
- Advanced decentralised control options (MultiManager)
- Low GWP R454B refrigerant
- Inbuilt safety equipment for an A2L refrigerant
- Compatible with Variable Primary Flow (VPF)
- Compact design

# R454B



MODEL		0042	0052	0062	0072	0082	0092	0112	0122	0142	0162	0182	0202	0222	0242
<b>PERFORMANCE - HEATING ONLY</b>															
GROSS VALUE <sup>1</sup>															
TOTAL HEATING CAPACITY	kW	53.5	62.6	73.4	83.3	92.6	105.4	121.3	136.8	158.9	176.7	207.4	222.9	244.9	275.6
TOTAL POWER INPUT	kW	12.5	14.3	16.5	18.6	20.6	23.7	27.2	30.3	35.5	39.7	45.6	48.8	53.9	59.9
COP	kW/kW	4.28	4.38	4.45	4.48	4.50	4.45	4.46	4.52	4.48	4.45	4.55	4.57	4.54	4.60
EN14511 VALUES <sup>1,2</sup>															
TOTAL HEAT CAPACITY	kW	53.6	62.7	73.5	83.5	92.7	105.5	121.5	136.9	159.1	176.9	207.6	223.2	245.3	275.9
COP	kW/kW	4.04	4.12	4.23	4.25	4.32	4.28	4.29	4.35	4.31	4.28	4.35	4.39	4.34	4.36
SEASONAL PERFORMANCE - LOW TEMPERATURE <sup>3</sup>															
RATED HEAT OUTPUT AT T <sub>designh</sub>	kW	63	74	87	99	110	125	144	163	189	210	247	265	291	325
SCOP		6.29	6.51	6.74	6.71	6.87	6.89	6.83	6.83	6.83	6.78	6.81	6.81	7.13	6.61
PERFORMANCE $\eta_s$	%	243	254	262	261	267	268	265	265	265	263	264	264	277	256
SEASONAL PERFORMANCE - MEDIUM TEMPERATURE <sup>4</sup>															
RATED HEAT OUTPUT AT T <sub>designh</sub>		59	69	80	91	101	115	133	150	175	194	227	244	269	302
SCOP		4.48	4.64	4.76	4.78	4.97	4.93	4.93	4.93	4.94	4.86	4.89	4.97	5.14	4.84
PERFORMANCE $\eta_s$	%	171	178	182	183	191	189	189	189	190	186	188	191	197	186
PERFORMANCE - COOLING ONLY															
GROSS VALUE <sup>5</sup>															
TOTAL COOLING CAPACITY	kW	45.84	53.92	64.85	73.47	82.96	94.45	108.5	122.6	142.0	157.2	184.6	200.2	217.8	242.1
TOTAL POWER INPUT	kW	10.04	11.34	13.18	14.94	16.13	18.48	21.38	23.89	27.78	31.48	36.25	38.67	42.78	48.13
EER	kW/kW	4.58	4.77	4.91	4.93	5.16	5.10	5.70	5.13	5.11	4.99	5.10	5.17	5.09	5.03
EN14511 VALUES <sup>5,6</sup>															
TOTAL COOLING CAPACITY	kW	45.7	53.8	64.7	73.3	82.8	94.3	108.3	122.4	141.7	156.9	184.3	199.8	217.4	241.7
EER	kW/kW	4.39	4.56	4.74	4.72	5.00	4.97	4.93	4.98	4.96	4.83	4.92	5.00	4.91	4.84
SEASONAL PERFORMANCE <sup>6</sup>															
P <sub>rated,c</sub>	kW	45.7	53.8	64.7	73.3	82.8	94.3	108.3	122.4	141.7	156.9	184.3	199.8	217.4	241.7
SEER		6.31	6.63	7.01	7.04	7.18	7.41	6.97	7.09	7.2	7.02	7.22	7.17	7.13	6.80
PERFORMANCE $\eta_s$	%	250	262	278	279	284	293	276	281	285	278	286	284	282	269
ELECTRICAL DATA															
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
FLA <sup>7</sup>	Total A	32	37	42	48	53	59	68	76	91	99	113	121	135	149
EXCHANGERS															
MINIMUM WATER FLOW	Evaporator l/s	1.333	1.583	1.917	2.167	2.444	2.806	3.222	3.639	4.222	4.667	5.472	5.944	6.472	7.194
MINIMUM WATER CONTENT	User Side l	180	240	313	350	339	472	466	574	712	712	929	921	940	926
MINIMUM WATER FLOW	Condenser l/s	1.056	1.222	1.472	1.667	1.889	2.139	2.472	2.778	3.250	3.611	4.222	4.556	4.972	5.556
HEAT EXCHANGER IN HEATING <sup>11</sup>															
WATER FLOW	User Side l/s	2.584	3.022	3.542	4.021	4.471	5.087	5.857	6.602	7.671	8.529	10.01	10.76	11.82	13.3
PRESSURE DROP <sup>2</sup>	User Side kPa	25.3	25.2	29.0	34.4	35.3	42.6	46.6	57.4	71.2	71.2	92.9	92.1	94.0	92.6
WATER FLOW	Source Side l/s	3.331	3.92	4.609	5.243	5.837	6.622	7.632	8.631	10	11.11	13.1	14.11	15.48	17.47
PRESSURE DROP <sup>2</sup>	Source Side kPa	84.1	91.1	55.8	55.3	54.3	54.2	59.4	60.1	61.2	62.0	71.2	63.4	75.7	94.6
HEAT EXCHANGER USER SIDE IN COOLING <sup>5</sup>															
WATER FLOW	User Side l/s	2.192	2.579	3.101	3.513	3.967	4.517	5.188	5.865	6.788	7.519	8.83	9.572	10.41	11.58
PRESSURE DROP <sup>2</sup>	User Side kPa	36.4	39.4	25.3	24.8	25.1	25.2	27.4	27.7	28.2	28.4	32.3	29.2	34.3	41.5
WATER FLOW	Source Side l/s	2.66	3.107	3.716	4.21	4.721	5.38	6.186	6.981	8.086	8.988	10.52	11.38	12.41	13.82
PRESSURE DROP <sup>2</sup>	Source Side kPa	26.8	26.6	32.0	37.7	17.1	17.0	17.5	18.3	18.9	23.0	23.7	25.3	26.0	31.9
REFRIGERANT CIRCUIT															
COMPRESSORS	No.	2	2	2	2	2	2	2	2	2	2	2	2	2	2
CAPACITY STEPS	No.	2	2	2	2	2	2	2	2	2	2	2	2	2	2
CIRCUITS	No.	1	1	1	1	1	1	1	1	1	1	1	1	1	1
REGULATION															
MINIMUM CAPACITY STEP	%	STEP	STEP	STEP	STEP	STEP	STEP	STEP	STEP	STEP	STEP	STEP	STEP	STEP	STEP
REFRIGERANT		R454B	R454B	R454B	R454B	R454B	R454B	R454B	R454B	R454B	R454B	R454B	R454B	R454B	R454B
REFRIGERANT CHARGE <sup>8</sup>	kg	3.4	4.7	5.0	6.0	7.2	8.6	9.9	11.3	12.5	13.3	16.3	19.3	19.7	19.8
OIL CHARGE		6.0	6.3	6.3	6.9	6.9	9.4	9.7	9.7	9.7	12.2	12.2	12.2	12.2	12.2
RC (ASHRAE) <sup>9</sup>	kg/kW	0.08	0.09	0.08	0.08	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.10	0.09	0.08
NOISE LEVELS															
TOTAL SOUND PRESSURE <sup>10</sup>	dB(A)	57	58	59	61	61	63	63	63	69	70	70	70	72	72
TOTAL SOUND POWER LEVEL IN COOLING <sup>11</sup>	dB(A)	73	74	75	77	77	80	80	80	86	87	87	87	89	89
TOTAL SOUND POWER LEVEL IN HEATING <sup>11</sup>	dB(A)	74	75	76	78	78	81	81	81	87	88	88	88	90	90
SIZE AND WEIGHT <sup>12</sup>															
WIDTH	mm	885	885	885	885	885	885	885	885	885	885	885	885	885	885
DEPTH	mm	1320	1320	1320	1320	1320	1640	1640	1640	1640	1640	1640	1640	1640	1640
HEIGHT	mm	1495	1495	1495	1495	1495	1805	1805	1805	1805	1805	1805	1805	1805	1805
OPERATING WEIGHT	kg	470	490	510	530	560	670	690	700	770	820	860	890	960	970

### Notes:

- User side exchanger hot water temperature (in/out) 40°C/45°C; Source side exchanger water temperature (in/out) 10°C / 7°C (or maximum calculated temperature coming from the maximum flow rate allowed).
- Values in compliance with EN14511.
- Seasonal space heating energy efficiency class Low Temperature [Regulation (EU) N. 813/2013]. Average Weather Conditions. Type of calculation with variable flow and variable temperature.
- Seasonal space heating energy efficiency class Medium Temperature [Regulation (EU) N. 813/2013]. Average Weather Conditions. Type of calculation with variable flow and variable temperature.
- Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger water (in/out) 30°C/35°C.
- Parameter calculated according to [Regulation (EU) N. 2016/2281].
- Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
- Theoretical - refer to serial plate for actual charge volumes.
- Rate in accordance with AHRI standard 550/590.
- Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
- Sound power on the basis of measurement taken in compliance with ISO 9614.
- Unit in standard configuration, without optional accessories.

Eurovent Certified Data

# EW-HT-G05 R513A High Temperature Water-to-Water Heat Pump

(105 to 129kW)



#### Notes:

1. Plant (side) heat exchanger water (in/out) 70°C/78°C; Source (side) heat exchanger water (in/out) 45°C/40°C.
2. Values in compliance with EN14511.
3. Seasonal space heating energy efficiency class MEDIUM TEMPERATURE in AVERAGE climate conditions. [REGULATION (EU) N. 813/2013].
4. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
5. Sound power on the basis of measurements made in compliance with ISO 9614.
6. Sound power level in heating, indoors.
7. Unit in standard configuration/execution, without optional accessories.
8. Seasonal space heating energy efficiency.
9. Fixed flow rate and variable temperature calculation.

The Climaveneta **EW-HT-G05** is perfect for applications requiring high temperature water of up to 78°C, a key feature for your decarbonisation project by complementing your air source heat pumps to create a cascade system, replacing fossil fuel heating systems.

## Key Features & Benefits

- High temperature water (78°C) for replacing fossil fuel heating systems
- Low GWP Refrigerant R513A (GWP<sub>100</sub> = 631)\*
- Compact footprint of only 1m<sup>2</sup>
- High temperature supply water of up to 78°C
- Advanced controls with W3000+ microprocessor
- Reliable and efficient with 2 independent refrigerant circuits
- Compatible with Master-Client controls, Keyboard In Pocket (KIP) interface and Building Energy Management System (BEMS) via interface cards
- Factory fitted options such as refrigerant leak detection, touch screen display, energy meter and additional soundproofing available

\*IPCC AR4

# R513A

MODEL		0262	0302
<b>PERFORMANCE - HEATING ONLY</b>			
GROSS VALUE <sup>1</sup>			
TOTAL HEATING CAPACITY	kW	105	129
TOTAL POWER INPUT	kW	28.6	34.3
COP	kW/kW	3.68	3.77
EN14511 VALUES <sup>1,2</sup>			
TOTAL HEAT CAPACITY	kW	105.2	129.3
COP	kW/kW	3.64	3.73
<b>SEASONAL PERFORMANCE - MEDIUM TEMPERATURE<sup>3,9</sup></b>			
RATED HEAT OUTPUT AT T <sub>designh</sub>	kW	60	74
SCOP		3.10	3.19
PERFORMANCE η <sub>s</sub> <sup>8</sup>	%	116	120
<b>ELECTRICAL DATA</b>			
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50
FLA <sup>7</sup>	Total A	49	64
<b>EXCHANGERS</b>			
MINIMUM WATER CONTENT	User Side l	390	480
MINIMUM WATER FLOW	Source Side l/s	1.98	2.29
<b>HEAT EXCHANGER IN HEATING<sup>1</sup></b>			
WATER FLOW	User Side l/s	3.21	3.95
PRESSURE DROP <sup>2</sup>	User Side kPa	14.20	15.80
WATER FLOW	Source Side l/s	3.78	4.68
PRESSURE DROP <sup>2</sup>	Source Side kPa	18.2	20.9
<b>REFRIGERANT CIRCUIT</b>			
COMPRESSORS	No.	2	2
NO. OF CAPACITY STEPS	No.	2	2
CIRCUITS	No.	2	2
<b>REGULATION</b>			
MINIMUM CAPACITY STEP	%	50	50
REFRIGERANT		R513A	R513A
REFRIGERANT CHARGE	kg	10.50	10.90
OIL CHARGE		6.60	6.80
<b>NOISE LEVELS</b>			
TOTAL SOUND PRESSURE <sup>4</sup>	dB(A)	60	60
TOTAL SOUND POWER LEVEL IN HEATING <sup>5,9</sup>	dB(A)	76	76
<b>SIZE AND WEIGHT<sup>7</sup></b>			
WIDTH	mm	1223	1223
DEPTH	mm	877	877
HEIGHT	mm	1496	1496
OPERATION WEIGHT	kg	415	430

# EW-HT R134a High Temperature Water-to-Water Heat Pump

(113 to 279kW)



#### Notes:

1. Plant (side) heat exchanger water (in/out) 70°C/78°C; Source (side) heat exchanger water (in/out) 45°C/40°C.
2. Values in compliance with EN14511.
3. Seasonal space heating energy efficiency class MEDIUM TEMPERATURE in AVERAGE climate conditions. [REGULATION (EU) N. 813/2013].
4. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
5. Sound power on the basis of measurements made in compliance with ISO 9614.
6. Sound power level in heating, indoors.
7. Unit in standard configuration/execution, without optional accessories.
8. Seasonal space heating energy efficiency.
9. Fixed flow rate and variable temperature calculation.

The Climaveneta **EW-HT** is perfect for applications requiring high temperature water of up to 78°C, a key feature for your decarbonisation project by complementing your air source heat pumps to create a cascade system, replacing fossil fuel heating systems.

## Key Features & Benefits

- High temperature water (78°C) for replacing fossil fuel heating systems
- Compact footprint of only 1m<sup>2</sup>
- High temperature supply water of up to 78°C
- Advanced controls with W3000+ microprocessor
- Reliable and efficient with 2 independent refrigerant circuits
- Compatible with Master-Client controls, Keyboard In Pocket (KIP) interface and Building Energy Management System (BEMS) via interface cards
- Factory fitted options such as refrigerant leak detection, touch screen display, energy meter and additional soundproofing available

# R134a

MODEL		0262	0302	0412	0512	0612
<b>PERFORMANCE - HEATING ONLY</b>						
GROSS VALUE <sup>1</sup>						
TOTAL HEATING CAPACITY	kW	113	139	181	225	279
TOTAL POWER INPUT	kW	27.9	34.2	43.7	55.1	67.6
COP	kW/kW	4.05	4.08	4.14	4.08	4.13
EN14511 VALUES <sup>1,2</sup>						
TOTAL HEAT CAPACITY	kW	113	140	181	225	280
COP	kW/kW	3.94	3.98	4.04	4.01	4.06
<b>SEASONAL PERFORMANCE - MEDIUM TEMPERATURE<sup>3,9</sup></b>						
RATED HEAT OUTPUT AT Tdesignh	kW	61.6	78.1	104	128	157
SCOP		3.30	3.30	3.25	3.27	3.3
PERFORMANCE ηs <sup>8</sup>	%	124	124	122	123	124
<b>ELECTRICAL DATA</b>						
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
FLA <sup>7</sup>	Total	A	49	64	79	99
<b>EXCHANGERS</b>						
MINIMUM WATER CONTENT	User Side	l	410	530	680	850
MINIMUM WATER FLOW	Source Side	l/s	1.50	2.03	2.69	3.31
<b>HEAT EXCHANGER IN HEATING<sup>1</sup></b>						
WATER FLOW	User Side	l/s	3.45	4.26	5.52	6.87
PRESSURE DROP <sup>2</sup>	User Side	kPa	24.2	19.7	19.8	20.1
WATER FLOW	Source Side	l/s	4.19	5.18	6.74	8.35
PRESSURE DROP <sup>2</sup>	Source Side	kPa	53.8	49.7	50.1	37.6
<b>REFRIGERANT CIRCUIT</b>						
COMPRESSORS	No.	2	2	2	2	2
NO. OF CAPACITY STEPS	No.	2	2	2	2	2
CIRCUITS	No.	2	2	2	2	2
<b>REGULATION</b>						
MINIMUM CAPACITY STEP	%	50	50	50	50	50
REFRIGERANT		R134a	R134a	R134a	R134a	R134a
REFRIGERANT CHARGE	kg	9.10	9.90	11.0	13.2	14.3
OIL CHARGE		6.80	6.80	9.40	13.6	12.6
<b>NOISE LEVELS</b>						
TOTAL SOUND PRESSURE <sup>4</sup>	dB(A)	60	60	62	62	64
TOTAL SOUND POWER LEVEL IN HEATING <sup>5, 9</sup>	dB(A)	76	76	78	78	80
<b>SIZE AND WEIGHT<sup>7</sup></b>						
WIDTH	mm	1223	1223	1223	1223	1223
DEPTH	mm	877	877	877	877	877
HEIGHT	mm	1496	1496	1496	1496	1496
OPERATION WEIGHT	kg	415	430	610	675	740

# TX2-W-G04 /H R1234ze Water-to-Water Heat Pump

(298 to 2,510kW)



#### Notes:

- Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger water (in/out) 30.00°C/35.00°C.
- Plant (side) exchanger hot water temperature (in/out) 40.00°C/45.00°C; Source (side) exchanger water temperature(in/out) 10.00°C/6.71°C (or the maximum calculated temperature coming from the maximum flow rate allowed).
- Values in compliance with EN14511.
- Unit performance with inverter compressor at maximum speeds.
- Unit performance with inverter compressor at nominal speed.
- Parameter calculated according to [Regulation (EU) N. 2016/2281].
- Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
- Theoretical - refer to serial plate for actual charge volumes.
- Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
- Sound power level in cooling, indoors, on the basis of measurement taken in compliance with ISO 9614.
- Unit in standard configuration, without optional accessories.

Eurovent Certified Data

The Climaveneta **TX2-W-G04 /H** is a high performance water source reversible (on the hydraulic side) heat pump optimised for comfort heating and cooling. It uses state of the art oil free centrifugal compressors and low GWP refrigerant R1234ze, ensuring high efficiency and silent operation.

### Key Features & Benefits


- Exceptional efficiency in a compact footprint
- Silent operation achieved using state of the art oil free centrifugal compressors optimised for R1234ze
- High quality shell and tube heat exchangers
- Low GWP refrigerant (GWP<sub>100</sub> = 1)\*
- Large variety of sizes to suit a wide variety of applications
- Flexible composition with water connections to the evaporator and condenser that can be deployed on the right or left, to fit any application

\*IPCC AR5



## R1234ze

MODEL		0251	0351	0551	0602	0702	0872	1022	1203	1314	1363	1404	1553	1584	1914	2064
<b>PERFORMANCE - HEATING ONLY (GROSS VALUE) <sup>2,3,4</sup></b>																
TOTAL HEATING CAPACITY	kW	297.9	406.7	643.6	731.1	828.8	1034	1269	1398	1576	1650	1691	1905	1869	2342	2510
TOTAL POWER INPUT	kW	59.3	84.3	137.4	144.7	169.7	220.6	272.4	299.6	309.8	357.0	334.5	391.4	383.2	474.7	523.2
COP	kW/kW	5.02	4.82	4.68	5.05	4.88	4.69	4.66	4.67	5.09	4.62	5.06	4.87	4.88	4.93	4.80
<b>PERFORMANCE - HEATING ONLY <sup>2,3,5</sup></b>																
TOTAL HEAT CAPACITY	kW	263.6	366.2	546.0	642.2	743.4	907.5	1091	1245	1394	1448	1494	1623	1639	2009	2146
COP	kW/kW	5.04	4.93	5.30	5.14	4.98	5.12	5.24	5.01	5.21	5.09	5.21	5.41	5.20	5.38	5.37
<b>PERFORMANCE - COOLING ONLY <sup>1,3,5</sup></b>																
TOTAL COOLING CAPACITY	kW	209.3	299.8	425.2	511.6	601.6	725.4	850.5	1016	1108	1146	1197	1264	1319	1571	1681
EER	kW/kW	5.67	5.78	6.04	5.87	5.79	5.88	5.98	5.75	6.07	5.83	6.13	6.20	6.08	6.19	6.16
<b>SEASONAL PERFORMANCE - AMBIENT REFRIGERATION <sup>6</sup></b>																
Prated,C	kW	209.3	299.8	425.2	511.6	601.6	725.4	850.5	1016	1108	1146	1197	1264	1319	1571	1681
SEER		8.99	9.15	9.77	9.36	9.25	9.53	10.02	9.33	9.50	9.31	9.65	10.16	9.54	9.83	10.13
<b>ELECTRICAL DATA</b>																
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/500	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
FLA:7	Total	A	117	165	231	282	330	396	462	561	612	627	660	693	726	858
<b>EXCHANGERS</b>																
MINIMUM WATER FLOW IN COOLING <sup>11</sup>	Evaporator	l/s	17.61	17.61	40.28	45.83	40.28	50.00	72.22	61.94	85.28	87.78	85.28	108.3	85.28	134.2
MINIMUM WATER FLOW IN HEATING <sup>2</sup>	Condenser	l/s	8.61	11.67	18.61	21.11	21.11	28.61	35.28	38.06	44.44	41.39	48.06	50.83	48.06	59.72
<b>HEAT EXCHANGER IN HEATING <sup>2</sup></b>																
PRESSURE DROP AT HEAT EXCHANGER	User Side	kPa	28.50	29.70	25.20	28.00	37.50	30.80	29.80	26.20	29.30	29.70	29.00	31.00	34.90	34.10
WATER FLOW	User Side	l/s	12.71	17.66	26.34	30.98	35.86	43.78	52.62	60.07	67.26	69.88	72.08	78.33	79.09	96.95
PRESSURE DROP AT HEAT EXCHANGER	Source Side	kPa	77.40	80.40	64.90	68.10	80.70	82.60	80.70	67.10	82.90	66.90	82.90	81.50	82.90	83.10
WATER FLOW	Source Side	l/s	17.28	17.61	36.11	42.21	40.28	50.00	72.03	61.94	85.28	87.78	85.28	107.9	85.28	133.4
<b>HEAT EXCHANGER IN COOLING <sup>11</sup></b>																
PRESSURE DROP AT HEAT EXCHANGER	User Side	kPa	26.10	53.40	20.60	22.90	41.30	39.80	25.80	41.30	32.00	26.10	37.40	25.60	45.40	26.40
WATER FLOW	User Side	l/s	10.03	14.36	20.35	24.48	28.79	34.72	40.70	48.61	53.01	54.82	57.29	60.49	63.11	75.18
PRESSURE DROP AT HEAT EXCHANGER	Source Side	kPa	24.10	26.50	20.20	23.60	32.70	26.10	24.00	23.30	24.40	24.80	24.40	24.70	29.70	27.40
WATER FLOW	Source Side	l/s	11.70	16.69	23.58	28.47	33.50	40.32	47.21	56.67	61.36	63.83	66.22	69.85	72.96	86.83
<b>REFRIGERANT CIRCUIT</b>																
COMPRESSORS	No.	1	1	1	2	2	2	2	3	4	3	4	3	4	4	4
CIRCUITS	No.	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
REFRIGERANT CHARGE <sup>8</sup>	kg	140	190	240	270	270	415	420	624	730	615	1000	850	1000	1070	1070
<b>NOISE LEVELS</b>																
TOTAL SOUND PRESSURE <sup>9</sup>	dB(A)	75	76	78	76	77	78	79	79	78	80	78	79	79	80	80
TOTAL SOUND POWER LEVEL IN COOLING <sup>11,5,10</sup>	dB(A)	93	94	96	95	96	97	98	98	98	99	98	99	99	100	100
TOTAL SOUND POWER LEVEL IN HEATING <sup>2,5,10</sup>	dB(A)	93	94	96	95	96	97	98	98	98	99	98	99	99	100	100
<b>SIZE AND WEIGHT <sup>11</sup></b>																
WIDTH	mm	2910	2910	2910	2910	2910	3050	3050	3710	4690	3710	4720	4690	4720	4720	4720
DEPTH	mm	1000	1000	1000	1560	1560	1620	1620	1710	1890	1710	1890	1660	1890	1890	1890
HEIGHT	mm	1950	1950	1950	2190	2190	2190	2190	2260	2400	2260	2400	2260	2400	2400	2400
OPERATION WEIGHT	kg	2280	2430	2630	3780	3010	4880	4910	7060	8520	7040	9760	7950	9760	10130	10340

Front View

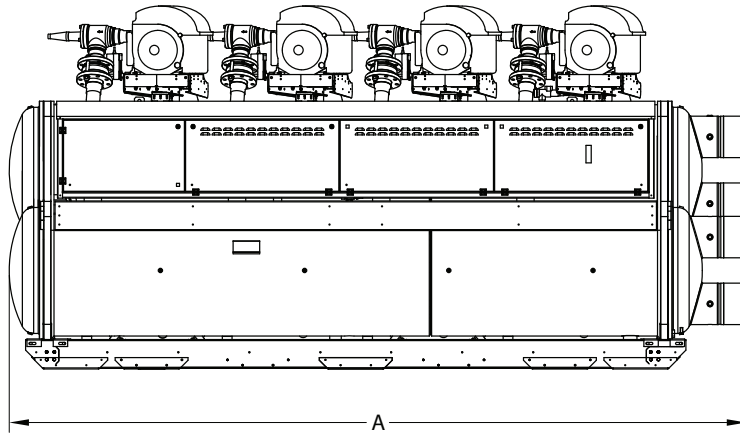

Side View

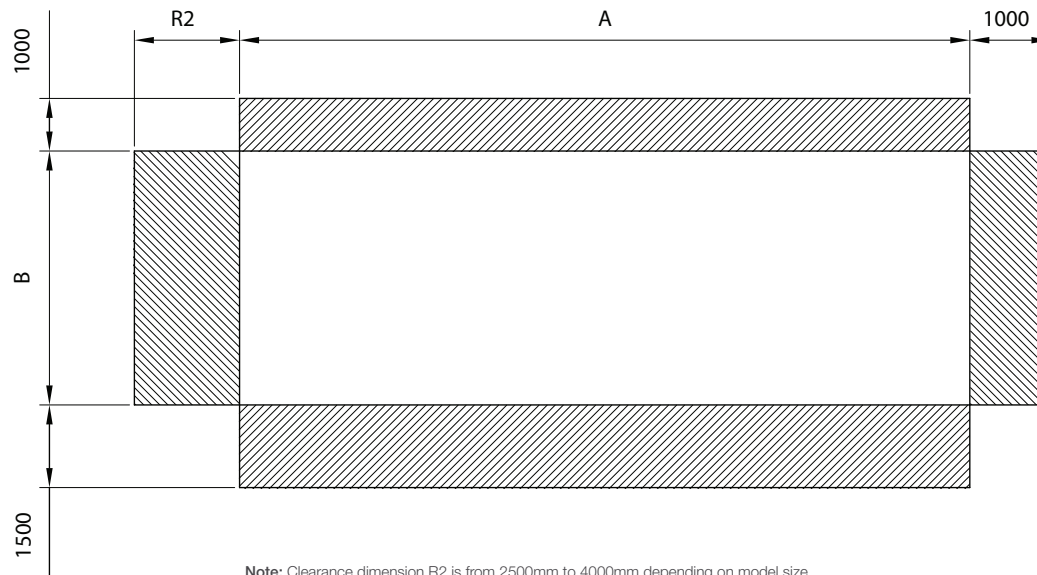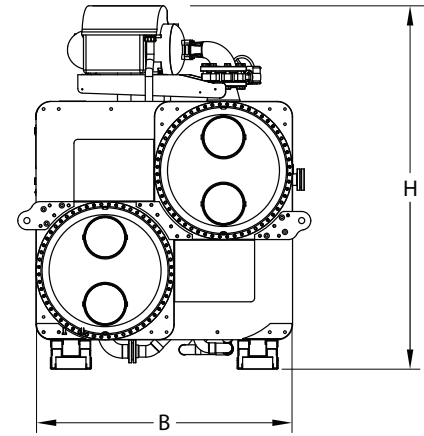

Note: Clearance dimension R2 is from 2500mm to 4000mm depending on model size.

## Commercial Heat Pumps & Chillers

# Our INTEGRA Simultaneous Heating & Cooling Range - An Overview

INTEGRA polyvalent heat pumps units, commonly known as 4-pipe systems, offer an innovative and efficient solution for customers requiring both heating and cooling at the same time.

Their ability to recover heat from the cooling circuit gives them exceptional versatility, combined with high energy efficiency and makes them an ideal choice for a wide range of buildings, such as large offices, hotels and hospitals alongside other premises with variable temperature control needs. The systems can be customised to adapt to the specific demands of each environment.

## TER Value

In all cases where INTEGRA simultaneously produces hot and cold water, the real efficiency of the unit must be considered as the sum of heating and cooling. Measuring efficiency through traditional EER and COP indices is therefore limiting.

To objectively measure the performance in contemporary loads conditions, we calculate TER - Total Efficiency Ratio. TER is calculated as the ratio of the sum of the heating and cooling power and electrical power input. TER reaches its maximum value when the loads are completely balanced and is the most effective way to represent the real efficiency of the unit.



INTEGRA

CLIMVENETA

## Commercial Heat Pumps & Chillers

### Our INTEGRA range at a glance

INTEGRA polyvalent heat pumps units, commonly known as 4-pipe systems, offer an innovative and efficient solution for customers requiring both heating and cooling at the same time.



### Climaveneta

Commercial polyvalent heat pumps that use a range of low GWP refrigerants, alongside the latest inverter scroll and screw compressors.



Notes: \* Water source

# i-NX-Q R410A Air Source Polyvalent Unit

(74 to 165kW)

Mitsubishi Electric's **i-NX-Q** is our range of air source simultaneous heating and cooling (polyvalent / 4-pipe) using Variable Speed Drive (VSD) scroll compressors as standard.

## Key Features & Benefits

- Best-in-class seasonal efficiency in a compact footprint
- High efficiency inverter scroll compressors providing a dual refrigeration circuit
- Wide range of options available including: inbuilt hydronic pumps, dual pressure relief valves, BEMS interface cards, EC Fans and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

# R410A



MODEL		0252P	0262P	0302P	0352P	0402P	0502P	0552P
<b>COOLING WITH HEAT RECOVERY<sup>1</sup> 2 3</b>								
COOLING CAPACITY	kW	68.63	79.78	89.07	101.9	116.3	134.7	154.3
RECOVERY HEAT EXCHANGER CAPACITY	kW	89.70	103.6	116.8	131.1	151.2	175.6	200.4
TOTAL POWER INPUT	kW	22.64	25.54	29.85	31.46	37.66	44.18	49.98
TER	kW/kW	6.992	7.178	6.898	7.406	7.102	7.024	7.096
<b>PERFORMANCE - HEATING ONLY<sup>1</sup> 2</b>								
TOTAL HEAT CAPACITY	kW	74.10	85.70	95.50	108.30	122.9	143.6	165.2
COP	kW/kW	3.12	3.29	3.22	3.35	3.28	3.30	3.29
<b>PERFORMANCE - COOLING ONLY<sup>1</sup> 2</b>								
TOTAL COOLING CAPACITY	kW	67.5	79.0	87.8	100.7	114.0	132.9	151.7
EER	kW/kW	2.78	2.93	2.74	3.07	2.86	2.92	2.95
<b>SEASONAL PERFORMANCE<sup>5</sup></b>								
RATED HEAT OUTPUT AT Tdesignh	kW	53.0	64.0	71.0	81.0	91.0	107.0	123.0
SCOP		3.97	3.94	3.96	4.08	4.11	4.12	4.16
<b>ELECTRICAL DATA</b>								
POWER SUPPLY	V/ph/Hz	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50
MAX F.L.A. <sup>6</sup>	Total A	76	75	75	109	109	111	113
<b>EXCHANGERS</b>								
MINIMUM WATER FLOW IN COOLING <sup>4</sup>	Evaporator l/s	1.583	1.861	2.083	2.389	2.722	3.167	3.639
MINIMUM WATER FLOW IN HEATING <sup>1</sup>	Condenser l/s	1.944	2.250	2.528	2.611	3.056	3.528	4.056
<b>REFRIGERANT CIRCUIT</b>								
COMPRESSORS	No.	2	2	2	2	2	2	2
CIRCUITS	No.	2	2	2	2	2	2	2
REFRIGERANT CHARGE <sup>7</sup>	kg	22.6	30.6	30.8	38.4	38.8	53.2	60.0
<b>NOISE LEVELS</b>								
TOTAL SOUND PRESSURE <sup>8</sup>	dB(A)	55	55	56	56	57	59	61
TOTAL SOUND POWER LEVEL IN COOLING <sup>9</sup>	dB(A)	87	87	88	88	89	91	93
TOTAL SOUND POWER LEVEL IN HEATING <sup>10</sup>	dB(A)	87	87	88	88	89	91	93
<b>SIZE AND WEIGHT<sup>11</sup></b>								
WIDTH	mm	2625	2625	2625	3250	3250	3875	4500
DEPTH	mm	1350	1350	1350	1350	1350	1350	1350
HEIGHT	mm	2070	2070	2070	2070	2070	2070	2070
OPERATION WEIGHT	kg	930	1050	1050	1290	1300	1480	1630

### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Seasonal space heating energy efficiency class LOW TEMPERATURE [REGULATION (EU) N. 813/2013] - Average Weather Conditions.
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes.
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

INTEGRATA

CLIMAVENETA

# i-NX-Q R410A Air Source Polyvalent Unit

(70 to 153kW)

Super-Low Noise Version (/SL)

Mitsubishi Electric's **i-NX-Q** is our range of air source simultaneous heating and cooling (polyvalent / 4-pipe) using Variable Speed Drive (VSD) scroll compressors as standard.

## Key Features & Benefits

- Best-in-class seasonal efficiency in a compact footprint
- High efficiency inverter scroll compressors providing a dual refrigeration circuit
- Wide range of options available including: inbuilt hydronic pumps, dual pressure relief valves, BEMS interface cards, EC Fans and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

# R410A



MODEL		0252P	0262P	0302P	0352P	0402P	0502P	0552P
<b>COOLING WITH HEAT RECOVERY<sup>1 2 3</sup></b>								
COOLING CAPACITY	kW	65.09	75.01	84.46	94.47	109.2	126.20	145.2
RECOVERY HEAT EXCHANGER CAPACITY	kW	84.59	96.84	110.2	120.9	141.2	164.0	188.1
TOTAL POWER INPUT	kW	20.92	23.40	27.71	28.37	34.43	40.58	46.15
TER	kW/kW	7.154	7.343	7.026	7.591	7.272	7.151	7.222
<b>PERFORMANCE - HEATING ONLY<sup>4 2</sup></b>								
TOTAL HEAT CAPACITY	kW	70.70	78.50	93.10	98.10	114.2	132.4	153.2
COP	kW/kW	3.29	3.38	3.37	3.45	3.35	3.36	3.38
<b>PERFORMANCE - COOLING ONLY<sup>1 2</sup></b>								
TOTAL COOLING CAPACITY	kW	62.9	70.9	84.0	89.5	105.0	119.9	138.4
EER	kW/kW	2.77	2.73	2.87	2.90	2.81	2.72	2.78
<b>SEASONAL PERFORMANCE<sup>5</sup></b>								
RATED HEAT OUTPUT AT Tdesignh	kW	52.0	59.0	70.0	74.0	79.0	97.0	115.0
SCOP		4.00	3.97	4.04	4.09	4.01	4.11	4.13
<b>ELECTRICAL DATA</b>								
POWER SUPPLY	V/ph/Hz	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50
MAX F.L.A <sup>6</sup>	Total A	76	75	77	109	111	111	113
<b>EXCHANGERS</b>								
MINIMUM WATER FLOW IN COOLING <sup>4</sup>	Evaporator l/s	1.583	1.861	2.083	2.389	2.722	3.167	3.639
MINIMUM WATER FLOW IN HEATING <sup>1</sup>	Condenser l/s	1.944	2.250	2.528	2.611	3.056	3.528	4.056
<b>REFRIGERANT CIRCUIT</b>								
COMPRESSORS	No.	2	2	2	2	2	2	2
CIRCUITS	No.	2	2	2	2	2	2	2
REFRIGERANT CHARGE <sup>7</sup>	kg	29.2	31.2	43.8	40.6	45.8	53.4	60.0
<b>NOISE LEVELS</b>								
TOTAL SOUND PRESSURE <sup>8</sup>	dB(A)	49	49	50	50	51	53	55
TOTAL SOUND POWER LEVEL IN COOLING <sup>9</sup>	dB(A)	81	81	82	82	83	85	87
TOTAL SOUND POWER LEVEL IN HEATING <sup>10</sup>	dB(A)	81	81	82	82	83	85	87
<b>SIZE AND WEIGHT<sup>11</sup></b>								
WIDTH	mm	2625	2625	3250	3250	3250	3875	4500
DEPTH	mm	1350	1350	1350	1350	1350	1350	1350
HEIGHT	mm	2070	2070	2070	2070	2070	2070	2070
OPERATION WEIGHT	kg	990	1080	1210	1330	1440	1520	1660

### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Seasonal space heating energy efficiency class LOW TEMPERATURE [REGULATION (EU) N. 813/2013] - Average Weather Conditions.
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes.
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

# INTEGR

# CLIMAVENETA

# NX-Q-G06

## R454B 2 Compressor

### Air Source Polyvalent Unit

(72 to 170kW)

Mitsubishi Electric's **NX-Q-G06** is our range of air source simultaneous heating and cooling (polyvalent / 4-pipe) using two high efficiency scroll compressors as standard.

#### Key Features & Benefits

- Low GWP refrigerant R454B provides an environmentally friendly solution
- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors providing a dual refrigeration circuit
- Wide range of options available including: inbuilt hydronic pumps, dual pressure relief valves, BEMS interface cards, EC Fans and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

# R454B



MODEL		0262P	0302P	0402P	0502P	0602P
<b>COOLING WITH HEAT RECOVERY<sup>1 2 3</sup></b>						
COOLING CAPACITY	kW	70.0	83.3	107.3	133.9	169.3
RECOVERY HEAT EXCHANGER CAPACITY	kW	87.5	103.9	134.1	168.7	213.9
TOTAL POWER INPUT	kW	18.64	22.07	28.72	37.33	47.98
TER	kW/kW	8.456	8.483	8.404	8.108	7.987
<b>PERFORMANCE - HEATING ONLY<sup>4 2</sup></b>						
TOTAL HEAT CAPACITY	kW	72.3	86.6	110.8	139.3	170.6
COP	kW/kW	3.59	3.61	3.60	3.58	3.48
<b>PERFORMANCE - COOLING ONLY<sup>1 2</sup></b>						
TOTAL COOLING CAPACITY	kW	68.6	82.0	106.1	132.1	161.5
EER	kW/kW	3.29	3.41	3.38	3.32	3.04
<b>SEASONAL PERFORMANCE<sup>5</sup></b>						
Prated,C	kW	68.6	82.0	106.1	132.1	161.5
SEER		3.99	4.11	4.09	4.02	3.70
<b>ELECTRICAL DATA</b>						
POWER SUPPLY	V/ph/Hz	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50
MAX F.L.A. <sup>6</sup>	Total A	48	59	79	98	123
<b>EXCHANGERS</b>						
MINIMUM WATER FLOW IN COOLING <sup>4</sup>	Evaporator l/s	2.000	2.361	3.056	3.889	4.778
MINIMUM WATER FLOW IN HEATING <sup>1</sup>	Condenser l/s	2.000	2.361	3.056	3.889	4.778
<b>REFRIGERANT CIRCUIT</b>						
COMPRESSORS	No.	2	2	2	2	2
CIRCUITS	No.	2	2	2	2	2
REFRIGERANT CHARGE <sup>7</sup>	kg	27.8	33.4	48.2	54.4	54.9
<b>NOISE LEVELS</b>						
TOTAL SOUND PRESSURE <sup>8</sup>	dB(A)	53	54	55	56	56
TOTAL SOUND POWER LEVEL IN COOLING <sup>9</sup>	dB(A)	85	86	87	88	88
TOTAL SOUND POWER LEVEL IN HEATING <sup>10</sup>	dB(A)	85	86	87	88	88
<b>SIZE AND WEIGHT<sup>11</sup></b>						
WIDTH	mm	2625	3250	3875	4500	4500
DEPTH	mm	1350	1350	1350	1350	1350
HEIGHT	mm	2070	2070	2070	2070	2070
OPERATION WEIGHT	kg	1000	1130	1310	1620	1650

#### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Parameter calculated according to [Regulation (EU) N. 2016/2281].
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes. b
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

INT<sub>Σ</sub>GRA

CLIMAVENETA

# NX-Q-G06 R454B 2 Compressor Air Source Polyvalent Unit (73 to 135kW)

Super-Low Noise Version (/SL)



Mitsubishi Electric's **NX-Q-G06** is our range of air source simultaneous heating and cooling (polyvalent / 4-pipe) using two high efficiency scroll compressors as standard.

## Key Features & Benefits

- Low GWP refrigerant R454B provides an environmentally friendly solution
- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors providing a dual refrigeration circuit
- Wide range of options available including: inbuilt hydronic pumps, dual pressure relief valves, BEMS interface cards, EC Fans and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

# R454B

MODEL		0262P	0302P	0402P	0502P
<b>COOLING WITH HEAT RECOVERY<sup>1, 2, 3</sup></b>					
COOLING CAPACITY	kW	70.0	83.3	107.3	134.0
RECOVERY HEAT EXCHANGER CAPACITY	kW	87.5	103.9	134.1	168.7
TOTAL POWER INPUT	kW	18.65	22.07	28.72	37.22
TER	kW/kW	8.448	8.482	8.403	8.135
<b>PERFORMANCE - HEATING ONLY<sup>4, 2</sup></b>					
TOTAL HEAT CAPACITY	kW	73.8	87.6	111.8	135.8
COP	kW/kW	3.70	3.69	3.68	3.61
<b>PERFORMANCE - COOLING ONLY<sup>1, 2</sup></b>					
TOTAL COOLING CAPACITY	kW	68.6	81.3	104.0	125.3
EER	kW/kW	3.32	3.40	3.32	3.02
<b>SEASONAL PERFORMANCE<sup>5</sup></b>					
Prated,C	kW	68.6	81.3	104.0	125.3
SEER		4.04	4.11	4.02	3.70
<b>ELECTRICAL DATA</b>					
POWER SUPPLY	V/ph/Hz	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50
MAX F.L.A. <sup>6</sup>	Total A	50	61	82	98
<b>EXCHANGERS</b>					
MINIMUM WATER FLOW IN COOLING <sup>4</sup>	Evaporator l/s	2.000	2.389	3.056	3.889
MINIMUM WATER FLOW IN HEATING <sup>1</sup>	Condenser l/s	2.000	2.389	3.056	3.889
<b>REFRIGERANT CIRCUIT</b>					
COMPRESSORS	No.	2	2	2	2
CIRCUITS	No.	2	2	2	2
REFRIGERANT CHARGE <sup>7</sup>	kg	37.8	44.0	49.7	53.5
<b>NOISE LEVELS</b>					
TOTAL SOUND PRESSURE <sup>8</sup>	dB(A)	48	49	50	52
TOTAL SOUND POWER LEVEL IN COOLING <sup>9</sup>	dB(A)	80	81	82	84
TOTAL SOUND POWER LEVEL IN HEATING <sup>10</sup>	dB(A)	80	81	82	84
<b>SIZE AND WEIGHT<sup>11</sup></b>					
WIDTH	mm	3250	3875	4500	4500
DEPTH	mm	1350	1350	1350	1350
HEIGHT	mm	2070	2070	2070	2070
OPERATION WEIGHT	kg	1120	1270	1490	1630

### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Parameter calculated according to [Regulation (EU) N. 2016/2281].
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes. b
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

# INTEGRA

# CLIMVENETA

# NX-Q-G06

## R454B 4 Compressor

### Air Source Polyvalent Unit

(157 to 323kW)

Mitsubishi Electric's **NX-Q-G06** is our range of air source simultaneous heating and cooling (polyvalent / 4-pipe) using four high efficiency scroll compressors as standard.

#### Key Features & Benefits

- Low GWP refrigerant R454B provides an environmentally friendly solution
- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors providing a dual refrigeration circuit
- Wide range of options available including: inbuilt hydronic pumps, dual pressure relief valves, BEMS interface cards, EC Fans and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

# R454B



MODEL		0604	0704	0804	0904	1004	1104	1204
<b>COOLING WITH HEAT RECOVERY<sup>1 2 3</sup></b>								
COOLING CAPACITY	kW	144.6	165.6	186.1	210.9	235.9	269.0	303.7
RECOVERY HEAT EXCHANGER CAPACITY	kW	188.8	216.0	243.1	274.6	306.3	350.8	395.0
TOTAL POWER INPUT	kW	47.72	54.57	61.63	68.87	76.32	88.71	99.91
TER	kW/kW	6.987	6.993	6.963	7.049	7.105	6.987	7.003
<b>PERFORMANCE - HEATING ONLY<sup>4 2</sup></b>								
TOTAL HEAT CAPACITY	kW	157.5	174.6	197.1	220.5	250.9	288.4	323.7
COP	kW/kW	2.92	2.90	2.94	2.98	2.94	2.99	3.00
<b>PERFORMANCE - COOLING ONLY<sup>1 2</sup></b>								
TOTAL COOLING CAPACITY	kW	143.5	159.3	180.9	202.3	230.1	265.6	298.0
EER	kW/kW	2.58	2.45	2.53	2.52	2.55	2.62	2.63
<b>SEASONAL PERFORMANCE<sup>5</sup></b>								
Prated,C	kW	143.5	159.3	180.9	202.3	230.1	265.6	298.0
SEER		3.52	3.52	3.67	3.75	3.59	3.75	3.83
<b>ELECTRICAL DATA</b>								
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
MAX F.L.A. <sup>6</sup>	Total A	115	133	152	169	193	218	243
<b>EXCHANGERS</b>								
MINIMUM WATER FLOW IN COOLING <sup>4</sup>	Evaporator l/s	4.444	4.917	5.611	6.278	7.139	8.250	9.250
MINIMUM WATER FLOW IN HEATING <sup>1</sup>	Condenser l/s	4.444	4.917	5.611	6.278	7.139	8.250	9.250
<b>REFRIGERANT CIRCUIT</b>								
COMPRESSORS	No.	4	4	4	4	4	4	4
CIRCUITS	No.	2	2	2	2	2	2	2
REFRIGERANT CHARGE <sup>7</sup>	kg	38.3	38.4	54.2	57.3	60.5	72.5	97.2
<b>NOISE LEVELS</b>								
TOTAL SOUND PRESSURE <sup>8</sup>	dB(A)	60	60	60	61	62	63	63
TOTAL SOUND POWER LEVEL IN COOLING <sup>9</sup>	dB(A)	92	92	92	93	94	95	95
TOTAL SOUND POWER LEVEL IN HEATING <sup>10</sup>	dB(A)	92	92	92	93	94	95	95
<b>SIZE AND WEIGHT<sup>11</sup></b>								
WIDTH	mm	3110	3110	3110	4110	4110	4110	4110
DEPTH	mm	2220	2220	2220	2220	2220	2220	2220
HEIGHT	mm	2150	2150	2150	2150	2150	2150	2150
OPERATION WEIGHT	kg	1660	1730	1850	2130	2370	2540	2680

#### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Parameter calculated according to [Regulation (EU) N. 2016/2281.
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes.
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

# INTEGR

# CLIMAVENETA

# NX-Q-G06 R454B 4 Compressor Air Source Polyvalent Unit (150 to 304kW)

Low Noise Version (/LN)



Mitsubishi Electric's **NX-Q-G06** is our range of air source simultaneous heating and cooling (polyvalent / 4-pipe) using four high efficiency scroll compressors as standard.

## Key Features & Benefits

- Low GWP refrigerant R454B provides an environmentally friendly solution
- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors providing a dual refrigeration circuit
- Wide range of options available including: inbuilt hydronic pumps, dual pressure relief valves, BEMS interface cards, EC Fans and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

# R454B

MODEL		0604	0704	0804	0904	1004	1104	1204
<b>COOLING WITH HEAT RECOVERY<sup>1 2 3</sup></b>								
COOLING CAPACITY	kW	144.8	165.7	186.3	211.1	236.1	269.3	304.1
RECOVERY HEAT EXCHANGER CAPACITY	kW	188.8	216.1	243.2	274.6	306.4	351.0	396.1
TOTAL POWER INPUT	kW	47.50	54.31	61.35	68.60	75.96	88.27	99.33
TER	kW/kW	7.023	7.031	7.000	7.080	7.143	7.027	7.050
<b>PERFORMANCE - HEATING ONLY<sup>4 2</sup></b>								
TOTAL HEAT CAPACITY	kW	150.2	165.8	186.4	212.2	238.7	273.2	304.9
COP	kW/kW	2.98	2.94	2.96	3.02	2.99	3.00	2.98
<b>PERFORMANCE - COOLING ONLY<sup>1 2</sup></b>								
TOTAL COOLING CAPACITY	kW	137.0	150.5	169.7	190.8	217.9	249.9	278.8
EER	kW/kW	2.47	2.27	2.30	2.31	2.39	2.40	2.36
<b>SEASONAL PERFORMANCE<sup>5</sup></b>								
Prated,C	kW	137.0	150.5	169.7	190.8	217.9	249.9	278.8
SEER		3.59	3.56	3.57	3.70	3.60	3.75	3.72
<b>ELECTRICAL DATA</b>								
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
MAX F.L.A. <sup>6</sup>	Total A	115	133	152	169	193	218	243
<b>EXCHANGERS</b>								
MINIMUM WATER FLOW IN COOLING <sup>4</sup>	Evaporator l/s	4.444	4.917	5.611	6.278	7.139	8.250	9.250
MINIMUM WATER FLOW IN HEATING <sup>1</sup>	Condenser l/s	4.444	4.917	5.611	6.278	7.139	8.250	9.250
<b>REFRIGERANT CIRCUIT</b>								
COMPRESSORS	No.	4	4	4	4	4	4	4
CIRCUITS	No.	2	2	2	2	2	2	2
REFRIGERANT CHARGE <sup>7</sup>	kg	38	38	54	57	61	73	97
<b>NOISE LEVELS</b>								
TOTAL SOUND PRESSURE <sup>8</sup>	dB(A)	54	54	54	55	56	57	57
TOTAL SOUND POWER LEVEL IN COOLING <sup>9</sup>	dB(A)	86	86	86	87	88	89	89
TOTAL SOUND POWER LEVEL IN HEATING <sup>10</sup>	dB(A)	87	87	87	88	89	90	90
<b>SIZE AND WEIGHT<sup>11</sup></b>								
WIDTH	mm	3110	3110	3110	4110	4110	4110	4110
DEPTH	mm	2220	2220	2220	2220	2220	2220	2220
HEIGHT	mm	2150	2150	2150	2150	2150	2150	2150
OPERATION WEIGHT	kg	1660	1730	1850	2130	2370	2540	2680

### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Parameter calculated according to [Regulation (EU) N. 2016/2281].
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes.
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

# INTEGR

# CLIMAVENETA

# NX-Q-G06 R454B 4 Compressor Air Source Polyvalent Unit (149 to 310kW)

Super-Low Noise Version (/SL)

Mitsubishi Electric's **NX-Q-G06** is our range of air source simultaneous heating and cooling (polyvalent / 4-pipe) using four high efficiency scroll compressors as standard.

## Key Features & Benefits

- Low GWP refrigerant R454B provides an environmentally friendly solution
- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors providing a dual refrigeration circuit
- Wide range of options available including: inbuilt hydronic pumps, dual pressure relief valves, BEMS interface cards, EC Fans and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

# R454B



MODEL		0604	0704	0804	0904	1004	1104	1204
<b>COOLING WITH HEAT RECOVERY<sup>1 2 3</sup></b>								
COOLING CAPACITY	kW	144.8	165.7	186.2	211.1	236.1	269.2	304.0
RECOVERY HEAT EXCHANGER CAPACITY	kW	188.8	216.1	243.1	274.6	306.4	350.9	396.0
TOTAL POWER INPUT	kW	47.48	54.37	61.53	68.63	75.93	88.35	99.48
TER	kW/kW	7.027	7.021	6.978	7.077	7.146	7.019	7.037
<b>PERFORMANCE - HEATING ONLY<sup>4 2</sup></b>								
TOTAL HEAT CAPACITY	kW	149.8	167.6	193.2	213.1	238.1	277.2	310.6
COP	kW/kW	3.05	3.03	3.01	3.00	3.05	3.10	3.03
<b>PERFORMANCE - COOLING ONLY<sup>1 2</sup></b>								
TOTAL COOLING CAPACITY	kW	136.0	153.0	175.7	192.4	216.0	250.0	281.8
EER	kW/kW	2.48	2.40	2.46	2.33	2.39	2.45	2.42
<b>SEASONAL PERFORMANCE<sup>5</sup></b>								
P <sub>Rated,C</sub>	kW	136.0	153.0	175.7	192.4	216.0	250.0	281.8
SEER		3.72	3.79	3.67	3.67	3.73	3.91	3.76
<b>ELECTRICAL DATA</b>								
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
MAX F.L.A. <sup>6</sup>	A	115	133	160	176	193	218	251
<b>EXCHANGERS</b>								
MINIMUM WATER FLOW IN COOLING <sup>4</sup>	Evaporator l/s	4.444	4.917	5.611	6.278	7.139	8.250	9.250
MINIMUM WATER FLOW IN HEATING <sup>1</sup>	Condenser l/s	4.444	4.917	5.611	6.278	7.139	8.250	9.250
<b>REFRIGERANT CIRCUIT</b>								
COMPRESSORS	No.	4	4	4	4	4	4	4
CIRCUITS	No.	2	2	2	2	2	2	2
REFRIGERANT CHARGE <sup>7</sup>	kg	49.5	63.1	63.2	63.3	73.8	99.0	99.0
<b>NOISE LEVELS</b>								
TOTAL SOUND PRESSURE <sup>8</sup>	dB(A)	50	50	51	51	51	53	54
TOTAL SOUND POWER LEVEL IN COOLING <sup>9</sup>	dB(A)	82	82	83	83	83	85	86
TOTAL SOUND POWER LEVEL IN HEATING <sup>10</sup>	dB(A)	83	83	84	84	84	86	87
<b>SIZE AND WEIGHT<sup>11</sup></b>								
WIDTH	mm	3110	3110	4110	4110	4110	5110	5110
DEPTH	mm	2220	2220	2220	2220	2220	2220	2220
HEIGHT	mm	2150	2150	2150	2150	2150	2150	2150
OPERATION WEIGHT	kg	1750	1850	2070	2230	2480	2810	2930

### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Parameter calculated according to [Regulation (EU) N. 2016/2281.
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes.
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

 Eurovent Certified Data

# INTEGR

# CLIMAVENETA

# NX2-Q-G06 R454B Air Source Polyvalent Unit

(367 to 583kW)

Standard Version (/K)

Mitsubishi Electric's **NX2-Q-G06** is our range of air source simultaneous heating and cooling (polyvalent / 4-pipe) using high efficiency scroll compressors.

## Key Features & Benefits

- Smart and independent management of the defrost cycles
- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors providing a dual refrigeration circuit
- Electronic expansion valve supplied as standard
- Wide range of options available including: inbuilt hydronic pumps, dual pressure relief valves, BEMS interface cards, EC Fans and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

# R454B



MODEL		0344	0364	0404	0446	0506	0526	0546
<b>COOLING WITH HEAT RECOVERY<sup>1,2,3</sup></b>								
COOLING CAPACITY	kW	346.9	366.8	403.0	451.8	494.3	533.0	550.6
RECOVERY HEAT EXCHANGER CAPACITY	kW	445.5	468.8	514.9	581.4	633.4	691.2	704.1
TOTAL POWER INPUT	kW	107.0	110.3	121.3	140.3	151.2	160.6	166.5
TER	kW/kW	7.41	7.57	7.57	7.36	7.46	7.56	7.53
<b>PERFORMANCE - HEATING ONLY<sup>4,2</sup></b>								
TOTAL HEAT CAPACITY	kW	367.0	388.9	417.5	472.3	515.9	563.5	583.4
COP	kW/kW	3.03	3.08	3.06	3.00	3.02	3.06	3.08
<b>PERFORMANCE - COOLING ONLY<sup>1,2</sup></b>								
TOTAL COOLING CAPACITY	kW	334.3	354.7	382.0	430.2	475.1	515.9	533.1
EER	kW/kW	2.69	2.78	2.67	2.62	2.68	2.78	2.79
<b>SEASONAL PERFORMANCE<sup>5</sup></b>								
Prated,C	kW	334.3	354.7	382.0	430.2	475.1	515.9	533.1
SEER		3.92	4.04	4.06	4.00	3.93	4.07	4.09
<b>ELECTRICAL DATA</b>								
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
MAX FLA <sup>6</sup>	Total A	257	270	297	333	365	392	405
<b>EXCHANGERS</b>								
MINIMUM WATER FLOW IN COOLING <sup>4</sup>	Evaporator l/s	10.58	11.31	12.33	13.89	13.89	17.50	17.50
MINIMUM WATER FLOW IN HEATING <sup>1</sup>	Condenser l/s	10.58	11.31	12.33	13.89	13.89	17.50	17.50
<b>REFRIGERANT CIRCUIT</b>								
COMPRESSORS	No.	4	4	4	6	6	6	6
CIRCUITS	No.	2	2	2	3	3	3	3
REFRIGERANT CHARGE <sup>7</sup>	kg	77.4	93.6	93.6	97.2	108	124	125
<b>NOISE LEVELS</b>								
TOTAL SOUND PRESSURE <sup>8</sup>	dB(A)	64	64	64	64	65	65	65
TOTAL SOUND POWER LEVEL IN COOLING <sup>9</sup>	dB(A)	96	96	96	96	97	97	97
TOTAL SOUND POWER LEVEL IN HEATING <sup>10</sup>	dB(A)	96	96	96	96	97	97	97
<b>SIZE AND WEIGHT<sup>11</sup></b>								
WIDTH	mm	3905	3905	3905	4515	5690	5690	5690
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2450	2450	2450	2450	2450	2450	2450
OPERATION WEIGHT	kg	3400	3490	3530	4670	5030	5170	5230

### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Parameter calculated according to [Regulation (EU) N. 2016/2281].
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes.
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

 Eurovent Certified Data

INT<sub>Σ</sub>GRA

CLIMAVENETA

1.35

Commercial Heat  
Pumps & Chillers

NX-Q-G06 R454B 4 Compressor Air Source Polyvalent Unit, Super-Low Noise Version  
NX2-Q-G06 R454B Air Source Polyvalent Unit, Standard Version

# NX2-Q-G06 R454B Air Source Polyvalent Unit

(364 to 572kW)

Super-Low Noise Version (/SL)

Mitsubishi Electric's **NX2-Q-G06** is our range of air source simultaneous heating and cooling (polyvalent / 4-pipe) using high efficiency scroll compressors.

## Key Features & Benefits

- Smart and independent management of the defrost cycles
- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors providing a dual refrigeration circuit
- Electronic expansion valve supplied as standard
- Wide range of options available including: inbuilt hydronic pumps, dual pressure relief valves, BEMS interface cards, EC Fans and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

# R454B



MODEL		0344	0364	0404	0446	0506	0526	0546
COOLING WITH HEAT RECOVERY <sup>1,2,3</sup>								
COOLING CAPACITY	kW	346.9	366.8	403.0	451.8	494.3	533.0	550.5
RECOVERY HEAT EXCHANGER CAPACITY	kW	445.4	468.8	514.9	581.4	633.4	681.2	704.0
TOTAL POWER INPUT	kW	106.8	110.2	121.3	140.1	150.9	160.3	166.2
TER	kW/kW	7.42	7.59	7.57	7.37	7.47	7.57	7.55
PERFORMANCE - HEATING ONLY <sup>4,2</sup>								
TOTAL HEAT CAPACITY	kW	364.3	381.5	422.7	473.7	514.2	555.4	572.2
COP	kW/kW	3.15	3.13	3.18	3.10	3.12	3.15	3.13
PERFORMANCE - COOLING ONLY <sup>1,2</sup>								
TOTAL COOLING CAPACITY	kW	316.0	336.4	370.2	409.0	443.6	486.1	505.7
EER	kW/kW	2.44	2.51	2.54	2.38	2.38	2.49	2.51
SEASONAL PERFORMANCE <sup>5</sup>								
Prated,C	kW	316.0	336.4	370.2	409.0	443.6	486.1	505.7
SEER		4.09	4.13	4.23	4.13	4.10	4.19	4.19
ELECTRICAL DATA								
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
MAX F.L.A. <sup>6</sup>	Total A	249	265	291	325	350	381	397
EXCHANGERS								
MINIMUM WATER FLOW IN COOLING <sup>4</sup>	Evaporator l/s	10.58	11.31	12.33	13.89	13.89	17.50	17.50
MINIMUM WATER FLOW IN HEATING <sup>1</sup>	Condenser l/s	10.58	11.31	12.33	13.89	13.89	17.50	17.50
REFRIGERANT CIRCUIT								
COMPRESSORS	No.	4	4	4	6	6	6	6
CIRCUITS	No.	2	2	2	3	3	3	3
REFRIGERANT CHARGE <sup>7</sup>	kg	87.3	92.7	107	113	128	128	128
NOISE LEVELS								
TOTAL SOUND PRESSURE <sup>8</sup>	dB(A)	56	56	56	57	57	57	57
TOTAL SOUND POWER LEVEL IN COOLING <sup>9</sup>	dB(A)	88	88	88	89	89	90	90
TOTAL SOUND POWER LEVEL IN HEATING <sup>10</sup>	dB(A)	89	89	89	90	90	91	91
SIZE AND WEIGHT <sup>11</sup>								
WIDTH	mm	4515	5080	5080	5690	5690	6865	7430
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2450	2450	2450	2450	2450	2450	2450
OPERATION WEIGHT	kg	3700	3840	4010	5280	5390	5690	5800

### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Parameter calculated according to [Regulation (EU) N. 2016/2281].
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes.
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

 Eurovent Certified Data

INT<sub>Σ</sub>GRA

CLIMAVENETA

# NX2-Q-G06 R454B Air Source Polyvalent Unit

(378 to 854kW)

High Efficiency Version (/A)

Mitsubishi Electric's **NX2-Q-G06** is our range of air source simultaneous heating and cooling (polyvalent / 4-pipe) using high efficiency scroll compressors.

## Key Features & Benefits

- Smart and independent management of the defrost cycles
- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors providing a dual refrigeration circuit
- Electronic expansion valve supplied as standard
- Wide range of options available including: inbuilt hydronic pumps, dual pressure relief valves, BEMS interface cards, EC Fans and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

# R454B



MODEL		0344	0364	0404	0446	0506	0526	0546	0606	0708	0738	0768	0808
COOLING WITH HEAT RECOVERY <sup>1,2,3</sup>													
COOLING CAPACITY	kW	346.9	366.8	403.0	451.8	494.3	533.0	550.6	605.6	695.7	734.1	769.7	807.2
RECOVERY HEAT EXCHANGER CAPACITY	kW	445.5	468.9	515.0	581.4	633.4	681.3	704.1	772.6	890.9	938.6	983.8	1030
TOTAL POWER INPUT	kW	107.2	110.5	121.6	140.7	151.6	160.8	166.8	181.5	212.1	221.4	232.1	241.8
TER	kW/kW	7.39	7.56	7.55	7.35	7.44	7.55	7.52	7.59	7.48	7.56	7.55	7.60
PERFORMANCE - HEATING ONLY <sup>4,2</sup>													
TOTAL HEAT CAPACITY	kW	378.7	399.7	429.4	495.5	534.2	577.0	599.6	640.6	753.4	795.3	826.0	854.1
COP	kW/kW	3.20	3.21	3.21	3.19	3.20	3.21	3.21	3.26	3.26	3.28	3.26	3.26
PERFORMANCE - COOLING ONLY <sup>1,2</sup>													
TOTAL COOLING CAPACITY	kW	344.9	361.1	399.3	446.0	499.5	525.3	543.0	598.8	696.0	724.2	761.4	798.6
EER	kW/kW	2.92	2.95	2.96	2.90	2.92	2.94	2.95	3.01	3.01	3.01	3.03	3.02
SEASONAL PERFORMANCE <sup>5</sup>													
Prated,C	kW	344.9	361.1	399.3	446.0	499.5	525.3	543.0	598.8	696.0	724.2	761.4	798.6
SEER		4.28	4.38	4.44	4.36	4.28	4.37	4.36	4.56	4.56	4.56	4.58	4.56
ELECTRICAL DATA													
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
MAX FLA <sup>6</sup>	Total	A	265	278	305	344	377	404	417	443	511	537	590
EXCHANGERS													
MINIMUM WATER FLOW IN COOLING <sup>4</sup>	Evaporator	l/s	10.58	11.31	12.33	13.89	13.89	17.50	17.50	17.50	21.14	22.67	23.72
MINIMUM WATER FLOW IN HEATING <sup>1</sup>	Condenser	l/s	10.58	11.31	12.33	13.89	13.89	17.50	17.50	17.50	21.14	22.67	23.72
REFRIGERANT CIRCUIT													
COMPRESSORS	No.	4	4	4	6	6	6	6	6	8	8	8	8
CIRCUITS	No.	2	2	2	3	3	3	3	3	4	4	4	4
REFRIGERANT CHARGE <sup>7</sup>	kg	100	101	107	128	128	137	142	142	178	190	190	190
NOISE LEVELS													
TOTAL SOUND PRESSURE <sup>8</sup>	dB(A)	65	65	65	64	65	65	65	66	66	67	67	67
TOTAL SOUND POWER LEVEL IN COOLING <sup>9</sup>	dB(A)	97	97	97	97	98	98	98	99	99	100	100	100
TOTAL SOUND POWER LEVEL IN HEATING <sup>10</sup>	dB(A)	97	97	97	97	98	98	98					
SIZE AND WEIGHT <sup>11</sup>													
WIDTH	mm	5080	5080	5080	6255	7430	7430	7430	7430	9780	9780	9780	9780
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450
OPERATION WEIGHT	kg	3720	3820	3860	5290	5530	5700	5780	5840	7440	7640	7680	7720

### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Parameter calculated according to [Regulation (EU) N. 2016/2281].
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes.
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

INT<sub>Σ</sub>GRA

CLIMAVENETA

# i-FX-Q2-G05 R513A Air Source Polyvalent Unit

(463 to 1,029kW)

High Efficiency Version (/CA)



INT<sub>2</sub>GRA

CLIMAVENETA

Mitsubishi Electric's **i-FX-Q2-G05** is our flagship range for air source simultaneous heating and cooling (polyvalent / 4-pipe). Thanks to its Variable Speed Drive (VSD) screw compressors and EC fans fitted as standard it brings exceptional seasonal efficiency by recovering heat from the cooling circuit to be used in the heating circuit.

## Key Features & Benefits

- Best-in-class seasonal efficiency in a compact footprint
- High efficiency inverter screw compressors providing a dual refrigeration circuit
- EC fans supplied as standard
- Low GWP refrigerant R513A
- Wide range of options available including: inbuilt hydronic pumps, thermal and energy meters, Smart LAN functions and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

**R513A**

MODEL		0502	0532	0602	0652	0702	0802	0902	1002	1102
<b>COOLING WITH HEAT RECOVERY<sup>1,2,3</sup></b>										
COOLING CAPACITY	kW	488.1	532.5	570.1	623.5	682.1	783.9	913.9	986.8	1101
RECOVERY HEAT EXCHANGER CAPACITY	kW	623.1	681.2	728.8	795.2	872.3	1002	1168	1257	1405
TOTAL POWER INPUT	kW	145.7	160.5	170.6	185.6	205.6	234.7	275.7	292.5	329.6
TER	kW/kW	7.63	7.56	7.62	7.65	7.56	7.61	7.55	7.67	7.60
<b>PERFORMANCE - HEATING ONLY<sup>4,2</sup></b>										
TOTAL HEAT CAPACITY	kW	463.4	491.5	531.3	599.0	659.5	765.3	871.2	938.3	1029
COP	kW/kW	3.31	3.27	3.00	3.34	3.32	3.38	3.33	3.36	3.35
<b>PERFORMANCE - COOLING ONLY<sup>1,2</sup></b>										
TOTAL COOLING CAPACITY	kW	487.0	530.8	569.5	626.3	688.4	786.9	914.4	984.6	1082
EER	kW/kW	2.99	2.99	2.99	2.99	2.99	2.99	3.03	3.01	2.86
<b>SEASONAL PERFORMANCE<sup>5</sup></b>										
Prated,C	kW	487.0	530.8	569.5	626.3	688.4	786.9	914.4	984.6	1082
SEER		5.16	5.10	5.12	5.09	5.13	5.03	4.74	4.67	4.65
<b>ELECTRICAL DATA</b>										
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
MAX F.L.A. <sup>6</sup>	Total A	362	362	387	458	484	515	576	625	699
<b>EXCHANGERS</b>										
MINIMUM WATER FLOW IN COOLING <sup>4</sup>	Evaporator l/s	11.11	11.11	16.39	16.39	16.39	25.00	25.00	30.56	30.56
MINIMUM WATER FLOW IN HEATING <sup>1</sup>	Condenser l/s	10.97	10.97	16.08	17.83	14.31	17.67	17.67	22.19	29.69
<b>REFRIGERANT CIRCUIT</b>										
COMPRESSORS	No.	2	2	2	2	2	2	2	2	2
CIRCUITS	No.	2	2	2	2	2	2	2	2	2
REFRIGERANT CHARGE <sup>7</sup>	kg	255	255	300	305	370	460	475	420	425
<b>NOISE LEVELS</b>										
TOTAL SOUND PRESSURE <sup>8</sup>	dB(A)	67	67	68	69	69	68	70	70	70
TOTAL SOUND POWER LEVEL IN COOLING <sup>9</sup>	dB(A)	100	100	101	102	102	101	103	103	103
TOTAL SOUND POWER LEVEL IN HEATING <sup>10</sup>	dB(A)	100	100	101	102	102	101	103	103	103
<b>SIZE AND WEIGHT<sup>11</sup></b>										
WIDTH	mm	8150	8150	8900	9650	10400	10400	10750	12250	12250
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2530	2530	2530	2530	2530	2530	2530	2530	2530
OPERATION WEIGHT	kg	8350	8380	9080	9590	10060	11010	12490	14170	14210

### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Seasonal space heating energy efficiency class LOW TEMPERATURE (REGULATION EU N. 813/2013) - Average Weather Conditions.
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes.
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

 Eurovent Certified Data

# i-FX-Q2-G05 R513A Air Source Polyvalent Unit

(459 to 1,018kW)

Super-Low Noise, High Efficiency  
Version (/SL-CA)



INT<sub>2</sub>GRA

CLIMAVENETA

Mitsubishi Electric's **i-FX-Q2-G05** is our flagship range for air source simultaneous heating and cooling (polyvalent / 4-pipe). Thanks to its Variable Speed Drive (VSD) screw compressors and EC fans fitted as standard it brings exceptional seasonal efficiency by recovering heat from the cooling circuit to be used in the heating circuit.

## Key Features & Benefits

- Best-in-class seasonal efficiency in a compact footprint
- High efficiency inverter screw compressors providing a dual refrigeration circuit
- EC fans supplied as standard
- Low GWP refrigerant R513A
- Wide range of options available including: inbuilt hydronic pumps, thermal and energy meters, Smart LAN functions and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

**R513A**

MODEL		0502	0532	0602	0652	0702	0802	0902	1002	1102
<b>COOLING WITH HEAT RECOVERY<sup>1,2,3</sup></b>										
COOLING CAPACITY	kW	488.1	532.6	570.1	623.5	682.1	783.8	913.9	986.8	1100
RECOVERY HEAT EXCHANGER CAPACITY	kW	623.1	681.4	728.8	795.2	872.3	1002	1168	1257	1405
TOTAL POWER INPUT	kW	145.5	160.3	170.4	185.3	205.4	234.5	274.6	291.6	329.3
TER	kW/kW	7.64	7.57	7.62	7.66	7.57	7.61	7.58	7.70	7.61
<b>PERFORMANCE - HEATING ONLY<sup>4,2</sup></b>										
TOTAL HEAT CAPACITY	kW	459.0	486.8	526.4	593.3	653.7	756.8	860.7	929.0	1018
COP	kW/kW	3.33	3.28	3.31	3.35	3.34	3.39	3.33	3.38	3.36
<b>PERFORMANCE - COOLING ONLY<sup>4,2</sup></b>										
TOTAL COOLING CAPACITY	kW	467.1	508.0	548.6	603.6	664.5	765.1	880.5	951.2	1038
EER	kW/kW	2.86	2.85	2.88	2.92	2.94	2.91	2.85	2.87	2.66
<b>SEASONAL PERFORMANCE<sup>5</sup></b>										
Prated,C	kW	467.1	508.0	548.6	603.6	664.5	765.1	880.5	951.2	1038
SEER		5.11	5.08	5.08	5.08	5.13	4.97	4.71	4.63	4.61
<b>ELECTRICAL DATA</b>										
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
MAX F.L.A. <sup>6</sup>	Total A	362	362	387	458	484	515	576	625	699
<b>EXCHANGERS</b>										
MINIMUM WATER FLOW IN COOLING <sup>4</sup>	Evaporator l/s	11.11	11.11	16.39	16.39	16.39	25.00	25.00	30.56	30.56
MINIMUM WATER FLOW IN HEATING <sup>1</sup>	Condenser l/s	10.97	10.97	16.08	17.83	14.31	17.67	17.67	22.19	29.69
<b>REFRIGERANT CIRCUIT</b>										
COMPRESSORS	No.	2	2	2	2	2	2	2	2	2
CIRCUITS	No.	2	2	2	2	2	2	2	2	2
REFRIGERANT CHARGE <sup>7</sup>	kg	255	255	300	305	370	460	475	420	425
<b>NOISE LEVELS</b>										
TOTAL SOUND PRESSURE <sup>8</sup>	dB(A)	57	58	58	59	59	59	61	61	59
TOTAL SOUND POWER LEVEL IN COOLING <sup>9</sup>	dB(A)	90	91	91	92	92	92	94	94	92
TOTAL SOUND POWER LEVEL IN HEATING <sup>10</sup>	dB(A)	90	91	91	92	92	92	94	94	92
<b>SIZE AND WEIGHT<sup>11</sup></b>										
WIDTH	mm	8150	8150	8900	9650	10400	10400	10750	12250	12250
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2530	2530	2530	2530	2530	2530	2530	2530	2530
OPERATION WEIGHT	kg	8800	8830	9530	10040	10510	11450	12940	14620	14660

### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Seasonal space heating energy efficiency class LOW TEMPERATURE (REGULATION) (EU N. 813/2013) - Average Weather Conditions.
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes.
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

1.39

Commercial Heat  
Pumps & Chillers

i-FX-Q2-G05 R513A Air Source Polyvalent Unit, High Efficiency Version  
i-FX-Q2-G05 R513A Air Source Polyvalent Unit, Super-Low Noise, High Efficiency Version

# i-FX-Q2-G05 R513A Air Source Polyvalent Unit

(438 to 898kW)

Extra-Low Noise, High Efficiency  
Version (XL-CA)



INT<sub>2</sub>GRA

CLIMAVENETA

Mitsubishi Electric's **i-FX-Q2-G05** is our flagship range for air source simultaneous heating and cooling (polyvalent / 4-pipe). Thanks to its Variable Speed Drive (VSD) screw compressors and EC fans fitted as standard it brings exceptional seasonal efficiency by recovering heat from the cooling circuit to be used in the heating circuit.

## Key Features & Benefits

- Best-in-class seasonal efficiency in a compact footprint
- High efficiency inverter screw compressors providing a dual refrigeration circuit
- EC fans supplied as standard
- Low GWP refrigerant R513A
- Wide range of options available including: inbuilt hydronic pumps, thermal and energy meters, Smart LAN functions and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

**R513A**

MODEL		0502	0532	0602	0652	0702	0802	0902	1002
<b>COOLING WITH HEAT RECOVERY<sup>1,2,3</sup></b>									
COOLING CAPACITY	kW	463.2	507.6	547.7	589.8	649.8	750.6	882.2	920.2
RECOVERY HEAT EXCHANGER CAPACITY	kW	590.9	648.3	696.5	752.2	829.8	959.9	1126	1178
TOTAL POWER INPUT	kW	137.2	151.5	159.7	174.6	193.8	224.9	262.8	278.0
TER	kW/kW	7.68	7.63	7.79	7.69	7.63	7.61	7.64	7.55
<b>PERFORMANCE - HEATING ONLY<sup>4,2</sup></b>									
TOTAL HEAT CAPACITY	kW	438.6	466.8	507.3	566.3	627.3	728.8	834.0	898.0
COP	kW/kW	3.35	3.31	3.35	3.37	3.36	3.41	3.37	3.41
<b>PERFORMANCE - COOLING ONLY<sup>4,2</sup></b>									
TOTAL COOLING CAPACITY	kW	442.5	483.0	525.3	571.2	632.0	731.4	847.1	911.7
EER	kW/kW	2.87	2.83	2.90	2.94	2.95	2.91	2.86	2.87
<b>SEASONAL PERFORMANCE<sup>5</sup></b>									
Prated,C	kW	442.5	483.0	525.3	571.2	632.0	731.4	847.1	911.7
SEER		5.10	5.08	5.10	5.04	5.19	5.00	4.60	4.56
<b>ELECTRICAL DATA</b>									
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
MAX F.L.A. <sup>6</sup>	Total A	333	352	387	420	464	515	576	625
<b>EXCHANGERS</b>									
MINIMUM WATER FLOW IN COOLING <sup>4</sup>	Evaporator l/s	11.11	11.11	16.39	16.39	16.39	25.00	25.00	30.56
MINIMUM WATER FLOW IN HEATING <sup>1</sup>	Condenser l/s	10.97	10.97	16.08	17.83	14.31	17.67	17.67	22.19
<b>REFRIGERANT CIRCUIT</b>									
COMPRESSORS	No.	2	2	2	2	2	2	2	2
CIRCUITS	No.	2	2	2	2	2	2	2	2
REFRIGERANT CHARGE <sup>7</sup>	kg	255	255	300	305	370	460	475	420
<b>NOISE LEVELS</b>									
TOTAL SOUND PRESSURE <sup>8</sup>	dB(A)	53	54	55	55	55	56	55	56
TOTAL SOUND POWER LEVEL IN COOLING <sup>9</sup>	dB(A)	86	87	88	88	88	89	88	89
TOTAL SOUND POWER LEVEL IN HEATING <sup>10</sup>	dB(A)	87	88	89	89	89	90	89	90
<b>SIZE AND WEIGHT<sup>11</sup></b>									
WIDTH	mm	8150	8150	8900	9650	10400	10400	10750	12250
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2530	2530	2530	2530	2530	2530	2530	2530
OPERATION WEIGHT	kg	8800	8830	9530	10040	10510	11450	12940	14620

### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Seasonal space heating energy efficiency class LOW TEMPERATURE (REGULATION (EU) N. 813/2013) - Average Weather Conditions.
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes.
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

 Eurovent Certified Data

# i-FX-WQ-G05 R513A Water Source Polyvalent Unit

(451 to 953kW)



INT<sub>2</sub>GRA

CLIMAVENETA

Mitsubishi Electric's **i-FX-WQ-G05** is our high performance water source simultaneous heating and cooling unit (Polyvalent / 6-pipe) that is fitted with Variable Speed Drive (VSD) screw compressors as standard.

## Key Features & Benefits

- Compact and considered design
- Exceptional efficiency with inverter screw compressors across twin circuits
- High quality shell and tube heat exchangers
- Dual Pressure Relief Valves (PRV) and Electronic Expansion Valves (EEV) as standard
- Low GWP refrigerant R513A
- A wide range of options including; acoustic enclosure, thermal and energy meters, smart LAN functions and many more

**R513A**

MODEL		0402	0452	0532	0592	0632	0702	0792	0852
<b>COOLING WITH HEAT RECOVERY<sup>1,2</sup></b>									
COOLING CAPACITY	kW	353.9	401.5	471.2	520.7	558.6	626.9	700.7	750.4
RECOVERY HEAT EXCHANGER CAPACITY	kW	451.9	512.9	597.0	662.0	712.0	800.2	888.8	953.9
TOTAL POWER INPUT	kW	106.1	120.7	136.1	153.3	166.3	187.8	203.4	220.5
TER	kW/kW	7.59	7.57	7.85	7.71	7.64	7.59	7.81	7.73
<b>PERFORMANCE - HEATING ONLY<sup>3</sup></b>									
TOTAL HEAT CAPACITY	kW	451.9	512.9	597.0	662.0	712.0	800.2	888.8	953.9
COP	kW/kW	4.29	4.28	4.42	4.35	4.31	4.29	4.40	4.36
<b>PERFORMANCE - COOLING ONLY<sup>1,2</sup></b>									
TOTAL COOLING CAPACITY	kW	407.6	462.3	544.5	602.9	648.0	725.8	813.3	871.5
EER	kW/kW	5.03	5.01	5.22	5.15	5.10	5.06	5.21	5.14
<b>SEASONAL PERFORMANCE IN COOLING - AMBIENT REFRIGERATION</b>									
Prated,C	kW	394.4	447.3	526.2	582.2	624.8	700.1	784.4	840.7
SEER		6.48	6.49	6.51	6.57	6.53	6.52	6.54	6.54
<b>ELECTRICAL DATA</b>									
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
MAX FLA <sup>9</sup>	Total A	241	270	304	338	381	428	454	480
<b>EXCHANGERS</b>									
MINIMUM WATER FLOW IN COOLING <sup>4</sup>	Evaporator l/s	12.50	15.28	17.22	17.22	21.67	24.44	26.11	26.11
MINIMUM WATER FLOW TO HEAT EXCHANGER	Source l/s	7.02	7.97	9.16	10.06	11.00	12.25	13.83	15.00
MINIMUM WATER FLOW IN HEATING <sup>1</sup>	Condenser l/s	12.50	15.28	17.22	17.22	21.67	24.44	26.11	26.11
<b>REFRIGERANT CIRCUIT</b>									
COMPRESSORS	No.	2	2	2	2	2	2	2	2
CIRCUITS	No.	2	2	2	2	2	2	2	2
THEORETICAL REFRIGERANT CHARGE	kg	80	80	102	102	126	152	152	137
<b>NOISE LEVELS</b>									
TOTAL SOUND PRESSURE <sup>7</sup>	dB(A)	65	65	66	67	67	67	67	67
TOTAL SOUND POWER LEVEL IN COOLING <sup>8,9</sup>	dB(A)	97	97	98	99	99	99	99	99
TOTAL SOUND POWER LEVEL IN HEATING <sup>8,10</sup>	dB(A)	97	97	98	99	99	99	99	99
<b>SIZE AND WEIGHT<sup>11</sup></b>									
WIDTH	mm	5000	5000	5000	5000	5000	5550	5550	5550
DEPTH	mm	1400	1400	1400	1400	1400	1400	1400	1400
HEIGHT	mm	1950	1950	2050	2050	2050	2050	2050	2050
OPERATION WEIGHT	kg	4010	4030	5520	5860	5984	6414	6884	7294

### Notes:

1. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger water (in/out) 14.00°C/30.00°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C; Source (side) heat exchanger water (in/out) 14.00°C/7.00°C.
4. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C.
5. Plant (side) cooling exchanger water /7.00°C (same water flow rate found during the cooling mode); Plant (side) heat exchanger water /45.00°C (same water flow rate found during the heating mode).
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
8. Sound power on the basis of measurements taken in compliance with ISO 9614.
9. Sound power level in cooling.
10. Sound power level in heating.
11. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

1.41

Commercial Heat  
Pumps & Chillers

i-FX-Q2-G05 R513A Air Source Polyvalent Unit, Extra-Low Noise, High Efficiency Version  
i-FX-WQ-G05 R513A Water Source Polyvalent Unit

## Commercial Heat Pumps & Chillers

# Our Chiller Range - An Overview

Consisting of a wide range of models, the Mitsubishi Electric range of chillers are a new generation of water chiller designed for comfort and process cooling applications.

Modern multi-function buildings, shopping centres, large business centres and process cooling are just some of the examples where increased comfort and precision control are required. The Mitsubishi Electric range of chillers can deliver all of this and more through their ability to be easily integrated into ever increasingly complex building systems.

In order to maximise performance, reliability and overall system efficiency, the Mitsubishi Electric range of products bring advanced technology and know-how together in customisable packages to aid design, specification, installation and on-going operation.

- Advanced modular technology
- Scalable and fully customisable
- Air source and water cooled versions
- Plate or Shell & Tube heat exchanger options



## Flexible Application Options

### Comfort Cooling

By using hydronic terminals, a simple application of a chiller can include cooling a space or environment to a set temperature. By using water as the medium of energy, high sensible cooling and stable room temperatures can be achieved.

- |                                    |                          |
|------------------------------------|--------------------------|
| ■ Retail stores / Shopping centres | ■ Schools / Universities |
| ■ Airports                         | ■ Museums                |
| ■ Offices                          | ■ Hotels and Resorts     |
| ■ Cinemas / Theatres               | ■ Hospitals / Healthcare |

### Process Cooling

During manufacturing processes, many substances become hot and if overheated can negatively effect the productivity and efficiency of the process. By correctly applying a chiller it is possible to ensure optimum temperatures and conditions are maintained at a steady state.

- Manufacturing processes
- Automotive and Electronic processes
- Energy and Power generation
- Industrial technology
- IT Cooling



 **CLIMVENETA**

## Commercial Heat Pumps & Chillers

### Our Chiller range at a glance

A wide range of advanced, customisable models for use in efficiently cooling a space or an environment to a set temperature. Our chillers fall into two broad ranges:



**Mitsubishi Electric** - Modular chillers manufactured to the highest quality standard, and suitable for a range of different applications, from comfort to industrial and even IT cooling processes.

**Climaveneta** - Chillers that use a wide range of low and lower GWP refrigerants, alongside the latest fixed speed/inverter scroll and screw compressors.



e-series

# EACV R32 Modular Air Cooled Chiller

(150 to 1,080kW)

The R32 e-Series **EACV** range allows for up to 6 individual units to be connected together to provide a system capacity from 150kW to 1,080kW. Using this modular approach reduces space requirements and simplifies lifting and installation.

## Key Features & Benefits

- Highly efficient inverter scroll compressors
- Modular to maximise space saving
- Y-shaped heat exchangers allow for a greater surface area, maximising efficiency, whilst also keeping the units much narrower than conventional chillers

R32



MODEL		EACV-M1500YCL-N	EACV-M1800YCL-N	
POWER SOURCE		3-phase 4-wire 380-400-415v 50/60Hz		
COOLING CAPACITY <sup>1</sup>		150	180	
	Power Input	kW	44.73	57.02
	EER		3.35	3.16
	IPLV <sup>4</sup>		6.42	6.31
	Water Flow Rate	m <sup>3</sup> /h	25.8	31.0
COOLING CAPACITY (EN14511) <sup>2</sup>		149.18	178.80	
	Power Input	kW	45.55	58.22
	EER		3.28	3.07
	Eurovent Efficiency Class		A	B
	SEER		5.52	5.36
	Performance (η <sub>s,c</sub> )	%	217.8	211.4
	SEPR (HT) <sup>3</sup>		7.11	6.36
	Water Flow Rate	m <sup>3</sup> /h	25.8	31.0
	Current	A	76 - 72 - 69	96 - 91 - 88
	CURRENT INPUT	Maximum Current	A	120
Standard Piping		kPa	56	
Inside Header Piping		kPa	134	
WATER PRESSURE DROP <sup>1</sup>	Cooling	°C	Outlet water 4~30	
	Outdoor	°C	-15~52	
TEMP RANGE	Cooling	°C	12.9~43.0	
	Outdoor	°C	-15~52	
CIRCULATING WATER VOLUME RANGE	m <sup>3</sup> /h	12.9~43.0	12.9~43.0	
SOUND PRESSURE LEVEL (Measured in anechoic room) at 1m <sup>1</sup>	dB (A)	65	67	
SOUND POWER LEVEL (Measured in anechoic room) <sup>1</sup>	dB (A)	83	85	
DIAMETER OF WATER PIPE (Standard piping)	Inlet	mm (in)	65A (2 1/2B) housing type joint	
	Outlet	mm (in)	65A (2 1/2B) housing type joint	
DIAMETER OF WATER PIPE (Inside header piping)	Inlet	mm (in)	150A (6B) housing type joint	
	Outlet	mm (in)	150A (6B) housing type joint	
EXTERNAL FINISH		Polyester powder coating steel plate		
EXTERNAL DIMENSION	W x D x H	3400 x 1080 x 2350	3400 x 1080 x 2350	
NET WEIGHT	Standard Piping	mm	1039 (2291)	
	Inside Header Piping	kg (lbs)	1067 (2352)	
	R32	kg (lbs)	4.15	
DESIGN PRESSURE	Water	MPa	1.0	
	Water Side	MPa	Stainless steel plate and copper brazing	
HEAT EXCHANGER	Air Side		Stainless steel plate and copper brazing	
	Type		Salt-resistant corrugated fin & aluminium micro channel	
COMPRESSOR	Starting Method		Inverter scroll hermetic compressor	
	Quantity		Inverter	
	Motor Output	kW	11.5 x 4	
	Air Flow Rate	m <sup>3</sup> /min	270 x 4	
FAN		L/s	4500 x 4	
		cfm	9534 x 4	
	Type, Quantity		Propeller fan x 4	
	Starting Method		Inverter	
	Motor Output	kW	0.92 x 4	
	External Static Pressure	Pa	20	
	REFRIGERANT	Type x Charge	R32 x 4.7 (kg) x 4 <sup>3</sup>	R32 x 4.7 (kg) x 4 <sup>3</sup>
		Control	LEV	LEV

### Notes:

1. Under normal cooling conditions at outdoor temp 35°CDB/24°CWB (95°FDB/75.2°FWB) outlet water temp 7°C (44.6°F) inlet water temp 12°C (53.6°F). Pump input is not included in cooling capacity and power input.

2. Under normal cooling conditions at outdoor temp 35°CDB/24°CWB (95°FDB/75.2°FWB) outlet water temp 7°C (44.6°F) inlet water temp 12°C (53.6°F). Pump input is included in cooling capacity and power input based on EN14511.

3. The unit is delivered fully charged with refrigerant. No additional refrigerant is required.

4. IPLV is calculated in accordance with AHRI 550-590.

5. This value is not certified by Eurovent.

\*Please don't use the steel material for the water piping.

\*Please always make water circulate, or pull the circulation water out completely when not in use.


\*Please do not use groundwater or well water in direct.

\*The water circuit must be closed circuit.


\*Due to continuous improvement, the above specifications may be subject to change without notice.

\*This model doesn't equip with a pump.


Front View

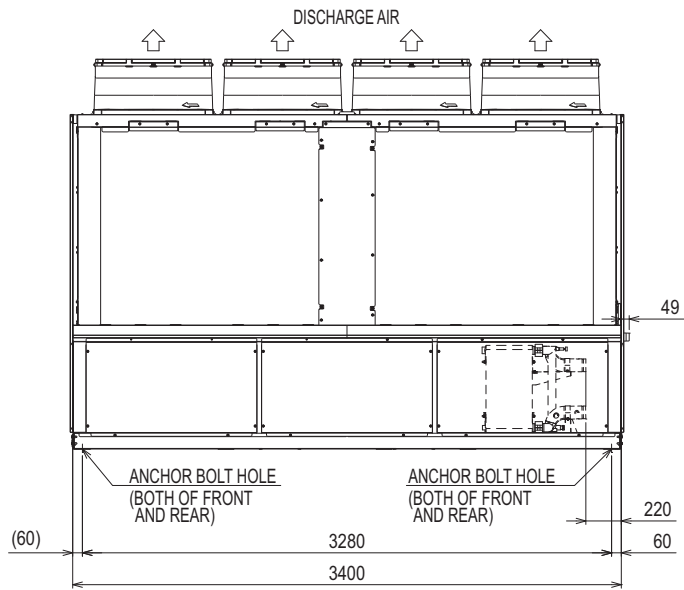

Side View

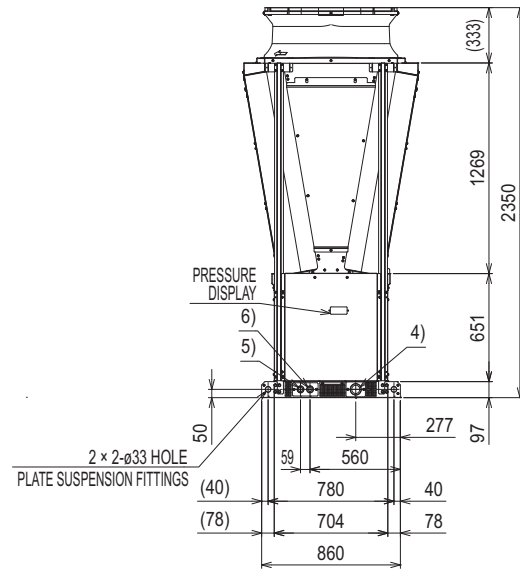


Upper View

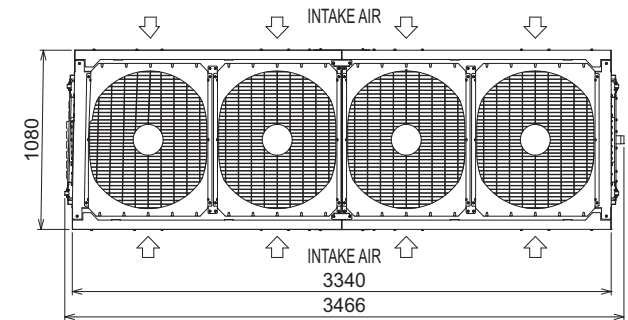

# MECH-iB-G07 R32 Air Cooled Chiller

(15 to 38kW)



Mitsubishi Electric's **MECH-iB-G07** chiller provides a compact and convenient solution to your small-scale cooling needs. Designed to meet the highest of quality standards, the range uses variable speed scroll compressors optimised for using the lower GWP refrigerant R32.

## Key Features & Benefits

- Extended cooling envelope
- Compact design
- Providing fluid leaving temperatures as low as -12°C
- Operates down to -20°C ambient temperatures
- Low GWP R32 Refrigerant
- High seasonal efficiency (EER, SEER, SEPR)
- Plug & Play with Integrated hydronic pump, flow switch and expansion vessel


# R32

MODEL		15Y	18Y	23Y	27Y	35Y	40Y
<b>PERFORMANCE - COOLING ONLY</b>							
GROSS VALUE <sup>1</sup>							
TOTAL COOLING CAPACITY	kW	14.93	17.79	21.03	27.73	32.51	38.19
TOTAL POWER INPUT	kW	4.83	5.23	6.50	8.42	9.90	11.88
EER	kW/kW	3.09	3.40	3.23	3.29	3.28	3.21
EN14511 VALUES <sup>1,2</sup>							
TOTAL COOLING CAPACITY	kW	15.00	17.90	21.10	27.80	32.70	38.40
EER	kW/kW	3.10	3.40	3.25	3.31	3.30	3.23
SEASONAL PERFORMANCE <sup>3</sup>							
Rated, C	kW	15.0	17.9	21.1	27.8	32.7	38.4
SEER		5.23	5.4	5.66	5.39	5.46	5.24
PERFORMANCE HS	%	206.0	213.0	223.0	212.0	215.0	207.0
ELECTRICAL DATA							
POWER SUPPLY	Total	V/ph/Hz	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50
F.L.A. <sup>4</sup>		A	11	12	15	20	28
EXCHANGERS							
MINIMUM WATER FLOW	Heat Exchanger	l/s	0.389	0.464	0.581	0.728	0.856
MINIMUM WATER CONTENT	System	l	75	90	115	140	165
HEAT EXCHANGER USER SIDE IN COOLING <sup>1,2</sup>							
WATER FLOW		l/s	0.714	0.851	1.005	1.326	1.554
PRESSURE DROP		kPa	15.2	21.6	15.1	20.5	25.1
REFRIGERANT CIRCUIT							
COMPRESSORS		l/s	1	1	1	1	1
CIRCUITS		kPa	1	1	1	1	1
REGULATION							
MINIMUM CAPACITY STEP		%	32	34	29	30	26
REFRIGERANT			R32	R32	R32	R32	R32
REFRIGERANT CHARGE <sup>5</sup>		kg	2.10	2.83	3.60	4.74	5.67
OIL CHARGE			1.00	1.00	1.00	2.30	2.30
RC (ASHRAE) <sup>6</sup>		kg/kW	0.14	0.16	0.17	0.17	0.18
FANS							
QUANTITY		No.	2	2	1	2	2
AIRFLOW		m <sup>3</sup> /s	1.84	1.95	2.34	4.52	4.35
POWER INPUT		kW	0.22	0.22	0.39	0.78	0.78
NOISE LEVELS							
TOTAL SOUND PRESSURE <sup>7</sup>		dB(A)	39	40	45	46	47
TOTAL SOUND POWER LEVEL IN COOLING <sup>8,9</sup>		dB(A)	70	71	76	78	79
SIZE AND WEIGHT <sup>10</sup>							
WIDTH		mm	900	900	1450	1450	1700
DEPTH		mm	420	420	550	550	650
HEIGHT		mm	1390	1390	1200	1700	1700
OPERATION WEIGHT		kg	144	155	207	256	306


### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C
2. Values in compliance with EN14511
3. Parameter calculated according to [Regulation (EU) N. 2016/2281]
4. Values calculated referring to the version with the maximum number of fans working at the max absorbed current. Safety values to be considered when cabling the unit for power supply and line-protection. Data valid for standard units without any additional options and only indicative. Refer to databook.
5. Theoretical - refer to serial plate for actual charge volumes
6. Rate in accordance with AHRI standard 550/590
7. Average sound pressure level at 1m distance, unit in a free field on a reflective surface;
8. non-binding value calculated from the sound power level.
9. Sound power on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in cooling, outdoors.
10. Unit in standard configuration, without optional accessories.


 Eurovent Certified Data

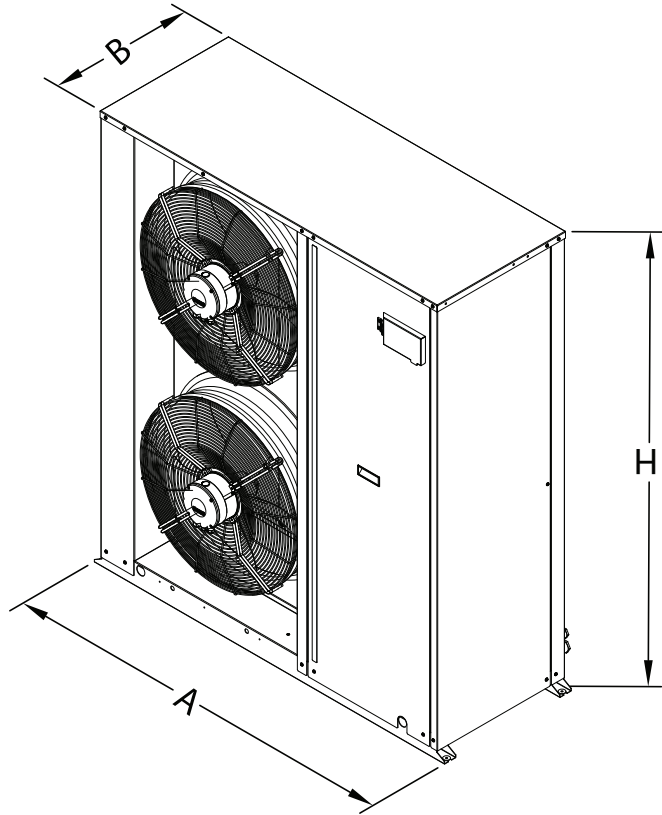

Front View

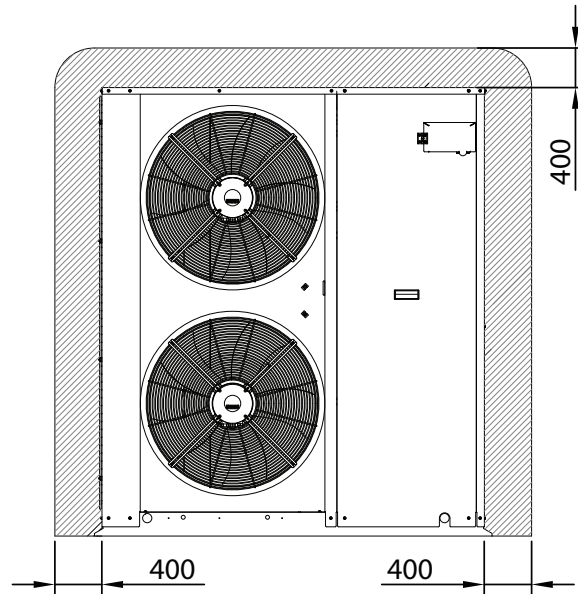

Top View

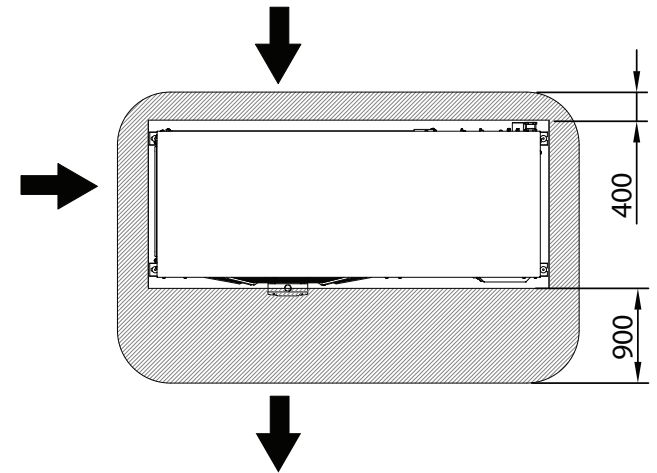

# MECH-iF-G05 R513A High Performance Air Cooled Chiller (414 to 921kW)

Mitsubishi Electric's **MECH-iF-G05** high performance chiller brings a new class of efficiency with its proprietary Variable Speed Drive (VSD) screw compressor cooling. Available with three configurations for noise performance (Standard, NR Kit and SL version), it features a wide operating envelope and a patented Reduced Exergy Depletion (RED) Cooler, further driving efficiencies and energy saving.

## Key Features & Benefits

- Best in class efficiency
- Mitsubishi Electric's proprietary single screw compressor
- 3 noise configurations available
- CU/AL coil treatments available
- Wide operating envelope down to -20°C ambient\*

\*Additional low temperature options may be required.

# R513A




MODEL		0411	0802	0902	0411	0802	0902	0411	0802	0902
VERSION		-	-	-	-NR	-NR	-NR	-SL	-SL	-SL
<b>PERFORMANCE - COOLING ONLY</b>										
<b>GROSS VALUE<sup>1</sup></b>										
TOTAL COOLING CAPACITY	kW	414.4	814.7	921.1	411.0	807.0	913.0	407.1	799.6	903.7
TOTAL POWER INPUT	kW	133.7	249.6	289.6	134.5	251.0	291.1	135.6	252.8	293.1
EER	kW/kW	3.10	3.26	3.18	3.06	3.22	3.14	3.00	3.16	3.08
<b>EN14511 VALUES<sup>1,2</sup></b>										
TOTAL COOLING CAPACITY	kW	413.9	814.1	920.4	410.6	806.3	912.4	406.6	799.0	903.1
EER	kW/kW	3.06	3.22	3.15	3.01	3.17	3.10	2.96	3.12	3.05
<b>SEASONAL PERFORMANCE<sup>3</sup></b>										
P <sub>RATED,C</sub>	kW	413.9	814.1	920.4	410.6	806.3	912.4	406.6	799.0	903.1
SEER		5.34	5.62	5.73	5.33	5.61	5.73	5.32	5.62	5.73
PERFORMANCE η <sub>s</sub>	%	210	222	226	210	222	226	210	222	226
<b>HEAT EXCHANGER IN COOLING<sup>1</sup></b>										
WATER FLOW	User Side l/s	19.8	39.0	44.1	19.7	38.6	43.7	19.5	38.2	43.2
PRESSURE DROP <sup>2</sup>	User Side kPa	54.1	50.9	40.7	53.3	50	40.1	52.5	49.3	39.4
<b>ELECTRICAL DATA</b>										
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
FLA <sup>4</sup>	Total A	269	533	554	269	533	554	269	533	554
<b>EXCHANGERS</b>										
MINIMUM WATER FLOW	Evaporator l/s	6.1	14.5	18.1	6.1	14.5	18.1	6.1	14.5	18.1
MINIMUM WATER CONTENT	Plant l	2000	2800	3200	2000	2800	3200	2000	2800	3200
<b>FANS</b>										
QUANTITY	No.	6	12	14	6	12	14	6	12	14
AIRFLOW	m <sup>3</sup> /s	32.4	64.8	75.6	29.4	58.8	68.6	27.8	55.6	64.8
<b>REFRIGERANT CIRCUIT</b>										
COMPRESSORS	No.	1	2	2	1	2	2	1	2	2
CIRCUITS	No.	1	2	2	1	2	2	1	2	2
REFRIGERANT		R513A	R513A	R513A	R513A	R513A	R513A	R513A	R513A	R513A
REFRIGERANT CHARGE <sup>5</sup>	kg	89	170	199	89	170	199	89	170	199
<b>NOISE LEVELS</b>										
TOTAL SOUND PRESSURE <sup>6</sup>	dB(A)	64	65	70	61	62	68	57	58	64
TOTAL SOUND POWER LEVEL IN COOLING <sup>7</sup>	dB(A)	96	98	103	93	95	101	89	91	97
<b>SIZE AND WEIGHT<sup>8</sup></b>										
WIDTH	mm	4150	7900	9150	4150	7900	9150	4150	7900	9150
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2500	2500	2500	2500	2500	2500	2500	2500	2500
OPERATING WEIGHT	kg	4350	8150	8610	4350	8150	8610	4350	8150	8610

### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
5. Theoretical - refer to serial plate for actual charge volumes.
6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
7. Sound power on the basis of measurement taken in compliance with ISO 9614.
8. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

# MECH-iF-G04 R1234ze High Performance Air Cooled Chiller (346 to 828kW)

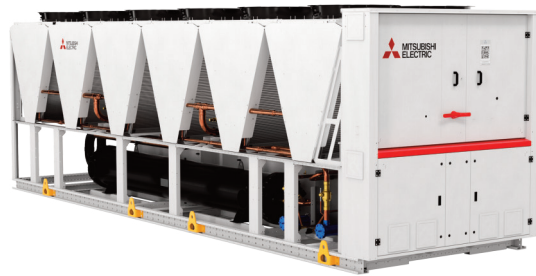

Mitsubishi Electric's **MECH-iF-G04** high performance chiller brings a new class of efficiency with its proprietary Variable Speed Drive (VSD) screw compressor cooling. Available with three configurations for noise performance (Standard, NR Kit and SL version), it features a wide operating envelope and a patented Reduced Exergy Depletion (RED) Cooler, further driving efficiencies and energy saving.

## Key Features & Benefits

- Best in class efficiency
- Mitsubishi Electric's proprietary single screw compressor
- 3 noise configurations available
- CU/AL coil treatments available
- Low GWP refrigerant (GWP<sub>100</sub> = 1)\*

\*IPCC AR5

# R1234ze

MODEL		0351	0702	0802	0351	0702	0802	0351	0702	0802
VERSION		-	-	-	-NR	-NR	-NR	-SL	-SL	-SL
<b>PERFORMANCE - COOLING ONLY</b>										
<b>GROSS VALUE<sup>1</sup></b>										
TOTAL COOLING CAPACITY	kW	346.0	701.9	828.1	342.6	696.2	819.5	339.2	690.0	811.0
TOTAL POWER INPUT	kW	105.8	213.0	269.5	106.0	213.5	270.5	106.6	214.3	271.6
EER	kW/kW	3.27	3.30	3.07	3.23	3.26	3.03	3.18	3.22	2.99
<b>EN14511 VALUES<sup>1,2</sup></b>										
TOTAL COOLING CAPACITY	kW	345.5	701.3	827.4	342.2	695.6	818.8	338.8	689.3	810.4
EER	kW/kW	3.22	3.25	3.04	3.19	3.22	3.00	3.14	3.18	2.95
<b>SEASONAL PERFORMANCE<sup>3</sup></b>										
P <sub>RATED,C</sub>	kW	345.5	701.3	827.4	342.2	695.6	818.8	338.8	689.3	810.4
SEER		5.68	5.83	5.85	5.68	5.83	5.85	5.67	5.83	5.84
PERFORMANCE η <sub>s</sub>	%	224	230	231	224	230	231	224	230	231
<b>HEAT EXCHANGER IN COOLING<sup>1</sup></b>										
WATER FLOW	User Side l/s	16.5	33.6	39.6	16.4	33.3	39.2	16.2	33.0	38.8
PRESSURE DROP <sup>2</sup>	User Side kPa	48	54.1	48.4	47.2	53.4	47.6	46.5	52.6	46.7
<b>ELECTRICAL DATA</b>										
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
FLA <sup>4</sup>	Total A	251	503	509	251	503	509	251	503	509
<b>EXCHANGERS</b>										
MINIMUM WATER FLOW	Evaporator l/s	5.7	12.3	14.6	5.7	12.3	14.6	5.7	12.3	14.6
MINIMUM WATER CONTENT	Plant l	1700	2400	2800	1700	2400	2800	1700	2400	2800
<b>FANS</b>										
QUANTITY	No.	6	12	14	6	12	14	6	12	14
AIRFLOW	m <sup>3</sup> /s	32.4	64.8	75.6	29.4	58.8	68.6	27.8	55.6	64.8
<b>REFRIGERANT CIRCUIT</b>										
COMPRESSORS	No.	1	2	2	1	2	2	1	2	2
CIRCUITS	No.	1	2	2	1	2	2	1	2	2
REFRIGERANT		R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze
REFRIGERANT CHARGE <sup>5</sup>	kg	74	150	177	74	150	177	74	150	177
<b>NOISE LEVELS</b>										
TOTAL SOUND PRESSURE <sup>6</sup>	dB(A)	68	70	72	66	68	70	59	61	63
TOTAL SOUND POWER LEVEL IN COOLING <sup>7</sup>	dB(A)	100	103	105	98	101	103	91	94	96
<b>SIZE AND WEIGHT<sup>8</sup></b>										
WIDTH	mm	4150	7900	9150	4150	7900	9150	4150	7900	9150
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2500	2500	2500	2500	2500	2500	2500	2500	2500
OPERATING WEIGHT	kg	4050	7650	8580	4050	7650	8580	4110	7730	8670

### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
5. Theoretical - refer to serial plate for actual charge volumes.
6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
7. Sound power on the basis of measurement taken in compliance with ISO 9614.
8. Unit in standard configuration, without optional accessories.

Eurovent Certified Data

1.49

Commercial Heat  
Pumps & Chillers

MECH-iF-G05 R513A High Performance Air Cooled Chiller  
MECH-iF-G04 R1234ze High Performance Air Cooled Chiller

# NX2-G06

## R454B 2 Compressor

### Air Cooled Chiller

(40 to 208kW)



**CLIMAVENETA**

#### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C
2. Values in compliance with EN14511
3. Parameter calculated according to [Regulation (EU) N. 2016/2281]
4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
5. Theoretical - refer to serial plate for actual charge volumes
6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
7. Sound power on the basis of measurement taken in compliance with ISO 9614. Sound power level in cooling, outdoors.
8. Unit in standard configuration, without option accessories.

 Eurovent Certified Data

Mitsubishi Electric's **NX2-G06** is our outdoor Air Cooled Chiller providing chilled water with hermetic rotary scroll compressors, ozone-friendly refrigerant R454B, axial-flow fans, plate heat exchanger and electronic expansion valve.

#### Key Features & Benefits

- Best-in-class seasonal efficiency in a compact footprint
- High quality brazed plate heat exchanger
- High efficiency scroll compressors
- EC Fans available as an option for improved efficiency
- Noise Reducer available for improved sound

# R454B

MODEL		0042	0052	0062	0072	0082	0092	0102	0112	0122	0142	0162	0182	0202	0222	
<b>PERFORMANCE - COOLING ONLY <sup>1</sup></b>																
TOTAL COOLING CAPACITY	kW	40.53	48.58	54.16	60.98	68.18	79.82	93.31	103.8	116.5	129.6	152.0	174.2	186.9	208.7	
TOTAL POWER INPUT	kW	13.64	16.10	17.02	17.66	20.47	25.36	27.94	32.74	38.27	44.42	47.39	55.37	61.54	70.86	
EER	kW/kW	2.978	3.019	3.188	3.446	3.327	3.142	3.344	3.174	3.042	2.919	3.207	3.144	3.039	2.944	
<b>EN14511 VALUES <sup>1 2</sup></b>																
TOTAL COOLING CAPACITY	kW	40.40	48.50	54.00	60.80	68.00	79.60	93.10	103.5	116.2	129.3	151.7	173.9	186.6	208.3	
EER	kW/kW	2.92	2.97	3.12	3.38	3.26	3.09	3.29	3.11	2.99	2.87	3.15	3.10	3.00	2.90	
<b>SEASONAL PERFORMANCE <sup>3</sup></b>																
PRATED,C	kW	40.4	48.5	54.0	60.8	68.0	79.6	93.1	103.5	116.2	129.3	151.7	173.9	186.6	208.3	
SEER		4.61	4.72	4.56	4.65	4.57	4.60	4.53	4.29	4.32	4.38	4.48	4.49	4.48	4.46	
PERFORMANCE $\eta_s$	%	181	186	179	183	180	181	178	168	170	172	176	177	176	175	
<b>ELECTRICAL DATA</b>																
POWER SUPPLY	V/ph/Hz	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	
F.L.A <sup>4</sup>	A	36	41	41	47	52	60	71	79	92	104	121	134	152	163	
<b>EXCHANGERS</b>																
MINIMUM WATER FLOW	l/s	1.16	1.38	1.58	1.77	2.00	2.33	2.72	3.05	3.41	3.77	4.47	5.11	5.47	6.13	
MINIMUM WATER CONTENT	l	109	130	145	165	182	216	251	278	314	351	409	468	502	565	
<b>REFRIGERANT CIRCUIT</b>																
COMPRESSORS	No.	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
CIRCUITS	No.	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
THEORETICAL REFRIGERANT CHARGE <sup>5</sup>	kg	7.6	7.6	8.0	9.9	10.0	11.1	13.1	14.3	15.5	15.8	21.9	22.7	22.8	22.9	
<b>NOISE LEVELS</b>																
TOTAL SOUND PRESSURE <sup>6</sup>	dB(A)	49	50	49	51	52	52	52	52	52	53	54	55	55	56	
TOTAL SOUND POWER LEVEL IN COOLING <sup>7</sup>	dB(A)	81	82	81	83	84	84	84	84	84	85	86	87	87	88	
<b>SIZE AND WEIGHT <sup>8</sup></b>																
WIDTH	mm	1825	1825	1825	2395	2395	2395	2825	2825	2825	2825	3980	3980	3980	3980	
DEPTH	mm	1195	1195	1195	1195	1195	1195	1195	1195	1195	1195	1195	1195	1195	1195	
HEIGHT	mm	1865	1865	1865	1865	1865	1865	1980	1980	1980	1980	1980	1980	1980	1980	
OPERATION WEIGHT	kg	500	510	550	630	630	640	770	770	850	920	1130	1170	1180	1220	

# NX2-G06 R454B 4 Compressor Air Cooled Chiller

(168 to 345kW)

Mitsubishi Electric's **NX2-G06** is our outdoor Air Cooled Chiller providing chilled water with hermetic rotary scroll compressors, ozone-friendly refrigerant R454B, axial-flow fans, plate heat exchanger and electronic expansion valve.

## Key Features & Benefits

- Best-in-class seasonal efficiency in a compact footprint
- High quality brazed plate heat exchanger
- High efficiency scroll compressors
- EC Fans available as an option for improved efficiency
- 2 different configurations for noise and efficiency performance available



# R454B

MODEL		0184P	0214P	0244P	0264P	0294P	0334P	0374P
<b>PERFORMANCE - COOLING ONLY <sup>1</sup></b>								
TOTAL COOLING CAPACITY	kW	168.4	197.5	226.2	250.7	280.0	313.1	345.8
TOTAL POWER INPUT	kW	49.44	58.24	68.66	77.32	81.59	93.64	106.6
EER	kW/kW	3.409	3.393	3.293	3.243	3.431	3.345	3.244
<b>EN14511 VALUES <sup>1, 2</sup></b>								
TOTAL COOLING CAPACITY	kW	168.1	197.2	225.8	250.4	279.7	312.8	345.4
EER	kW/kW	3.35	3.34	3.24	3.20	3.38	3.30	3.20
<b>SEASONAL PERFORMANCE <sup>3</sup></b>								
PRATED,C	kW	168.1	197.2	225.8	250.4	279.7	312.8	345.4
SEER		4.73	4.76	4.78	4.79	4.71	4.73	4.62
PERFORMANCE $\eta_s$	%	186	188	188	189	185	186	182
<b>ELECTRICAL DATA</b>								
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
F.L.A <sup>4</sup>	Total A	133	152	170	186	209	235	262
<b>EXCHANGERS</b>								
MINIMUM WATER FLOW	Evaporator l/s	5.25	6.14	7.03	7.78	8.69	9.81	10.89
MINIMUM WATER CONTENT	Plant l	440	520	590	660	730	820	920
<b>REFRIGERANT CIRCUIT</b>								
COMPRESSORS	No.	4	4	4	4	4	4	4
CIRCUITS	No.	2	2	2	2	2	2	2
THEORETICAL REFRIGERANT CHARGE <sup>5</sup>	kg	30.1	31.9	37.5	37.6	47.5	51.8	51.9
<b>NOISE LEVELS</b>								
TOTAL SOUND PRESSURE <sup>6</sup>	dB(A)	54	54	55	55	56	58	59
TOTAL SOUND POWER LEVEL IN COOLING <sup>7</sup>	dB(A)	86	86	87	87	88	90	91
<b>SIZE AND WEIGHT <sup>8</sup></b>								
WIDTH	mm	3160	3160	3160	3160	4335	4335	4335
DEPTH	mm	2250	2250	2250	2250	2250	2250	2250
HEIGHT	mm	2290	2290	2290	2290	2290	2290	2290
OPERATION WEIGHT	kg	1620	1640	1850	1880	2230	2260	2470



**Notes:**  
1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.  
2. Values in compliance with EN14511.  
3. Parameter calculated according to [Regulation (EU) N. 2016/2281].  
4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.  
5. Theoretical - refer to serial plate for actual charge volumes.  
6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.  
7. Sound power on the basis of measurement taken in compliance with ISO 9614.  
8. Unit in standard configuration, without option accessories.

■ Eurovent Certified Data

# NX2-G06 R454B 4-8 Compressor Air Cooled Chiller

(379 to 867kW)

Standard Version (/K)



**CLIMAVENETA**

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
5. Theoretical - refer to serial plate for actual charge volumes.
6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
7. Sound power on the basis of measurement taken in compliance with ISO 9514.
8. Unit in standard configuration, without option accessories.

■ Eurovent Certified Data

Mitsubishi Electric's **NX2-G06** is our outdoor Air Cooled Chiller producing chilled water with hermetic rotary scroll compressors, ozone-friendly refrigerant R454B, axial-flow fans, Shell & Tube heat exchanger and electronic expansion valve.

## Key Features & Benefits

- Best-in-class seasonal efficiency in a compact footprint
- High quality Shell & Tube heat exchanger
- High efficiency scroll compressors
- EC Fans available as an option for improved efficiency
- 3 different configurations for noise and efficiency performance available

**R454B**

MODEL		0404	0424	0464	0515	0576	0585	0636	0676	0706	0768	0808	0848	0898	0928
<b>PERFORMANCE - COOLING ONLY <sup>1</sup></b>															
TOTAL COOLING CAPACITY	kW	379.1	398.9	437.0	488.0	538.9	546.7	597.9	636.3	656.5	720.5	759.5	798.1	835.5	867.1
TOTAL POWER INPUT	kW	115.6	122.6	136.9	152.2	167.4	168.7	183.9	198.2	200.4	218.0	231.5	245.1	259.4	273.6
EER	kW/kW	3.279	3.254	3.192	3.206	3.219	3.241	3.251	3.210	3.276	3.305	3.281	3.256	3.221	3.169
<b>EN14511 VALUES <sup>1,2</sup></b>															
TOTAL COOLING CAPACITY	kW	378.6	398.5	436.5	487.5	538.3	546.2	597.3	635.7	655.9	719.8	758.8	797.4	834.8	866.4
EER	kW/kW	3.22	3.21	3.14	3.16	3.17	3.20	3.21	3.17	3.23	3.26	3.23	3.22	3.18	3.13
<b>SEASONAL PERFORMANCE <sup>3</sup></b>															
PRATED,C	kW	378.6	398.5	436.5	487.5	538.3	546.2	597.3	635.7	655.9	719.8	758.8	797.4	834.8	866.4
SEER		4.67	4.68	4.65	4.70	4.70	4.76	4.75	4.73	4.77	4.75	4.74	4.75	4.75	4.74
PERFORMANCE $\eta_s$	%	184	184	183	185	185	187	187	186	188	187	187	187	187	187
<b>ELECTRICAL DATA</b>															
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
F.L.A <sup>4</sup>	Total A	257	270	297	329	362	373	406	432	449	488	514	541	567	594
<b>EXCHANGERS</b>															
MINIMUM WATER FLOW	Evaporator l/s	10.58	11.31	12.33	13.67	14.97	15.89	17.00	18.03	18.97	19.86	21.14	22.67	23.72	24.69
MINIMUM WATER CONTENT	Plant l	950	1000	1090	1460	1610	1640	1790	1910	1970	2160	2280	2400	2500	2600
<b>REFRIGERANT CIRCUIT</b>															
COMPRESSORS	No.	4	4	4	5	6	5	6	6	6	8	8	8	8	8
CIRCUITS	No.	2	2	2	2	2	2	2	3	2	4	4	4	4	4
THEORETICAL REFRIGERANT CHARGE <sup>5</sup>	kg	46.6	51.5	51.7	59.6	64.4	72.0	74.8	75.1	85.6	88.5	95.1	104	106	106
<b>NOISE LEVELS</b>															
TOTAL SOUND PRESSURE <sup>6</sup>	dB(A)	62	62	62	62	63	63	62	62	63	63	63	64	64	64
TOTAL SOUND POWER LEVEL IN COOLING <sup>7</sup>	dB(A)	94	94	94	94	95	95	95	95	96	96	96	97	97	97
<b>SIZE AND WEIGHT <sup>8</sup></b>															
WIDTH	mm	3905	3905	3905	5080	5080	5080	6255	6255	6255	7430	7430	7430	7430	7430
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560
OPERATION WEIGHT	kg	2590	2620	2660	3190	3420	3500	3940	3980	4100	4970	5010	5080	5120	5150

# NX2-G06 R454B 4-8 Compressor Air Cooled Chiller

(380 to 872kW)

High Efficiency Version (/A)



1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.  
 2. Values in compliance with EN14511.  
 3. Parameter calculated according to [Regulation (EU) N. 2016/2281].  
 4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.  
 5. Theoretical - refer to serial plate for actual charge volumes.  
 6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.  
 7. Sound power on the basis of measurement taken in compliance with ISO 9614.  
 8. Unit in standard configuration, without option accessories.

Eurovent Certified Data

Mitsubishi Electric's **NX2-G06** is our outdoor Air Cooled Chiller producing chilled water with hermetic rotary scroll compressors, ozone-friendly refrigerant R454B, axial-flow fans, Shell & Tube heat exchanger and electronic expansion valve.

## Key Features & Benefits

- Best-in-class seasonal efficiency in a compact footprint
- High quality Shell & Tube heat exchanger
- High efficiency scroll compressors
- EC Fans available as an option for improved efficiency
- 3 different configurations for noise and efficiency performance available

# R454B

MODEL		0404	0424	0464	0515	0576	0585	0636	0676	0706	0768	0808	0848	0898	0928
<b>PERFORMANCE - COOLING ONLY <sup>1</sup></b>															
TOTAL COOLING CAPACITY	kW	380.1	400.0	439.8	490.2	540.8	548.6	599.7	639.0	658.6	721.1	762.2	801.1	839.7	872.3
TOTAL POWER INPUT	kW	111.3	117.1	129.4	145.0	161.1	161.8	177.5	188.0	194.2	211.1	222.6	234.4	246.5	258.4
EER	kW/kW	3.41	3.41	3.39	3.38	3.35	3.39	3.37	3.39	3.39	3.41	3.42	3.41	3.40	3.37
<b>EN14511 VALUES <sup>1,2</sup></b>															
TOTAL COOLING CAPACITY	kW	379.5	399.5	439.3	489.7	540.2	548.1	599.1	638.4	658.0	720.4	761.5	800.5	839.0	871.6
EER	kW/kW	3.35	3.37	3.34	3.33	3.30	3.35	3.33	3.35	3.34	3.37	3.37	3.37	3.36	3.33
<b>SEASONAL PERFORMANCE <sup>3</sup></b>															
PRATED,C	kW	379.5	399.5	439.3	489.7	540.2	548.1	599.1	638.4	658.0	720.4	761.5	800.5	839.0	871.6
SEER		4.74	4.77	4.73	4.78	4.72	4.82	4.82	4.86	4.83	4.81	4.81	4.83	4.84	4.86
PERFORMANCE $\eta_s$	%	187	188	186	188	186	190	190	192	190	189	189	190	191	191
<b>ELECTRICAL DATA</b>															
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
F.L.A <sup>4</sup>	Total A	265	278	305	337	370	381	413	444	457	503	530	556	583	610
<b>EXCHANGERS</b>															
MINIMUM WATER FLOW	Evaporator l/s	10.58	11.31	12.33	13.67	14.97	15.89	17.00	18.03	18.97	19.86	21.14	22.67	23.72	24.69
MINIMUM WATER CONTENT	Plant l	950	1000	1090	1460	1610	1640	1790	1910	1970	2160	2280	2400	2500	2600
<b>REFRIGERANT CIRCUIT</b>															
COMPRESSORS	No.	4	4	4	5	6	5	6	6	6	8	8	8	8	8
CIRCUITS	No.	2	2	2	2	2	2	2	3	2	4	4	4	4	4
THEORETICAL REFRIGERANT CHARGE <sup>5</sup>	kg	56.1	59.9	62.7	76.5	77.9	80.8	88.8	94.1	98.8	107	129	129	129	129
<b>NOISE LEVELS</b>															
TOTAL SOUND PRESSURE <sup>6</sup>	dB(A)	63	63	63	62	63	63	63	64	64	64	64	65	65	65
TOTAL SOUND POWER LEVEL IN COOLING <sup>7</sup>	dB(A)	95	95	95	95	96	96	96	97	97	97	97	98	98	98
<b>SIZE AND WEIGHT <sup>8</sup></b>															
WIDTH	mm	5080	5080	5080	3255	6255	6255	7430	7430	7430	9780	9780	9780	9780	9780
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560
OPERATION WEIGHT	kg	2930	2960	3000	3600	3830	3900	4290	4430	4450	5660	5720	5770	5810	5850

# i-FX2-G05 R513A Air Cooled Chiller

(533 to 1,079kW)

Standard Version (-K)



The new generation of customisable screw compressor chillers has arrived with Climaveneta's range of **i-FX2** air cooled chillers. Available with 3 efficiency levels, all of which can be combined with 4 different levels of noise suppression, and the ability to fit integrated hydronic pumps; the **i-FX2** range has a multitude of combinations to match your project requirements.

## Key Features & Benefits

- Next generation efficient design
- Wide operating envelope for comfort and process applications
- Variety of low noise versions to match your project requirements
- Exceptionally compact design
- Wide variety of customisations available including factory fitted hydronic pumps

# R513A

MODEL		0532	0602	0622	0672	0732	0802	0892	0972	1032	1082	
<b>PERFORMANCE - COOLING ONLY</b>												
<b>GROSS VALUE<sup>1</sup></b>												
TOTAL COOLING CAPACITY	kW	533.2	597.3	623.6	674.3	725.5	800.5	889.2	966.7	1034	1079	
TOTAL POWER INPUT	kW	182.5	202.8	208.4	224.5	247.3	280.9	307.4	325.4	344.5	362.8	
EER	kW/kW	2.92	2.95	2.99	3.00	2.93	2.85	2.89	2.97	3.00	2.97	
<b>EN14511 VALUES<sup>1,2</sup></b>												
TOTAL COOLING CAPACITY	kW	532.7	596.7	623.0	673.7	724.8	799.9	888.5	966.0	1033	1078	
EER	kW/kW	2.89	2.91	2.96	2.97	2.90	2.82	2.86	2.94	2.97	2.93	
<b>SEASONAL PERFORMANCE<sup>3</sup></b>												
P <sub>PARTED,C</sub>	kW	533	597	623	674	725	800	888	966	1033	1078	
SEER		5.08	5.00	5.06	4.89	4.85	4.87	4.99	5.00	4.90	4.97	
PERFORMANCE $\eta_s$	%	200	197	199	193	191	192	197	197	193	196	
<b>HEAT EXCHANGER IN COOLING<sup>1</sup></b>												
WATER FLOW	User Side	l/s	25.5	28.6	29.8	32.2	34.7	38.3	42.5	46.2	49.4	51.6
PRESSURE DROP <sup>2</sup>	User Side	kPa	43.3	54.4	45.8	53.5	56.3	46.3	57.1	42.5	48.6	64.5
<b>ELECTRICAL DATA</b>												
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	
FLA <sup>4</sup>	Total	A	360	398	407	436	481	559	624	626	639	701
<b>EXCHANGERS</b>												
MINIMUM WATER FLOW	Evaporator	l/s	13.1	13.1	14.4	14.4	16.7	20.0	20.0	24.7	24.7	22.5
MINIMUM WATER CONTENT	Plant	l	1900	2100	2200	2400	2500	2800	3100	3400	3600	3800
<b>FANS</b>												
QUANTITY	No.	6	7	7	8	8	9	10	11	12	12	
AIRFLOW	m <sup>3</sup> /s	30.9	36.1	36.1	41.2	41.2	46.4	51.5	56.7	61.8	61.8	
<b>REFRIGERANT CIRCUIT</b>												
COMPRESSORS	No.	2	2	2	2	2	2	2	2	2	2	
CIRCUITS	No.	2	2	2	2	2	2	2	2	2	2	
REFRIGERANT		R513A	R513A	R513A	R513A	R513A	R513A	R513A	R513A	R513A	R513A	
REFRIGERANT CHARGE <sup>5</sup>	kg	83	92	94	101	112	132	143	155	166	167	
<b>NOISE LEVELS</b>												
TOTAL SOUND PRESSURE <sup>6</sup>	dB(A)	68	69	69	69	70	69	70	71	71	71	
TOTAL SOUND POWER LEVEL IN COOLING <sup>7</sup>	dB(A)	100	101	101	101	102	102	103	104	104	104	
<b>SIZE AND WEIGHT<sup>8</sup></b>												
WIDTH	mm	4150	5400	5400	5400	5400	6650	6650	7900	7900	7900	
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	
HEIGHT	mm	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	
OPERATING WEIGHT	kg	4500	5000	5007	5106	5388	5863	5974	6464	6584	7031	

### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
5. Theoretical - refer to serial plate for actual charge volumes.
6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
7. Sound power on the basis of measurement taken in compliance with ISO 9614.
8. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

# i-FX2-G05 R513A Air Cooled Chiller

(1,123 to 1,859kW)

Standard Version (-K)  
continued



The new generation of customisable screw compressor chillers has arrived with Climaveneta's range of **i-FX2** air cooled chillers. Available with 3 efficiency levels, all of which can be combined with 4 different levels of noise suppression, and the ability to fit integrated hydronic pumps; the **i-FX2** range has a multitude of combinations to match your project requirements.

## Key Features & Benefits

- Next generation efficient design
- Wide operating envelope for comfort and process applications
- Variety of low noise versions to match your project requirements
- Exceptionally compact design
- Wide variety of customisations available including factory fitted hydronic pumps

# R513A

MODEL		1122	1192	1242	1382	1452	1552	1633	1703	1863	
<b>PERFORMANCE - COOLING ONLY</b>											
<b>GROSS VALUE<sup>1</sup></b>											
TOTAL COOLING CAPACITY	kW	1123	1185	1243	1382	1450	1551	1628	1702	1859	
TOTAL POWER INPUT	kW	384.0	389.6	413.8	454.1	495.0	501.8	550.3	579.2	621.9	
EER	kW/kW	2.92	3.04	3.01	3.04	2.93	3.09	2.96	2.94	2.99	
<b>EN14511 VALUES<sup>1,2</sup></b>											
TOTAL COOLING CAPACITY	kW	1122	1184	1242	1382	1449	1550	1627	1701	1858	
EER	kW/kW	2.88	3.00	2.96	3.01	2.89	3.05	2.92	2.90	2.96	
<b>SEASONAL PERFORMANCE<sup>3</sup></b>											
P <sub>PARTED,C</sub>	kW	1122	1184	1242	1382	1449	1550	1627	1701	1858	
SEER		5.01	5.04	5.05	5.12	5.03	5.16	4.99	5.04	5.13	
PERFORMANCE $\eta_s$	%	197	199	199	202	198	203	197	198	202	
<b>HEAT EXCHANGER IN COOLING<sup>1</sup></b>											
WATER FLOW	User Side	l/s	53.7	56.7	59.4	66.1	69.3	74.2	77.9	81.4	88.9
PRESSURE DROP <sup>2</sup>	User Side	kPa	69.9	67.6	69.9	61.3	67.5	58.5	69.4	75.9	52.6
<b>ELECTRICAL DATA</b>											
POWER SUPPLY		V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	
FLA <sup>4</sup>	Total	A	785	825	857	932	984	1008	1094	1178	1270
<b>EXCHANGERS</b>											
MINIMUM WATER FLOW	Evaporator	l/s	22.5	23.6	24.2	28.3	28.3	37.2	38.9	38.9	41.7
MINIMUM WATER CONTENT	Plant	l	3900	4100	4400	4800	5100	5400	5700	6000	6500
<b>FANS</b>											
QUANTITY	No.	12	14	14	16	16	18	18	18	20	
AIRFLOW	m <sup>3</sup> /s	61.8	72.1	72.1	82.4	82.4	92.7	92.7	92.7	103	
<b>REFRIGERANT CIRCUIT</b>											
COMPRESSORS	No.	2	2	2	2	2	2	3	3	3	
CIRCUITS	No.	2	2	2	2	2	2	3	3	3	
REFRIGERANT		R513A	R513A	R513A	R513A	R513A	R513A	R513A	R513A	R513A	
REFRIGERANT CHARGE <sup>5</sup>	kg	167	187	207	243	243	263	263	268	288	
<b>NOISE LEVELS</b>											
TOTAL SOUND PRESSURE <sup>6</sup>	dB(A)	72	72	73	73	73	73	73	73	74	
TOTAL SOUND POWER LEVEL IN COOLING <sup>7</sup>	dB(A)	105	105	106	106	106	106	106	106	107	
<b>SIZE AND WEIGHT<sup>8</sup></b>											
WIDTH	mm	7900	9150	9150	10400	10400	11650	11650	11650	12900	
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	
HEIGHT	mm	2640	2640	2640	2640	2640	2640	2640	2640	2640	
OPERATING WEIGHT	kg	7409	8243	8249	9008	9008	10165	11301	11679	12284	

- Notes:**
1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
  2. Values in compliance with EN14511.
  3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
  4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
  5. Theoretical - refer to serial plate for actual charge volumes.
  6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
  7. Sound power on the basis of measurement taken in compliance with ISO 9614.
  8. Sound power level in cooling, outdoors.

■ Eurovent Certified Data

1.55

Commercial Heat  
Pumps & Chillers

i-FX2-G05 R513A Air Cooled Chiller

# i-FX2-G04 R1234ze Air Cooled Chiller

(392 to 861kW)

High Efficiency Version (-E)



The new generation of customisable screw compressor chillers has arrived with Climaveneta's range of **i-FX2** air cooled chillers. Available with 3 efficiency levels, all of which can be combined with 4 different levels of noise suppression, and the ability to fit integrated hydronic pumps; the **i-FX2** range has a multitude of combinations to match your project requirements.

## Key Features & Benefits

- Next generation of efficiency with exceptionally low GWP refrigerant ( $GWP_{100} = 1$ )\*
- Wide operating envelope for comfort and process applications
- Variety of low noise versions to match your project requirements
- Exceptionally compact design
- Wide variety of customisations available including factory fitted hydronic pumps

\*IPCC AR5

# R1234ze

MODEL		0392	0432	0502	0552	0662	0742	0872
<b>PERFORMANCE - COOLING ONLY</b>								
<b>GROSS VALUE<sup>1</sup></b>								
TOTAL COOLING CAPACITY	kW	392.5	426.2	499.3	550.7	658.3	744.3	861.4
TOTAL POWER INPUT	kW	116.4	128.6	145.1	161.4	207.6	234.7	269.2
EER	kW/kW	3.37	3.31	3.44	3.41	3.17	3.17	3.20
<b>EN14511 VALUES<sup>1,2</sup></b>								
TOTAL COOLING CAPACITY	kW	392.0	425.7	498.8	550.2	657.7	743.7	860.8
EER	kW/kW	3.33	3.27	3.41	3.37	3.13	3.14	3.17
<b>SEASONAL PERFORMANCE<sup>3</sup></b>								
P <sub>rated,c</sub>	kW	392	426	499	550	658	744	861
SEER		2.56	5.59	5.59	5.65	5.64	5.42	5.40
PERFORMANCE $\eta_s$	%	219	221	220	223	223	214	213
<b>HEAT EXCHANGER IN COOLING<sup>1</sup></b>								
WATER FLOW	User Side l/s	18.8	20.4	23.9	26.3	31.5	35.6	41.2
PRESSURE DROP <sup>2</sup>	User Side kPa	39.1	46.2	33.3	40.6	51.0	40.0	33.7
<b>ELECTRICAL DATA</b>								
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
FLA <sup>4</sup>	Total A	273	301	334	360	461	532	594
<b>EXCHANGERS</b>								
MINIMUM WATER FLOW	Evaporator l/s	9.2	9.2	13.9	13.9	14.4	20.0	24.7
MINIMUM WATER CONTENT	Plant l	1400	1500	1700	1900	2300	2600	3000
<b>FANS</b>								
QUANTITY	No.	6	7	8	8	10	12	12
AIRFLOW	m <sup>3</sup> /s	30.9	36.05	41.2	41.2	51.5	61.8	61.8
<b>REFRIGERANT CIRCUIT</b>								
COMPRESSORS	No.	2	2	2	2	2	2	2
CIRCUITS	No.	2	2	2	2	2	2	2
REFRIGERANT		R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze
REFRIGERANT CHARGE <sup>5</sup>	kg	72	82	92	94	125	149	154
<b>NOISE LEVELS</b>								
TOTAL SOUND PRESSURE <sup>6</sup>	dB(A)	68	69	69	70	69	71	73
TOTAL SOUND POWER LEVEL IN COOLING <sup>7</sup>	dB(A)	100	101	101	102	102	104	106
<b>SIZE AND WEIGHT<sup>8</sup></b>								
WIDTH	mm	4150	5400	5400	5400	6650	7900	7900
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2640	2640	2640	2640	2640	2640	2640
OPERATING WEIGHT	kg	4428	4942	5105	5105	5693	6579	7342

### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
  2. Values in compliance with EN14511.
  3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
  4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
  5. Theoretical - refer to serial plate for actual charge volumes.
  6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
  7. Sound power on the basis of measurement taken in compliance with ISO 9614.
  8. Sound power level in cooling, outdoors.
8. Unit in standard configuration, without optional accessories.

Eurovent Certified Data

# i-FX2-G04 R1234ze Air Cooled Chiller

(929 to 1,532kW)

High Efficiency Version (-E)  
continued



- Notes:**
1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
  2. Values in compliance with EN14511.
  3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
  4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
  5. Theoretical - refer to serial plate for actual charge volumes.
  6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
  7. Sound power on the basis of measurement taken in compliance with ISO 9614.
  8. Unit in standard configuration, without optional accessories.

Eurovent Certified Data

The new generation of customisable screw compressor chillers has arrived with Climaveneta's range of **i-FX2** air cooled chillers. Available with 3 efficiency levels, all of which can be combined with 4 different levels of noise suppression, and the ability to fit integrated hydronic pumps; the **i-FX2** range has a multitude of combinations to match your project requirements.

## Key Features & Benefits

- Next generation of efficiency with exceptionally low GWP refrigerant (GWP<sub>100</sub> = 1)\*
- Wide operating envelope for comfort and process applications
- Variety of low noise versions to match your project requirements
- Exceptionally compact design
- Wide variety of customisations available including factory fitted hydronic pumps

\*IPCC AR5

# R1234ze

MODEL		0932	1022	1072	1183	1323	1433	1533
<b>PERFORMANCE - COOLING ONLY</b>								
<b>GROSS VALUE<sup>1</sup></b>								
TOTAL COOLING CAPACITY	kW	929.7	1023	1072	1184	1327	1425	1532
TOTAL POWER INPUT	kW	285.7	303.4	325.3	360.6	408.8	433.9	473.0
EER	kW/kW	3.25	3.37	3.30	3.28	3.25	3.28	3.24
<b>EN14511 VALUES<sup>1,2</sup></b>								
TOTAL COOLING CAPACITY	kW	929.1	1023	1072	1183	1327	1424	1531
EER	kW/kW	3.22	3.32	3.25	3.25	3.21	3.24	3.21
<b>SEASONAL PERFORMANCE<sup>3</sup></b>								
P <sub>rated,c</sub>	kW	929	1023	1072	1183	1327	1424	1531
SEER		5.45	5.62	5.6	5.37	5.43	5.50	5.57
PERFORMANCE η <sub>s</sub>	%	215	222	221	212	214	217	220
<b>HEAT EXCHANGER IN COOLING<sup>4</sup></b>								
WATER FLOW	User Side l/s	44.5	48.9	51.3	56.6	63.5	68.1	73.2
PRESSURE DROP <sup>2</sup>	User Side kPa	39.3	58.0	55.4	45.0	46.2	53.2	35.7
<b>ELECTRICAL DATA</b>								
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
FLA <sup>4</sup>	Total A	642	687	719	818	892	960	1017
<b>EXCHANGERS</b>								
MINIMUM WATER FLOW	Evaporator l/s	24.7	22.5	23.6	28.3	38.9	38.9	41.7
MINIMUM WATER CONTENT	Plant l	3300	3600	3800	4100	4600	5000	5400
<b>FANS</b>								
QUANTITY	No.	14	16	16	18	18	20	20
AIRFLOW	m <sup>3</sup> /s	72.1	82.4	82.4	92.7	92.7	103	103
<b>REFRIGERANT CIRCUIT</b>								
COMPRESSORS	No.	2	2	2	3	3	3	3
CIRCUITS	No.	2	2	2	3	3	3	3
REFRIGERANT		R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze
REFRIGERANT CHARGE <sup>5</sup>	kg	168	182	187	261	276	290	300
<b>NOISE LEVELS</b>								
TOTAL SOUND PRESSURE <sup>6</sup>	dB(A)	73	73	73	73	73	74	74
TOTAL SOUND POWER LEVEL IN COOLING <sup>7</sup>	dB(A)	106	106	106	106	106	107	107
<b>SIZE AND WEIGHT<sup>8</sup></b>								
WIDTH	mm	9150	10400	10400	11650	11650	12900	12900
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2640	2640	2640	2640	2640	2640	2640
OPERATING WEIGHT	kg	8053	8634	8805	11067	11655	12243	12314

# i-FX2-G04 R1234ze Air Cooled Chiller

(408 to 797kW)

Low noise with EC Fans  
Version (-SL-K-EC)



The new generation of customisable screw compressor chillers has arrived with Climaveneta's range of **i-FX2** air cooled chillers. Available with 3 efficiency levels, all of which can be combined with 4 different levels of noise suppression, and the ability to fit integrated hydronic pumps; the **i-FX2** range has a multitude of combinations to match your project requirements.

## Key Features & Benefits

- Next generation of efficiency with exceptionally low GWP refrigerant (GWP<sub>100</sub> = 1)\*
- Wide operating envelope for comfort and process applications
- Variety of low noise versions to match your project requirements
- Exceptionally compact design
- Wide variety of customisations available including factory fitted hydronic pumps

\*IPCC AR5

# R1234ze

MODEL		0422	0452	0512	0572	0602	0672	0712	0772	0862	
<b>PERFORMANCE - COOLING ONLY</b>											
<b>GROSS VALUE<sup>1</sup></b>											
TOTAL COOLING CAPACITY	kW	408.5	439.1	482.0	544.7	575.0	636.0	688.8	741.6	797.0	
TOTAL POWER INPUT	kW	128.6	144.9	159.7	169.4	183.2	219.0	225.7	249.7	262.0	
EER	kW/kW	3.18	3.03	3.02	3.22	3.14	2.90	3.05	2.97	3.04	
<b>EN14511 VALUES<sup>1,2</sup></b>											
TOTAL COOLING CAPACITY	kW	408.1	438.6	481.6	544.2	574.5	635.4	688.1	740.9	796.5	
EER	kW/kW	3.14	2.99	2.99	3.18	3.10	2.87	3.01	2.93	3.02	
<b>SEASONAL PERFORMANCE<sup>3</sup></b>											
P <sub>PARTED,C</sub>	kW	408	439	482	544	574	635	688	741	796	
SEER		5.45	5.35	5.28	5.39	5.34	5.24	5.40	5.16	5.11	
PERFORMANCE η <sub>s</sub>	%	215	211	208	213	211	207	213	203	201	
<b>HEAT EXCHANGER IN COOLING<sup>1</sup></b>											
WATER FLOW	User Side	l/s	19.5	21.0	23.1	26.1	27.5	30.4	32.9	35.5	38.1
PRESSURE DROP <sup>2</sup>	User Side	kPa	42.4	49.0	31.1	39.7	44.2	47.6	55.8	58.8	28.9
<b>ELECTRICAL DATA</b>											
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	
FLA <sup>4</sup>	Total	A	291	316	339	379	398	458	489	525	551
<b>EXCHANGERS</b>											
MINIMUM WATER FLOW	Evaporator	l/s	9.17	9.17	13.89	13.89	13.89	14.44	14.44	16.67	24.72
MINIMUM WATER CONTENT	Plant	l	1400	1500	1700	1900	2000	2200	2400	2600	2800
<b>FANS</b>											
QUANTITY	No.	6	6	6	8	8	8	10	10	10	
AIRFLOW	m <sup>3</sup> /s	27.78	27.78	27.78	37.04	37.04	37.04	46.30	46.30	46.30	
<b>REFRIGERANT CIRCUIT</b>											
COMPRESSORS	No.	2	2	2	2	2	2	2	2	2	
CIRCUITS	No.	2	2	2	2	2	2	2	2	2	
REFRIGERANT		R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	
REFRIGERANT CHARGE <sup>5</sup>	kg	72	76	78	92	94	96	125	130	136	
<b>NOISE LEVELS</b>											
TOTAL SOUND PRESSURE <sup>6</sup>	dB(A)	59	60	60	61	61	61	62	62	63	
TOTAL SOUND POWER LEVEL IN COOLING <sup>7</sup>	dB(A)	91	92	92	93	93	93	95	95	96	
<b>SIZE AND WEIGHT<sup>8</sup></b>											
WIDTH	mm	4150	4150	4150	5400	5400	5400	6650	6650	6650	
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	
HEIGHT	mm	2640	2640	2640	2640	2640	2640	2640	2640	2640	
OPERATING WEIGHT	kg	4949	4961	5056	5686	5686	5718	6283	6643	7405	

### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
5. Theoretical - refer to serial plate for actual charge volumes.
6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
7. Sound power on the basis of measurement taken in compliance with ISO 9614.
8. Sound power level in cooling, outdoors.

8. Unit in standard configuration, without optional accessories.

Eurovent Certified Data

# i-FX2-G04 R1234ze Air Cooled Chiller

(926 to 1,619kW)

Low noise with EC Fans  
Version (-SL-K-EC)  
continued



- Notes:**
1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
  2. Values in compliance with EN14511.
  3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
  4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
  5. Theoretical - refer to serial plate for actual charge volumes.
  6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
  7. Sound power on the basis of measurement taken in compliance with ISO 9614. Sound power level in cooling, outdoors.
  8. Unit in standard configuration, without optional accessories.

Eurovent Certified Data

The new generation of customisable screw compressor chillers has arrived with Climaveneta's range of **i-FX2** air cooled chillers. Available with 3 efficiency levels, all of which can be combined with 4 different levels of noise suppression, and the ability to fit integrated hydronic pumps; the **i-FX2** range has a multitude of combinations to match your project requirements.

## Key Features & Benefits

- Next generation of efficiency with exceptionally low GWP refrigerant (GWP<sub>100</sub> = 1)\*
- Wide operating envelope for comfort and process applications
- Variety of low noise versions to match your project requirements
- Exceptionally compact design
- Wide variety of customisations available including factory fitted hydronic pumps

\*IPCC AR5

# R1234ze

MODEL		0962	1062	1152	1253	1333	1463	1573	1683
<b>PERFORMANCE - COOLING ONLY</b>									
<b>GROSS VALUE<sup>1</sup></b>									
TOTAL COOLING CAPACITY	kW	926.4	1016	1110	1186	1234	1412	1511	1619
TOTAL POWER INPUT	kW	305.0	322.0	363.7	383.3	404.2	461.3	499.1	529.9
EER	kW/kW	3.04	3.16	3.05	3.09	3.05	3.06	3.03	3.06
<b>EN14511 VALUES<sup>1,2</sup></b>									
TOTAL COOLING CAPACITY	kW	925.7	1015	1109	1185	1233	1411	1510	1619
EER	kW/kW	3.01	3.11	3.01	3.06	3.02	3.03	2.99	3.01
<b>SEASONAL PERFORMANCE<sup>3</sup></b>									
P <sub>PARTED,C</sub>	kW	926	1015	1109	1185	1233	1411	1510	1619
SEER		5.13	5.25	5.23	5.16	5.17	5.18	5.23	5.26
PERFORMANCE $\eta_s$	%	202	207	206	203	204	204	206	207
<b>HEAT EXCHANGER IN COOLING<sup>4</sup></b>									
WATER FLOW	User Side l/s	44.3	48.6	53.1	56.7	59.0	67.5	72.3	77.4
PRESSURE DROP <sup>2</sup>	User Side kPa	39.0	57.2	59.3	45.2	48.8	48.5	59.8	68.7
<b>ELECTRICAL DATA</b>									
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
FLA <sup>4</sup>	Total A	651	702	764	812	857	987	1045	1097
<b>EXCHANGERS</b>									
MINIMUM WATER FLOW	Evaporator l/s	24.72	22.5	23.61	28.33	28.33	37.22	38.89	38.89
MINIMUM WATER CONTENT	Plant l	3200	3600	3900	4200	4300	4900	5300	5700
<b>FANS</b>									
QUANTITY	No.	12	14	14	16	16	18	18	20
AIRFLOW	m <sup>3</sup> /s	55.56	64.82	64.82	74.08	74.08	83.34	83.34	92.6
<b>REFRIGERANT CIRCUIT</b>									
COMPRESSORS	No.	2	2	2	3	3	3	3	3
CIRCUITS	No.	2	2	2	3	3	3	3	3
REFRIGERANT		R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze	R1234ze
REFRIGERANT CHARGE <sup>5</sup>	kg	158	178	183	227	232	256	276	300
<b>NOISE LEVELS</b>									
TOTAL SOUND PRESSURE <sup>6</sup>	dB(A)	63	63	63	63	63	64	64	64
TOTAL SOUND POWER LEVEL IN COOLING <sup>7</sup>	dB(A)	96	96	96	96	96	97	97	97
<b>SIZE AND WEIGHT<sup>8</sup></b>									
WIDTH	mm	7900	9150	9150	10400	10400	11650	11650	12900
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2640	2640	2640	2640	2640	2640	2640	2640
OPERATING WEIGHT	kg	7935	8697	8869	11375	11377	12508	12598	13171

# FX2-G05 R513A Air Cooled Chiller

(322 to 996kW)

Standard Version (/K)



**CLIMAVENETA**

#### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
5. Theoretical - refer to serial plate for actual charge volumes.
6. Average sound pressure level at 10m distance; unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
7. Sound power on the basis of measurement taken in compliance with ISO 9614. Sound power level in cooling, outdoors.
8. Unit in standard configuration, without option accessories.

 Eurovent Certified Data

The new generation of customisable screw compressor chillers has arrived with Mitsubishi Electric's range of **FX2-G05** air cooled chillers. The second generation of this chiller family marks considerable developments in seasonal efficiency, footprint, noise, operating envelope and configuration and customisation.

### Key Features & Benefits

- Compressors using low GWP refrigerant
- Wide operating envelope for comfort and process applications
- Exceptionally compact design
- Available with EC Fans including High ESP version

**R513A**

MODEL		0322	0352	0402	0472	0512	0572	0652	0702	0772	0852	0902	1002
<b>PERFORMANCE - COOLING ONLY 1</b>													
TOTAL COOLING CAPACITY	kW	322.1	350.2	411.9	464.4	516.7	573.4	645.8	707.6	779.8	862.9	937.3	996.0
TOTAL POWER INPUT	kW	102.4	119.2	133.1	146.1	172.5	188.6	207.4	239.2	254.6	272.4	295.1	315.5
EER	kW/kW	3.146	2.938	3.095	3.179	2.995	3.040	3.114	2.958	3.063	3.168	3.176	3.157
<b>EN14511 VALUES 1,2</b>													
TOTAL COOLING CAPACITY	kW	321.8	349.8	411.5	463.9	516.2	572.9	645.2	707.0	779.1	862.3	936.6	995.2
EER	kW/kW	3.12	2.91	3.06	3.14	2.97	3.01	3.08	2.93	3.02	3.13	3.14	3.12
<b>SEASONAL PERFORMANCE 3</b>													
PRATED,C	kW	321.8	349.8	411.5	463.9	516.2	572.9	645.2	707.0	779.1	862.3	936.6	995.2
SEER		4.51	4.50	4.56	4.58	4.56	4.56	4.58	4.57	4.57	4.58	4.59	4.59
PERFORMANCE ηs	%	177	177	179	180	179	179	180	180	180	180	180	181
<b>HEAT EXCHANGER IN COOLING 1</b>													
WATER FLOW	User Side l/s	15.4	16.8	19.7	22.2	24.7	27.4	30.9	33.8	37.3	41.3	44.8	47.6
PRESSURE DROP 2	User Side kPa	27.7	32.7	38.8	49.4	37.3	46	46.6	44.5	54.1	47.2	49.2	55.6
<b>ELECTRICAL DATA</b>													
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
FL.A. 4	Total A	228	257	275	293	362	410	459	459	515	571	622	673
<b>EXCHANGERS</b>													
MINIMUM WATER FLOW	Evaporator l/s	10.6	10.6	13.3	13.3	12.5	12.5	15.8	17.5	17.5	19.2	19.2	19.2
MINIMUM WATER CONTENT	Plant l	1100	1200	1400	1600	1800	2000	2300	2500	2700	3000	3300	3500
<b>FANS</b>													
QUANTITY	No.	4	4	5	6	6	7	8	8	9	10	11	12
AIRFLOW	m3/s	21.3	21.3	26.6	31.9	31.9	37.2	42.5	42.5	47.9	53.2	58.5	63.8
<b>REFRIGERANT CIRCUIT</b>													
COMPRESSORS	No.	2	2	2	2	2	2	2	2	2	2	2	2
CIRCUITS	No.	2	2	2	2	2	2	2	2	2	2	2	2
<b>THEORETICAL REFRIGERANT CHARGE 5</b>													
	kg	57	60	71	81	88	98	113	120	133	150	163	173
<b>NOISE LEVELS</b>													
TOTAL SOUND PRESSURE 6	dB(A)	67	67	67	68	68	68	68	70	69	69	70	70
TOTAL SOUND POWER LEVEL IN COOLING 7	dB(A)	99	99	99	100	100	100	100	102	102	102	103	103
<b>SIZE AND WEIGHT 8</b>													
WIDTH	mm	2750	2750	4000	4000	4000	5250	5250	5250	6500	6500	7750	7750
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640
OPERATION WEIGHT	kg	3120	2950	3600	3730	4570	5060	5190	5550	6400	6980	7460	7620

# FX2-G05 R513A Air Cooled Chiller


(1,056 to 1,839kW)

Standard Version (/K)  
continued




#### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
5. Theoretical - refer to serial plate for actual charge volumes.
6. Average sound pressure level at 10m distance; unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
7. Sound power on the basis of measurement taken in compliance with ISO 9614.
8. Sound power level in cooling, outdoors.
8. Unit in standard configuration, without option accessories.

 Eurovent Certified Data

The new generation of customisable screw compressor chillers has arrived with Mitsubishi Electric's range of **FX2-G05** air cooled chillers. The second generation of this chiller family marks considerable developments in seasonal efficiency, footprint, noise, operating envelope and configuration and customisation.

### Key Features & Benefits

-  Compressors using low GWP refrigerant
-  Wide operating envelope for comfort and process applications
-  Exceptionally compact design
-  Available with EC Fans including High ESP version

# R513A

MODEL		1052	1102	1152	1222	1262	1322	1402	1503	1593	1663	1773	1883
PERFORMANCE - COOLING ONLY 1													
TOTAL COOLING CAPACITY	kW	1056	1098	1139	1232	1264	1332	1400	1506	1592	1664	1778	1839
TOTAL POWER INPUT	kW	343.2	369.3	354.3	396.3	423.2	433.9	474.8	475.0	523.1	556.9	580.4	605.3
EER	kW/kW	3.077	2.973	3.215	3.109	2.987	3.070	2.949	3.171	3.043	2.988	3.063	3.038
EN14511 VALUES 1,2													
TOTAL COOLING CAPACITY	kW	1055	1097	1138	1231	1264	1331	1399	1505	1591	1663	1777	1838
EER	kW/kW	3.04	2.94	3.17	3.07	2.96	3.03	2.91	3.13	3.01	2.96	3.03	3.00
SEASONAL PERFORMANCE 3													
PRATED,C	kW	1055	1097	1138	1231	1264	1331	1399	1505	1591	1663	1777	1838
SEER		4.56	4.56	4.58	4.60	4.56	4.57	4.58	4.59	4.59	4.58	4.60	4.63
PERFORMANCE ηs	%	180	179	180	181	179	180	180	181	181	180	181	182
HEAT EXCHANGER IN COOLING 1													
WATER FLOW	User Side l/s	50.5	52.5	54.5	58.9	60.5	63.7	67.0	72.0	76.1	79.6	85.0	87.9
PRESSURE DROP 2	User Side kPa	48.3	52.1	56.1	61.6	48.8	54.2	59.9	52.5	58.6	45.1	51.6	59.1
ELECTRICAL DATA													
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
FL.A. 4	Total A	713	753	761	761	835	916	916	1009	1089	1129	1137	1137
EXCHANGERS													
MINIMUM WATER FLOW	Evaporator l/s	25.0	25.0	25.0	25.0	31.1	31.1	31.1	41.7	41.7	41.7	41.7	41.7
MINIMUM WATER CONTENT	Plant l	3700	3800	4000	4300	4400	4700	4900	5300	5600	5800	6200	6400
FANS													
QUANTITY	No.	12	12	14	14	14	16	16	18	18	18	20	20
AIRFLOW	m3/s	63.8	63.8	74.4	74.4	74.4	85.1	85.1	95.7	95.7	95.7	106.3	106.3
REFRIGERANT CIRCUIT													
COMPRESSORS	No.	2	2	2	2	2	2	2	3	3	3	3	3
CIRCUITS	No.	2	2	2	2	2	2	2	3	3	3	3	3
THEORETICAL REFRIGERANT CHARGE 5													
	kg	179	186	195	210	214	232	238	263	271	281	303	318
NOISE LEVELS													
TOTAL SOUND PRESSURE 6	dB(A)	71	71	71	71	72	73	73	73	73	73	73	73
TOTAL SOUND POWER LEVEL IN COOLING 7	dB(A)	104	104	104	104	105	106	106	106	106	106	106	106
SIZE AND WEIGHT 8													
WIDTH	mm	7750	7750	9000	9000	9150	10400	10400	11650	11650	11650	12900	12900
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640
OPERATION WEIGHT	kg	7870	7900	8430	8500	8860	9470	9610	12050	12110	12120	12710	12720

# FX2-G05 R513A Air Cooled Chiller

(340 to 1,372kW)

High Efficiency Version (/E)



#### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
5. Theoretical - refer to serial plate for actual charge volumes.
6. Average sound pressure level at 10m distance; unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
7. Sound power on the basis of measurement taken in compliance with ISO 9614. Sound power level in cooling, outdoors.
8. Unit in standard configuration, without option accessories.

Eurovent Certified Data

The new generation of customisable screw compressor chillers has arrived with Mitsubishi Electric's range of **FX2-G05** air cooled chillers. The second generation of this chiller family marks considerable developments in seasonal efficiency, footprint, noise, operating envelope and configuration and customisation.

### Key Features & Benefits

- Compressors using low GWP refrigerant
- Wide operating envelope for comfort and process applications
- EC Fans available as an option
- Exceptionally compact design

# R513A

MODEL		0352	0402	0452	0472	0572	0602	0652	0702	0772	0852	0902	1002	1052	1152	1222	1322	1402	
<b>PERFORMANCE - COOLING ONLY 1</b>																			
TOTAL COOLING CAPACITY	kW	340.3	389.8	444.9	485.0	570.3	619.0	658.9	698.5	756.1	844.7	918.1	1001	1061	1133	1207	1311	1372	
TOTAL POWER INPUT	kW	98.7	113.1	128.5	142.9	163.3	178.3	189.4	200.5	222.8	246.7	267.5	289.5	310.9	331.5	352.4	390.1	409.2	
EER	kW/kW	3.448	3.447	3.462	3.394	3.492	3.472	3.479	3.484	3.394	3.424	3.432	3.458	3.414	3.418	3.425	3.361	3.353	
<b>EN14511 VALUES 1,2</b>																			
TOTAL COOLING CAPACITY	kW	339.9	389.4	444.5	484.6	569.8	618.5	658.4	697.9	755.5	844.1	917.4	1000	1060	1132	1206	1310	1371	
EER	kW/kW	3.41	3.41	3.43	3.36	3.45	3.44	3.44	3.44	3.36	3.39	3.39	3.41	3.37	3.37	3.38	3.33	3.32	
<b>SEASONAL PERFORMANCE 3</b>																			
PRATED,C	kW	339.9	389.4	444.5	484.6	569.8	618.5	658.4	697.9	755.5	844.1	917.4	1000	1060	1132	1206	1310	1371	
SEER		4.63	4.64	4.69	4.66	4.72	4.64	4.66	4.73	4.71	4.74	4.79	4.72	4.74	4.74	4.66	4.69		
PERFORMANCE ηs	%	182	182	185	183	186	183	183	186	185	185	187	188	186	187	187	183	185	
<b>HEAT EXCHANGER IN COOLING 1</b>																			
WATER FLOW	User Side l/s	16.27	18.64	21.27	23.20	27.27	29.60	31.51	33.40	36.16	40.40	43.90	47.88	50.72	54.17	57.73	62.68	65.62	
PRESSURE DROP 2	User Side kPa	26.5	34.8	27.7	32.9	41.4	34.1	38.6	43.4	36.3	40	47.2	61.2	48.7	53.2	59.2	39.7	43.5	
<b>ELECTRICAL DATA</b>																			
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	
FL.A. 4	Total A	236	272	301	301	377	420	448	475	475	531	587	638	688	732	776	776	858	
<b>EXCHANGERS</b>																			
MINIMUM WATER FLOW	Evaporator l/s	13.33	13.33	12.50	12.50	15.83	17.50	17.50	17.50	19.17	19.17	19.17	19.17	25.00	25.00	25.00	41.67	41.67	
MINIMUM WATER CONTENT	Plant l	1200	1400	1600	1700	2000	2200	2300	2400	2600	3000	3200	3500	3700	4000	4200	4600	4800	
<b>FANS</b>																			
QUANTITY	No.	6	8	8	8	10	10	11	12	12	13	14	15	16	17	18	18	20	
AIRFLOW	m3/s	31.90	42.53	42.53	42.53	53.17	53.17	58.48	63.80	63.80	69.12	74.43	79.75	85.07	90.38	95.70	95.70	106.33	
<b>REFRIGERANT CIRCUIT</b>																			
COMPRESSORS	No.	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
CIRCUITS	No.	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
<b>THEORETICAL REFRIGERANT CHARGE 5</b>																			
NOISE LEVELS	kg	65	76	86	94	109	117	126	134	143	160	173	188	200	213	227	244	258	
<b>NOISE LEVELS</b>																			
TOTAL SOUND PRESSURE 6	dB(A)	66	67	67	67	67	67	68	68	68	68	69	69	70	70	70	70	71	
TOTAL SOUND POWER LEVEL IN COOLING 7	dB(A)	98	99	99	99	100	100	101	101	101	101	102	102	103	103	103	103	104	
<b>SIZE AND WEIGHT 8</b>																			
WIDTH	mm	4000	5250	5250	5250	6500	6500	7750	7750	7750	9000	9000	10250	10250	11650	11650	11650	12900	
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	
HEIGHT	mm	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	
OPERATION WEIGHT	kg	3660	4270	4390	4440	5660	5960	6420	6550	6640	7530	8060	8570	8920	9430	9550	10490	11150	

# FX2-G04 R1234ze Air Cooled Chiller

(255 to 1,561kW)

High Efficiency Version (/A)



#### Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
5. Theoretical - refer to serial plate for actual charge volumes.
6. Average sound pressure level at 10m distance; unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
7. Sound power on the basis of measurement taken in compliance with ISO 9614. Sound power level in cooling, outdoors.
8. Unit in standard configuration, without option accessories.

 Eurovent Certified Data

The new generation of customisable screw compressor chillers has arrived with Mitsubishi Electric's range of **FX2-G04** air cooled chillers. The second generation of this chiller family marks considerable developments in seasonal efficiency, footprint, noise, operating envelope and configuration and customisation.

## Key Features & Benefits

- High efficiency screw compressors using ultra-low GWP refrigerant
- Wide operating envelope for comfort and process applications
- EC Fans available as an option
- Exceptionally compact design

# R1234ze

MODEL		0252	0302	0322	0352	0402	0452	0512	0572	0652	0772	0902	0972	1052	1152	1243	1373	1503	1593
PERFORMANCE - COOLING ONLY 1																			
TOTAL COOLING CAPACITY	kW	255.3	289.9	315.1	365.0	405.4	445.9	519.7	573.4	679.0	781.7	903.5	967.9	1058	1145	1239	1362	1488	1561
TOTAL POWER INPUT	kW	76.0	87.3	94.4	106.7	121.7	135.2	156.8	172.2	204.8	235.6	276.0	287.2	319.7	343.6	373.1	415.8	446.3	473.4
EER	kW/kW	3.35	3.32	3.33	3.42	3.33	3.29	3.31	3.33	3.31	3.31	3.27	3.37	3.30	3.33	3.32	3.27	3.33	3.29
EN14511 VALUES 1,2																			
TOTAL COOLING CAPACITY	kW	255.0	289.5	314.7	364.7	405.0	445.4	519.2	572.9	678.4	781.0	902.9	967.1	1057	1145	1238	1361	1487	1560
EER	kW/kW	3.32	3.28	3.31	3.39	3.29	3.25	3.28	3.29	3.27	3.27	3.24	3.33	3.27	3.29	3.28	3.24	3.29	3.25
SEASONAL PERFORMANCE 3																			
PRATED,C	kW	255.0	289.5	314.7	364.7	405.0	445.4	519.2	572.9	678.4	781.0	902.9	967.1	1057	1145	1238	1361	1487	1560
SEER		4.55	4.52	4.61	4.54	4.56	4.61	4.56	4.61	4.60	4.63	4.61	4.64	4.65	4.69	4.63	4.58	4.67	4.69
PERFORMANCE ηs	%	179	178	181	178	179	181	179	182	181	182	181	183	183	185	182	180	184	185
HEAT EXCHANGER IN COOLING 1																			
WATER FLOW	User Side l/s	12.21	13.86	15.07	17.46	19.39	21.32	24.85	27.42	32.47	37.38	43.21	46.28	50.57	54.77	59.24	65.14	71.14	74.65
PRESSURE DROP 2	User Side kPa	38.1	36.3	23.9	32.1	39.7	48.0	34.3	41.8	51.5	54.3	35.3	52.5	48.4	53.3	46.9	46.2	55.1	60.7
ELECTRICAL DATA																			
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
FL.A. 4	Total A	185	215	226	248	286	323	371	393	444	548	609	648	731	768	853	914	964	1024
EXCHANGERS																			
MINIMUM WATER FLOW	Evaporator l/s	7.22	8.33	9.17	9.17	9.17	9.17	15.83	15.83	15.83	17.50	25.00	19.17	25.00	25.00	31.11	41.67	41.67	41.67
MINIMUM WATER CONTENT	Plant l	900	1000	1100	1300	1400	1600	1800	2000	2400	2700	3200	3400	3700	4000	4300	4800	5200	5500
FANS																			
QUANTITY	No.	5	5	5	6	6	7	8	8	10	12	12	14	16	16	18	18	19	20
AIRFLOW	m3/s	26.58	26.58	26.58	31.90	31.90	37.22	42.53	42.53	53.17	63.80	63.80	74.43	85.07	85.07	95.70	95.70	101.0	106.3
REFRIGERANT CIRCUIT																			
COMPRESSORS	No.	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3
CIRCUITS	No.	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3
THEORETICAL REFRIGERANT CHARGE 5																			
	kg	51	55	59	67	72	81	93	98	123	142	152	160	191	195	216	222	232	248
NOISE LEVELS																			
TOTAL SOUND PRESSURE 6	dB(A)	66	67	67	68	68	68	68	70	69	70	71	71	73	73	73	73	73	73
TOTAL SOUND POWER LEVEL IN COOLING 7	dB(A)	98	99	99	100	100	100	100	102	102	103	104	104	106	106	106	106	106	106
SIZE AND WEIGHT 8																			
WIDTH	mm	4000	4000	4000	4000	4000	5250	5250	5250	6500	7750	7750	9000	10400	10400	11650	11650	12900	12900
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2640
OPERATION WEIGHT	kg	3540	3560	3660	3810	4470	4990	5190	5250	6710	7650	7900	8340	9370	9440	11380	12070	12680	12930

# Commercial Heat Pumps & Chillers Accessories / Optional Extras

DESCRIPTION	MODEL REF.
<b>e-Series</b>	
Fin Guard for EACV-M / EAHV-M	EC-130FG
<b>Ecodan CAHV</b>	
Main Pipework Thermistor	TW-TH16
Differential Pressure Switch for Water Systems	KS10-EP201S
Wired Remote Controller	PAR-W31MAA
Centralised Controller	AE-C400E
<b>Ecodan QAHV</b>	
Main Pipework Thermistor	TW-TH16
Centralised Controller	AE-C400E
Secondary Side Control Circuit Kit	Q-1SCK

# IT Cooling

Close Control Computer Room  
Air Conditioning Systems





# Contents

<b>MSY-TP</b> R32 High SHF Wall Mounted System, Inverter (Cooling Only)	<b>2.6</b>
<b>s-MEXT DX</b> R32 Computer Room Air Conditioner (CRAC)	<b>2.7</b>
<b>x-MEXT DX</b> R410A Computer Room Air Conditioner (CRAC)	<b>2.8</b>
<b>w-MEXT</b> Chilled Water Computer Room Air Handler (CRAH)	<b>2.9</b>
<b>w-NEXT</b> Chilled Water Computer Room Air Handler (CRAH)	<b>2.10</b>
<b>w-MEXT-XL</b> Extra Large Computer Room Air Handler (CRAH)	<b>2.11</b>
<b>MEWALL</b> Data Centre Fan Wall	<b>2.12</b>
<b>m-MRAC / m-MROW</b> R410A Multi Density Close Coupled Control System	<b>2.13</b>
<b>NR2-FC-G06-Z</b> R454B Free-Cooling Chiller	<b>2.14</b>
<b>TR2-FC-G04-Z</b> R1234ze Free-Cooling Chiller	<b>2.15</b>
<b>Accessories / Optional Extras</b>	<b>2.16</b>

# Computer Room Air Conditioning Systems

## Precise Temperature and Humidity Control

More and more businesses are opting to store their data on-site in enterprise data centres, and in the past standard wall mounted split systems may have been an option to cool this type of application.

However, complex IT environments are often characterised by variable cooling loads, which require a high cooling capacity at full load in order to allow the IT equipment to operate correctly when it is most needed.

## The perfect match between efficiency and reliability

The need for high sensible cooling and control of both temperature and humidity in critical IT environments has therefore never been higher, and this is where our new range of specialist IT cooling systems makes it possible to keep temperature and humidity constant, even with very wide load variations, ensuring the correct room conditions all year round.


With our IT cooling systems, both efficiency and reliability are paramount throughout all the stages of research, design and manufacturing. By using this approach, along with over 50 years of manufacturing experience within the IT cooling sector, we are able to offer tailor made IT cooling solutions that have been designed to fulfil this requirement, reducing operational costs in the process through the use of highly efficient technology.



### Mitsubishi Electric Perimeter Cooling Units

Mitsubishi Electric's systems are specifically designed for rooms with a high sensible cooling load that require precise temperature and humidity control. Because of the need for 24 hours a day, 365 days a year operation, high quality components are used and designed to maximise the energy efficiency of the system. Features include:

- Direct Expansion or chilled water versions
- Precise temperature and humidity control
- High Sensible cooling
- Easily integrates into existing and new control networks
- Back-up and rotate functions
- Inverter driven capacity control
- New generation EC PUL (Polymeric Ultralight) high efficiency fans
- Free cooling
- Dual fluid circuits available for the highest reliability

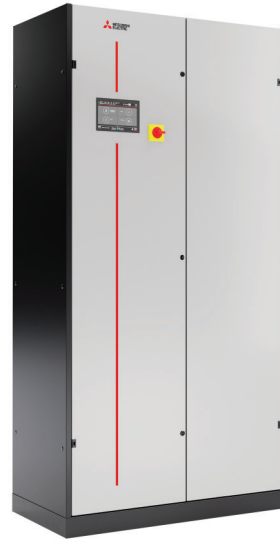

### Designing the Optimum IT Cooling System

Two factors need to be taken into account when designing the perfect system for IT cooling: density and capacity. Mitsubishi Electric's wide range of products allows you to choose the correct balance of these factors, in order to meet your individual application requirements.

Mitsubishi Electric's range of dedicated IT cooling equipment includes DX systems specifically designed for IT applications, and for those who are familiar with the benefits and installation processes of our existing Mitsubishi Electric HVAC outdoor units. This opens up new opportunities for the application of DX systems in critical IT environments.



# MSY-TP

## R32 High SHF Wall Mounted System

### Inverter (Cooling Only)



The M Series **MSY-TP** R32 High SHF wall mounted system blends energy efficiency with a modern design. This cooling only unit has a high sensible cooling capacity, making it ideal for small computer rooms and areas that require a greater degree of sensible cooling. The MSY-TP also utilises lower GWP R32 refrigerant.

### Key Features & Benefits

- Compact and stylish white design
- High sensible cooling ability
- Weekly timer provides greater control of scheduling
- Cooling down to -25°C outdoor air temperature

# R32

MSY-TP - INDOOR UNITS		MSY-TP35VF2	MSY-TP50VF2
CAPACITY (kW)	Cooling (nominal)	3.5 (1.5-4.0)	5.0 (1.5-5.7)
	Cooling (UK)	3.47 (1.48-3.96)	4.96 (1.48-5.65)
SHF (nominal)		0.98	0.82
EER (nominal)		4.61	3.45
SEER (BS EN14825)		9.00	8.00
ErP ENERGY EFFICIENCY CLASS	Cooling	A+++	A++
AIRFLOW (l/s)	Cooling - Lo-Mi-Hi-SHi	168-193-228-273	168-193-228-275
PIPE SIZE mm (in)	Gas	9.52 (3/8")	9.52 (3/8")
	Liquid	6.35 (1/4")	6.35 (1/4")
SOUND PRESSURE LEVEL (dBA)	Cooling - Lo-Mi-Hi-SHi	31-36-40-45	31-36-40-45
SOUND POWER LEVEL (dBA)		60	60
DIMENSIONS (mm)	Width x Depth x Height	923 x 250 x 305	923 x 250 x 305
WEIGHT (kg)		12.1	12.1
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz
FUSE RATING (BS88) - HRC (A)		10	10
INTERCONNECTING CABLE No. CORES		4	4

MUY-TP - OUTDOOR UNITS		MUY-TP35VF2	MUY-TP50VF2
SOUND PRESSURE LEVEL (dBA)	Cooling	45	47
SOUND POWER LEVEL (dBA)	Cooling	58	61
WEIGHT (kg)		32.5	32.5
DIMENSIONS (mm)	Width x Depth x Height	800 x 285 x 550	800 x 285 x 550
ELECTRICAL SUPPLY		Fed by Indoor Unit	Fed by Indoor Unit
PHASE		Single	Single
SYSTEM POWER INPUT (kW)	Cooling (nominal)	0.76	1.45
	Cooling (UK)	0.64	1.12
STARTING CURRENT (A)		3.6	6.4
SYSTEM RUNNING CURRENT (A)	Cooling [MAX]	3.6 [9.6]	6.4 [9.6]
FUSE RATING (BS88) - HRC (A)		10	10
MAINS CABLE No. CORES		3	3
MAX PIPE LENGTH (m)		20	20
MAX HEIGHT DIFFERENCE (m)		12	12
CHARGE REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) - R32 (GWP 675) - 7m		0.85 / 0.57	0.85 / 0.57
MAX ADDITIONAL REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) - R32 (GWP 675)		0.13 / 0.09	0.13 / 0.09

Notes: The SHF figures are based on nominal conditions. Requires an additional MAC-334IF-E interface and PAR-42MAAB wired remote controller

# s-MEXT DX

## R32 Computer Room Air Conditioner (CRAC)

### Key Features & Benefits

- High efficiency achieved through Mr Slim Power Inverter technology
- EC plug fans fitted as standard
- Pipe runs up to 100m
- Full function - Humidifier & Heater options
- Available in Upflow [over] and Downflow [under] variants



Notes:  
 The cooling capacity does not consider the supply fan motor thermal load.  
 1. Gross value based on return air of 27°C - 47%RH; Ambient Temperature 35°C; ESP=20Pa; Interconnecting pipework length 5m.  
 2. SHR = Sensible Cooling Capacity / Total Cooling Capacity.  
 3. EER = Energy Efficiency Ratio.  
 4. Rubber pipe - referred to internal diameter.  
 5. Minimum section.  
 6. External Static Pressure.  
 7. Corresponding to the nominal ESP=20Pa.  
 8. As per ISO 3744. Sound pressure level on air return at 1m.  
 9. All data refers to a single outdoor unit / circuit.  
 10. In one direction.  
 11. Additional refrigerant required for pipework separation greater than the standard.  
 12. Average sound pressure level, at 1m distance, unit in a free field on a reflective surface according to ISO3744. Non-binding value obtained from the sound power level.

Ideal for smaller IT Cooling environments, the s-MEXT system combines a high quality indoor CRAC with Mitsubishi Electric's Mr Slim Power Inverter condensing unit to create an efficient and precision Direct Expansion (DX) Split System for server rooms, UPS rooms and Mechanical and Technical rooms (MERs & TERs).



CRAC UNITS (Computer Room Air Conditioning)			s-MEXT-G00-DX-F1-006-S	s-MEXT-G00-DX-F1-009-S	s-MEXT-G00-DX-F1-009-S	s-MEXT-G00-DX-F1-013-S	s-MEXT-G00-DX-F1-013-S	s-MEXT-G00-DX-F2-022-S	s-MEXT-G00-DX-F3-028-S	s-MEXT-G00-DX-F3-038-D	s-MEXT-G00-DX-F3-044-D
<b>PERFORMANCE</b>											
COOLING CAPACITY <sup>1</sup>	Total	kW	6.8	10.1	10.1	11.9	11.9	22.6	28.0	39.0	42.5
	Sensible	kW	6.2	8.9	8.9	10.2	10.2	19.3	26.2	33.6	35.3
SHR <sup>2</sup>			0.91	0.88	0.88	0.86	0.86	0.85	0.94	0.86	0.83
SYSTEM EER <sup>3</sup>	Nominal	kW/kW	4.67	4.30	4.30	3.49	3.49	3.18	2.68	3.58	2.88
<b>REFRIGERANT</b>											
TYPE			R32	R32	R32	R32	R32	R32	R32	R32	R32
NUMBER OF CIRCUITS	No.		1	1	1	1	1	1	1	2	2
<b>CONNECTIONS</b>											
REFRIGERANT PIPE	Gas	Ø Inch	5/8"	5/8"	5/8"	5/8"	5/8"	1"	1"	1"	1"
	Liquid	Ø Inch	3/8"	3/8"	3/8"	3/8"	3/8"	1/2"	1/2"	3/8"	1/2"
CONDENSATE <sup>4</sup>		Ø mm	19	19	19	19	19	19	19	19	19
POWER SUPPLY CABLE <sup>5</sup>	No. x mm <sup>2</sup>		3G1.5	3G1.5	3G1.5	3G1.5	3G1.5	3G1.5	5G1.5	5G1.5	5G1.5
<b>ELECTRICAL DATA</b>											
POWER SUPPLY	V/ph/Hz		230/1/50	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50	400/3+N/50	400/3+N/50	400/3+N/50
STARTING CURRENT (SA)	A		2	2	2	2.8	2.8	3.3	3.8	3.8	3.8
MAX ABSORBED CURRENT (FLA)	A		27.8	27.8	27.8	27.6	27.6	35.9	28.8	28.8	28.8
<b>FANS (EC)</b>											
QUANTITY	No.		1	1	1	1	1	2	1	1	1
AIRFLOW	m <sup>3</sup> /h		2000	2500	2500	2800	2800	5000	7600	8800	10000
NOMINAL ESP <sup>6</sup>	Pa		20	20	20	20	20	20	20	20	20
POWER INPUT <sup>7</sup>	kW		0.21	0.35	0.35	0.47	0.47	0.70	0.64	1.43	1.96
<b>ELECTRICAL HEATERS</b>											
STEPS	No.		2	2	2	2	2	3	3	3	3
POWER INPUT	kW		2.6	2.6	2.6	2.6	2.6	3.9	9.0	9.0	9.0
<b>HUMIDIFIER</b>											
CAPACITY	kg/h		3.0	3.0	3.0	3.0	3.0	3.0	8.0	8.0	8.0
POWER INPUT	kW		2.3	2.3	2.3	2.3	2.3	2.3	6.0	6.0	6.0
<b>SOUND<sup>8</sup></b>											
SOUND PRESSURE LEVEL	dB(A)		53	57	57	61	61	60	60	63	67
SOUND POWER LEVEL	dB(A)		69	73	73	77	77	76	76	79	83
<b>FILTERS</b>											
EFFICIENCY CLASS	ISO EN16890	COARSE	60%	60%	60%	60%	60%	60%	60%	60%	60%
<b>SIZE AND WEIGHT</b>											
FRAME SIZE			F1	F1	F1	F1	F1	F2	F3	F3	F3
WIDTH	mm		600	600	600	600	600	1000	1000	1000	1000
DEPTH	mm		500	500	500	500	500	500	890	890	890
HEIGHT	mm		1980	1980	1980	1980	1980	1980	1980	1980	1980
NET WEIGHT	Upflow (O)	kg	103	106	106	110	110	165	237	237	237
	Downflow (U)	kg	110	115	115	120	120	175	247	247	247

OUTDOOR UNITS <sup>9</sup>		PUZ-ZM60VHA3	PUZ-ZM100VDA2	PUZ-ZM100YDA2	PUZ-ZM125VDA2	PUZ-ZM125YDA2	PUZ-ZM250YKA3	PUZ-ZM250YKA3	PUZ-ZM200YKA3	PUZ-ZM250YKA3
QUANTITY OF OUTDOOR UNITS		1	1	1	1	1	1	1	2	2
<b>INSTALLATION</b>										
PIPEWORK SEPARATION <sup>10</sup>	Standard	30	40	40	40	40	30	30	30	30
	Max <sup>11</sup>	55	100	100	100	100	100	100	100	100
<b>ELECTRICAL DATA</b>										
POWER SUPPLY	V/ph/Hz	230/1/50	230/1/50	400/3+N/50	230/1/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50
POWER INPUT	Nominal	kW	1.25	2	2.94	2.94	6.41	9.67	4.73	6.41
MAX OPERATING CURRENT	A		19.0	27.2	8.7	27.2	9.7	22.5	22.5	22.5
POWER SUPPLY CABLE	No. x mm <sup>2</sup>		3G4	3G4	5G1.5	3G4	5G1.5	5G6	5G6	5G6
<b>SOUND</b>										
SOUND PRESSURE LEVEL <sup>12</sup>		53	44	44	50	50	62	62	62	62
SOUND POWER LEVEL		67	63	63	70	70	77	77	77	77
<b>SIZE AND WEIGHT</b>										
WIDTH	mm	950	1110	1110	1050	1050	1050	1050	1050	1050
DEPTH	mm	355	505	505	370	370	370	370	370	370
HEIGHT	mm	943	870	870	1338	1338	1338	1338	1338	1338
WEIGHT	kg	70	107	114	116	125	135	135	137	135

# x-MEXT DX

## R410A Computer Room Air Conditioner (CRAC)



The **x-MEXT DX** is a highly efficient computer room air conditioner (CRAC), incorporating a wide range of options and configurations, and manufactured to the highest Mitsubishi Electric quality and reliability standards. The x-MEXT includes BLDC Mitsubishi Electric compressors, microchannel heat exchanger options, and an EC fan on the indoor unit with an impeller made of recycled plastic, that is specifically design for the x-MEXT range.

### Key Features & Benefits

- Perimeter unit with upflow (over) and downflow (under) configurations
- Full inverter technology with BLDC Mitsubishi Electric compressors and a proprietary fan design
- Excellent efficiency with load matching control
- Advanced in-house developed control software
- Intelligent LAN controls for up to 15 units
- Interface cards available with many common BEMS protocols
- Automatic transfer switches and fast restart options
- Optional low ambient temperature kit for extreme conditions
- Full function humidifier and heating options
- Optional dampers, floor stands and discharge plenums

# R410A

CRAC UNITS (Computer Room Air Conditioning)		x-MEXT-i-G02 -DX-U/O-029	x-MEXT-i-G02 -DX-U/O-040	x-MEXT-i-G02 -DX-U/O-051	x-MEXT-i-G02 -DX-U/O-052	x-MEXT-i-G02 -DX-U/O-067	x-MEXT-i-G02 -DX-U/O-076	x-MEXT-i-G02 -DX-U/O-078	x-MEXT-i-G02 -DX-U/O-090	x-MEXT-i-G02 -DX-U/O-108	x-MEXT-i-G02 -DX-U/O-140	
<b>PERFORMANCE - WITH CONDENSERS LISTED</b>												
COOLING CAPACITY*1	Total	kW	27.7	38.8	49.5	50.4	63.9	74.4	75.9	87.6	104.0	132.0
SHR	Nominal		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
EER*2	Nominal		3.45	3.32	2.93	3.55	3.15	3.14	3.63	3.38	3.12	2.61
<b>FANS</b>												
AIRFLOW		m <sup>3</sup> /h	8,000	10,500	11,000	14,750	17,000	17,000	21,500	22,500	25,500	27,000
FAN TYPE			Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC
FANS	No.		1	1	1	2	2	2	2	2	3	3
POWER INPUT	kW		0.80	1.61	1.85	2.16	3.20	3.22	3.21	3.66	5.15	6.24
MAX EXTERNAL STATIC PRESSURE	Pa		364	299	243	237	173	169	300	245	141	84
<b>REFRIGERANT</b>												
REFRIGERANT			R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A
REFRIGERANT CIRCUITS	No.		1	1	1	1	1	1	2	2	2	2
COMPRESSOR(S) TYPE	Operating Mode		i	i	i	i	1 + i	1 + i	2(i)	2(i)	2(1 + i)	2(1 + i)
<b>FILTERS</b>												
FILTERS	No.		2	2	2	3	3	3	4	4	4	4
EFFICIENCY CLASS*3	Coarse		60%	60%	60%	60%	60%	60%	60%	60%	60%	60%
<b>SOUND LEVEL</b>												
PRESSURE LEVEL*4	Downflow [under] / Upflow [over]	dB(A)	50 / 69	47 / 65	47 / 64	48 / 66	47 / 65	47 / 64	49 / 68	49 / 67	50 / 69	52 / 69
POWER LEVEL	Downflow [under] / Upflow [over]	dB(A)	67 / 86	64 / 82	64 / 81	65 / 83	64 / 82	64 / 81	67 / 86	67 / 85	68 / 87	70 / 87
<b>ELECTRICAL</b>												
POWER SUPPLY	V/ph/Hz		400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50
MAX RUNNING CURRENT	FLA	A	30.6	41.5	41.5	47	57.4	57.4	82	82	108	108
<b>DIMENSIONS AND WEIGHT</b>												
FRAME SIZE			M	M	M	L	L	L	XL	XL	XL	XL
DIMENSIONS	Width	mm	1,142	1,142	1,142	1,600	1,600	1,600	2,550	2,550	2,550	2,550
	Depth	mm	885	885	885	885	885	885	885	885	885	885
	Height	mm	1,980	1,980	1,980	1,980	1,980	1,980	1,980	1,980	1,980	1,980
NET WEIGHT	Upflow [over]	kg	363	372	375	459	502	503	799	806	915	916
	Downflow [under]	kg	372	380	383	477	520	521	839	846	955	957
<b>CONNECTIONS*5</b>												
REFRIGERANT PIPE DIAMETER	Gas	Ø mm	18	22	22	22	28	28	2 x 22	2 x 22	2 x 28	2 x 28
	Liquid	Ø mm	16	18	18	18	18	18	2 x 18	2 x 18	2 x 18	2 x 18
CONDENSATE DRAIN*6		Ø mm	19	19	19	19	19	19	19	19	19	19

OUTDOOR REMOTE CONDENSER(S)*7		MEGR-MC-E 034	MEGR-MC-E 049	MEGR-MC-E 067	MEGR-MC-E 067	MEGR-MC-E 082	MEGR-MC-E 110	2 x MEGR- MC-E 049	2 x MEGR- MC-E 055	2 x MEGR- MC-E 067	2 x MEGR- MC-E 082	
FAN TYPE*8		Axial EC	Axial EC	Axial EC	Axial EC	Axial EC	Axial EC	Axial EC	Axial EC	Axial EC	Axial EC	
FANS	No.	1	2	2	2	3	4	2	2	2	3	
AIRFLOW		m <sup>3</sup> /h	9,550	15,555	19,000	19,000	25,000	36,600	15,555	18,300	19,000	25,000
POWER SUPPLY	V/ph/Hz		400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50	400 / 3 / 50
MAX RUNNING CURRENT	FLA	A	1.92	3.84	3.84	3.84	5.76	7.68	3.84	3.84	3.84	5.76
SOUND LEVEL*4	Pressure	dB(A)	56	54	58	58	59	59	54	57	58	59
DIMENSIONS*9	Width	mm	1,140	1,140	1,140	1,140	1,140	2,200	1,140	1,140	1,140	1,140
	Length	mm	1,360	2,040	2,600	2,600	2,600	2,280	2,040	2,040	2,600	2,600
	Height	mm	1,168	1,168	1,168	1,168	1,168	1,168	1,168	1,168	1,168	1,168
NET WEIGHT	kg	50	82	96	96	114	169	82	82	96	114	
CONNECTION SIZE*5	Gas	Ømm	18	22	22	22	28	28	22	22	28	
REFRIGERANT PIPE DIAMETER	Liquid	Ømm	16	18	18	18	22	22	18	18	18	

#### Notes:

- \*1 Gross Total Values shown for Downflow [under] airflow configuration. Operating Conditions:  
Return Air Temperature: 30°C / Relative Humidity: 35% / Ambient: 35°C / External Static Pressure: 20Pa
- \*2 EER for indoor unit only.
- \*3 As per ISO EN 16890. Other filter options are available.
- \*4 Average sound level, at 1m distance, unit in a free field on a reflective surface according to ISO3744.  
Non-binding value obtained from the sound power level.
- \*5 Equipment connection only; consult x-MEXT / MEGR databooks for interconnecting pipework sizing.
- \*6 Rubber pipe - refers to internal diameter.
- \*7 All data is "per condenser". Typical condenser arrangement shown, other condenser sizing combinations are available.
- \*8 Other type of fans are available.
- \*9 Based on vertical airflow direction.
- These units contain <HFC R410A [GWP<sub>100</sub> 2088]> fluorinated greenhouse gas.

# w-MEXT

## Chilled Water Computer Room Air Handler (CRAH)



The **w-MEXT** chilled water range incorporates the latest EC Plug fans, advanced controls software and maximises the coil area to bring high efficiency and high SHR performance to smaller data centre and server room environments.

Group controls and smart control strategies are not reserved for larger environments: w-MEXT can operate with intelligent integrated LAN functions for active redundancy and also integrate with the Hydronic Plant Connect (HPC) group control system, bringing harmony between the CRAHs and Chillers.

Additional options for electric heating and humidification further extend control and operational functionality.

### Key Features & Benefits

- Compact footprint with Under, Over and Displacement airflows
- Adaptive set-point
- High efficiency EC plug fans
- LAN controls for up to 15 units
- Variety of valve options

CRAH UNITS (Computer Room Air Handler)			w-MEXT U/O 006 F1	w-MEXT U/O 009 F1	w-MEXT U/O 011 F1	w-MEXT U/O 013 F1	w-MEXT U/O 016 F2	w-MEXT U/O 022 F2	w-MEXT U/O 026 F2
<b>PERFORMANCE</b>									
COOLING CAPACITY*1	Total	kW	4.6	7.9	9.7	12.5	15.4	20.4	25.6
SHR	Nominal		1.00	1.00	1.00	1.00	1.00	1.00	1.00
EER*2	Nominal		65.3	37.6	30.2	27.8	38.5	30.0	26.9
<b>FANS</b>									
AIRFLOW		m³/h	1,500	2,200	2,500	2,700	4,300	5,000	5,400
FAN TYPE			Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC	Centrifugal EC
FANS	No.		1	1	1	1	2	2	2
POWER INPUT		kW	0.07	0.21	0.32	0.45	0.40	0.68	0.95
MAX EXTERNAL STATIC PRESSURE		Pa	201	471	384	276	277	370	254
<b>WATER CIRCUIT</b>									
FLOW RATE		l/s	0.22	0.38	0.46	0.60	0.74	0.97	1.22
PRESSURE DROP*3		kPa	23.5	61.1	32.2	55.7	46.5	80.2	108
<b>FILTERS</b>									
FILTERS	No.		1	1	1	1	2	2	2
EFFICIENCY CLASS*4	Coarse		60%	60%	60%	60%	60%	60%	60%
<b>SOUND LEVEL</b>									
PRESSURE LEVEL*5		dB(A)	43	56	58	60	53	60	62
POWER LEVEL*5		dB(A)	59	72	74	76	69	76	78
<b>ELECTRICAL</b>									
POWER SUPPLY		V/ph/Hz	230 / 1 / 50	230 / 1 / 50	230 / 1 / 50	230 / 1 / 50	230 / 1 / 50	230 / 1 / 50	230 / 1 / 50
MAX RUNNING CURRENT*6	FLA	A	3.6	4.0	4.0	4.0	7.2	8.0	8.0
<b>ELECTRIC HEATER (optional)</b>									
STEPS	No.		2	2	2	2	3	3	3
CAPACITY		kW	2.6	2.6	2.6	2.6	3.9	3.9	3.9
MAX RUNNING CURRENT*7	FLA	A	11.3	11.3	11.3	11.3	16.9	16.9	16.9
<b>HUMIDIFIER (optional)</b>									
QUANTITY	No.		1	1	1	1	1	1	1
CAPACITY		kg/h	3.0	3.0	3.0	3.0	3.0	3.0	3.0
MAX RUNNING CURRENT*8	FLA	A	14.1	14.1	14.1	14.1	14.1	14.1	14.1
<b>DIMENSIONS AND WEIGHT</b>									
<b>FRAME SIZE</b>			F1	F1	F1	F1	F2	F2	F2
DIMENSIONS	Width	mm	600	600	600	600	1,000	1,000	1,000
	Depth	mm	500	500	500	500	500	500	500
	Height	mm	1,980	1,980	1,980	1,980	1,980	1,980	1,980
NET WEIGHT	Upflow [over]	kg	103	109	116	120	163	173	181
	Downflow [under]	kg	110	118	126	130	173	183	191
<b>CONNECTIONS</b>									
WATER*9	Inlet	Ø inch	3/4"	3/4"	3/4"	1"	1 1/4"	1 1/4"	1 1/4"
	Outlet	Ø inch	3/4"	3/4"	3/4"	1"	1 1/4"	1 1/4"	1 1/4"
CONDENSATE DRAIN*10		Ø mm	19	19	19	19	19	19	19

**Notes:**

- \*1: Gross total values shown. Operating conditions: Return Air Temperature: 26°C / Relative Humidity: 40% / Water Inlet: 10°C / Water ΔT: 5K / Glycol: 0% / External Static Pressure: 20Pa.
- \*2: EER for indoor unit only.
- \*3: For heat exchanger coil and 2-port valve only.
- \*4: As per ISO EN 16890. Other filter options are available.
- \*5: Average sound level, at 1m distance, unit in a free field on a reflective surface according to ISO 3744. Values for downflow [under] and upflow [over] only.
- \*6: Cooling only version. Humidifier / electrical heating options will change value. Refer to databook.
- \*7: For electric heater only.
- \*8: For humidifier only.
- \*9: As per ISO 228/1-G.
- \*10: Rubber pipe - refers to internal diameter.

# w-NEXT

## Chilled Water Computer Room Air Handler (CRAH)



High precision air conditioners are ideal for applications where high sensible cooling and control of temperature and humidity are required. The **w-NEXT** chilled water range incorporates the latest EC plug fan(s), advanced controls software and an increased coil area resulting in the highest efficiency.

### Key Features & Benefits

- High Efficiency - EC plug fans
- Small footprint
- Adaptive Set Point
- Active Redundancy
- Available in Upflow [over] and Downflow [under] variants

CRAH UNITS (Computer Room Air Handler)		w-NEXT S 045 E3P	w-NEXT S 053 E4	w-NEXT S 072 E5	w-NEXT S 081 E6
CAPACITY (kW) <sup>*2</sup>	Total	41.0	48.1	66.1	73.5
	Sensible	41.0	48.1	66.1	73.5
SHR <sup>*3</sup>		1.00	1.00	1.00	1.00
EER		18.6	22.4	22.8	21.2
EC SUPPLY FAN(S)	No.	1	1	2	2
AIRFLOW (m³/h)		10,800	13,100	16,350	20,000
EXTERNAL STATIC PRESSURE (Pa)		20	20	20	20
MAX EXTERNAL STATIC PRESSURE (Pa)		297	194	532	458
POWER INPUT (kW) <sup>*4</sup>		2.20	2.15	2.90	3.47
AIR FILTERS	No.	2	3	3	4
	Extended filtering surface (m²)	1.71	2.07	2.59	3.16
	Efficiency [ISO EN 16890] (COARSE)	60%	60%	60%	60%
CHILLED WATER FLOW RATE (l/s)		1.96	2.30	3.16	3.51
WATERSIDE PRESSURE DROP (kPa)	Coil + 2-Port Valve	34.1	37.3	42.9	35.6
SOUND LEVEL dB(A) (ISO3774) <sup>*5</sup>	Downflow - Power / Pressure	73 / 57	74 / 57	73 / 56	75 / 58
	Upflow - Power / Pressure	77 / 61	78 / 61	77 / 60	79 / 62
POWER SUPPLY (V/Ph/Hz)		400 / 3+N / 50	400 / 3+N / 50	400 / 3+N / 50	400 / 3+N / 50
MAX POWER ABSORBED (kW)		2.90	2.70	5.40	5.80
MAX RUNNING CURRENT (A)		4.4	4.2	8.4	8.9
DIMENSIONS (mm)	Width	1085	1305	1630	1875
	Depth	930	930	930	930
	Height	1925	1980	1980	1980
	NET WEIGHT (kg)	321	345	470	531
CONNECTIONS	Water Inlet / Outlet ISO 7/1 (Ø inch)	1 1/4"	1 1/2"	2"	2"
	Condensate (Ømm) <sup>*6</sup>	19	19	19	19

CRAH UNITS (Computer Room Air Handler)		w-NEXT S 100 E7	w-NEXT S 120 E8	w-NEXT S 138 E9	w-NEXT S 160 E10 <sup>*1</sup>	w-NEXT S 215 E10 <sup>*1</sup>
CAPACITY (kW) <sup>*2</sup>	Total	91.6	111.0	126.0	147.0	204.0
	Sensible	91.6	111.0	126.0	147.0	177.0
SHR <sup>*3</sup>		1.00	1.00	1.00	1.00	0.87
EER		23.0	17.8	19.6	22.8	31.7
EC SUPPLY FAN(S)	No.	2	3	3	3	3
AIRFLOW (m³/h)		24,200	28,300	33,100	37,150	37,150
EXTERNAL STATIC PRESSURE (Pa)		20	20	20	20	20
MAX EXTERNAL STATIC PRESSURE (Pa)		247	237	309	207	207
POWER INPUT (kW) <sup>*4</sup>		3.98	6.22	6.42	6.44	6.44
AIR FILTERS	No.	4	5	6	6	6
	Extended filtering surface (m²)	3.83	4.47	5.24	6.54	6.54
	Efficiency [ISO EN 16890] (COARSE)	60%	60%	60%	60%	60%
CHILLED WATER FLOW RATE (l/s)		4.38	5.33	6.04	7.03	9.74
WATERSIDE PRESSURE DROP (kPa)	Coil + 2-Port Valve	31.7	48.6	47	66.7	62.2
SOUND LEVEL dB(A) (ISO3774) <sup>*5</sup>	Downflow - Power / Pressure	76 / 59	79 / 61	80 / 62	79 / 61	79 / 61
	Upflow - Power / Pressure	80 / 63	83 / 65	81 / 63	N/A	N/A
POWER SUPPLY (V/Ph/Hz)		400 / 3+N / 50	400 / 3+N / 50	400 / 3+N / 50	400 / 3+N / 50	400 / 3+N / 50
MAX POWER ABSORBED (kW)		5.40	8.10	8.70	8.10	8.10
MAX RUNNING CURRENT (A)		8.3	12.6	13.3	12.5	12.5
DIMENSIONS (mm)	Width	2175	2499	2699	3510	3510
	Depth	930	930	930	930	930
	Height	1980	1980	1980	1980	1980
	NET WEIGHT (kg)	589	660	753	900	970
CONNECTIONS	Water Inlet / Outlet ISO 7/1 (Ø inch)	2 1/2"	2 1/2"	3"	3"	3"
	Condensate (Ømm) <sup>*6</sup>	19	19	19	19	19

THE COOLING CAPACITY DOES NOT CONSIDER THE SUPPLY FAN MOTOR THERMAL LOAD

<sup>\*1</sup> Downflow version only.

<sup>\*2</sup> Gross value based on return air at 24°C - 45%RH; Chiller water 7°C / 12°C.

<sup>\*3</sup> SHR = Sensible cooling capacity / Total cooling capacity.

<sup>\*4</sup> Fan(s) input power (ESP=20Pa).

<sup>\*5</sup> Average level at 1m from unit in free field conditions.

<sup>\*6</sup> Rubber pipe - refers to internal diameter.

# w-MEXT-XL

## Extra Large Computer Room Air Handler (CRAH)



Mitsubishi Electric's **w-MEXT-XL** is a purpose built, extra large CRAH, specifically designed to meet the needs of large colocation and hyperscale data centers.

With a capacity ranging from 193kW to 336kW, in four module sizes, the w-MEXT-XL is available in three performance versions with a perfectly matched heat exchanger designed for 10K, 12K and 15K Delta T conditions, giving it the best in class efficiency. Additionally the w-MEXT-XL can be used with downflow or rear-flow configurations with options for hydraulic connections (version dependent).

An array of high quality industry leading options are available to the w-MEXT-XL including; harmonic filters for EC fans to provide a guaranteed THDi < 5%, fast restart using inbuilt Ultracap with new embedded logic for ultra-quick cooling restoration, EPIV valves with advanced monitoring and Automatic Transfer Switch (ATS) to automatically switch to an alternative power supply and more.

### Key Features & Benefits

- Design purposefully for meeting hyperscale and large colocation datacenters needs
- Exceptional performance with best in class efficiency
- Uniquely versatile with flexible hydraulic connections, multiple air delivery versions and a range of sizes
- Options for high quality EC fans fitted with harmonic filters for THDi < 5%
- Available with an extensive array of accessories such as Fast Restart and EPIV Valves
- Designed for effortless maintenance with frontal access to all components, easy filter changes and sliding EC fans

CRAH UNITS (Computer Room Air Handler)	R 150			R 200			R 250			R 300				
WORKING CONDITIONS	MDT	HDT	SHDT	MDT	HDT	SHDT	MDT	HDT	SHDT	MDT	HDT	SHDT		
<b>PERFORMANCE</b>														
COOLING CAPACITY	Total	kW	199	198	224	220	221	262	297	281	324	303	302	336
SHR <sup>1</sup>	Nominal		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
EER	Nominal		18.5	18.3	20.6	22.1	21.5	25.9	20.6	19.6	22.8	21.7	21.5	23.9
<b>FANS</b>														
AIRFLOW		m <sup>3</sup> /h	49,500	48,800	48,800	52,700	52,500	51,700	66,000	65,500	65,000	66,500	65,700	66,000
FAN TYPE			EC Radial	EC Radial	EC Radial	EC Radial	EC Radial	EC Radial	EC Radial	EC Radial	EC Radial	EC Radial	EC Radial	EC Radial
FANS	No.		3	3	3	3	3	3	4	4	4	4	4	4
POWER INPUT		kW	10.80	10.80	10.80	9.97	10.30	10.10	14.40	14.40	14.20	14.00	14.10	14.10
MAX EXTERNAL STATIC PRESSURE		Pa	46	46	46	64	47	68	42	48	57	60	60	60
<b>WATER CIRCUIT</b>														
FLOW RATE		l/s	4.79	3.97	3.59	5.29	4.42	4.2	7.12	5.63	5.19	7.27	6.05	5.38
PRESSURE DROP		kPa	128	87.8	73.3	134	92.9	99.1	156	103	111	145	128	140
<b>FILTERS</b>														
FILTERS	No.		6	6	6	8	8	8	8	8	8	8	8	8
AVAILABLE STATIC PRESSURE		Pa	522	540	540	403	427	434	526	530	530	497	513	508
<b>NOISE DATA</b>														
TOTAL SOUND PRESSURE <sup>2</sup>		dB(A)	62	62	62	63	63	64	61	61	61	60	60	60
SOUND POWER		dB(A)	81	81	81	82	82	83	80	80	80	79	79	79
<b>ELECTRICAL</b>														
POWER SUPPLY		V/ph/Hz	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50	400/3+N/50
MAX RUNNING CURRENT <sup>3</sup>	FLA	A	18.9	18.9	18.9	18.9	18.9	18.9	25.2	25.2	25.2	25.2	25.2	25.2
<b>DIMENSIONS AND WEIGHT</b>														
FRAME SIZE			H7P	H7P	H7P	H8P	H8P	H8P	H9P	H9P	H9P	H10P	H10P	H10P
WIDTH		mm	2,550	2,550	2,550	3,000	3,000	3,000	3,400	3,400	3,400	3,400	3,400	3,400
DEPTH		mm	1,070	1,070	1,070	1,070	1,070	1,070	1,070	1,070	1,070	1,070	1,070	1,070
HEIGHT		mm	2,925	2,925	2,925	2,925	2,925	2,925	2,925	2,925	2,925	2,925	2,925	2,925
WEIGHT		kg	991	1,051	1,075	1,086	1,161	1,240	1,323	1,343	1,433	1,441	1,462	1,558

**Notes:**  
 MDT (Medium Delta T): Indoor conditions: Return air temperature 37°C - Relative humidity 25%. Chilled water: Inlet 20°C - Outlet 30°C - 0% Glycol.  
 HDT (High Delta T): Indoor conditions: Return air temperature 37°C - Relative humidity 25%. Chilled water: Inlet 20°C - Outlet 32°C - 0% Glycol.  
 SHDT (Super High Delta T): Indoor conditions: Return air temperature 40°C - Relative humidity 20%. Chilled water: Inlet 20°C - Outlet 35°C - 0% Glycol.

\*1: SHR = Sensible cooling capacity gross / Total cooling capacity gross.  
 \*2: Average sound pressure level, at 1m distance, unit in a free field on a reflective surface according to ISO3744. Non-binding value obtained from the sound power level.  
 \*3: The electric data indicated refer only to the standard indoor unit without accessories.  
 Data table shows rear-flow design. Downflow details and performance available on request.

# MEWALL

## Data Centre Fan Wall



Mitsubishi Electric's new and improved **MEWALL** brings performance and reliability at scale. It is ideal for hyperscale datacentres and large co-location customers, so that they can fully utilise their large building structures to deliver improved efficiencies and make every kW count.

By changing the airflow convention, the unit is designed for horizontal airflow at scale. This allows for taller heat exchangers, with elevated water temperatures, improving performance over conventional designs. It also allows for the separation of the white space from the technical corridor, simplifying security arrangements. Most importantly, this design eliminates the need for raised floors: simplifying building design, installation and reducing costs. Available in 2 sizes for 350kW to 400kW applications, it is available with a variety of options including an option to replace the side panels with filters to lower the airflow pressure drop and further improve on efficiency.

### Key Features & Benefits

- State of the art EC fans with high efficiency air intake grilles
- High quality, low pressure drop filters easily accessible from the front
- Improved performance with side filter version
- Eliminates the need for raised floors in your white space
- Highly efficient EC fan combined with efficient heat exchanger
- Operates at modern hyperscale conditions
- Easy to service - fully accessible from the front
- Advanced control and networking options
- Available with variety of options including a variety of hydronic control valves, harmonic filters, fast restarts, touchscreen display and more

MEWALL	402	462
FRAME	3B2	3H2
<b>PERFORMANCE **</b>		
COOLING CAPACITY	430	446
SENSIBLE HEAT RATIO (SHR)	1	1
ENERGY EFFICIENCY RATIO (EER) **	17.8	19.2
<b>FANS</b>		
FANS TYPE	EC RADIAL	EC RADIAL
QUANTITY	8	8
AIRFLOW	129,000	134,000
EXTERNAL STATIC PRESSURE (ESP)	50	50
FANS POWER INPUT	24.2	23.2
<b>CHILLED WATER CIRCUIT **</b>		
WATER FLOW	8.61	8.93
TOTAL PRESSURE DROP <sup>3</sup>	134	118
<b>FILTERS</b>		
QTY	1	1
<b>NOISE DATA</b>		
TOTAL SOUND POWER	88	88
TOTAL SOUND PRESSURE <sup>4</sup>	68	68
<b>ELECTRICAL</b>		
POWER SUPPLY	400 / 3+N / 50	400 / 3+N / 50
MAX ABSORBED CURRENT (FLA)	44.8	44.8
<b>DIMENSIONS AND WEIGHT</b>		
DIMENSIONS <sup>5</sup>		
Width	mm	3,600
Depth	mm	1,600
Height	mm	4,000
WEIGHT <sup>5</sup>	kg	2,460

#### Notes:

\*1: Gross Total Values Shown. Operating Conditions: Return Air Temperature: 37°C / Relative Humidity: 25% / Water Inlet: 20°C / Water Delta T: 12K / Glycol: 0%.

\*2: EER for indoor unit only.

\*3: Pressure drop includes heat exchanger and hydronic valve.

\*4: Average sound pressure level, at 1m distance, unit in a free field on a reflective surface according to ISO3744. Non-binding value obtained from the sound power level.

\*5: Unit in standard configuration, without optional accessories.

# m-MRAC / m-MROW

## R410A Multi Density Close Coupled Control System



Mitsubishi Electric's **Multi Density** systems combine the efficiency, quality and simplicity of VRF with high performance close coupled air conditioning units. Multi Density is ideal for applications where high sensible cooling and control of temperature in high density applications is required. This system consists of multiple indoor 'coolside' close coupled air conditioners connected to a City Multi VRF outdoor unit. The result is a full inverter multi-split system, designed according to the best quality standards and dedicated to the most reliable IT environments. The range is particularly suitable for high density racks and blade server cooling in data centres, as it is able to cope with the high density of the thermal load, putting the air conditioning unit directly within the rows of racks to cool the localised heat sources (hot spots).

### Key Features & Benefits

- High Efficiency - full Mitsubishi Electric inverter technology
- Small footprint
- Pipe runs up to 165m
- Trusted VRF technology

# R410A

CRAC UNITS (COMPUTER ROOM AIR CONDITIONING)		m-MRAC G02 009 / M-MROW G02 009	m-MRAC G02 015 / M-MROW G02 015	m-MRAC G02 025 / M-MROW G02 025
COOLING CAPACITY (kW) <sup>1</sup>	Total	10.6	16.6	28.6
	Sensible	9.6	15.7	27.4
SHR <sup>2</sup>		0.91	0.94	0.96
EC SUPPLY FAN (no.)		2	4	5
AIRFLOW (m <sup>3</sup> /h)		1,500	2,700	4,200
NOMINAL EXTERNAL STATIC PRESSURE (Pa)		20	20	20
MAX EXTERNAL STATIC PRESSURE (Pa)		60	60	60
POWER INPUT (kW) <sup>3</sup>		0.18	0.34	0.85
REFRIGERANT		R410A	R410A	R410A
REFRIGERANT CIRCUITS (n <sup>3</sup> )		1	1	1
AIR FILTERS	NO.	2	2	2
	Extended filtering surface (m <sup>2</sup> )	0.35	0.35	0.35
	Efficiency [ISO EN 16890] (COARSE)	40%	40%	40%
SOUND LEVEL [ISO 3744] (dB(A)) <sup>4</sup>	Pressure Level	63.5	64.5	70.5
	Power Level	79	80	86
POWER SUPPLY (V / Ph / Hz)		230 / 1 / 50	230 / 1 / 50	230 / 1 / 50
ABSORBED CURRENT (A) <sup>5</sup>		0.8	1.5	4
STARTING CURRENT (A)		2.9	5.8	7.3
DIMENSIONS (mm)	Width	300	300	300
	Depth (MROW / MRAC)	1000 / 1200	1000 / 1200	1000 / 1200
	Height	2,085	2,085	2,085
NET WEIGHT (kg)	In-Row	175	190	193
	Enclosure	185	200	203
CONNECTIONS	Refrigerant pipes diameter - Gas (Ø Inch)	3/4"	7/8"	1"
	Refrigerant pipes diameter - Liquid (Ø Inch)	1/2"	5/8"	3/4"
	Condensate (Ømm) <sup>5</sup>	16	16	16
	Power supply wiring cable (no. x mm <sup>2</sup> ) <sup>6</sup>	3G1.5	3G1.5	3G1.5

OUTDOOR UNITS		m-MOCU G02 050	2 X m-MOCU G02 050
RATED COOLING CAPACITY	kW	50	50 x 2
SYSTEM EER <sup>7</sup>	kW/kW	2.96	3.24
SOUND PRESSURE LEVEL (dB(A))	Cooling	65	68
WEIGHT (kg)		304	304 x 2
DIMENSIONS (mm)	Width x Depth x Height	1650 x 740 x 1750	1650 x 740 x 1750 [x2]
POWER SUPPLY (V / Hz)		380-415v, 50Hz	380-415v, 50Hz
PHASE		3	3
OUTDOOR POWER INPUT (kW)	Cooling (nominal)	15.2	13.7
STARTING CURRENT (A)		27.8	27.8 x 2
MAX RUNNING CURRENT (A)	Cooling	37.6	37.6 x 2
FUSE RATING (BS88) - HRC (A)		40	40 x 2
MAINS CABLE	No. Cores	5G6	5G6
MAX PIPE LENGTH (m)		165	165
MAX HEIGHT DIFFERENCE (m)		50 (40 <sup>7</sup> )	50 (40 <sup>7</sup> )
CHARGE REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (T)	R410A (GWP 2088)	11.8 / 24.6	11.8 / 24.6 x 2
GUARANTEED OPERATING RANGE (°C)	Max Temp	45	45
	Min Temp	-15	-15

#### Notes:

THE COOLING CAPACITY DOES NOT CONSIDER THE SUPPLY FAN MOTOR THERMAL LOAD.

<sup>1</sup> All data refers to the Rating Configuration with 2x m-MROW-Z G02 F/S 025 @35°C

Outdoor Temperature and 35°C/27%rh Indoor Temperature.

<sup>2</sup> SHR = Sensible cooling capacity / Total cooling capacity.

<sup>3</sup> Corresponding to the nominal ESP=20Pa.

<sup>4</sup> Sound pressure level on air return at 1m.

<sup>5</sup> Rubber pipe - refers to internal diameter.

<sup>6</sup> Minimum section. It's possible to connect indoor units with a sum of sizing from 25 to 75.

<sup>7</sup> When outdoor unit is below indoor unit.

These units contain <HFC R410A (GWP<sub>100</sub> 2088)> fluorinated greenhouse gas.

# NR2-FC-G06-Z

## R454B Free-Cooling Chiller (359 to 895kW)



The **NR2-FC-G06-Z** is our outdoor chiller with integrated free-cooling utilising hermetic rotary Scroll compressors with R454B refrigerant, axial-flow fans, shell and tubes exchanger and an electronic expansion valve.

The range is composed of units equipped with four, five and six compressors in multi-circuit configuration. Available in 14 sizes from 359kW to 895kW cooling capacity and operating on R454B low GWP refrigerant, makes the NR2-FC-G06-Z best in class. The NR2-FC-G06-Z is available as four different configurations for noise and efficiency performance (K, SL-K, A, SL-A), with a wide operating range from 5°C to +24°C evaporator leaving water temperatures (ELWT) and ambient temperatures from 48°C to -30°C. The NR2-FC-G06-Z can also be fitted with a range of options including Soft Start, energy meters, BEMS interface cards and on-board hydronic kits.

### Key Features & Benefits

- Best-in-class seasonal efficiency in a compact footprint
- Available in 'No Glycol' versions
- High efficiency scroll compressors providing a multi refrigeration circuit
- EC Fans available as an option for improved efficiency (standard on A version)
- Four different configurations for noise and efficiency performance available (K, SL-K, A, SL-A)
- Lower GWP refrigerant R454B
- Available options include; inbuilt hydronic pumps, energy meters, Refrigerant leak detection, dual power supply and many more
- Microchannel MCHX for condenser coil and Cu/Al for free cooling coil
- Fast Restart fitted as standard

# R454B

NR2-FC-G06-Z / A		0384	0414	0434	0462	0494	0524	0554	0594	0624	0685	0746	0836	0866	0926
<b>MECHANICAL COOLING (30°C / 20°C) <sup>1</sup></b>															
COOLING CAPACITY	kW	359.8	388.7	416.7	444.1	471.0	501.6	531.8	569.6	607.7	660.6	699.5	805.6	835.8	895.0
COMPRESSOR POWER INPUT	kW	76.53	79.48	82.67	86.03	89.52	96.89	104.5	108.7	113.1	122.3	137.2	153.4	160.9	176.3
TOTAL POWER INPUT	kW	86.70	91.40	96.30	101.3	106.5	113.9	121.5	127.4	133.5	146.1	161.0	180.6	188.1	203.5
EER	kW/kW	4.15	4.25	4.33	4.38	4.42	4.40	4.38	4.47	4.55	4.52	4.35	4.46	4.44	4.40
<b>TOTAL FREE-COOLING (30°C / 20°C) <sup>2</sup></b>															
TOTAL FREE-COOLING OCCURS AT	°C	10.7	11.3	11.8	12.0	12.3	12.0	11.6	11.7	11.9	12.3	11.9	11.9	11.7	11.1
COOLING CAPACITY	kW	359.8	388.7	416.7	444.1	471.0	501.6	531.8	569.6	607.7	660.6	699.5	805.6	835.8	895.0
TOTAL POWER INPUT	kW	10.20	11.90	13.60	15.30	17.00	17.00	17.00	18.70	20.40	23.80	23.80	27.20	27.20	27.20
EER	kW/kW	35.27	32.66	30.64	29.03	27.71	29.51	31.28	30.46	29.79	27.76	29.39	29.62	30.73	32.90
<b>MECHANICAL COOLING (16°C / 10°C) <sup>3</sup></b>															
COOLING CAPACITY	kW	279.4	301.2	322.3	343.0	363.3	387.2	410.7	439.3	468.1	508.8	540.4	621.3	644.9	691.2
COMPRESSOR POWER INPUT	kW	73.56	76.84	80.32	83.94	87.66	94.65	101.8	106.5	111.3	120.4	133.7	150.3	157.3	171.7
TOTAL POWER INPUT	kW	83.80	88.70	93.90	99.20	104.7	111.6	118.8	125.2	131.7	144.2	157.5	177.5	184.5	198.9
EER	kW/kW	3.33	3.39	3.43	3.45	3.47	3.47	3.45	3.50	3.55	3.52	3.43	3.50	3.49	3.47
<b>TOTAL FREE-COOLING (16°C / 10°C) <sup>4</sup></b>															
TOTAL FREE-COOLING OCCURS AT	°C	2.9	3.5	3.9	4.1	4.3	4.0	3.7	3.8	4.0	4.3	4.0	4.0	3.8	3.3
COOLING CAPACITY	kW	279.4	301.2	322.3	343.0	363.3	387.2	410.7	439.3	468.1	508.8	540.4	621.3	644.9	691.2
TOTAL POWER INPUT	kW	10.20	11.90	13.60	15.30	17.00	17.00	17.00	18.70	20.40	23.80	23.80	27.20	27.20	27.20
EER	kW/kW	27.39	25.31	23.70	22.42	21.37	22.78	24.16	23.49	22.95	21.38	22.71	22.84	23.71	25.41
<b>SEASONAL EFFICIENCY IN COOLING (REG. EU 2016/2281) <sup>5</sup></b>															
PRATED,C	kW	262.2	282.4	301.9	321.3	340.2	362.7	384.8	411.5	438.3	476.3	506.2	581.9	604.1	647.8
SEPR HT		7.20	7.24	7.18	7.16	7.10	7.12	7.24	7.26	7.31	7.33	7.39	7.48	7.40	7.59
<b>ELECTRICAL DATA</b>															
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/51	400/3/52	400/3/53	400/3/54	400/3/55
MAX F.L.A. <sup>7</sup>	Total	A	201	217	233	249	265	280	295	312	329	365	395	445	459
<b>EXCHANGERS</b>															
MINIMUM WATER FLOW IN COOLING	Evaporator	l/s	6.66	6.66	6.66	8.33	8.33	8.61	8.61	9.44	9.44	9.44	13.69	13.69	13.69
MINIMUM SYSTEM VOLUME	l		940	1020	1100	1180	1250	1320	1400	1500	1600	1750	1850	2120	2200
<b>REFRIGERANT CIRCUIT</b>															
COMPRESSORS	No.	4	4	4	4	4	4	4	4	4	5	6	6	6	6
CIRCUITS	No.	2	2	2	2	2	2	2	2	2	2	2	2	3	2
THEORETICAL REFRIGERANT CHARGE	kg	36.0	40.5	46.8	58.5	60.3	60.3	63.0	69.3	72.9	75.6	77.4	80.1	80.1	80.1
<b>NOISE LEVELS</b>															
TOTAL SOUND PRESSURE <sup>8</sup>	dB(A)	63	63	64	63	64	64	64	64	65	65	65	65	66	66
TOTAL SOUND POWER LEVEL IN COOLING <sup>8</sup>	dB(A)	95	95	96	96	97	97	97	97	98	98	98	98	99	99
<b>SIZE AND WEIGHT <sup>7</sup></b>															
WIDTH	mm	3905	5080	5080	6255	6255	6255	6255	7430	7430	8605	8605	9780	9780	9780
DEPTH	mm	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260	2260
HEIGHT	mm	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560	2560
OPERATION WEIGHT	kg	3160	3580	3770	4600	4790	4820	4840	5220	5400	6140	6610	7170	7180	7210

#### Notes:

<sup>1</sup> Gross Value. Plant (side) cooling exchanger water (in/out) 30.00°C/20.00°C;

Source (side) heat exchanger air (in) 35.0°C; Ethylene glycol 30%.

<sup>2</sup> Gross Value. Plant (side) cooling exchanger water (in/out) 30.00°C/20.00°C; Ethylene glycol 30%.

<sup>3</sup> Gross Values. Plant (side) cooling exchanger water (in/out) 16.00°C/10.00°C;

Source (side) heat exchanger air (in) 35.0°C; Ethylene glycol 30%.

<sup>4</sup> Gross Values. Plant (side) cooling exchanger water (in/out) 16.00°C/10.00°C; Ethylene glycol 30%.

<sup>5</sup> Average sound pressure level at 10m distance, unit in a free field on a reflective surface;

non-binding value calculated from the sound power level.

<sup>6</sup> Sound power on the basis of measurements taken in compliance with ISO 9614.

<sup>7</sup> Unit in standard configuration, without optional accessories.

<sup>8</sup> Seasonal energy efficiency of high temperature process cooling; REGULATION (EU) N. 2016/2281.

General - Other models are available to suit noise or efficiency (K, SL-K, SL-A) including No Glycol (NG) hydraulic version. Models shown here are high efficiency "A" versions

# TR2-FC-G04-Z

## R1234ze Free-Cooling Chiller (1,216 to 1,819kW)



The **TR2-FC-G04-Z** is a high efficiency free-cooling chiller designed for hyperscale and colocation data centres. Available in both standard and No Glycol (-NG) versions, it features oil-free centrifugal compressors optimised for low GWP R1234ze refrigerant, operating in 3 modes: total free-cooling, hybrid free-cooling and mechanical cooling. The innovative new free-cooling control logic enhances the system's EER throughout the year, providing up to 20% annual energy savings compared to previous control logics.

### Key Features & Benefits

- Best-in-class Energy Efficiency Ratio (EER)
- Low GWP R1234ze refrigerant (IPCC AR5)
- Highly efficient components throughout: magnetic levitation centrifugal compressors, large diameter EC fans and advanced control and optimisation algorithms
- Designed for chilled water with higher temperatures up to 26°C and high ΔT of up to 20K, ideal for the modern hyperscale data centre
- V-block design improves maintenance and increases the cooling density with the patented Reduced Exergy Depletion (R.E.D) Cooler
- Wide set of new options: fan diffusers, discharge air plenum, fast restart with ultracap, and energy monitoring amongst many others

# R1234ze

FREE-COOLING CHILLER	1232	1653	1803	1232	1653	1803
VERSION	-	-	-	-NG	-NG	-NG
<b>PERFORMANCE</b>						
MECHANICAL COOLING - GROSS VALUE*1						
COOLING CAPACITY	kW	1216	1619	1771	1249	1662
TOTAL POWER INPUT	kW	252.1	338.4	381.9	253.0	339.6
EER	kW/kW	4.82	4.78	4.64	4.94	4.89
<b>FREE-COOLING @ 10°C AMBIENT - GROSS VALUE*2</b>						
COOLING CAPACITY	kW	1178	1507	1654	1042	1341
FREE-COOLING KW / NOMINAL KW	%	97	93	93	83	81
TOTAL FREE-COOLING (GROSS VALUE)*2						
TOTAL FREE-COOLING AMBIENT*3	°C	9.3	8.4	8.4	5.6	4.7
TOTAL POWER INPUT	kW	22.4	28.0	30.8	27.9	33.5
EER	kW/kW	54.29	57.82	57.50	44.77	49.61
<b>HEAT EXCHANGER IN COOLING*1</b>						
GLYCOL	%	30	30	30	0	0
WATER FLOW	User Side	l/s	26.7	35.6	25.0	33.3
PRESSURE DROP	User Side	kPa	74.8	97.5	100	71.2
<b>ELECTRICAL DATA</b>						
POWER SUPPLY	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
F.L.A.**	Total	A	537	787	796	537
<b>EXCHANGERS</b>						
MINIMUM WATER FLOW	Evaporator	l/s	16.7	20.8	22.2	16.7
MINIMUM WATER CONTENT	Plant	l	5000	5000	5000	5000
<b>FANS</b>						
QUANTITY	No.	16	20	22	16	20
AIRFLOW	m³/s	78.4	104.2	113.1	78.4	104.2
<b>REFRIGERANT CIRCUIT</b>						
COMPRESSORS	No.	2	3	3	2	3
CIRCUITS	No.	1	1	1	1	1
REFRIGERANT		R1234ze	R1234ze	R1234ze	R1234ze	R1234ze
REFRIGERANT CHARGE*5	kg	680	840	860	680	840
<b>SOUND LEVELS</b>						
TOTAL SOUND PRESSURE*6	dB(A)	68	69	70	68	69
TOTAL SOUND POWER LEVEL IN COOLING*7	dB(A)	101	102	103	101	102
<b>DIMENSIONS &amp; WEIGHT*8</b>						
WIDTH	mm	9500	11700	12800	9500	11700
DEPTH	mm	2260	2260	2260	2260	2260
HEIGHT	mm	2500	2500	2500	2500	2500
OPERATION WEIGHT	kg	10700	12700	14000	11800	14100

Notes:  
 \*1 Plant (side) cooling exchanger water (in/out) 32°C/20°C; Source (side) heat exchanger air (in) 35°C.  
 \*2 Plant (side) cooling exchanger water (in/out) 32°C/20°C.  
 \*3 Maximum ambient temperature where free-cooling capacity >= nominal cooling capacity, as stated above.  
 \*4 Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.  
 \*5 Theoretical - refer to serial plate for actual charge volumes.  
 \*6 Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.  
 \*7 Sound power on the basis of measurement taken in compliance with ISO 9614.  
 \*8 Unit in standard configuration, without optional accessories.

# IT Cooling Accessories / Optional Extras

DESCRIPTION	MODEL REF.
<b>MSY-TP / MUY-TP</b>	
Air outlet guide for MUY-TP35/50VF2	MAC-881SG
Standard wired remote controller	PAR-42MAAB
Interface for M-NET, MA remote controller (PAR-42MAAB), on/off input and run/fault output	MAC-334IF-E
Interface for Wi-Fi connection to MELCloud Home service	MAC-597IF-E
<b>s-MEXT DX</b>	
s-MEXT-G00 F01 Support Frame H510 P043	
s-MEXT-G00 F02 Support Frame H510 P043	
s-MEXT-G00 F03 Support Frame H510 P043	
s-MEXT-G00 F01 Plenum c/w 3 Grilles P013	
s-MEXT-G00 F02 Plenum c/w 3 Grilles P013	
s-MEXT-G00 F03 Plenum c/w 3 Grilles P013	
s-MEXT-G00 Modbus serial card (RS485)	
s-MEXT-G00 BACnet TCP/IP card (RJ45)	
<b>x-MEXT DX</b>	
Modbus Serial card (RS485)	
BACNet TCP/IP Ethernet card (RJ45)	
Floor stand with rubber holders (350-500mm)	
Floor stand with rubber holders (500-750mm)	
Floor stand with rubber holders (750-1000mm)	
Electric heater	
Steam humidifier	
Air discharge plenum with 3 grilles	
Inlet damper with actuator	
Epoxy coated condenser coil(s)	
<b>w-MEXT / w-NEXT / w-MEXT-XL</b>	
Modbus Serial card (RS485) for w-MEXT, w-NEXT and w-MEXT-XL	
BACNet TCP/IP Ethernet card (RJ45) for w-MEXT, w-NEXT and w-MEXT-XL	
Floor stand with rubber holders (255-350mm) for w-MEXT and w-NEXT	
Floor stand with rubber holders (355-450mm) for w-MEXT and w-NEXT	
Floor stand with rubber holders (400-510mm) for w-MEXT and w-NEXT	
Electric heater for w-MEXT and w-NEXT	
Steam humidifier for w-MEXT and w-NEXT	
Air discharge plenum with 3 grilles for w-MEXT and w-NEXT	
Inlet damper with actuator for w-MEXT, w-NEXT and w-MEXT-XL	
<b>m-MRAC / m-MROW</b>	
Multi Density Tee & Adaptor	

# Refrigeration

Energy Efficient Refrigeration Units





# Contents

<b>Refrigeration - An Overview</b>	<b>3.4</b>
<b>ECOV Series</b> R744 Natural Refrigerant Condensing Unit	<b>3.6</b>
<b>Accessories / Optional Extras</b>	<b>3.8</b>

## Energy Efficient Refrigeration Units

# Energy Efficient Refrigeration Units

Refrigeration is a necessary part of our modern way of life and is essential to the way we store and display food for convenience purchase.

At the same time, given today's concerns about global warming and environmental protection, energy conservation policies are becoming increasingly stringent. It is becoming progressively more important for cold chain retailers to shift towards greener natural refrigerants and energy efficient equipment.

With our technical expertise, long experience and innovative product range, we are able to offer customers the ability to reduce their carbon emissions and assist them in achieving the UK governments Net Zero targets.

## Introducing the ECOV Natural Refrigerant Condensing Units

The Mitsubishi Electric ECOV Series is ideally suited for convenience stores, cold storage rooms and cold chain distribution centres, and delivers reliability and energy efficiency through its use of proven Mitsubishi Electric technology.

Utilising non-flammable CO<sub>2</sub> refrigerant with a low global-warming potential of 1, means that CO<sub>2</sub> emissions are significantly reduced when compared to conventional systems that use HFC refrigerants.



## Energy Efficient Refrigeration Units

# ECOV Series - Key Technologies


## A. Compressor

### Inverter-driven

With the use of an inverter driven single stage scroll compressor for the ECOV-X37/55VA and an inverter driven 2 stage rotary compressor for the ECOV-X15VA, the energy efficiency of the system is higher than that of a fixed speed non-inverter system.

### Optimised refrigerant circuit

The ECOV Series adopts an optimal compressor for each capacity. The ECOV-X15VA uses a two-stage compressor, while the ECOV-X37/55VA utilises a single-stage compressor with a middle pressure injection circuit.

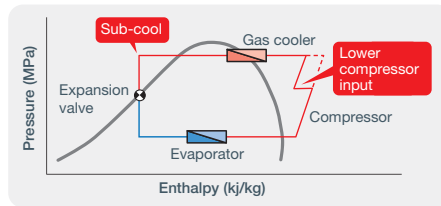

These mechanisms enable the gas cooler to achieve greater sub-cooling with maximum efficiency.

## B. Heat Exchanger (Rear side)

### Flat aluminum tube



The use of a MFC\* aluminum flat tube heat exchanger and corrugated fins increases the contact area with air and refrigerant, resulting in greater heat-exchanging efficiency. Anti-corrosion coating against salt damage is applied to the heat exchanger as a standard feature.



\*MFC: Multi Flow Condenser

## C. Heat Recovery Port

Heat recovered from the refrigeration equipment can be utilised to provide space heating and/or sanitary hot water elsewhere in the building.

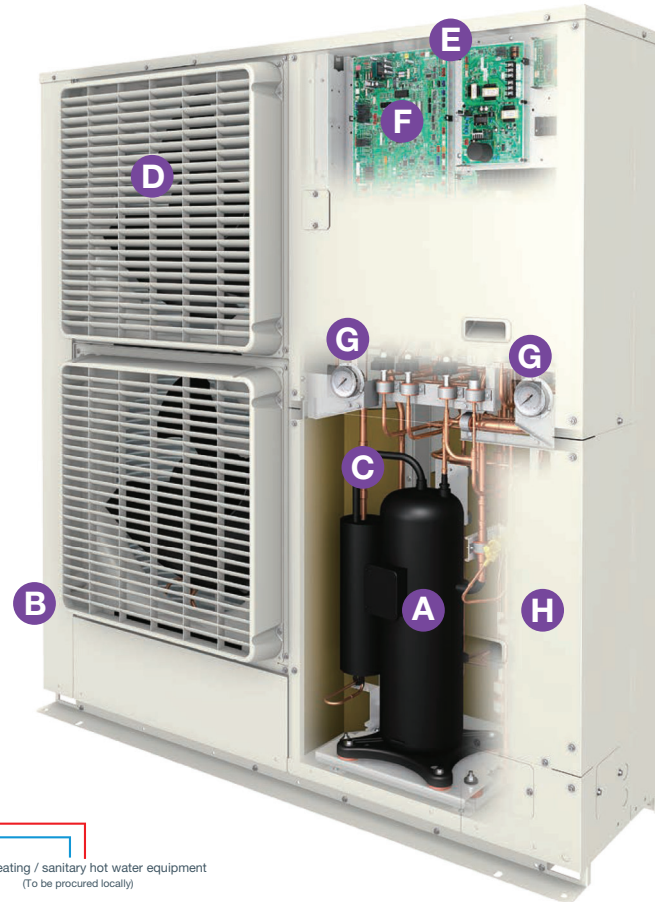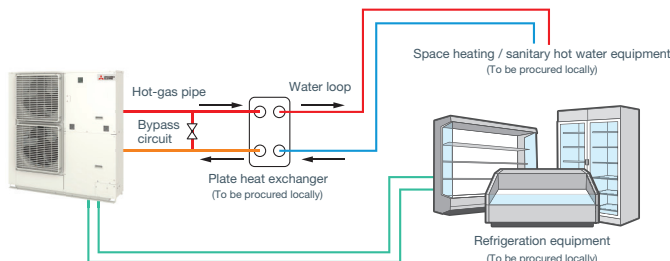

## D. Fan

### DC Inverter fan


DC-driven inverter fan(s) are equipped in each unit for precise control, to optimise system efficiency and minimise noise levels.



## E. Control Board

### IGBT Module

Power modules manufactured by Mitsubishi Electric are used on the ECOVs inverter board.



This greatly reduces the power loss of the voltage boosting circuit and improves the units efficiency levels.

## Easy Servicing

### F. LED Display

During operation, a digital LED display shows the refrigerant's low pressure value, operation mode, and compressor frequency. In case of malfunction, an error code is displayed enabling quick diagnosis.

### G. Pressure Gauges

Gauges displaying the low and high pressure values.

### H. Liquid Receiver / Accumulator

A large liquid receiver and accumulator inside the unit provides the ability to easily control the refrigerant charge and ensure durability against liquid return, which leads to easy on-site service and stable operation.

# ECOV Series R744 Natural Refrigerant Condensing Unit



The **ECOV Series** refrigeration condensing units are inverter-driven and deliver reliability and energy efficient heat recovery through their use of proven Mitsubishi Electric technology.

Utilising the natural and stable refrigerant CO<sub>2</sub> (R744) with a GWP of 1, the environmentally clean solution enables compliance with local planning laws and F Gas Regulations. Designed with a compact footprint, these units can be easily installed in smaller plant areas and are capable of delivering chilling or freezing. With refrigeration duties ranging from 1.29kW to 16.7kW at an ambient temperature of 35°C, the ECOV Series is an ideal choice for small retail shops, convenience stores and cold storage rooms, including distribution centres.

## Key Features & Benefits

- Utilises natural CO<sub>2</sub> refrigerant to help meet key CSR targets
- Wide evaporating temperature range between -45°C and -5°C, meaning units can be used for chilling or freezing
- Modbus compatibility allows the units to easily communicate with various monitoring systems
- Heat recovery port enables rejected heat to be used for sanitary hot water demand in other areas of the building
- DC driven fans ensure the units deliver a low noise level, allowing installation in noise sensitive urban environments
- Anti-corrosion coating applied as standard to the heat exchanger, protecting against salt damage in harsher coastal environments
- Equipped with an inverter driven compressor, multi-flow gas cooler and DC inverter fan to improve energy saving performance
- Small footprint and horizontal air flow structure, facilitating installation in small spaces and urban environments
- The ECOV-X15VA features a pre-alarm function which enables an alarm to be activated when a risk of fault is detected, preventing malfunction and downtime of unit
- The ECOV-X15VA features three additional operation modes for easy maintenance and further energy savings

# R744

MODEL		ECOV-X15VA	ECOV-X37VA	ECOV-X55VA
REFRIGERATING CAPACITY	ET = -10°C <sup>1</sup>	kW	4.0	10.0
	ET = -30°C <sup>2</sup>	kW	2.27	5.07
SUCTION PRESSURE SATURATION TEMPERATURE RANGE		°C	-45~-5	-35~-5
REFRIGERANT TYPE			R744	R744
INSTALLATION CONDITIONS			Outdoor installation	Outdoor installation
OPERATING CONDITIONS		°C	Ambient temperature -25~43	Ambient temperature -25~43
POWER SOURCE			Single phase 220-240v, 50Hz	3-phase 4-wire 380-400-415v, 50Hz
ELECTRICAL CHARACTERISTICS	Power consumption <sup>1</sup>	kW	1.9	6.25
	Operating current	A	9.0-8.6-8.2	10.8-10.3-9.9
	Power factor <sup>7</sup>	%	96.5	87.6
	Starting current	A	5.5-5.3-5.1	8.0
OPERATING FREQUENCY		Hz	37~70	35~66
COP (SEPR) (Seasonal Efficiency Performance Ratio)			2.1	1.6 (2.53)
COMPRESSOR			C-CV163L0A (Rotary)	HXK17FA-Y (Scroll)
		Model		
		Displacement volume	m <sup>3</sup> /h	4.1
		Crank case heater	W	45
GAS COOLER			All aluminum flat tube fin	Salt-resistant corrugated fin & aluminum micro channel
		Heat exchanger type		
		Fan	Motor output	W
			Fan diameter	mm
		Air flow rate	m <sup>3</sup> /min	77.4
		Saturation pressure adjustment device		
LIQUID RECEIVER			Electronic fan controller	Electronic fan controller
CAPACITY CONTROL			2.3	11
STARTUP METHOD			Inverter type	Inverter type
HIGH-PRESSURE-CUT PREVENTION FUNCTION			Inverter startup	Inverter startup
PROTECTION DEVICE <sup>5</sup>			Standard	Standard
		Pressure switch <high pressure/low pressure>	High pressure: Standard (Mechanical) Low pressure: Standard (Digital)	High pressure: Standard (Mechanical) Low pressure: Standard (Digital)
		Overcurrent protection	Standard	Standard
		Thermal switch (discharge pipe)	-	Standard (Mechanical)
		Oil temperature detection protection	-	Standard
BUILT-IN DEVICE <sup>5</sup>			Standard <Discharge, Liquid>	Standard <Discharge, Liquid>
		Pressure gauge	-	Standard
		Suction accumulator	Suction accumulator (2.0L)	Standard
		Oil Separator	-	Standard
COMMUNICATION <sup>6</sup>			MODBUS®	MODBUS®
DIMENSIONS (Width x Depth x Height)		mm	1200 x 477(+39) x 1250	1455 x 506(+38) x 1600
WEIGHT		kg	115	290
PIPE SIZE				
		Suction pipe	mm (in)	15.88 (5/8")
		Liquid pipe	mm (in)	9.52 (3/8") <sup>3</sup>
MAX PIPE LENGTH		m	25	50
SOUND PRESSURE LEVEL @1m <sup>4</sup>		dB(A)	56	54.5 (51)
SOUND PRESSURE LEVEL @10m <sup>4</sup>		dB(A)	36	34.5

### Notes:

\*1 Measurement conditions: Ambient temperature: 32°C, Evaporation temperature: -10°C, Compressor operating frequency: 70Hz for ECOV-X15VA / 61Hz for ECOV-X37VA / 95Hz for ECOV-X55VA, Fan control: Target condensation temperature = Ambient temperature: 5°C.

\*2 Measurement conditions: Ambient temperature: 32°C, Evaporation temperature: -30°C, Compressor operating frequency: 70Hz for ECOV-X15VA / 61Hz for ECOV-X37VA / 95Hz for ECOV-X55VA, Fan control: Target condensation temperature = Ambient temperature: 5°C.

\*3 If the liquid pipe length exceeds 30m, set the pipe diameter to 12.7mm (1/2").

\*4 Measurement conditions of sound pressure levels: Ambient temperature: 32°C, Evaporation temperature: -10°C, Measurement location: 1m or 10m from front of unit (refer to spec table row) / height 1m, Compressor operating frequency: 70Hz for ECOV-X15VA / 66Hz for ECOV-X37VA / 95Hz for ECOV-X55VA, Fan control: Target condensation temperature = Ambient temperature 5°C. Measurement conditions of sound pressure levels in brackets are altered as follows: Compressor operating frequency: 61Hz for ECOV-X37VA / 95Hz for ECOV-X55VA, Fan control: Target condensation temperature = Ambient temperature 10°C.

\*5 A pressure relief device, a sight glass and a dryer must be installed on the liquid pipe.

Please procure these parts locally.

\*6 MODBUS® is a registered trademark of SCHNEIDER ELECTRIC USA, INC. in the United States.


\*7 Power condenser cannot be installed.

\*8 Use the included reducer to connect the liquid piping.


**Product Dimensions**

**ECOV-X15VA**


Upper View

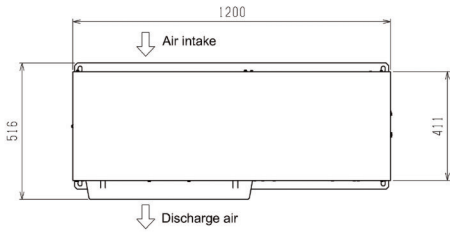


Front View

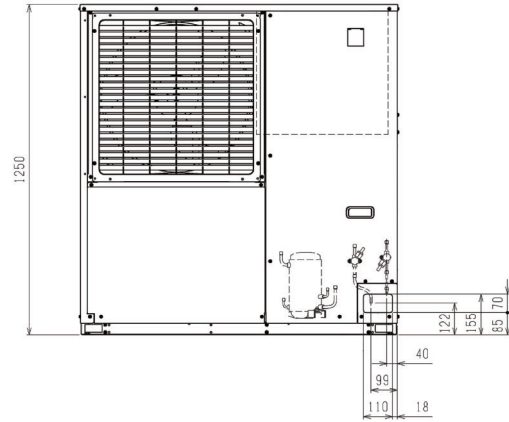

Side View

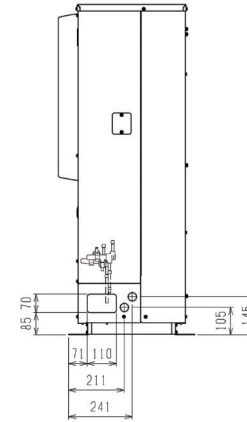


Rear View

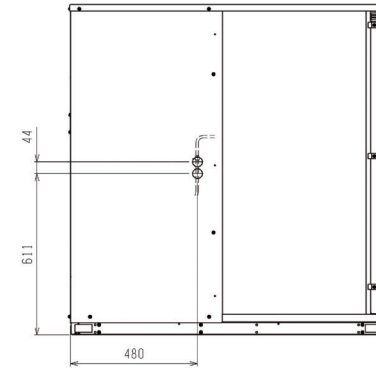


**Product Dimensions**

**ECOV-X37/55VA**


Upper View

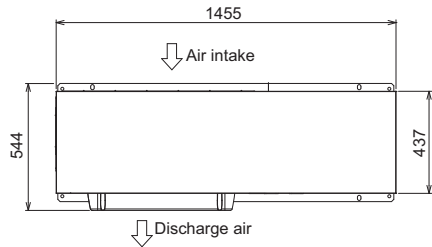


Left Side View




Front View

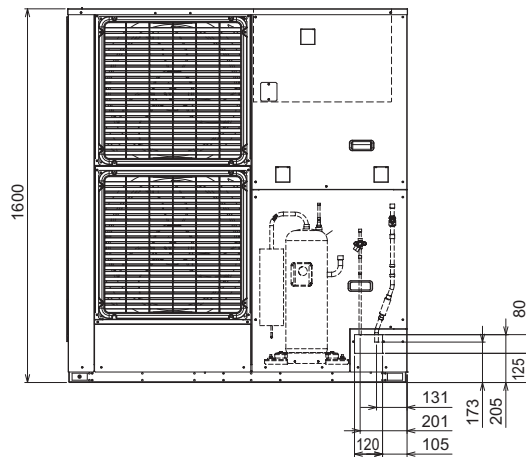

Right Side View

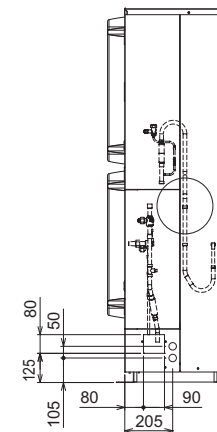

Rear View

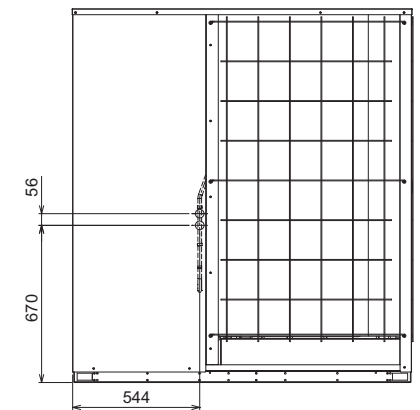

# Refrigeration Accessories / Optional Extras

DESCRIPTION	MODEL REF.
<b>ECOV Series</b> Air protection guide for ECOV-X15VA, ECOV-X37VA & ECOV-X55VA (1 required per ECOV-X15VA and 2 required per ECOV-X37/55VA)	AG-X37A




# Residential Heating

Ecodan Residential Renewable Heating Systems



**ecodan**<sup>®</sup>  
Renewable Heating Technology

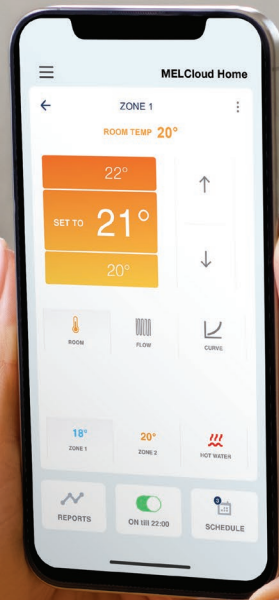

# Contents

<b>Ecodan Heat Pumps - Renewable Heating Systems</b>	<b>4.4</b>
<b>PUZ-WZ50-120VAA/YAA</b> R290 Monobloc Air Source Heat Pumps	<b>4.6</b>
<b>PUZ-WM50VHA</b> R32 Monobloc Air Source Heat Pump	<b>4.8</b>
<b>PUZ-WM60-112VAA/YAA</b> R32 Monobloc Air Source Heat Pumps	<b>4.10</b>
<b>PUZ-HWM140VHA/YHA</b> R32 Monobloc Air Source Heat Pumps	<b>4.12</b>
<b>EHPT20X-MEHEW</b> FTC7 Packaged Cylinder for Ecodan Monobloc Units	<b>4.14</b>
<b>EHPT15-17X-UKHLEWS</b> FTC7 Pre-Plumbed Slimline Cylinders for Ecodan Monobloc Units	<b>4.16</b>
<b>EHPT15-30X-UKHEWS/L</b> FTC7 Pre-Plumbed Standard Cylinders for Ecodan Monobloc Units	<b>4.18</b>
<b>FTC7 / FTC2BR</b> Flow Temperature Controllers for use with Ecodan Monobloc Units and Third Party BEMS	<b>4.20</b>
<b>Energy Monitoring Packs</b>	<b>4.21</b>
<b>MELCloud Home Wi-Fi Connectivity</b>	<b>4.22</b>
<b>i-LIFE2 SLIM</b> Fan Assisted Radiator	<b>4.24</b>
<b>Accessories / Optional Extras</b>	<b>4.26</b>

# Ecodan Heat Pumps - Renewable Heating Systems

There is now no doubt that the world is in a climate crisis and that we need to act immediately to avoid catastrophic climate change. The UK Government have reacted by being the first major economy to pass net zero (Greenhouse Gas) emission laws. Renewable technologies, such as heat pumps, have become an integral part of the solution to the problem of reducing carbon emissions generated through heating.

As a market leader in both commercial and domestic heat pumps, Mitsubishi Electric is a pioneer in the development of this renewable technology. Around the world, heat pumps have been utilised for decades and Mitsubishi Electric has refined this technology to produce Ecodan - one of the most advanced, efficient heating systems available on the market today.

The award winning Ecodan heat pumps are available from 5kW up to 640kW, making them suitable for virtually any property, from small flats to large detached houses, from an office block to a school. They are the renewable, low carbon alternative to traditional high carbon heating systems.

- Renewable heating solution capable of reducing emissions and achieving climate targets
- Highly efficient, proven and refined technology that can lower energy bills
- Range of easy to design, install and maintain systems suitable for a variety of property and application types

**Ecodan heat pumps are a renewable heating technology that efficiently and reliably generates sustainable space heating and hot water all year round, delivering a level of comfort that sets the technology apart from other forms of heating.**



**TV presenter, architect, lecturer and writer, George Clarke is a passionate advocate of design excellence and high levels of quality in the construction industry.**

“ The way we design, build, heat, power and recycle our homes needs to change, and change quickly, and renewable heating is an important part of our future.










I'm therefore delighted to associate myself with Ecodan, the market-leading brand of heat pumps built here in the UK and which can help reduce energy bills and lower emissions for almost any home. ”

**George Clarke**

Ecodan Brand Ambassador

## Range Overview



System Type	Litres	5kW	5kW	6kW	6kW	8.5kW	8.5kW	10kW	11.2kW	12kW	14kW	40kW	40kW	40kW
<b>FTC7 Standalone</b>  PAC-IF082B-E		●	●	●	●	●	●	●	●	●	●			
<b>FTC7 Packaged Cylinder</b>  EHPT20X-MEHEW	200	●	●	●	●	●	●	●	●	●	●			
<b>FTC7 Pre-Plumbed Slimline Cylinder</b> 	EHPT15X-UKHLEWS	150	●	●	●	●	●							
	EHPT17X-UKHLEWS	170	●	●	●	●	●							
<b>FTC7 Pre-Plumbed Standard Cylinder</b> 	EHPT15X-UKHEWS	150	●	●	●	●	●							
	EHPT17X-UKHEWS	170	●	●	●	●	●							
	EHPT21X-UKHEWS	210	●	●	●	●	●							
	EHPT21X-UKHEWL	210			●	●	●	●	●	●	●			
	EHPT25X-UKHEWL	250			●	●	●	●	●	●	●			
EHPT30X-UKHEWL	300				●	●	●	●	●	●				
<b>Approvals</b>     	Manufactured in the United Kingdom	●	●	●	●	●	●	●	●	●				
	Red Dot Award	●		●	●	●	●	●	●	●				
	Quiet Mark Certification					●		●		●				
	Microgeneration Certification Scheme	●	●	●	●	●	●	●	●	●	●		●	
	Keymark	●	●	●	●	●	●	●	●	●	●		●	●
Boiler Upgrade Scheme Product Eligibility List	●	●	●	●	●	●	●	●	●	●				

Notes: For further information on the Ecodan QAHV and CAHV models, please refer to the 'Commercial Heat Pumps & Chillers' section of this catalogue. Product Eligibility List from <https://www.ofgem.gov.uk/publications/boiler-upgrade-scheme-product-eligibility>.



## PUZ-WZ50-120VAA/YAA

### R290 Monobloc Air Source Heat Pumps



The new R290 Ecodan monobloc air source heat pumps are designed specifically to suit the demands of the UK market and include 5, 6, 8.5, 10 and 12kW sizes.

The innovative, stylish and compact single fan outdoor unit utilises advanced technologies to deliver improved efficiencies. Designed for a wide range of applications, the market leading low noise levels virtually eliminate the need for planning permission, maximises installation options and is a viable solution for all types of domestic requirements that the UK housing market demands.

#### Key Features & Benefits

- A+++ heating efficiency
- Ultra quiet noise levels
- MELCloud Home enabled
- High water temperature of up to 75°C
- Fully electric source of heating and hot water
- Minimised energy consumption
- Flexible product placement
- Remote control, monitoring, maintenance and technical support
- Ideal for energy storage
- Zero carbon ready



Manufactured in the UK

# R290

OUTDOOR UNIT		PUZ-WZ50VAA(-BS)	PUZ-WZ60VAA(-BS)	PUZ-WZ85VAA(-BS)	PUZ-WZ85YAA(-BS)	PUZ-WZ100VAA(-BS)	PUZ-WZ100YAA(-BS)	PUZ-WZ120VAA(-BS)	PUZ-WZ120YAA(-BS)
HEAT PUMP SPACE HEATER - 55°C	ErP Rating (Range A+++ to D)	A++	A++	A++	A++	A++	A++	A++	A++
	$\eta_{h}$	138%	139%	143%	143%	141%	141%	142%	142%
	SCOP (MCS)	3.38	3.43	3.51	3.51	3.48	3.48	3.51	3.51
HEAT PUMP SPACE HEATER - 35°C	ErP Rating (Range A+++ to D)	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++
	$\eta_{h}$	182%	179%	183%	183%	189%	189%	192%	192%
	SCOP (MCS)	4.42	4.39	4.47	4.47	4.62	4.62	4.71	4.71
HEAT PUMP COMBINATION HEATER - Large Profile <sup>1</sup>	ErP Rating (Range A+ to F)	A+	A+	A+	A+	A+	A+	A+	A+
	$\eta_{wh}$	143%	143%	137%	137%	129%	129%	129%	129%
HEATING <sup>2</sup> (A-7/W35)	Capacity (kW)	5.2	6.2	8.5	8.5	10.0	10.0	11.5	11.5
	Power Input (kW)	1.94	2.51	3.27	3.27	3.70	3.70	4.69	4.69
	COP	2.68	2.47	2.60	2.60	2.70	2.70	2.45	2.45
OPERATING AMBIENT TEMPERATURE (°C DB)		-25 ~ +46	-25 ~ +46	-25 ~ +46	-25 ~ +46	-25 ~ +46	-25 ~ +46	-25 ~ +46	-25 ~ +46
MAXIMUM WATER OUTLET TEMPERATURE (°C)		75	75	75	75	75	75	75	75
SOUND DATA <sup>3</sup>	Pressure Level at 1m (dBA)	40	40	40	40	40	40	40	40
	Power Level (dBA) <sup>4</sup>	56	56	54	54	55	55	55	55
WATER DATA	Pipework Size (mm)	22	22	28	28	28	28	28	28
	Flow Rate (l/min)	14	17	27	27	34	34	34	34
DIMENSIONS (mm)	Width	1050	1050	1050	1050	1050	1050	1050	1050
	Depth	480	480	480	480	480	480	480	480
	Height	1020	1020	1040	1040	1040	1040	1040	1040
WEIGHT (kg)		89	89	103	117	120	131	120	131
ELECTRICAL DATA	Electrical Supply	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	380-415v, 50Hz	220-240v, 50Hz	380-415v, 50Hz	220-240v, 50Hz	380-415v, 50Hz
	Phase	Single	Single	Single	3	Single	3	Single	3
	Nominal Running Current [MAX] (A) <sup>5</sup>	13	13	21	12	28	12	35	12
	Fuse Rating - MCB Sizes (A) <sup>5</sup>	16	16	25	16	32	16	40	16
REFRIGERANT CHARGE (kg) / CO <sub>2</sub> EQUIVALENT (t)	R290 (GWP 0.02)	0.60 / 0.000012	0.60 / 0.000012	0.60 / 0.000012	0.60 / 0.000012	0.82 / 0.0000164	0.82 / 0.0000164	0.82 / 0.0000164	0.82 / 0.0000164

<sup>1</sup> Combination with EHPT20X-MEHEW Cylinder

<sup>2</sup> Under normal heating conditions at outdoor temp: -7°CDB / -8°CWB, outlet water temp 35°C, inlet water temp 30°C.

<sup>3</sup> Under normal heating conditions at outdoor temp: 7°CDB / 6°CWB, outlet water temp 55°C, inlet water temp 47°C as tested to BS EN14511.

<sup>4</sup> Sound power level tested to BS EN12102.

<sup>5</sup> Under nominal heating conditions at outdoor temp: 7°C, outlet water temp: 35°C.

<sup>6</sup> MCB Sizes BS EN60898-2 & BS EN60947-2.

<sup>7</sup> Quiet Mark certification is for PUZ-WZ85VAA/YAA(-BS), PUZ-WZ100VAA/YAA(-BS) and PUZ-WZ120VAA/YAA(-BS) models only.

$\eta_{h}$  is the seasonal space heating energy efficiency (SSHEE)  $\eta_{wh}$  is the water heating energy efficiency



CERTIFIED

Certificate Number: 037-0033-20-01 / 037-0159-25 / 037-0161-25  
Product Type: Heat Pumps  
Product Reference: PUZ-WZ50/60/85/100/120VAA/YAA(-BS)


Certificate Numbers:  
037-0135-23-1/2/3/4  
037-0159-25-1/2  
037-0161-24-1/2/3/4

## Product Dimensions


PUZ-WZ50-60VAA(-BS)

All measurements in mm


Front View

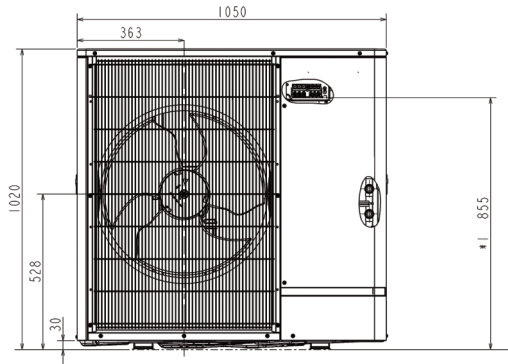


Upper View

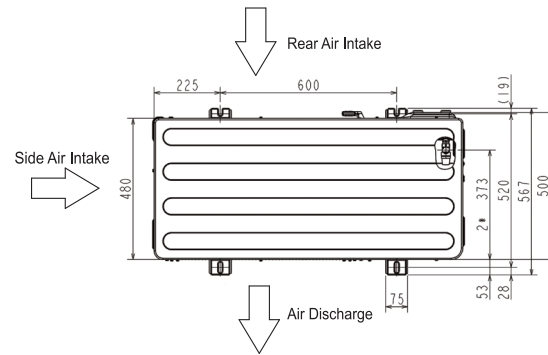

Side View



## Flow Temperature

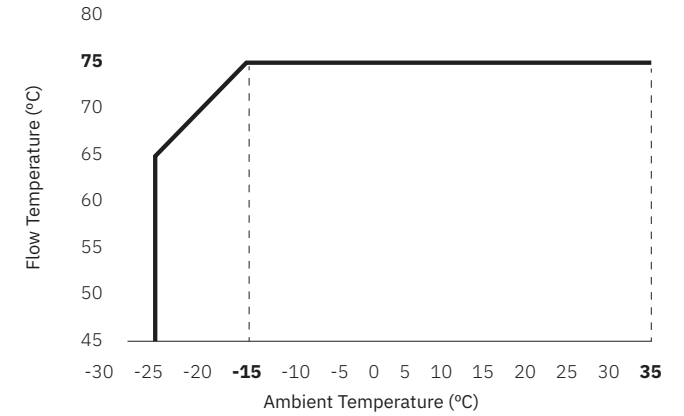


## Product Dimensions


PUZ-WZ85-120VAA/YAA(-BS)

All measurements in mm


Front View

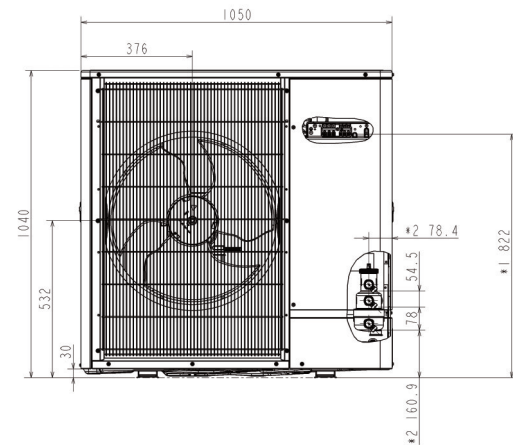

Upper View

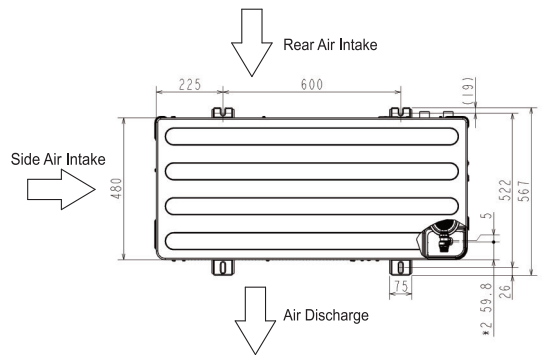

Side View





## Protected Zones

There must not be any building openings or entrance to the basement in this area.

Must not extend to adjacent buildings or public traffic areas.

Ignition sources must not be present, either permanently or for a short period of time.

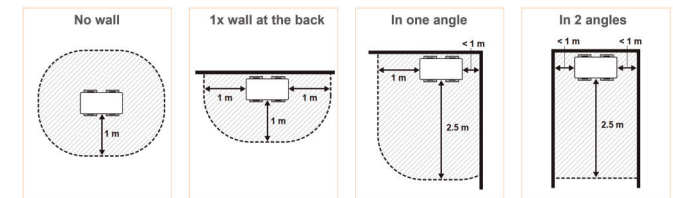



## PUZ-WM50VHA

### R32 Monobloc Air Source Heat Pump



Our range of Ecodan monobloc air source heat pumps includes a 5kW size.

With enhanced performance and efficiencies of the new chassis, combined with the ability to cascade up to six units of the same output, this Ecodan monobloc system can provide a capacity range from 5 through to 30kW. Designed to suit a wide number of applications, this model offers a viable solution for all types of domestic requirements that the UK housing market demands.

#### Key Features & Benefits

- Self-contained unit, only requiring water and electric connections
- No need for gas supply, flues or ventilation
- Low maintenance and quiet operation
- Operates with outside temperatures as low as -20°C
- Optimised low ambient defrost control and operation down to -7°C
- Hybrid function, for use with conventional boilers
- Energy monitoring as standard
- Multiple unit cascade function



Manufactured in the UK



OUTDOOR UNIT		PUZ-WM50VHA(-BS)
HEAT PUMP SPACE HEATER - 55°C	ErP Rating (Range A+++ to D)	A++
	$\eta_s$	129%
	SCOP	3.24
HEAT PUMP SPACE HEATER - 35°C	ErP Rating (Range A+++ to D)	A+++
	$\eta_s$	183%
	SCOP	4.62
HEAT PUMP COMBINATION HEATER - Large Profile <sup>1</sup>	ErP Rating (Range A+ to F)	A+
	$\eta_{wh}$	135%
HEATING <sup>2</sup> (A-7/W35)	Capacity (kW)	5.0
	Power Input (kW)	1.67
	COP	3.00
OPERATING AMBIENT TEMPERATURE (°C DB)		-20 ~ +35
SOUND DATA <sup>3</sup>	Pressure Level at 1m (dBA)	47
	Power Level (dBA) <sup>4</sup>	61
WATER DATA	Pipework Size (mm)	22
	Flow Rate (l/min)	14
	Water Pressure Drop (kPa)	12.0
DIMENSIONS (mm)	Width	950
	Depth	330+30 <sup>7</sup>
	Height	923
WEIGHT (kg)		71
ELECTRICAL DATA	Electrical Supply	220-240v, 50Hz
	Phase	Single
	Nominal Running Current [MAX] (A) <sup>5</sup>	4.64 [13]
	Fuse Rating - MCB Sizes (A) <sup>6</sup>	16
REFRIGERANT CHARGE (kg) / CO <sub>2</sub> EQUIVALENT (t)	R32 (GWP 675)	2.0 / 1.35

<sup>1</sup> Combination with E\*PT20X Cylinder

<sup>2</sup> Under normal heating conditions at outdoor temp: -7°CDB / -8°CWB, outlet water temp 35°C, inlet water temp 30°C.

<sup>3</sup> Under normal heating conditions at outdoor temp: 7°CDB / 6°CWB, outlet water temp 55°C, inlet water temp 47°C as tested to BS EN14511.

<sup>4</sup> Sound power level tested to BS EN12102.

<sup>5</sup> Under nominal heating conditions at outdoor temp: 7°C, outlet water temp: 35°C.

<sup>6</sup> MCB Sizes BS EN60898-2 & BS EN60947-2.

<sup>7</sup> Grille.

$\eta_s$  is the seasonal space heating energy efficiency (SSHEE)  $\eta_{wh}$  is the water heating energy efficiency



Certificate Number: 037-0032-20  
Product Type: Heat Pumps  
Product Reference: PUZ-WM50VHA(-BS)




Certification Numbers:  
037-0032-20-01/02

Product Dimensions

PUZ-WM50VHA(-BS)


All measurements in mm

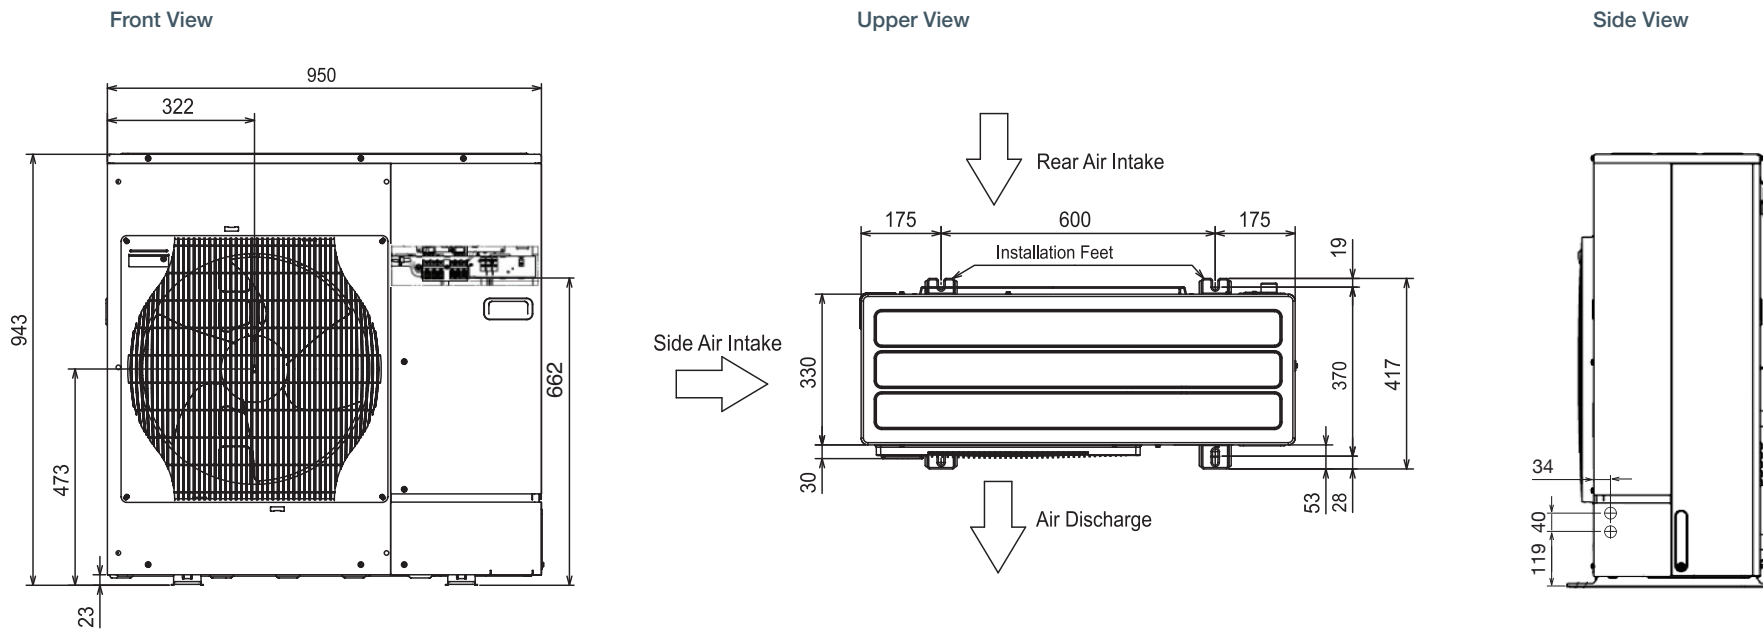

Installation Location

PUZ-WM50VHA(-BS)

All measurements in mm

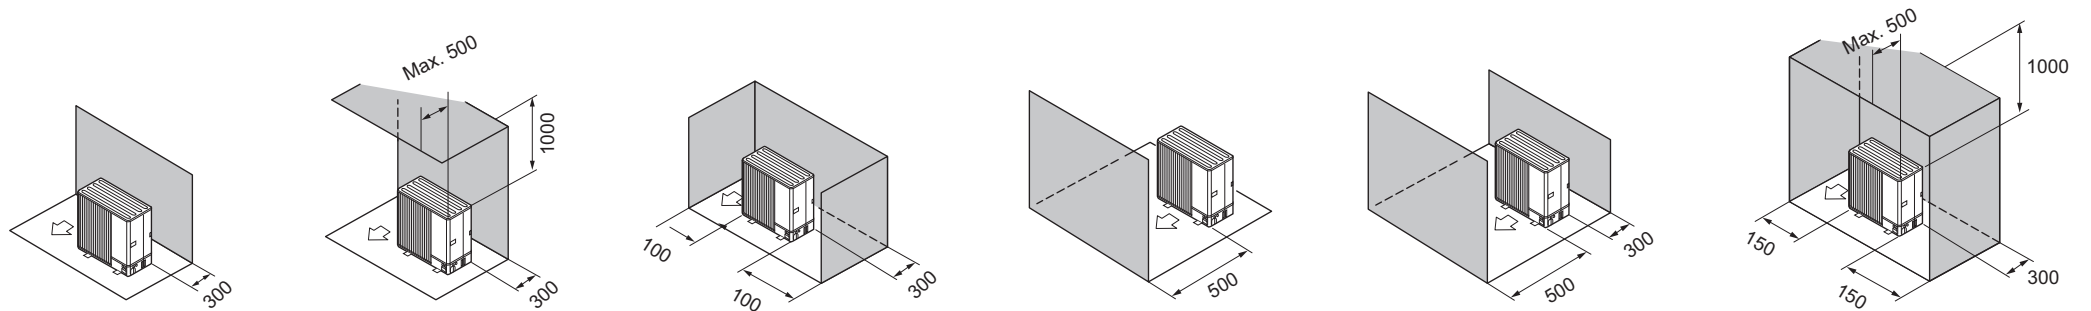

Please refer to Databook and Installation Manual for further details.



## PUZ-WM60-112VAA/YAA

### R32 Monobloc Air Source Heat Pumps



The multiple award winning range of AA chassis Ecodan monobloc air source heat pumps are designed specifically to suit the demands of the UK market and includes 6, 8.5 and 11.2kW sizes.

The innovative, stylish and compact single fan outdoor unit utilises advanced technologies to deliver improved efficiencies. Designed for a wide range of applications, the market leading low noise levels virtually eliminate the need for planning permission, maximises installation options and is a viable solution for all types of domestic requirements that the UK housing market demands.

#### Key Features & Benefits

- Self-contained unit, only requiring water and electric connections
- No need for gas supply, flues or ventilation
- Low maintenance and ultra quiet operation
- Operates with outside temperatures as low as -25°C
- Optimised low ambient defrost control and operation down to -7°C
- Hybrid function, for use with conventional boilers
- Energy monitoring as standard
- Multiple unit cascade function



OUTDOOR UNIT		PUZ-WM60VAA(-BS)	PUZ-WM85VAA(-BS)	PUZ-WM85YAA(-BS)	PUZ-WM112VAA(-BS)	PUZ-WM112YAA(-BS)
HEAT PUMP SPACE HEATER - 55°C	ErP Rating (Range A+++ to D)	A++	A++	A++	A++	A++
	$\eta_s$	142%	139%	139%	134%	134%
	SCOP	3.57	3.48	3.46	3.34	3.31
HEAT PUMP SPACE HEATER - 35°C	ErP Rating (Range A+++ to D)	A+++	A+++	A+++	A+++	A+++
	$\eta_s$	190%	193%	193%	191%	191%
	SCOP	4.81	4.84	4.81	4.74	4.70
HEAT PUMP COMBINATION HEATER - Large Profile <sup>1</sup>	ErP Rating (Range A+ to F)	A+	A+	A+	A+	A+
	$\eta_{wh}$	145%	145%	145%	148%	148%
HEATING <sup>2</sup> (A-7/W35)	Capacity (kW)	6.0	8.5	8.5	11.2	11.2
	Power Input (kW)	1.88	3.27	3.27	3.73	3.73
	COP	3.20	2.60	2.60	3.00	3.00
OPERATING AMBIENT TEMPERATURE (°C DB)		-20 ~ +35	-20 ~ +35	-25 ~ +35	-25 ~ +35	-25 ~ +35
SOUND DATA <sup>3</sup>	Pressure Level at 1m (dBA)	45	45	45	45	45
	Power Level (dBA) <sup>4</sup>	58	58	58	60	60
WATER DATA	Pipework Size (mm)	22	28	28	28	28
	Flow Rate (l/min)	17	24	24	32	32
	Water Pressure Drop (kPa)	8.0	15.0	15.0	24.0	24.0
DIMENSIONS (mm)	Width	1050	1050	1050	1050	1050
	Depth	480	480	480	480	480
	Height	1020	1020	1020	1020	1020
WEIGHT (kg)		98	98	111	119	119
ELECTRICAL DATA	Electrical Supply	220-240v, 50Hz	220-240v, 50Hz	400v, 50Hz	220-240v, 50Hz	400v, 50Hz
	Phase	Single	Single	Three	Single	Three
	Nominal Running Current [MAX] (A) <sup>5</sup>	5.68 [13]	9.1 [22]	2.9 [11.5]	10.9 [28]	3.6 [13]
	Fuse Rating - MCB Sizes (A) <sup>6</sup>	16	25	16	32	16
REFRIGERANT CHARGE (kg) / CO <sub>2</sub> EQUIVALENT (t)	R32 (GWP 675)	2.2 / 1.49	2.2 / 1.49	2.2 / 1.49	3.0 / 2.03	3.0 / 2.03

<sup>1</sup> Combination with E-PT20X Cylinder

<sup>2</sup> Under normal heating conditions at outdoor temp: -7°CDB / -8°CWB, outlet water temp 35°C, inlet water temp 30°C.

<sup>3</sup> Under normal heating conditions at outdoor temp: 7°CDB / 6°CWB, outlet water temp 55°C, inlet water temp 47°C as tested to BS EN14511.

<sup>4</sup> Sound power level tested to BS EN12102.

<sup>5</sup> Under normal heating conditions at outdoor temp: 7°C, outlet water temp: 35°C.

<sup>6</sup> MCB Sizes BS EN60898-2 & BS EN60947-2.

$\eta_s$  is the seasonal space heating energy efficiency (SSHEE)  $\eta_{wh}$  is the water heating energy efficiency



Certificate Number: 037-0033-20 / 037-0034-20  
Product Type: Heat Pumps  
Product Reference: PUZ-WM60/85VAA(-BS) / PUZ-WM112VAA(-BS)


Certification Numbers:  
037-0033-20-01/02/03/04/05/06  
037-0034-20-01/02/03/04

**Product Dimensions**


PUZ-WM60-112VAA/YAA(-BS)

All measurements in mm


Front View

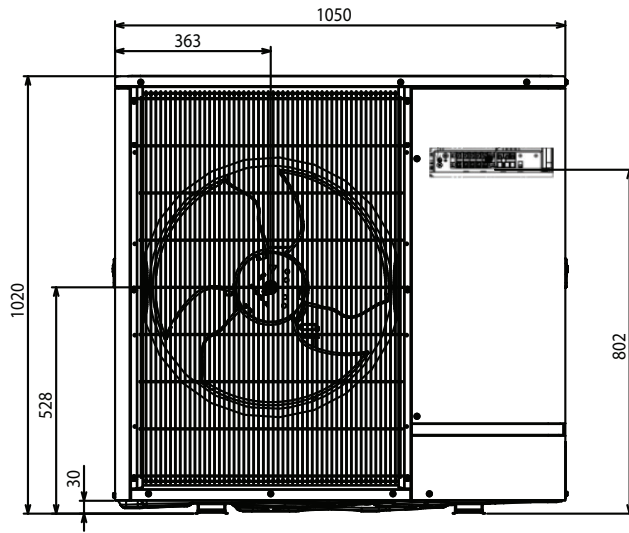

Upper View

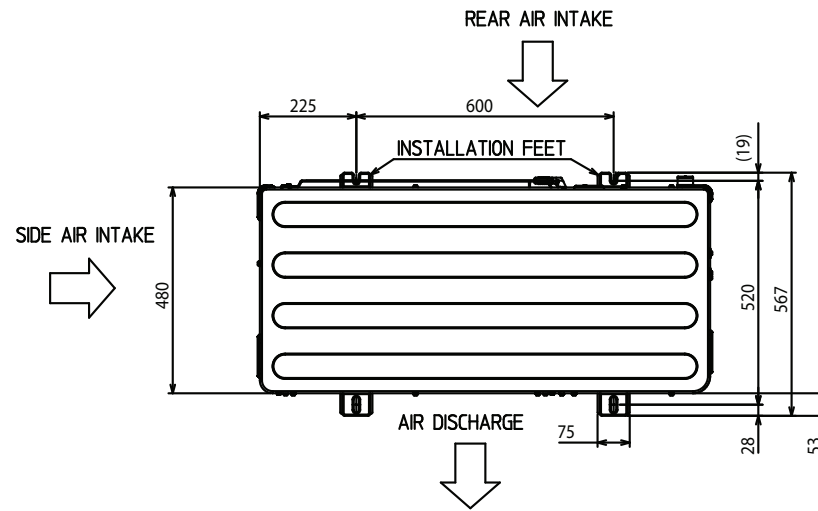


Side View

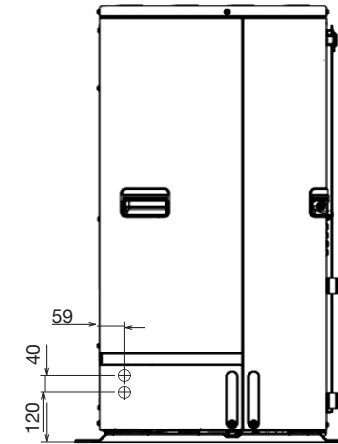

**Installation Location**

PUZ-WM60-112VAA/YAA(-BS)

All measurements in mm

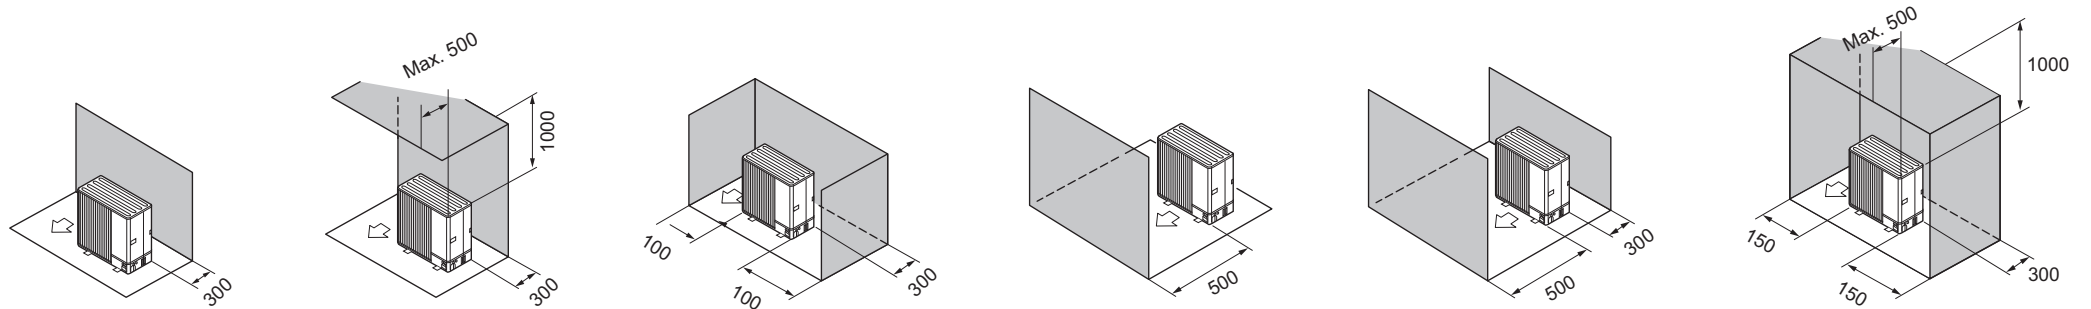


Please refer to Databook and Installation Manual for further details.



## PUZ-HWM140VHA/YHA

### R32 Monobloc Air Source Heat Pumps

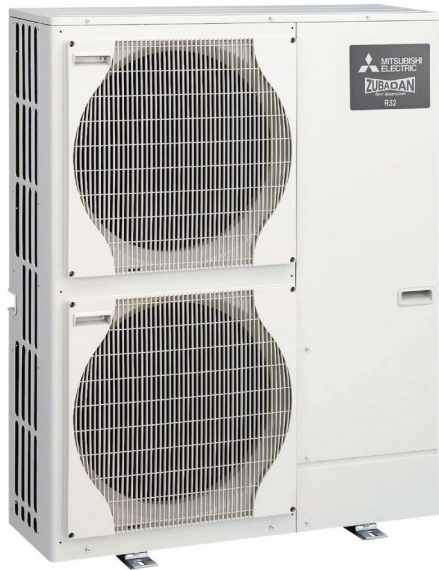

Our range of Zubadan chassis Ecodan monobloc air source heat pumps are suitable for properties with large space heating requirements and are available in single or three phase 14kW sizes.

With its advanced flash injection technology, this product provides a solution to low ambient capacity issues common to standard systems and is a viable solution for all types of domestic requirements that the UK housing market demands.

#### Key Features & Benefits

- Self-contained unit, only requiring water and electric connections
- No need for gas supply, flues or ventilation
- Low maintenance and quiet operation
- Operates with outside temperatures as low as -28°C
- Optimised low ambient defrost control and operation down to -15°C
- Hybrid function, for use with conventional boilers
- Energy monitoring as standard
- Multiple unit cascade function



OUTDOOR UNIT		PUZ-HWM140VHA(-BS)	PUZ-HWM140YHA(-BS)
HEAT PUMP SPACE HEATER - 55°C	ErP Rating (Range A+++ to D)	A++	A++
	$\eta_s$	131%	131%
	SCOP	3.26	3.24
HEAT PUMP SPACE HEATER - 35°C	ErP Rating (Range A+++ to D)	A+++	A+++
	$\eta_s$	176%	176%
	SCOP	4.33	4.30
HEAT PUMP COMBINATION HEATER - Large Profile <sup>1</sup>	ErP Rating (Range A+ to F)	A+	A+
	$\eta_{wh}$	130%	130%
HEATING <sup>2</sup> (A-7/W35)	Capacity (kW)	14.0	14.0
	Power Input (kW)	5.71	5.71
	COP	2.45	2.45
OPERATING AMBIENT TEMPERATURE (°C DB)		-28 ~ +35	-28 ~ +35
SOUND DATA <sup>3</sup>	Pressure Level at 1m (dBA)	53	53
	Power Level (dBA) <sup>4</sup>	67	67
WATER DATA	Pipework Size (mm)	28	28
	Flow Rate (l/min)	40.1	40.1
	Water Pressure Drop (kPa)	20	20
DIMENSIONS (mm)	Width	1020	1020
	Depth	330+30 <sup>7</sup>	330+30 <sup>7</sup>
	Height	1350	1350
WEIGHT (kg)		132	143
ELECTRICAL DATA	Electrical Supply	220-240v, 50Hz	380-415v, 50Hz
	Phase	Single	3
	Nominal Running Current [MAX] (A) <sup>5</sup>	13.8 [35]	4.5 [13]
	Fuse Rating - MCB Sizes (A) <sup>6</sup>	40	16
REFRIGERANT CHARGE (kg) / CO <sub>2</sub> EQUIVALENT (t)	R32 (GWP 675)	3.3 / 2.23	3.3 / 2.23

For information marked with a "-" please consult the databook or speak to your local sales office.

<sup>1</sup> Combination with E-PT20X Cylinder <sup>2</sup> Under normal heating conditions at outdoor temp: -7°CDB / -8°CWB, outlet water temp 35°C, inlet water temp 30°C.

<sup>3</sup> Under normal heating conditions at outdoor temp: 7°CDB / 6°CWB, outlet water temp 55°C, inlet water temp 47°C as tested to BS EN14511.

<sup>4</sup> Sound power level tested to BS EN12102. <sup>5</sup> Under nominal heating conditions at outdoor temp: 7°C, outlet water temp: 35°C.

<sup>6</sup> MCB Sizes BS EN60898-2 & BS EN60947-2. <sup>7</sup> Grille.

$\eta_s$  is the seasonal space heating energy efficiency (SSHEE)  $\eta_{wh}$  is the water heating energy efficiency



Certificate Number: 037-0035-20  
Product Type: Heat Pumps  
Product Reference: PUZ-HWM140VHA/YHA(-BS)



CERTIFIED


Certification Numbers:  
037-0035-20-01/02/03/04

**Product Dimensions**


PUZ-HWM140VHA/YHA(-BS)

All measurements in mm

Front View

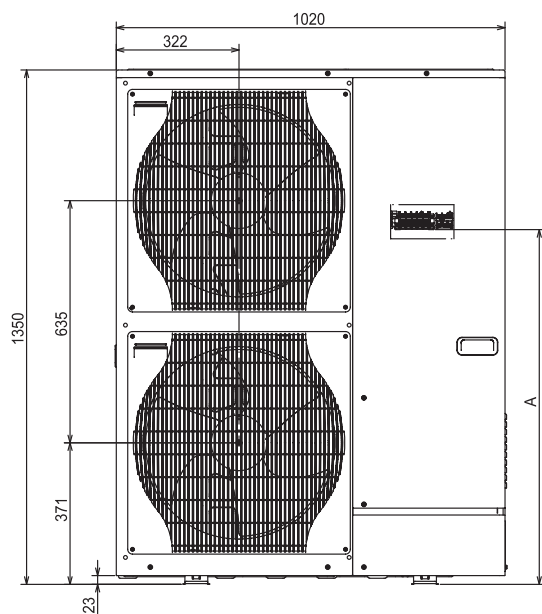


Upper View

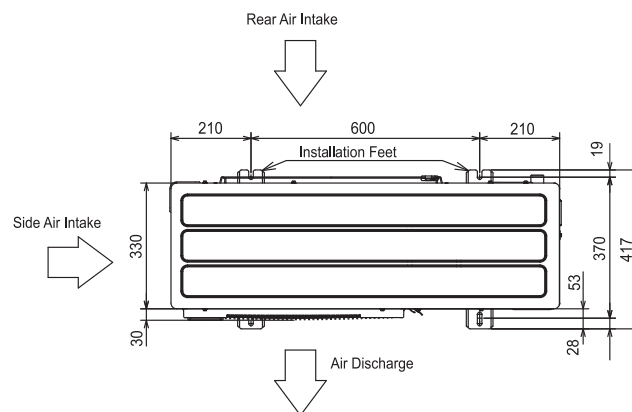

	A
VHA	1079
YHA	931


Side View

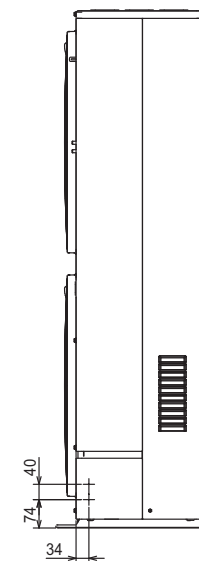

**Installation Location**

PUZ-HWM140VHA/YHA(-BS)

All measurements in mm

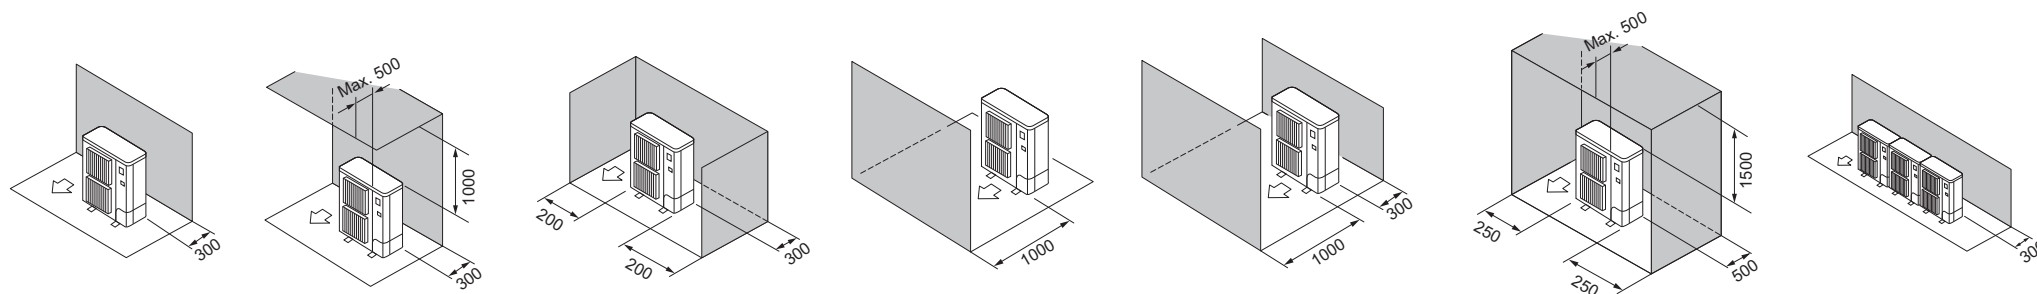

Please refer to Databook and Installation Manual for further details.



## EHPT20X-MEHEW

### FTC7 Packaged Cylinder for Ecodan Monobloc Units



The Packaged Cylinder provides a highly adaptable heating solution for all property types.

Designed to optimise performance within a compact white goods footprint, the plug and play packaged cylinder fully integrates with the Ecodan monobloc air source heat pump range. Advanced plate heat exchanger technology delivers superior heat up times and our rapid SD card commissioning, MELCloud Home Wi-Fi connectivity and energy monitoring functions are also included as standard.

#### Key Features & Benefits

- A+ hot water efficiency
- Stylish and modern aesthetics
- Packaged hot water, heating and controls
- Colour touch screen control
- MELCloud Home enabled
- Minimised energy consumption
- Flexible product placement
- Plug and play simple installation
- Intuitive user friendly operation
- Remote control, monitoring, maintenance and technical support

#### FTC7 Controller

Mitsubishi Electric's seventh generation controller (FTC7) includes intelligent room temperature control as standard. This together with advanced weather compensation ensures the system delivers efficient, comfortable heating regardless of the season. FTC7 also includes energy monitoring showing consumed and produced energy.




# R290 R32

CYLINDER		EHPT20X-MEHEW	
NOMINAL HOT WATER VOLUME (LITRES)		200	
HEAT PUMP COMBINATION HEATER - Large Profile (Average Climate)		ErP Rating (Range A+ to F)	
OPERATING AMBIENT TEMPERATURE (°C DB)		A+	
SOUND PRESSURE LEVEL AT 1M (dBA)		0 ~ +35°C (RH<80%)	
WATER DATA		28	
Flow Rate (l/min) - with R32 Heat Pump 5 / 6 / 8.5 / 11.2 / 14kW		14 / 17 / 24 / 32 / 40	
- with R290 Heat Pump 5 / 6 / 8.5 / 10 / 12kW		14 / 17 / 27 / 34 / 34	
Primary Circuit Pump		Grundfos UPM3 15-75 130	
Sanitary Hot Water Pump		Grundfos UPSO 15-60 130	
Connection Size (mm) Heating / DHW		G1 / G3/4	
WATER SAFETY DEVICES	Heating Water Circuit	Control Thermistor (°C)	80
	DHW Cylinder	Flow Sensor (minimum flow 5L/min)	Supplied
Control Thermistor (°C)		75	
Temp and Pressure Relief Valve (°C)/ (MPa) (Bar)		90 / 0.7 (7)	
DIMENSIONS (mm)		Width	
		595	
		Depth	
		680	
		Height	
		1600	
WEIGHT EMPTY / FULL (kg)		81 / 287	
ELECTRICAL DATA		Electrical Supply	
Control Board - optionally powered by outdoor unit		220-240v, 50Hz	
Phase		Single	
Fuse Rating - MCB Sizes (A) <sup>1</sup>		10	
Immersion Heater		Electrical Supply	
		220-240v, 50Hz	
		Phase	
		Single	
		Capacity (kW)	
		3	
		Max Running Current (A)	
		13	
		Fuse Rating - MCB Sizes (A) <sup>1</sup>	
		16	
MECHANICAL ZONES		DHW and 1 Heating Zone <sup>2</sup>	
OPTIONAL SIMPLIFIED WIRELESS ROOM THERMOSTAT AND WIRELESS RECEIVER		PAR-WT60R-E and PAR-WR61R-E Receiver	


<sup>1</sup> MCB Sizes BS EN60898-2 & BS EN60947-2. <sup>2</sup> Optional 2 zone accessory pack available.

**Notes:** Notes: Cylinder includes: Flow Temperature Controller (FTC7) with Main Controller and Temperature Sensors, Pumps & Valves for Zone 1 and DHW use, Flow Sensor, Plate Heat Exchanger, Scale Trap and 3kW Immersion Heater.


Left View

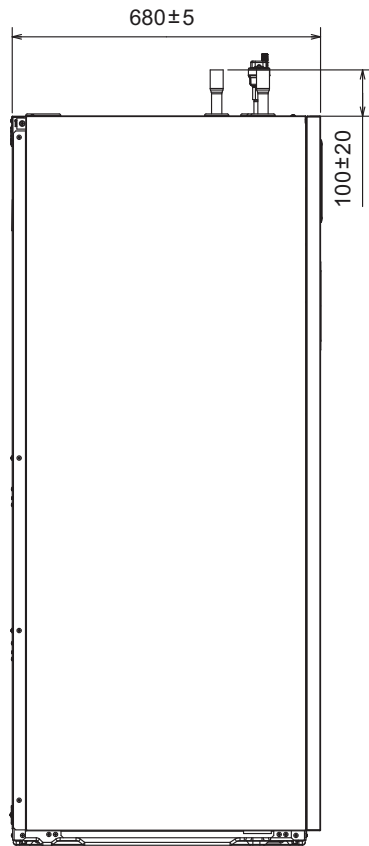


Front View

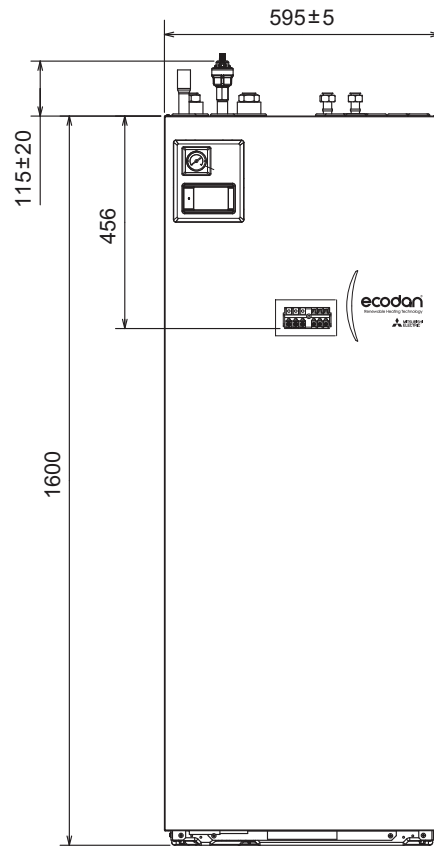

Right View

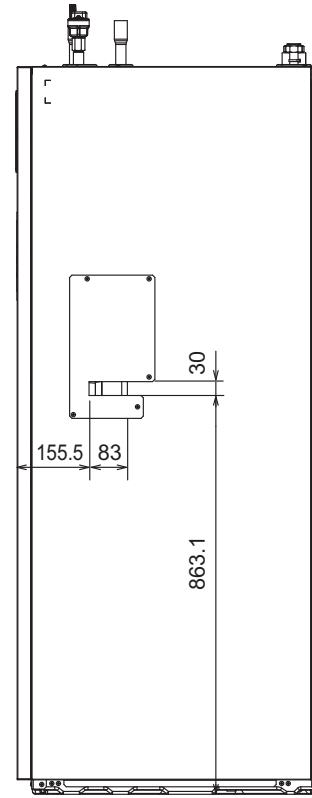

Upper View

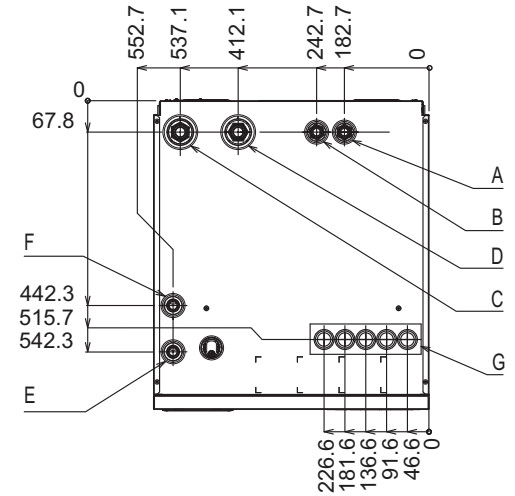

Letter	Pipe Description	Connection size/type
A	DHW outlet connection	G3/4"/Compression
B	Cold water inlet connection	G3/4"/Compression
C	Space heating return connection	G1"/Compression
D	Space heating flow connection	G1"/Compression
E	Flow from heat pump connection	G1"/Compression
F	Return to heat pump connection	G1"/Compression
G	Electrical cable inlets	

# ecodan®

## EHPT15-17X-UKHLEWS

### FTC7 Pre-Plumbed Slimline Cylinders for Ecodan Monobloc Units



The Pre-Plumbed Slimline Cylinder comes complete with integrated hydraulic components & advanced controls.


Designed to optimise performance and flexibility within a minimal footprint, the slimline cylinder fully integrates with the Ecodan monobloc air source heat pump range. Advanced plate heat exchanger technology delivers superior heat up times and our rapid SD card commissioning, MELCloud Home Wi-Fi connectivity and energy monitoring functions are also included as standard.

#### Key Features & Benefits

- Pre-Plumbed and Pre-Wired
- DHW Plate Heat Exchanger combined with scale trap
- Low Loss Header
- Colour touch screen control
- MELCloud Home enabled
- Plug and play simple installation
- Excellent hot water recovery times
- Automatic heat pump flow rate regulation
- Intuitive user friendly operation
- Remote control, monitoring, maintenance and technical support

#### FTC7 Controller

Mitsubishi Electric's seventh generation controller (FTC7) includes intelligent room temperature control as standard. This together with advanced weather compensation ensures the system delivers efficient, comfortable heating regardless of the season. FTC7 also includes energy monitoring showing consumed and produced energy.

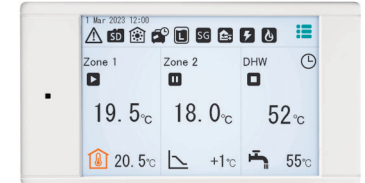

Manufactured in the UK


## R290 R32

CYLINDER		EHPT15X-UKHLEWS	EHPT17X-UKHLEWS
NOMINAL HOT WATER VOLUME (LITRES)		150	170
ErP Rating (Range A+ to F)		C	C
HEAT LOSS (kWh/24hrs)		1.40	1.59
HEAT LOSS (W)		58	66
WATER	Flow rate (l/min) - with R32 Heat Pump 5 / 6 / 8.5kW	14 / 17 / 24	14 / 17 / 24
	- with R290 Heat Pump 5 / 6 / 8.5kW	14 / 17 / 27	14 / 17 / 27
Primary Circuit Pump	Heating Circuit Pump		Grundfos UPM3L 25-75 130AZA
	Sanitary Hot Water Pump		Grundfos UPM3 AUTO 25-70 130
	Connection Size (mm) Heating / DHW	22 / 22	22 / 22
	Charge Pressure (MPa (Bar))	0.35 (3.5)	0.35 (3.5)
WATER SAFETY	Water Circuit DHW Cylinder	Control Thermistor (°C)	80
		DHW Expansion Vessel (Litres)	12
		Control Thermistor	75
		Over Temperature Cut-Out (°C)	80 ± 5
		Temp and Pressure Relief Valve (°C) / (MPa (Bar))	90 / 1.0 (10)
DIMENSIONS (mm)		Expansion Relief Valve (Cold) (MPa (Bar))	0.8 (8)
		Width	676
		Depth	654
		Height	1516
WEIGHT EMPTY / FULL (kg)		59 / 209	63 / 233
CYLINDER MATERIAL	Cylinder Insulation	Cylinder Material	Duplex stainless steel
		Insulation Type	CFC / HCFC-free flame-retardant expanded Polyurethane
		Insulation Thickness (mm)	50
		GWP of Insulation	3.1
		ODP of Insulation	0
ELECTRICAL DATA	Control Board optionally powered by outdoor unit	Electrical Supply	220-240v, 50Hz
		Phase	Single
		Fuse Rating - MCB Sizes (A) <sup>1</sup>	16
		Electrical Supply	220-240v, 50Hz
	Immersion Heater	Phase	Single
		Capacity (kW)	3
		Max Running Current (A)	13
		Fuse Rating - MCB Sizes (A) <sup>1</sup>	16
MECHANICAL ZONES		DHW and 1 Heating Zone <sup>2</sup>	
OPTIONAL SIMPLIFIED WIRELESS ROOM THERMOSTAT AND WIRELESS RECEIVER		PAR-WT60R-E Controller and PAR-WR61R-E Receiver	


<sup>1</sup> MCB Sizes BS EN60898-2 & BS EN60947-2. <sup>2</sup> Optional 2 zone accessory pack available.

**Notes:** Cylinder includes: Flow Temperature Controller (FTC7) with Main Controller and Temperature Sensors, Heat Pump Filter, Pumps & Valves for Primary Circuit and Zone 1 and DHW use, Flow Sensor, Plate Heat Exchanger, Scale Trap, 3kW Immersion Heater, DHW Expansion Vessel, Diverter Valve and Low Loss Header.

Front View

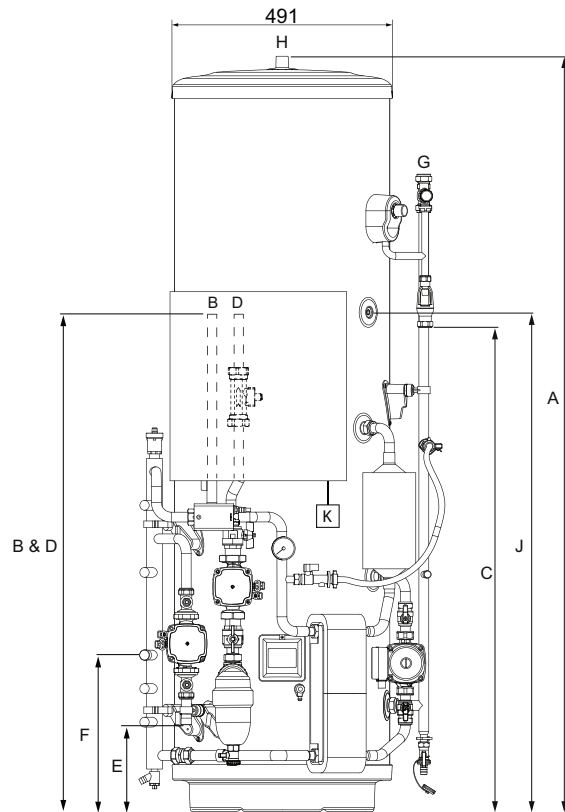

Upper View

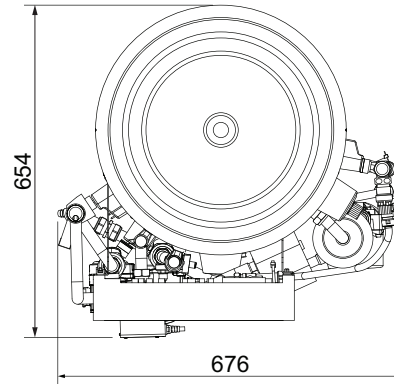

Letter	Pipe Description	Connection size/type
A	Overall height	
B	Heat pump flow connection	22mm O/D Copper
C	Tundish outlet connection	22mm Compression
D	Heat pump return connection	22mm O/D Copper
E	Heating zone 1 circuit flow connection	22mm O/D Copper
F	Heating zone 1 circuit return connection	22mm O/D Copper
G	Cold water inlet connection	22mm Compression
H	Hot water outlet connection	22mm Compression / 3/4" BSP M
J	THW5A sensor pocket	
K	Wi-Fi adaptor (included, installer to locate and mount)	

Capacity	150	170
A	1516	1690
B	1127	1127
C	909	1083
D	1127	1127
E	194	194
F	350	350
J	943	1117
K	Installer to locate and mount	



## EHPT15-30X-UKHEWS/L

### FTC7 Pre-Plumbed Standard Cylinders for Ecodan Monobloc Units



The Pre-Plumbed Standard Cylinder comes complete with integrated hydraulic components & advanced controls.

Designed to optimise performance and flexibility within an average footprint, the standard cylinder fully integrates with the Ecodan monobloc air source heat pump range. Advanced plate heat exchanger technology delivers superior heat up times and our rapid SD card commissioning, MELCloud Home Wi-Fi connectivity and energy monitoring functions are also included as standard.

#### Key Features & Benefits

- Pre-Plumbed and Pre-Wired
- DHW Plate Heat Exchanger combined with scale trap
- Low Loss Header
- Colour touch screen control
- MELCloud Home enabled
- Plug and play simple installation
- Excellent hot water recovery times
- Automatic heat pump flow rate regulation
- Intuitive user friendly operation
- Remote control, monitoring, maintenance and technical support

#### FTC7 Controller

Mitsubishi Electric's seventh generation controller (FTC7) includes intelligent room temperature control as standard. This together with advanced weather compensation ensures the system delivers efficient, comfortable heating regardless of the season. FTC7 also includes energy monitoring showing consumed and produced energy.



Manufactured in the UK


# R290 R32

CYLINDER		EHPT15X-UKHEWS	EHPT17X-UKHEWS	EHPT21X-UKHEWS	EHPT21X-UKHEWL	EHPT25X-UKHEWL	EHPT30X-UKHEWL	
NOMINAL HOT WATER VOLUME (LITRES)		150	170	210	210	250	300	
ErP Rating (Range A+ to F)		B	B	C	C	C	C	
HEAT LOSS (kWh/24hrs)		1.15	1.23	1.53	1.53	1.80	2.09	
HEAT LOSS (W)		48	51	64	65	75	86	
WATER	Flow rate (l/min) - with R32 Heat Pump 5 / 6 / 8.5 / 11.2 / 14kW	14 / 17 / 24 / - / -	14 / 17 / 24 / - / -	14 / 17 / 24 / - / -	- / 17 / 24 / 32 / 40	- / 17 / 24 / 32 / 40	- / - / 24 / 32 / 40	
	- with R290 Heat Pump 5 / 6 / 8.5 / 10 / 12kW	14 / 17 / 27 / - / -	14 / 17 / 27 / - / -	14 / 17 / 27 / - / -	- / 17 / 27 / 34 / 34	- / 17 / 27 / 34 / 34	- / - / 27 / 34 / 34	
Primary Circuit Pump		Grundfos UPMAL 25-75 130AZA						
Heating Circuit Pump		Grundfos UPM3 AUTO 25-70 130						
Sanitary Hot Water Pump		Grundfos UPSO 15-60 CIL2						
Connection Size (mm) Heating / DHW		22 / 22	22 / 22	22 / 22	28 / 22	28 / 22	28 / 22	
Charge Pressure (MPa (Bar))		0.35 (3.5)	0.35 (3.5)	0.35 (3.5)	0.35 (3.5)	0.35 (3.5)	0.35 (3.5)	
WATER SAFETY	Water Circuit DHW Cylinder	Control Thermistor (°C)	80	80	80	80	80	
		DHW Expansion Vessel (Litres)	12	18	18	18	24	24
		Control Thermistor	75	75	75	75	75	75
		Over Temperature Cut-Out (°C)	80 +/- 5	80 +/- 5	80 +/- 5	80 +/- 5	80 +/- 5	80 +/- 5
Temp and Pressure Relief Valve (°C) / (MPa (Bar))		90 / 1.0 (10)	90 / 1.0 (10)	90 / 1.0 (10)	90 / 1.0 (10)	90 / 1.0 (10)	90 / 1.0 (10)	
Expansion Relief Valve (Cold) (MPa (Bar))		0.8 (8)	0.8 (8)	0.8 (8)	0.8 (8)	0.8 (8)	0.8 (8)	
DIMENSIONS (mm)	Width	730	730	730	748	748	748	
	Depth	756	756	756	755	755	755	
	Height	1131	1257	1509	1509	1761	2075	
WEIGHT EMPTY / FULL (kg)		55 / 205	58 / 228	64 / 274	68 / 278	74 / 324	82 / 382	
CYLINDER MATERIAL	Cylinder	Duplex stainless steel						
	Insulation	CFC / HCFC-free flame-retardant expanded Polyurethane						
Insulation Type								
Insulation Thickness (mm)		60	60	60	60	60	60	
GWP of Insulation		3.1	3.1	3.1	3.1	3.1	3.1	
ODP of Insulation		0	0	0	0	0	0	
ELECTRICAL DATA	Control Board optionally powered by outdoor unit	Electrical Supply	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	
		Phase	Single	Single	Single	Single	Single	
		Fuse Rating - MCB Sizes (A) <sup>1</sup>	16	16	16	16	16	
	Immersion Heater	Electrical Supply	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
		Phase	Single	Single	Single	Single	Single	
		Capacity (kW)	3	3	3	3	3	
		Max Running Current (A)	13	13	13	13	13	
		Fuse Rating - MCB Sizes (A) <sup>1</sup>	16	16	16	16	16	
MECHANICAL ZONES		DHW and 1 Heating Zone <sup>2</sup>						
OPTIONAL SIMPLIFIED WIRELESS ROOM THERMOSTAT AND WIRELESS RECEIVER		PAR-WT60R-E Controller and PAR-WR61R-E Receiver						


<sup>1</sup> MCB Sizes BS EN60898-2 & BS EN60947-2. <sup>2</sup> Optional 2 zone accessory pack available.

**Notes:** Cylinder includes: Flow Temperature Controller (FTC7) with Main Controller and Temperature Sensors, Heat Pump Filter, Pumps & Valves for Primary Circuit and Zone 1 and DHW use, Flow Sensor, Plate Heat Exchanger, Scale Trap, 3kW Immersion Heater, DHW Expansion Vessel, Diverter Valve and Low Loss Header.


Front View

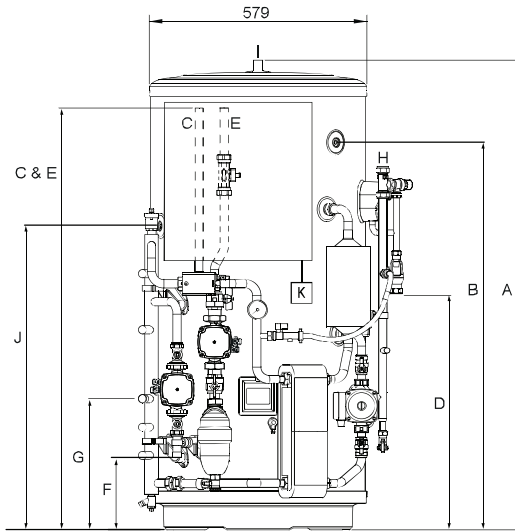


Upper View



Front View

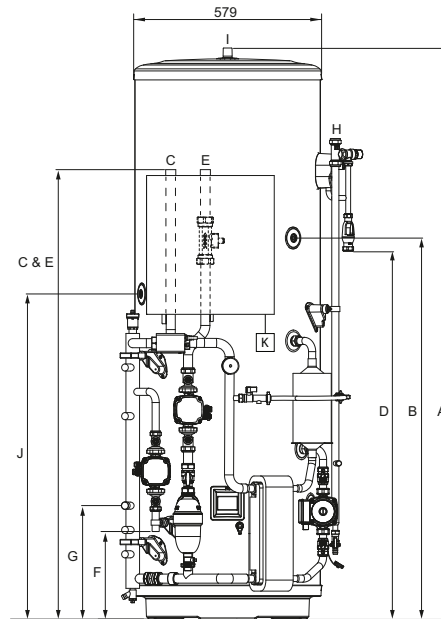

Upper View




Letter	Pipe Description	Connection size/type
A	Overall height	
B	Secondary return tapping (Not fitted to 150L and 170L)	
C	Heat pump flow connection - 150/170/210(S)	22mm O/D Copper
	Heat pump flow connection - 210(L)/250/300	28mm O/D Copper
D	Tundish outlet connection	22mm Compression
E	Heat pump return connection - 150/170/210(S)	22mm O/D Copper
	Heat pump return connection - 210(L)/250/300	28mm O/D Copper
F	Heating zone 1 circuit flow connection	22mm O/D Copper
G	Heating zone 1 circuit return connection	22mm O/D Copper
H	Cold water inlet connection	22mm Compression
I	Hot water outlet connection	22mm Compression / 3/4" BSP M
J	THW5A sensor pocket	
K	Wi-Fi adaptor (included, installer to locate and mount)	

Capacity	150	170	210 (S)	210 (L)	250	300
A	1131	1257	1509	1509	1761	2075
B	Not Fitted	Not Fitted	1050	1050	1175	1385
C	1122	1122	1122	1370	1370	1370
D	505	630	880	880	1136	1450
E	1122	1122	1122	1370	1370	1370
F	194	194	194	270	270	270
G	350	350	350	350	350	350
J	675	815	925	925	1005	1193
K	Installer to locate and mount					



## FTC7 / FTC2BR Flow Temperature Controllers

For use with Ecodan  
Monobloc Units and  
Third Party BEMS

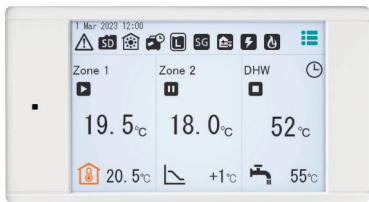

The FTC7 Flow Temperature Controller is designed specifically by Mitsubishi Electric to integrate with the Ecodan PUZ monobloc air source heat pump range and a third party cylinder.

The FTC2BR has been developed to allow the Ecodan PUZ-(H)WM range to interface with third party or BEMS (Building Energy Management System) controls. A combination of volt free and voltage inputs allow the Ecodan PUZ-(H)WM monobloc range to be used in applications where only simple on/off and temperature control is required.

### Functions that can be controlled and monitored by third party controls:

#### Controlled

- On/Off heating mode
- On/Off heating ECO mode
- On/Off hot water mode
- On/Off holiday mode
- On/Off legionella mode
- Change water flow temperature

#### Monitored

- Unit running
- Error
- Defrost

The ability to interface with third party controls opens up a huge number of application opportunities. Many processes simply require a heat source that provides hot water, without polished end user controls. The FTC2BR controller allows the Ecodan PUZ to be used in these applications. FTC2BR inputs and outputs can be used in conjunction with local BEMS.

# R290 R32

FLOW TEMPERATURE CONTROLLERS		FTC7 (PAC-IF082B-E)	FTC2BR (PAC-IF033B-E)
COMPATIBILITY	PUZ-WZ50VAA(-BS)	✓	
	PUZ-WZ60VAA(-BS)	✓	
	PUZ-WZ85VAA/YAA(-BS)	✓	
	PUZ-WZ100VAA/YAA(-BS)	✓	
	PUZ-WZ120VAA/YAA(-BS)	✓	
	PUZ-WM50VHA(-BS)	✓	✓
	PUZ-WM60VAA(-BS)	✓	✓
	PUZ-WM85VAA/YAA(-BS)	✓	✓
	PUZ-WM112VAA/YAA(-BS)	✓	✓
	PUZ-HWM140VHA/YHA(-BS)	✓	✓
BUILT-IN FEATURES	Initial Setting Wizard	✓	
	Commissioning Aide	✓	
	Smart Grid Ready	✓	
	PV Connection	✓	
	Energy Monitoring	✓	
	Dual Set-Point DHW	✓	
	Flow Rate Control Logic	✓	
	Quiet Mode	✓	
	Cascade <sup>*1</sup>	✓	
Hybrid	✓		
MELCloud Home ENABLED <sup>*2</sup>		✓	
BEMS INTERFACE			✓
DIMENSIONS (MM)	Width	393	336
	Depth	86.7	69
	Height	422	278
WEIGHT (kg)		4.2	3.2
OPERATING AMBIENT TEMPERATURE (°C) / HUMIDITY		0~ +35°C (RH<80%)	0~ +35°C (RH<80%)
ELECTRICAL DATA	Electrical Supply	Via Outdoor Unit or Independent Source (230v)	Via Outdoor Unit or Independent Source (230v)
	Phase	Single	Single

<sup>\*1</sup> Requires additional optional part PAC-IF082B-E. Please contact your regional sales office technical team. <sup>\*2</sup> Requires MELCloud Home Wi-Fi Interface MAC-5971F-E.



# Energy Monitoring Packs

All Ecodan Flow Temperature Control systems come with free energy monitoring as standard. System users are able to measure both consumed electrical energy and produced heat energy to the nearest kWh.

In addition to the basic system functionality features, i.e. hot water and heating status, the system's energy performance can also now be viewed. Historic energy consumption, heat production and run cost reports are available via the main controller, SD card or MELCloud Home.



PACK	5kW	5kW	6kW	6kW	8.5kW	8.5kW	10kW	11.2kW	12kW	14kW	DESCRIPTION	ELECTRIC METER	HEAT METER	DATA STORAGE
EMP1	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	Energy input & output estimation included as standard			
EMP2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	Electrical energy measurement consumption pack	2 x ACC-EM-EML-1PH2 System Electricity Meter		
EMPH-M-1PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	Electrical energy consumption and heat generation pack for hybrid systems	2 x ACC-EM-EML-1PH2 System Electricity Meter	1 x ACC-HM-749-G25 Glycol Mono Hybrid System Heat Meter	ACC-RES-DSV-1Y One Year



## MELCloud Home Wi-Fi Connectivity



MELCloud Home is a cloud based solution for controlling your Mitsubishi Electric Ecodan heating system either locally or remotely by PC, Mac, Tablet or Smartphone via the internet.

MELCloud Home enables effortless management of an Ecodan system anytime, anywhere, providing real-time system status updates and allowing the user to monitor energy usage and temperature reports, directly from their device.



The set up and remote operation of your Ecodan heating system via MELCloud Home is simple and straight forward. All you need is a wireless connection where the Ecodan is located and an internet connection on your mobile or fixed device. To set up the system, the router and the Ecodan Wi-Fi interface need pairing and this is done simply and quickly via the WPS button found on all mainstream routers, or using access point pairing via a mobile phone.

### Key Features & Benefits

- Monitor & control your Ecodan directly from your connected device
- Access to remote maintenance and technical support
- Reports on energy use, temperature history and more
- Share / restrict access and control of the Ecodan system
- Smart home integration via Amazon Alexa



### System Diagram

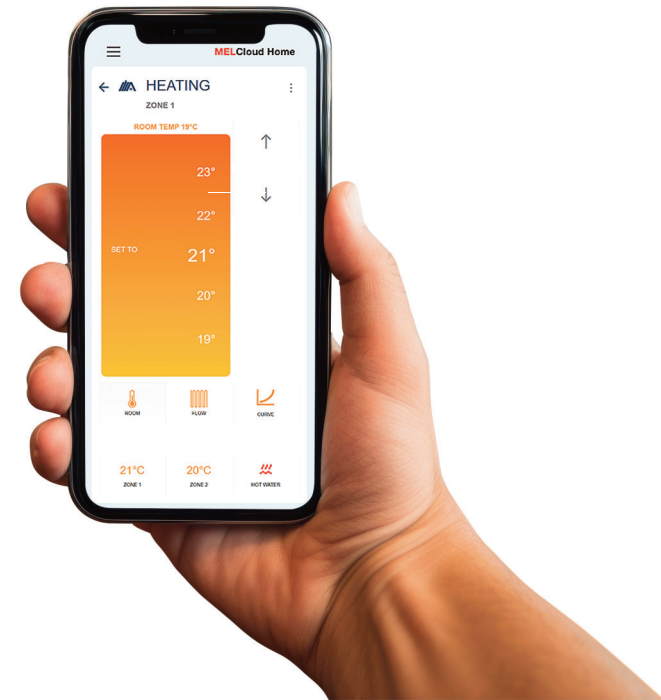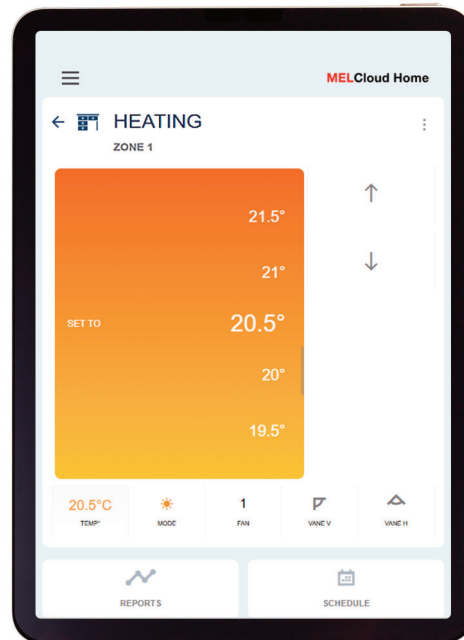



For more information, watch our videos:

Smart Control your Ecodan heat pump with MELCloud Home

Click play or Scan the QR code



MELCloud Home access point on Ecodan air source heat pumps

Click play or Scan the QR code



Available for PC, Mac, Tablet or Smartphone

## Supported Ecodan Models

All **Ecodan FTC7** systems have energy monitoring functionality as standard and the ability to connect to MELCloud Home. A MAC-597IF-E Wi-Fi Interface is required to use MELCloud Home.

Wi-Fi Interface		MAC-597IF-E
DESCRIPTION		Wi-Fi Interface
CONNECT TO		Indoor Unit
MAX NUMBER OF UNITS		1
COMPATIBILITY		Ecodan FTC7
POWER SUPPLY		From indoor unit
DIMENSIONS (WxDxH) mm		73.5 x 18.5 x 41.5
CONTROL	On/Off	✓
	Mode	✓
	Heating Setpoint	✓
	Hot Water Boost	✓
	2-Zone Control	✓
	Holiday Mode	✓
	Timer	✓
	Frost Protection	✓
MONITOR	On/Off	✓
	Mode	✓
	Heating Setpoint	✓
	Tank Temperature	✓
	Tank Target Temperature	✓
	Outside Temperature	✓
	Fault Codes	✓
	Consumed Electrical Energy	✓
	Produced Heat Energy	✓

## Supported Hardware / Software

### Tablets (Apps or Web Client)

Apple iPad / iPad mini  
 Samsung Galaxy Tab / Note  
 Google Nexus  
 Dell Latitude 10  
 Microsoft Surface  
 BlackBerry PlayBook

### Smartphones (Apps or Web Client)

Apple iPhone  
 Samsung Galaxy S  
 Google Nexus  
 Nokia Lumia  
 BlackBerry Z10

### Operating Systems

Android™  
 Apple iOS / OS  
 Microsoft Windows  
 BlackBerry

### Internet Browsers (Web Client only)

Microsoft Internet Explorer  
 Google Chrome  
 Apple Safari  
 Mozilla Firefox  
 Opera

### Please Note:

This is not definitive list of all compatible devices, other similar devices which use supported Operating Systems or Internet Browsers should also work either via dedicated Apps or via Web Browser / Web Client options. Please note that user experience may vary slightly depending on hardware and software combination. Google, Android, Google Play, Google Chrome and other marks are trademarks of Google LLC.

# i-LIFE2 Slim

## Fan Assisted Radiator


The i-Life2 Slim Fan Assisted Radiator is designed to work seamlessly with existing heating or renewable technologies.

### Key Features & Benefits

- **Stylish** - At only 13cm deep, the sleek and elegant satin-white, wall mounted cabinet is designed to blend seamlessly into any setting
- **Flexible** - Packed with advanced controls and functions, the i-Life2 Slim will work with traditional heating or renewable systems such as heat pumps
- **Easy to Use** - Airflow is managed by deflectors at the top of the unit, which open and close automatically, ensuring fast and even heat distribution



MODEL		I-LIFE2 SLIM DLMV 080 ATS2	I-LIFE2 SLIM DLMV 170 ATS2
CAPACITY (W) <sup>2 *8</sup>		500 / 780 / 880	1060 / 1660 / 2130
ELECTRICAL DATA	Electrical Supply	230v, 50Hz	230v, 50Hz
	Phase	Single	Single
	Fan Power Input (W) - (Lo-Mi-Hi) <sup>1 *8</sup>	0.7 / 4.6 / 10.7	1.62 / 10.1 / 19.0
WATER DATA	Water Flow Rate (l/min) - (Lo-Mi-Hi) <sup>2</sup>	1.2 / 2.4 / 2.4	3 / 4.8 / 6
	Water Pressure Drop (kPa) - (Lo-Mi-Hi) <sup>2 *8</sup>	3 / 6 / 8	2 / 5 / 8
AIR DATA	Air Flow Rate (m3/h) - (Lo-Mi-Hi) <sup>1</sup>	51 / 93 / 125	122 / 221 / 277
SOUND DATA	Sound Pressure (dB(A)) - (Lo-Mi-Hi) <sup>3</sup>	24 / 35 / 41	26 / 36 / 42
	Sound Power (dB(A)) - (Lo-Mi-Hi) <sup>4 *7 *8</sup>	33 / 44 / 50	35 / 45 / 51
DIMENSIONS (mm) <sup>5</sup>	Width	737	937
	Depth	131	131
	Height	579	579
WEIGHT (kg) <sup>5</sup>		17	20


 i-Life2 Slim units are managed by a variable speed fan motor that continuously modulates the fan speed

1. Room temperature 27°C d.b./19°C w.b.; Chilled water (in/out) 7/12°C.
2. Room temperature 20°C d.b.; Hot water (in/out) 45/40 °C.
3. Sound pressure level in free field on a reflective surface, 1m from fan front and 1m from the ground. Non-binding value obtained from sound power level.
4. Sound power on the basis of measurements made in compliance with ISO 374 and Eurovent 8/2.
5. Unit in standard configuration/execution, without optional accessories.
6. Values in compliance with EN14511-3:2013.
7. Values in compliance with [REGULATION (UE) N.2016/2281].
8. Certified data in EUROVENT.

Product Dimensions

i-LIFE2 SLIM DLMV 080 ATS2 & i-LIFE2 SLIM DLMV 170 ATS2


All measurements in mm

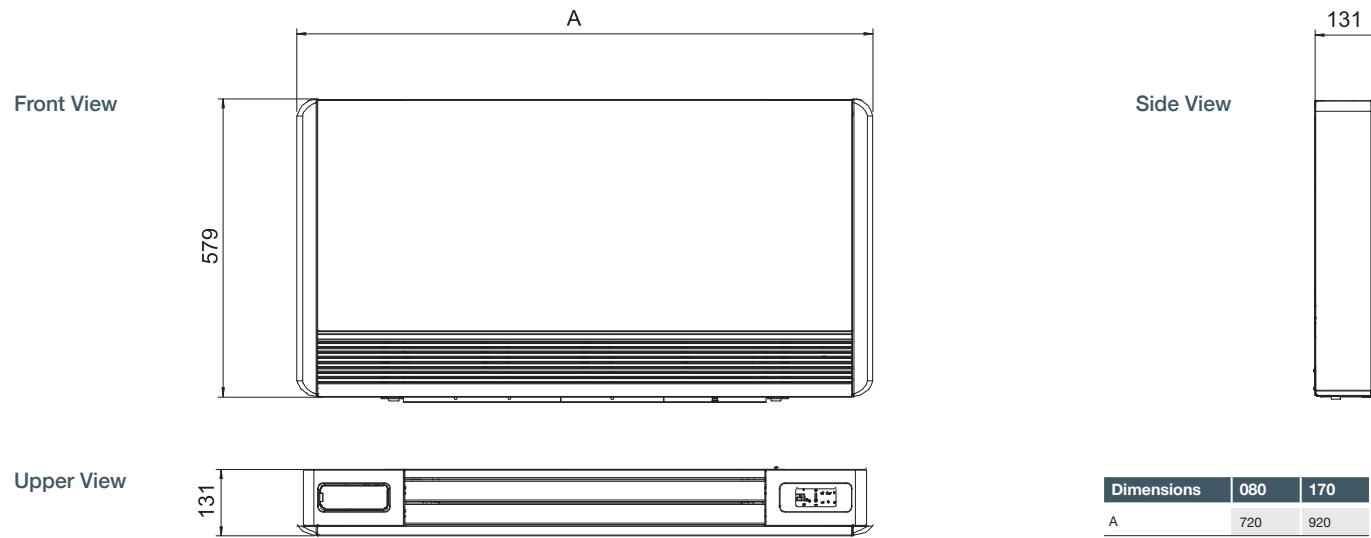

Installation Location

i-LIFE2 SLIM DLMV 080 ATS2 & i-LIFE2 SLIM DLMV 170 ATS2

All measurements in mm

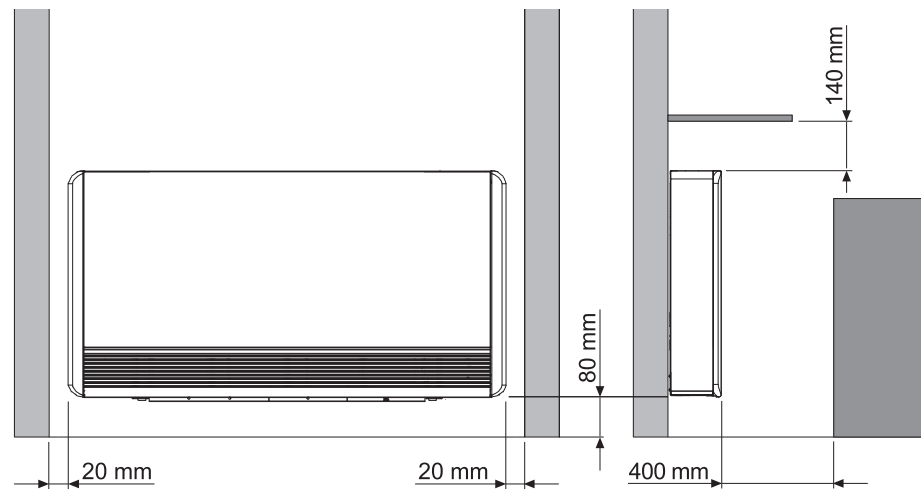



## Accessories / Optional Extras



**PAR-WT60R-E**  
FTC Wireless Controller Transmitter

DESCRIPTION	MODEL REF.
<b>PUZ</b>	
FTC Wireless Controller Transmitter	PAR-WT60R-E
FTC Wireless Controller Receiver 2m Cable	PAR-WR61R-E
Modbus CN105 Interface	ACC-BEMS-A1MR5
Isolator 20A IP65	ACC-ISO-020
Isolator 32A IP65	ACC-ISO-032
Isolator 40A IP65	ACC-ISO-040
FTC High Temperature Sensor 5m Cable	PAC-TH012HT-E
FTC High Temperature Sensor 30m Cable	PAC-TH012HTL-E
FTC Flow and Return Temperature Sensors 5m Cable	PAC-TH011-E
FTC Cylinder DHW Temp Sensor 5m Cable	PAC-TH011TK2-E
FTC Cylinder DHW Temp Sensor 30m Cable	PAC-TH011TKL2-E
FTC Third Party Indoor Unit Flow Sensor	PAC-FS01-E
FTC G3 Compliance Kit	PAC-WK02UK-E
FTC Particle Filter 22mm < 8.0kW	ACC-FI-HP22
FTC Particle Filter 28mm ≥ 8.0kW	ACC-FI-HP28
FTC Service Diagnostic Tool	PAC-SK52ST
Ecodan Anti-Vibration Fix-It-Foot 600mm Kit	ACC-AVM-001
Ecodan Reinforced Lightweight Slab + Anti-Vibration Fix-It-Foot Kit	ACC-AVS-001
Compatible Drain Socket Kit	PAC-SH71DS-E
10L Anti Freeze	ACC-AFZ-010A
20L Anti Freeze	ACC-AFZ-020A
Insulated Through Wall Sleeve Kit (85mm)	ACC-FCP-TW1
External Pipework Trunking Length (1m x 140mm Black x2)	ACC-TRU-LE1
External Pipework Trunking Length (2m x 140mm Black x1)	ACC-TRU-LE2
External Pipework Trunking Length Connector (140mm Black)	ACC-TRU-JO1
External Pipework Trunking Wall Cover (140mm Black)	ACC-TRU-CO1
External Pipework Trunking Elbow (140mm Black)	ACC-TRU-EL1
External Pipework Trunking External Corner (140mm Black)	ACC-TRU-EC1
External Pipework Trunking Internal Corner (140mm Black)	ACC-TRU-IC1
Pack for 2 Zone Systems with Equal Temperatures	ACC-2ZP-K01
Pack for 2 Zone Systems with Different Temperatures	ACC-2ZP-K02
Insulated Flexible Connection Pipes (22mm x 500mm) Standard Pair	ACC-FCP-S22
Insulated Flexible Connection Pipes (28mm x 500mm) Standard Pair	ACC-FCP-S28
Insulated Flexible Connection Pipes (28mm x 300mm) Elbow Pair	ACC-FCP-E28
EMLITE ECA2v 1Ph System Electricity Meter	ACC-EM-EML-1PH2
SONTEX 749 25% Glycol Mono Hybrid System Heat Meter	ACC-HM-749-G25
SONTEX 449 25% Glycol Mono System Heat Meter	ACC-HM-449-G25
Packaged Cylinder Controller Blanking Plate	PAC-RC02-E
Modbus and BACnet MSTP CN105 Adaptor	MELCOBEMS MINI (A1M+)

# Ventilation

Fresh Air Ventilation Range





# Contents

<b>LGH-RVX3-E</b> Commercial Lossnay	<b>5.6</b>
<b>LGH-RVXT3-E</b> Commercial Lossnay	<b>5.8</b>
<b>LGH-RVS-E</b> Commercial Lossnay	<b>5.10</b>
<b>GUX-MS-E</b> Lossnay Outdoor Air Processing Unit	<b>5.12</b>
<b>VL-CZPVU-L/R-E</b> Residential Lossnay	<b>5.14</b>
<b>CP-500CM-L/R</b> Cooling Module	<b>5.16</b>
<b>s-AIRME-G07 HR-P C</b> Air Handling Unit	<b>5.18</b>
<b>Accessories / Optional Extras</b>	<b>5.20</b>


## Fresh Air Ventilation Range

# Why Do We Need **Fresh Air Ventilation**?

The build-up of health damaging pollutants, mould and rot are all attributed to poor indoor air quality and the lack of effective ventilation.

With highly airtight buildings on the rise, alongside increasingly strict legislation on air quality, the need is growing for an effective solution such as mechanical ventilation, which is also energy efficient. Mitsubishi Electric systems are perfectly placed to address this need and are the ideal solution to provide fresh air.

Our range includes single and multi-room Mechanical Ventilation with Heat Recovery (MVHR) units and medium to large scale ventilation solutions including Air Handling Units (AHUs). All systems have been designed to provide the best ventilation solution for the chosen application, by delivering the required amount of fresh air, whilst extracting the right amount of stale air, in the most energy efficient way possible.

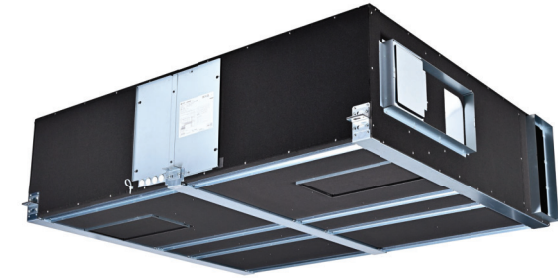

### Fresh air benefits include:

- A healthy and better maintained building
- Improved air quality for occupants
- Improved comfort via the recovery of heat to incoming fresh air



## Fresh Air Ventilation Range


### Excellent Air Quality and Heat Exchange Efficiency

#### How Lossnay Works

Our Lossnay systems have perfected the recovery of energy that would have otherwise been wasted. They do this by either warming or cooling incoming air, a feature which makes Mitsubishi Electric MVHR units extremely energy efficient.

Heat Recovery is made possible via the unique Lossnay ultra-thin paper core technology, which is constructed in a corrugated form and layered in alternative directions.

**This design allows a cross airflow to maximise heat recovery without the supply and exhaust air mixing, ensuring only fresh air is introduced to the building.**

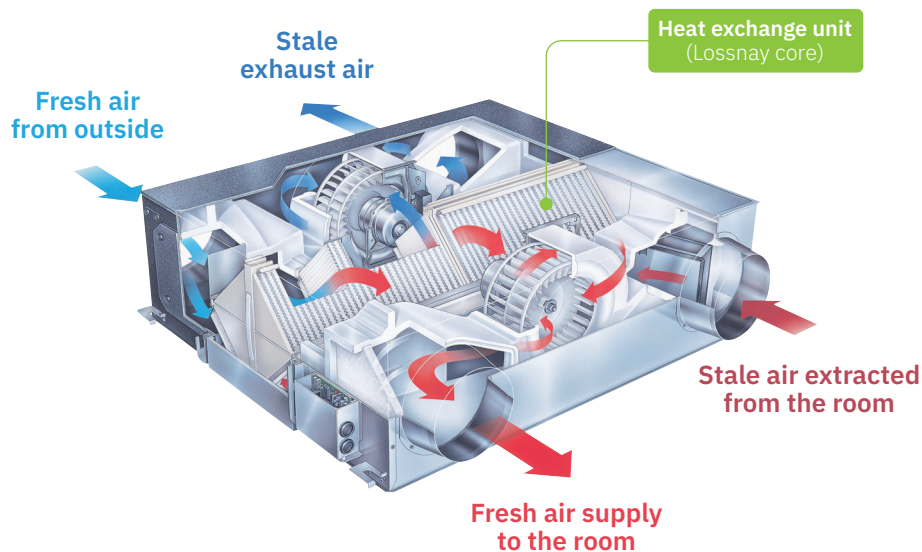

#### How Air Handling Units work

Packaged Air Handling Units (AHUs) are designed to provide a tempered fresh air supply into commercial buildings. They work in conjunction with the building's air conditioning system to provide occupants with a fresh and comfortable environment.



The Mitsubishi Electric AIRME Compact Air Handling Units incorporate a frameless structure to achieve a line-up of units that are as compact as possible, maximising air tightness and improving thermal properties.

**The s-AIRME-G07 HR-P range of AHU's utilises a combination of Mr Slim R32 Power Inverter heat pump technology, energy efficient plate heat exchanger heat recovery technology, and an integrated control system.**



# LGH-RVX3-E

## Commercial Lossnay

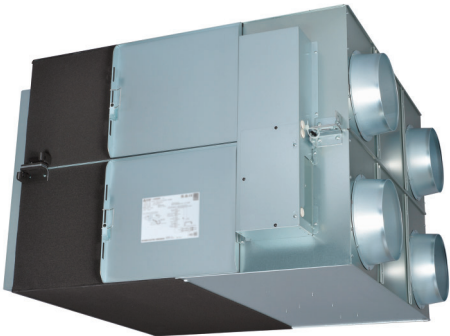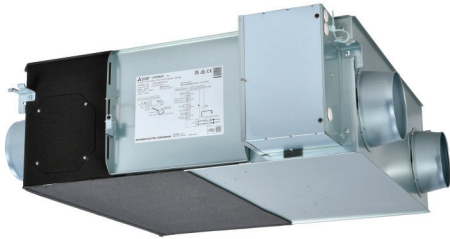

CO<sub>2</sub> LEVELS  
LOW MID HIGH



Compatible with Mitsubishi Electric  
plug-and-play CO<sub>2</sub> sensor  
(powered by the Lossnay unit)

The new Lossnay **LGH-RVX3-E** Mechanical Ventilation Heat Recovery (MVHR) systems are designed to supply clean, fresh air into any commercial building, whilst simultaneously extracting stale air, ensuring good indoor air quality for occupant wellbeing. These units are also able to recover valuable heat energy from inside the building, maximising energy efficiency and reducing running costs.

### Key Features & Benefits

- Mitsubishi Electric pioneered heat exchanger enables maximised latent heat exchange, resulting in cost and carbon savings
- Four commissionable fan speeds, settable between 25-100%, with independent supply and return fan control offering low running costs and easier compliance to Part L
- Optional Mitsubishi Electric energy saving CO<sub>2</sub> sensor allows automatic incremental fan control for a healthy indoor environment
- Full airflow in bypass mode, promoting good indoor air quality during free cooling
- Dual-Barrier coating on the fan prevents dust and grease accumulation, ensuring long-term efficient operation
- Lightweight structure ideal for easy ceiling installation
- Vertical installation available for flexibility of application
- Easy control interlock with Mr Slim and City Multi air conditioning systems, including M-NET connection for centralised control

MODEL		LGH-15RVX3-E	LGH-25RVX3-E	LGH-35RVX3-E	LGH-50RVX3-E	LGH-65RVX3-E	LGH-80RVX3-E	LGH-100RVX3-E	LGH-160RVX3-E	LGH-200RVX3-E	
25% (Default speed 1)	Air Volume	m <sup>3</sup> /h	38	63	88	125	163	200	250	500	
		l/s	10	17	24	35	45	56	69	139	
	External Static Pressure	Pa	8	8	10	10	10	11	12	11	
	Temperature Exchange Efficiency	Heating %	81.5	88.0	82.0	75.0	82.0	80.0	83.5	80.0	83.5
		Cooling %	78.0	85.0	79.0	73.0	80.0	78.0	82.5	78.0	82.5
	Enthalpy Exchange Efficiency	Heating %	80.5	84.0	80.0	73.0	80.0	73.5	75.5	73.5	76.0
		Cooling %	73.0	75.0	74.5	68.0	74.0	70.5	73.5	70.5	71.0
	Specific Fan Power	W/(l/s)	0.96	0.63	0.62	0.43	0.44	0.41	0.39	0.41	0.41
	Input Power	W	10	11	15	15	20	23	27	45	57
	Sound Pressure Level	dB(A)	17.0	17.0	17.0	17.0	17.5	18.0	18.5	18.0	18.0
50% (Default speed 2)	Air Volume	m <sup>3</sup> /h	75	125	175	250	325	400	500	1000	
		l/s	21	35	49	69	90	111	139	278	
	External Static Pressure	Pa	30	30	40	38	38	43	48	43	
	Temperature Exchange Efficiency	Heating %	78.0	81.0	79.0	73.5	78.5	78.0	79.5	78.0	79.5
		Cooling %	73.5	79.0	74.0	71.0	74.5	75.5	77.0	75.5	76.0
	Enthalpy Exchange Efficiency	Heating %	76.5	75.5	77.5	72.0	76.5	70.5	68.5	70.5	67.5
		Cooling %	66.0	68.0	68.5	63.0	66.5	65.0	66.0	65.0	65.0
	Specific Fan Power	W/(l/s)	0.72	0.60	0.60	0.49	0.56	0.58	0.60	0.58	0.59
	Input Power	W	15	21	29	34	51	64	83	128	163
	Sound Pressure Level	dB(A)	18.0	19.5	19.0	21.0	24.0	25.0	27.0	26.0	27.5
75% (Default speed 3)	Air Volume	m <sup>3</sup> /h	113	188	263	375	488	600	750	1200	
		l/s	31	52	73	104	135	167	208	333	
	External Static Pressure	Pa	68	68	90	85	85	96	107	96	
	Temperature Exchange Efficiency	Heating %	75.5	78.5	77.0	71.5	75.0	76.5	77.0	76.5	77.5
		Cooling %	70.5	76.5	71.0	67.0	70.0	70.0	72.0	70.0	71.5
	Enthalpy Exchange Efficiency	Heating %	73.5	72.0	74.5	69.5	72.0	65.0	63.0	65.0	64.0
		Cooling %	62.0	63.5	64.5	58.0	60.0	58.5	61.0	58.5	60.0
	Specific Fan Power	W/(l/s)	0.96	0.81	0.84	0.78	0.89	0.96	1.01	0.97	1.00
	Input Power	W	30	42	61	81	120	160	210	324	416
	Sound Pressure Level	dB(A)	22.0	25.0	24.5	27.0	31.5	33.5	35.0	35.0	36.0
100% (Default speed 4)	Air Volume	m <sup>3</sup> /h	150	250	350	500	650	800	1000	1600	
		l/s	42	69	97	139	181	222	278	444	
	External Static Pressure	Pa	120	120	160	150	150	170	190	170	
	Temperature Exchange Efficiency	Heating %	73.5	75.5	75.0	70.5	72.5	75.0	75.5	75.0	76.5
		Cooling %	65.5	70.5	66.5	63.5	65.0	65.0	67.5	65.0	66.5
	Enthalpy Exchange Efficiency	Heating %	70.5	69.0	72.0	68.5	69.5	62.0	60.5	62.0	60.5
		Cooling %	58.0	59.0	60.0	53.5	55.5	54.5	55.5	54.5	57.0
	Specific Fan Power	W/(l/s)	1.32	1.08	1.23	1.33	1.36	1.54	1.58	1.55	1.54
	Input Power	W	55	75	120	185	245	343	438	687	855
	Sound Pressure Level	dB(A)	27.0	30.5	30.5	35.0	37.5	39.0	40.0	41.0	41.5
DUCT SIZE	mm	100	150	150	200	200	250	250	(SA,PA)250 (OA,EA)270 x 700	(SA,PA)250 (OA,EA)270 x 700	
WEIGHT	kg	20	22	30	33	41	47	53	96	108	
DIMENSIONS	Width x Depth x Height	mm	780 x 610 x 289	780 x 735 x 289	888 x 874 x 331	888 x 1016 x 331	908 x 954 x 404	1144 x 1004 x 404	1144 x 1231 x 404	1144 x 1004 x 808	1144 x 1231 x 808
ELECTRICAL POWER SUPPLY						220-240v, 50Hz					
MAXIMUM CURRENT	A	0.57	0.88	1.37	1.86	2.37	3.23	3.77	4.74	5.40	
FUSE RATING (BS88) – HRC (A)	A	6	6	6	6	6	6	6	10	10	
HEAT EXCHANGER		Paper with specially treated Cellulose Membrane									
STANDARD FILTER		ISO 16890 Coarse 60% <sup>1</sup>									


Notes: Running current, power consumption, recovery efficiency, and sound levels are based on the above default airflow rates at 25%, 50%, 75%, and 100%. Specific duty point data is available upon request. Supply and exhaust fan speeds can be individually commissioned between 25% and 100% in 5% increments. Sound Pressure Level measured at 1.5m under the centre of the bottom panel. Air flow rates, external static pressure and specific fan powers tested to BS EN13053: 2019. Energy recovery efficiencies tested to BS EN308: 2022.

<sup>1</sup>: EN 779 G4 equivalent according to 'REHVA Filter Class Conversion between EN 779 and EN ISO 16890-1'.



# LGH-RVXT3-E

## Commercial Lossnay

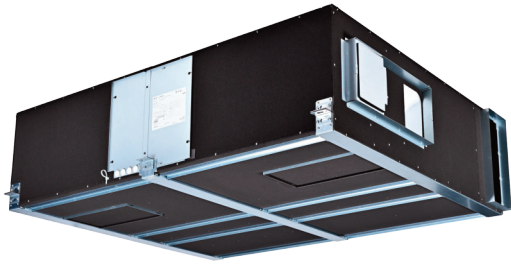

CO<sub>2</sub> LEVELS  
LOW MID HIGH



Compatible with Mitsubishi Electric  
plug-and-play CO<sub>2</sub> sensor  
(powered by the Lossnay unit)

Lossnay **LGH-RVXT3-E** Mechanical Ventilation Heat Recovery (MVHR) systems are designed to supply clean, fresh air into any commercial building, whilst simultaneously extracting stale air, ensuring good indoor air quality for occupant wellbeing. Offering a significantly reduced height, whilst maintaining a large airflow, these units are designed for installation in ceiling voids within commercial properties.

### Key Features & Benefits

- Mitsubishi Electric pioneered heat exchanger enables maximised latent heat exchange, resulting in cost and carbon savings
- Low unit height (500mm) and lightweight structure, ideal for ceiling installation
- Four commissionable fan speeds, settable between 25-100%, with independent supply and return fan control offering low running costs and easier compliance to Part L
- Optional Mitsubishi Electric energy saving CO<sub>2</sub> sensors allow automatic incremental fan control for a healthy indoor environment; sensors powered by Lossnay unit
- Easy control interlock with Mr Slim and City Multi air conditioning systems, including M-NET connection for centralised control
- Dual-Barrier coating on the fan prevents dust and grease accumulation, ensuring long-term efficient operation

MODEL			LGH-160RVXT3-E	LGH-200RVXT3-E	LGH-250RVXT3-E
25% (DEFAULT SPEED 1)	Air Volume	m <sup>3</sup> /h	400	500	625
		l/s	111	139	174
	External Static Pressure	Pa	12	12	12
	Temperature Exchange Efficiency	Heating %	88.0	86.0	84.0
		Cooling %	83.0	82.0	81.0
	Enthalpy Exchange Efficiency	Heating %	85.5	84.5	81.5
		Cooling %	78.0	75.0	73.0
	Specific Fan Power	W/(l/s)	0.41	0.40	0.50
	Input Power	W	46	56	86
	Sound Pressure Level	dB(A)	19.5	21.0	23.0
50% (DEFAULT SPEED 2)	Air Volume	m <sup>3</sup> /h	800	1000	1250
		l/s	222	278	347
	External Static Pressure	Pa	48	48	48
	Temperature Exchange Efficiency	Heating %	85.5	83.0	80.0
		Cooling %	79.0	78.0	76.5
	Enthalpy Exchange Efficiency	Heating %	83.0	81.5	78.0
		Cooling %	73.0	67.5	66.0
	Specific Fan Power	W/(l/s)	0.65	0.69	0.82
	Input Power	W	144	192	284
	Sound Pressure Level	dB(A)	26.0	28.0	31.5
75% (DEFAULT SPEED 3)	Air Volume	m <sup>3</sup> /h	1200	1500	1875
		l/s	333	417	521
	External Static Pressure	Pa	107	107	107
	Temperature Exchange Efficiency	Heating %	83.0	81.0	78.0
		Cooling %	75.0	73.0	70.5
	Enthalpy Exchange Efficiency	Heating %	81.0	79.5	76.0
		Cooling %	65.5	61.0	59.0
	Specific Fan Power	W/(l/s)	1.10	1.20	1.34
	Input Power	W	368	498	696
	Sound Pressure Level	dB(A)	33.0	35.0	38.0
100% (DEFAULT SPEED 4)	Air Volume	m <sup>3</sup> /h	1600	2000	2500
		l/s	444	556	694
	External Static Pressure	Pa	190	190	190
	Temperature Exchange Efficiency	Heating %	82.0	80.0	77.0
		Cooling %	70.0	67.5	65.0
	Enthalpy Exchange Efficiency	Heating %	80.0	78.5	75.0
		Cooling %	61.5	56.5	54.0
	Specific Fan Power	W/(l/s)	1.59	1.88	2.09
	Input Power	W	708	1044	1448
	Sound Pressure Level	dB(A)	38.0	40.0	44.0
DUCT SIZE	mm	Outlets (SA/EA): 250 x 650 / Inlets (RA/OA): 465 x 220			
WEIGHT	kg	172		172	
DIMENSIONS	Width x Depth x Height	2100 x 1600 x 500			
ELECTRICAL POWER SUPPLY		3-phase, 380-415v, 50Hz <sup>2</sup>			
MAXIMUM CURRENT	A	3.0	3.9	5.0	
HEAT EXCHANGER		Paper with Specially Treated Cellulose Membrane			
STANDARD FILTER		ISO 16890 Coarse 60% <sup>1</sup>			

**Notes:** Running current, power consumption, recovery efficiency, and sound levels are based on the above default airflow rates at 25%, 50%, 75%, and 100%. Specific duty point data is available upon request. Supply and exhaust fan speeds can be individually commissioned between 25% and 100% in 5% increments. Sound Pressure Level measured at 1.5m under the centre of the bottom panel. Air flow rates, external static pressure and specific fan powers tested to BS EN13053: 2019. Energy recovery efficiencies tested to BS EN308: 2022.

<sup>1</sup>: EN 779 G4 equivalent according to 'REHVA Filter Class Conversion between EN 779 and EN ISO 16890-1'.

<sup>2</sup>: 3 phase 4 wire power must be connected. The unit only uses loads L2 and L3, meaning L1 does not draw load.

## Accessories

### Remote Controllers

#### PZ-62DR-EB

Lossnay remote controller for LGH-RVXT3-E

#### PZ-4GS-E

External signal relay for LGH-RVXT3-E

### Filters

#### PZ-250TRF-E

Standard replacement filter (Coarse 60%) for LGH-RVXT3-E

#### PZ-250TPF-E

ISO 16890 ePM<sub>1</sub> 75%, ePM<sub>2.5</sub> 80%, ePM<sub>10</sub> 95% filter for LGH-RVXT3-E

### Control Sensors

#### PZ-70CSW-E

Wall mounted plug and play CO<sub>2</sub> sensor with traffic light signals for LGH-RVXT3-E

#### PZ-70CSD-E


Duct mounted plug and play CO<sub>2</sub> sensor for LGH-RVXT3-E

#### PTH-3202

Constant pressure transducer for LGH-RVXT3-E


## Product Dimensions

LGH-160/200/250RVXT3-E

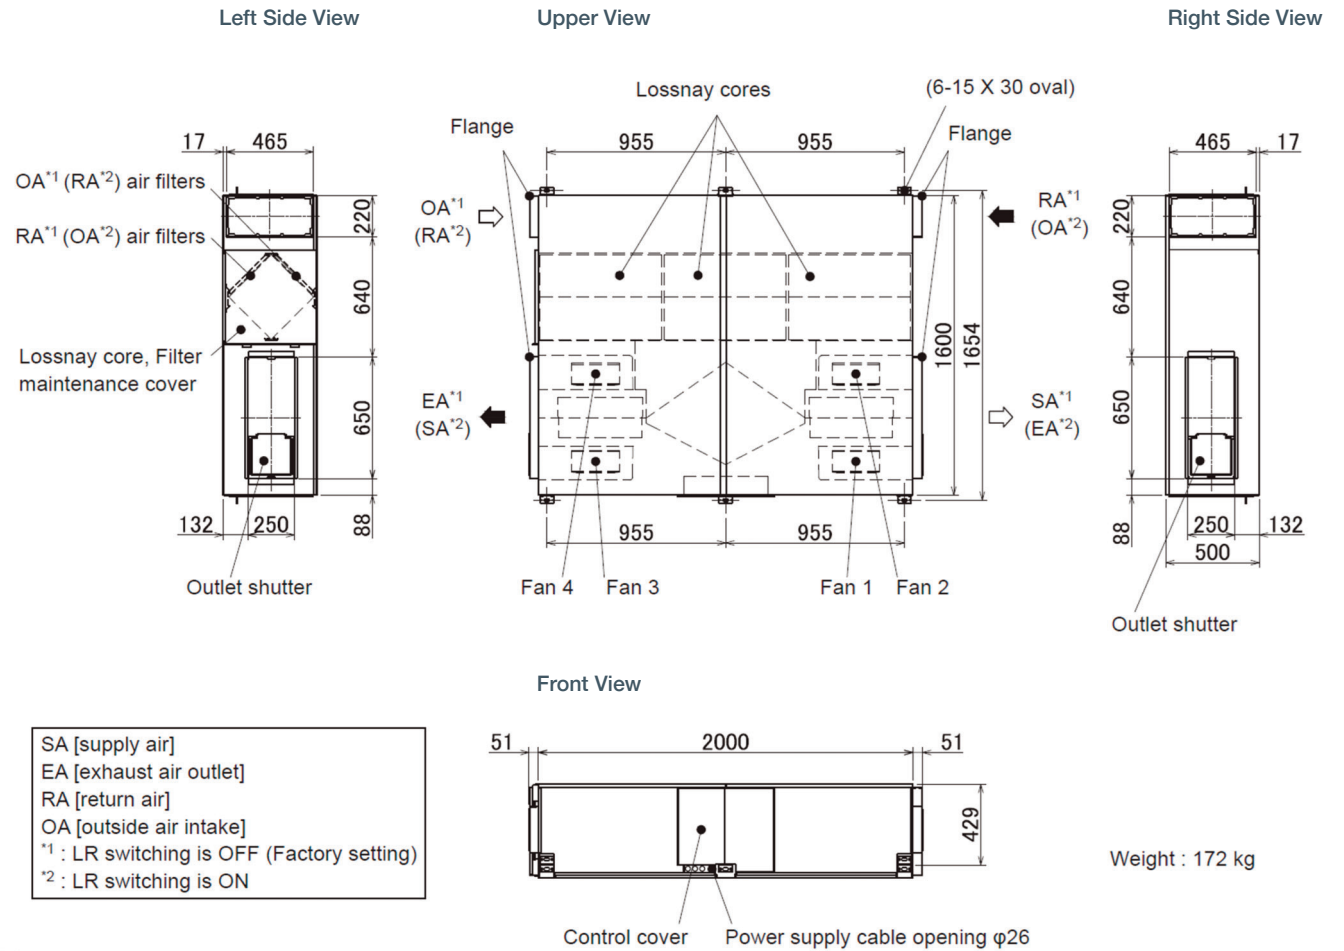

# LGH-RVS-E

## Commercial Lossnay

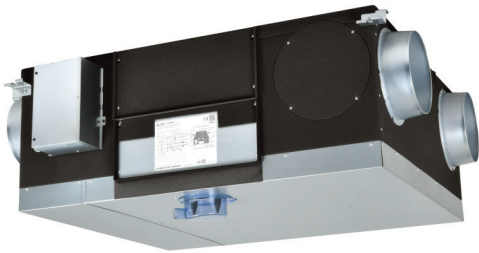

Compatible with Mitsubishi Electric  
plug-and-play CO<sub>2</sub> sensor  
(powered by the Lossnay unit)

The **LGH-RVS-E** is designed to simultaneously extract stale air from a commercial building and supply fresh filtered air. Whilst doing this the Lossnay units also recover valuable heat energy for maximum efficiency.

### Key Features & Benefits

- Fresh air ventilation with energy efficient heat recovery
- Plastic heat exchanger - perfect for higher humidity environments
- Optional Mitsubishi Electric energy saving CO<sub>2</sub> sensors allow automatic incremental fan control for a healthy indoor environment; sensors powered by Lossnay unit
- Four commissionable fan speeds, settable between 25-100%, with independent supply and return fan control offering low running costs and easier compliance to Part L
- Easy control interlock with Mr Slim and City Multi air conditioning systems, including M-NET connection for centralised control
- Integrated bypass damper for free cooling
- In-built condensate drainage traps

MODEL			LGH-50RVS-E	LGH-80RVS-E	LGH-100RVS-E
25%	Air Volume	l/s	35	56	69
		m <sup>3</sup> /hr	125	200	250
	External Static Pressure	Pa	9	11	12
	Temperature Exchange Efficiency	%	93	90	90
	Specific Fan Power	W/(l/s)	0.72	0.58	0.5
	Input Power	W	25	32	35
	Sound Pressure Level	dB(a)	18	18	18
50%	Air Volume	l/s	69	111	139
		m <sup>3</sup> /hr	250	400	500
	External Static Pressure	Pa	38	43	48
	Temperature Exchange Efficiency	%	91	86	86
	Specific Fan Power	W/(l/s)	0.86	0.77	0.72
	Input Power	W	60	85	100
	Sound Pressure Level	dB(a)	22	25	24
75%	Air Volume	l/s	104	167	208
		m <sup>3</sup> /hr	375	600	750
	External Static Pressure	Pa	84	96	107
	Temperature Exchange Efficiency	%	89	84	84
	Specific Fan Power	W/(l/s)	1.06	1.05	1.08
	Input Power	W	110	175	225
	Sound Pressure Level	dB(a)	27	30	32
100%	Air Volume	l/s	139	222	278
		m <sup>3</sup> /hr	500	800	1000
	External Static Pressure	Pa	150	170	190
	Temperature Exchange Efficiency	%	87	82	82
	Specific Fan Power	W/(l/s)	1.37	1.46	1.6
	Input Power	W	190	325	445
	Sound Pressure Level	dB(a)	33	36	37
DUCT SIZE		mm	200	250	250
WEIGHT	(with full condensate drain)	kg	55 (67)	63 (77)	73 (89)
DIMENSIONS	Width x Depth x Height	mm	974 x 946 x 465	1185 x 997 x 465	1185 x 1224 x 465
ELECTRICAL POWER SUPPLY			220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
MAXIMUM RUNNING CURRENT		A	2.2	3.7	4.2
FUSE RATING (BS88) - HRC (A)		A	6	6	6
HEAT EXCHANGER			Plastic Counter Flow		
CONDENSATE CONNECTION		mm	32	32	32
STANDARD FILTER			ISO 16890:2016 / EN779:2012 Coarse 35% / G3		
OPTIONAL FILTER(S)			ISO 16890:2016 / EN779:2012 ePM <sub>1</sub> 65%, ePM <sub>2.5</sub> 75%, ePM <sub>10</sub> 90% / F8 ePM <sub>10</sub> 80% / M6		

Notes: Airflow rate, static pressure, power input, running current, and heat exchange efficiency tested to ISO 16494 (winter condition), 230v 50Hz. A-Weighted Sound Pressure Level measured at 1.5m under the centre of the unit in an anechoic chamber.

## Accessories

### Controls

#### PZ-62DR-EB

Lossnay remote controller for LGH-RVS-E

#### PZ-4GS-E

External signal relay for LGH-RVS-E

### Filters

#### PZ-S50RF-E

Replacement Coarse 35% / G3 filter for LGH-50RVS-E

#### PZ-S80RF-E

Replacement Coarse 35% / G3 filter for LGH-80RVS-E

#### PZ-S100RF-E

Replacement Coarse 35% / G3 filter for LGH-100RVS-E

#### PZ-S50RFM-E

ePM<sub>10</sub> 80% / M6 filter for LGH-50RVS-E

#### PZ-S80RFM-E

ePM<sub>10</sub> 80% / M6 filter for LGH-80RVS-E

#### PZ-S100RFM-E

ePM<sub>10</sub> 80% / M6 filter for LGH-100RVS-E

#### PZ-S50RFH-E

ePM<sub>1</sub> 65% / F8 filter for LGH-50RVS-E

#### PZ-S80RFH-E

ePM<sub>1</sub> 65% / F8 filter for LGH-80RVS-E

#### PZ-S100RFH-E

ePM<sub>1</sub> 65% / F8 filter for LGH-100RVS-E

### Control Sensors

#### PZ-70CSW-E

Wall mounted plug and play CO<sub>2</sub> sensor with traffic light signals for LGH-RVS-E

#### PZ-70CSD-E


Duct mounted plug and play CO<sub>2</sub> sensor for LGH-RVS-E

#### PTH-3202

Constant pressure transducer for LGH-RVS-E

## Product Dimensions



### LGH-50/80/100RVS-E

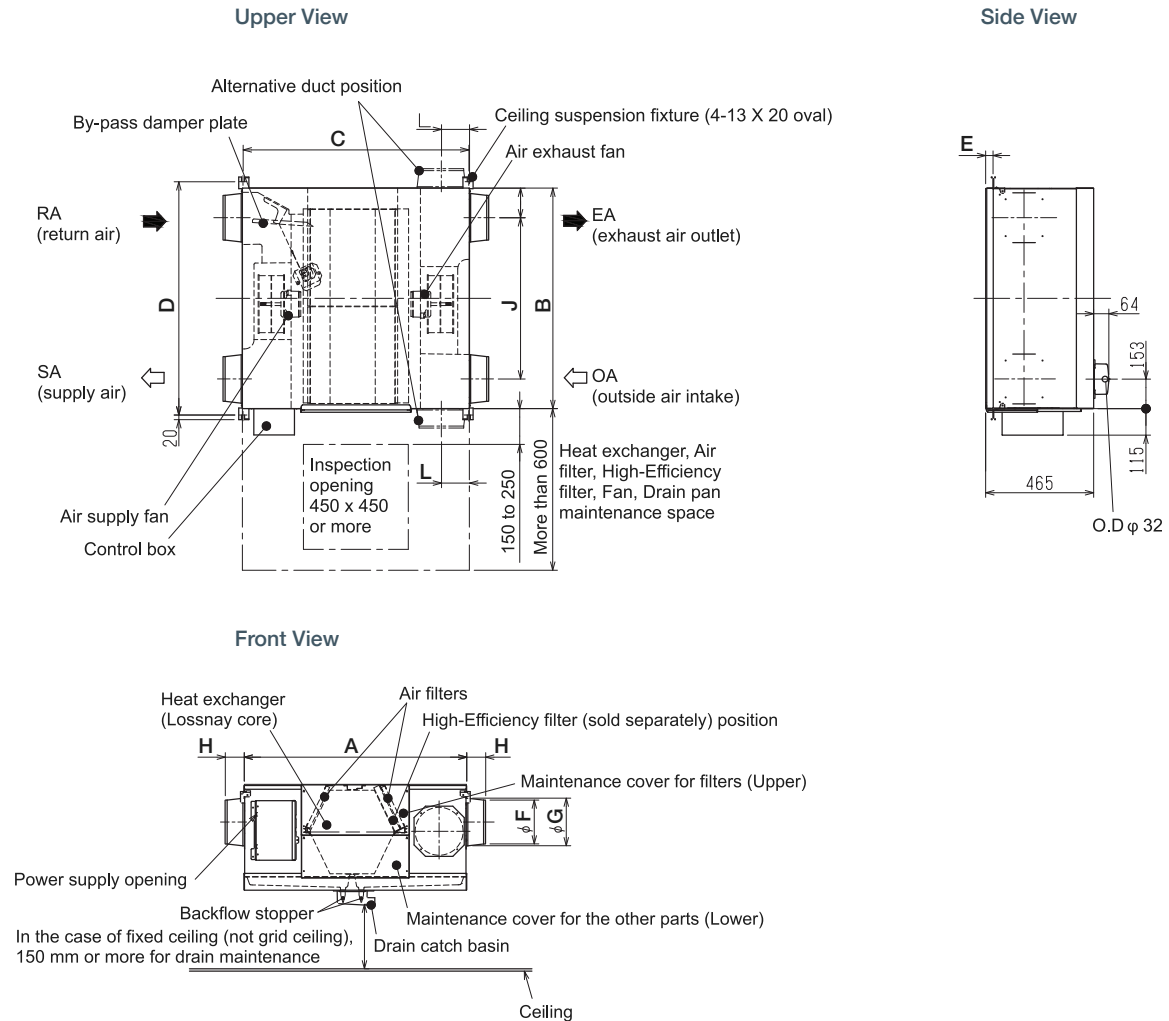

	A	B	C	D	E	F	G	H	J	L
LGH-50RVS-E	974	946	969	1001	32	192	208	83	692	120
LGH-80RVS-E	1185	997	1179	1051	55	242	258	82	683	161
LGH-100RVS-E	1185	1224	1179	1279	55	242	258	82	910	161

# GUX-MS-E

## Lossnay Outdoor Air Processing Unit

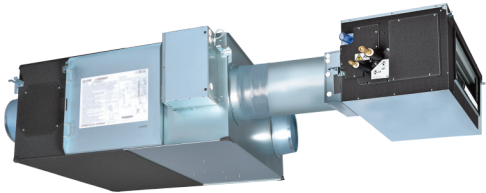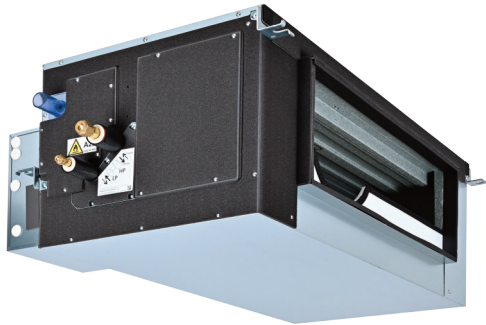

Designed to work seamlessly with City Multi YXM VRF and the Lossnay RVX(T)3 MVHR ranges, the **GUX-MS-E** delivers treated outdoor air with confidence. The DX coil provides heated or cooled fresh air into commercial applications improving comfort, simplifying design and giving installers and specifiers the reassurance of one trusted Mitsubishi Electric system.

### Key Features & Benefits

- Seamless Air Treatment System - GUX units connect with City Multi YXM and Lossnay RVX(T)3 ranges to deliver a simple, effective solution for heated or cooled fresh air supply
- Lower GWP R32 Refrigerant - for reduced carbon impact and future-ready legislation compliance
- Optional Low Level Leak Detector (PAC-SL72SA-E) - provides long service life, easy maintenance and supports compliance and safety regulations
- Wide Airflow Capability (500–2500 m<sup>3</sup>/h) - delivers high airflow without the size, weight, or installation demands of traditional AHUs, enabling solutions where space is limited
- Flexible Air Control - supports return air temperature control with or without supply air temperature limit capabilities, enabling the right approach for each building while maintaining occupant comfort
- Outdoor Air Temperature Conditioning - provides greater control of incoming fresh air temperature, improving comfort and supporting flexible system design

**R32 R410A**

MODEL		GUX-MS32-E		GUX-MS50-E		GUX-MS80-E		GUX-MS100-E
COMPATIBLE LOSSNAY(S) MVHR		LGH-50RVX3-E	LGH-65RVX3-E	LGH-80RVX3-E	LGH-100RVX3-E	LGH-160RVX(T)3-E	LGH-200RVX(T)3-E	LGH-250RVXT3-E
COIL CAPACITY (kW)*1	Heating (Nominal)	3.2	4.0	5.0	6.3	8.0	10.0	12.5
	Cooling (Nominal)	2.8	3.6	4.5	5.6	7.1	9.0	11.2
	UK Heating	3.2	4.0	5.0	6.3	8.0	10.0	12.5
	UK Cooling	2.5	3.2	4.0	5.0	6.4	8.1	10.0
POWER INPUT (kW)	Heating (Nominal)	0.0025		0.0025		0.0025		0.0025
	Cooling (Nominal)	0.0124		0.0124		0.0124		0.0124
COIL OPERATIONAL AIRFLOW RANGE (l/s)		97 - 222		144 - 322		222 - 625		222 - 778
REQUIRED LOSSNAY FAN SETTING (%)		70 - 100		65 - 100		50 - 100		35 - 100
VENTILATION AIRFLOW RANGE (l/s) <sup>2</sup>		67 - 222		67 - 322		67 - 625		67 - 778
DUCT SPIGOT SIZE (mm)	Inlet	200 Round		250 Round		650 x 250		650 x 250
	Outlet	520 x 200		750 x 250		750 x 250		750 x 250
WEIGHT (kg)		21		26		28		28
DIMENSIONS (mm)	Width	813		1035		1130		1130
	Depth	492		492		461		461
	Height	330		394		404		404
ELECTRICAL SUPPLY		220-240v, 50Hz						
PHASE		Single						
MAX RUNNING CURRENT (A)		<0.1						
FUSE RATING (BS88) - HRC (A)		6						

#### Notes:

\*1 The cooling / heating capacity does not take into account heat recovery of the Lossnay MVHR unit.

\*2 Achievable airflow rate should be calculated using curves of Lossnay fan, GUX pressure drop, and ductwork system.

## Accessories

### Controls

#### PAR-42MAAB

Standard white wired remote controller for GUX-MS-E

#### PAR-42MAAPB


Standard black wired remote controller for GUX-MS-E

#### AE-C400E

Centralised controller for GUX-MS-E


## Product Dimensions

### GUX-MS32-E

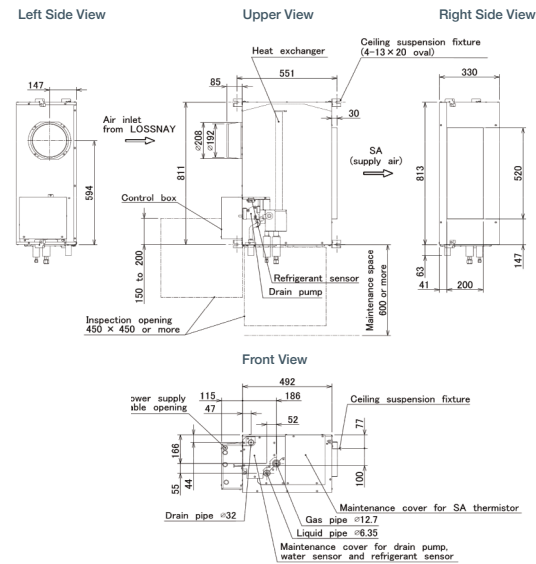


## Product Dimensions

### GUX-MS50-E

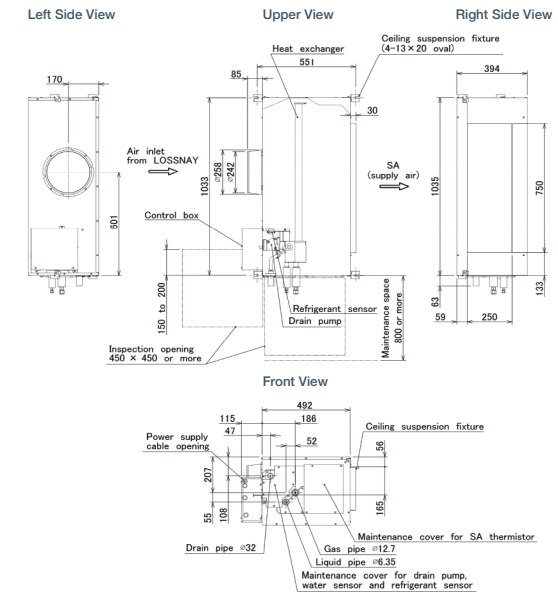


## Product Dimensions

### GUX-MS80-E

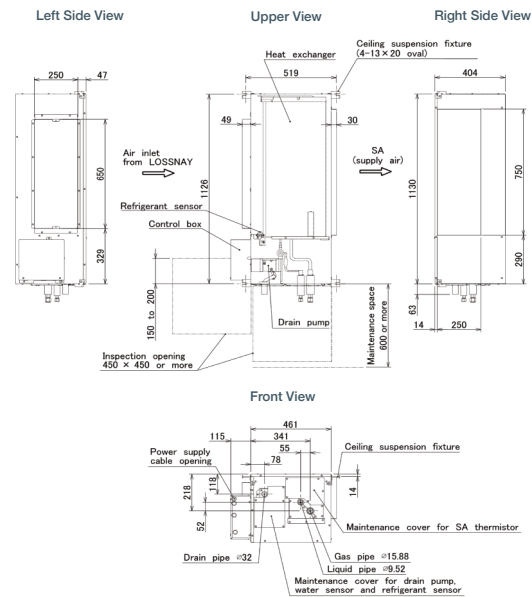

## Product Dimensions

### GUX-MS100-E

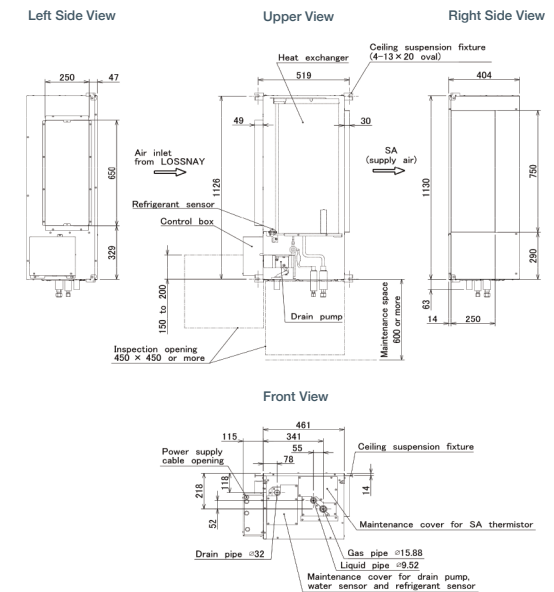

# VL-CZPVU-L/R-E

## Residential Lossnay



The **VL-CZPVU-L/R-E** residential Lossnay range of Mechanical Ventilation with Heat Recovery (MVHR) units create an environment of constant clean and healthy air at home. These systems are designed to continuously extract from bathrooms, kitchens, toilets and utility rooms where air can become polluted, whilst supplying a balanced flow of fresh air from outside to spaces such as bedrooms and living rooms. The Lossnay unit minimises the energy lost by recovering the heat from the extracted air, transferring this to the supplied fresh air.

### Key Features & Benefits

- Ultra quiet noise levels ensure minimal disturbance
- Optional filters placed within the MVHR unit for particulate matter and NOx allow for improved indoor air quality
- Full summer bypass function with auto mode and settable temperature parameters enable customisable control
- Digital controller included for ease of commissioning and operation
- Fan boost signal via live switch or volt free contact, with settable delay and overrun timers
- Cloud control enables remote monitoring and control
- Suitable for use in individual houses or in multi-residential apartment applications

MODEL		VL-250CZPVU-R/L-E	VL-350CZPVU-R/L-E	VL-500CZPVU-R/L-E	VL-520CZPVU-R/L-E
AIRFLOW (l/s)	30%-50%-70%-100%	21-35-49-69	27-44-62-89	42-69-97-139	42-69-97-139
EXTERNAL STATIC PRESSURE (Pa)	30%-50%-70%-100%	14-38-74-150	14-38-74-150	18-50-98-200	18-50-98-310
SOUND PRESSURE LEVEL (dB(A))*	30%-50%-70%-100%	<15-16-22-31	<15-19-26-35	<15-22-29-37	<15-22-29-39
DIMENSIONS (mm)	Width x Depth x Height	563 x 595 x 386	623 x 658 x 462	632 x 725 x 586	632 x 725 x 586
WEIGHT (kg)		26	32	39	39
ELECTRICAL POWER SUPPLY			220-240v, 50Hz		
MAX RUNNING CURRENT (A)		1.0	1.32	2.3	2.4
SUMMER BYPASS				Full Bypass	
SPIGOT DIAMETER (mm)		125	150	160 / 180	160 / 180
STANDARD FILTER (ISO 16890:2016/EN1779:2012)	Outside Air			Coarse 55% / G3	
	Return Air			Coarse 55% / G3	
OPTIONAL FILTER(S)	Supply Air			NOx 90%	
	Outside Air			ePM2.5 50%	

Notes: \*1 Sound pressure level dB(A) level at 3m calculated from sound power spectrum. Full sound power spectrum at duty conditions available for breakout and in-duct upon request.

SAP 2012 PCDB DATA	SFP W/(l/s)	HEAT EXCHANGE EFFICIENCY (%)	SFP W/(l/s)	HEAT EXCHANGE EFFICIENCY (%)	SFP W/(l/s)	HEAT EXCHANGE EFFICIENCY (%)	SFP W/(l/s)	HEAT EXCHANGE EFFICIENCY (%)
K + 1 (21 l/s)	0.62	90	0.86	90	0.80	91	0.80	87
K + 2 (29 l/s)	0.67	89	0.80	90	0.72	90	0.74	88
K + 3 (37 l/s)	0.79	88	0.84	89	0.74	90	0.76	88
K + 4 (45 l/s)	1.00	87	0.96	89	0.82	89	0.84	88
K + 5 (53 l/s)	1.19	87	1.08	88	0.91	88	0.94	87
K + 6 (61 l/s)	-	-	1.28	87	1.09	88	1.10	86
K + 7 (69 l/s)	-	-	-	-	1.24	88	1.27	86

## Accessories

### Remote Controllers

#### P-RCC-E

Remote controller cover and 1m cable with noise filter for VL-CZPVU-E (extendable to 200m)

### Filters

#### P-250F-E

Replacement Coarse 55% / G3 filter for VL-250CZPVU-E

#### P-350F-E

Replacement Coarse 55% / G3 filter for VL-350CZPVU-E

#### P-500F-E

Replacement Coarse 55% / G3 filter for VL-500/520CZPVU-E

#### P-250PF-E

ePM<sub>2.5</sub> 50% / M6 filter for VL-250CZPVU-E

#### P-350PF-E

ePM<sub>2.5</sub> 50% / M6 filter for VL-350CZPVU-E

#### P-500PF-E

ePM<sub>2.5</sub> 50% / M6 filter for VL-500/520CZPVU-E

#### P-250NF-E

NOx 90% supply air filter for VL-250CZPVU-E

#### P-350NF-E

NOx 90% supply air filter for VL-350CZPVU-E

#### P-500NF-E

NOx 90% supply air filter for VL-500/520CZPVU-E

### Noise Attenuators

#### P-250SB-E

Acoustic top box for VL-250CZPVU-E

#### P-350SB-E

Acoustic top box for VL-350CZPVU-E

#### P-500SB-E

Acoustic top box for VL-500/520CZPVU-E

### Control Sensors

#### P-09CSW-E


Wall mounted CO<sub>2</sub> sensor for VL-CZPVU-E

#### P-09HSD-E

Duct mounted plug and play humidity sensor for VL-CZPVU-E


## Product Dimensions

### VL-250CZPVU-L/R-E

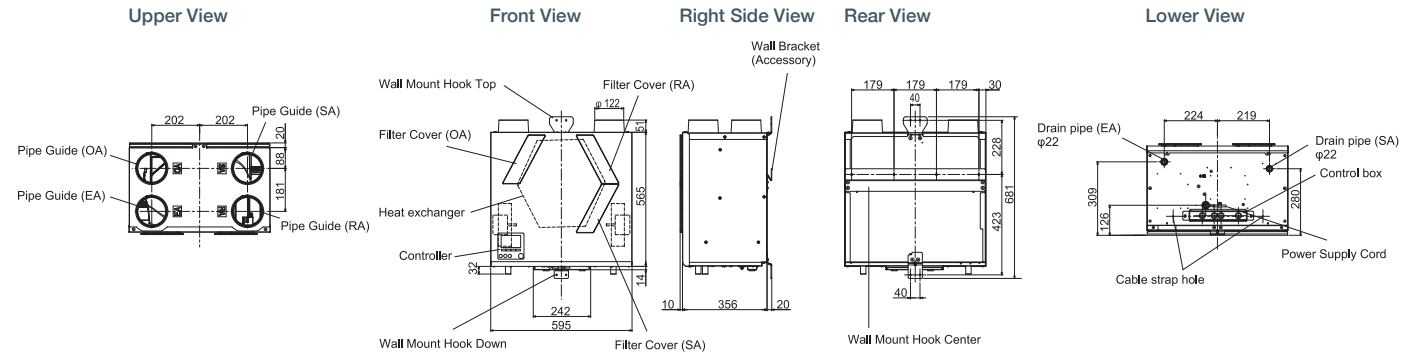


## Product Dimensions

### VL-350CZPVU-L/R-E

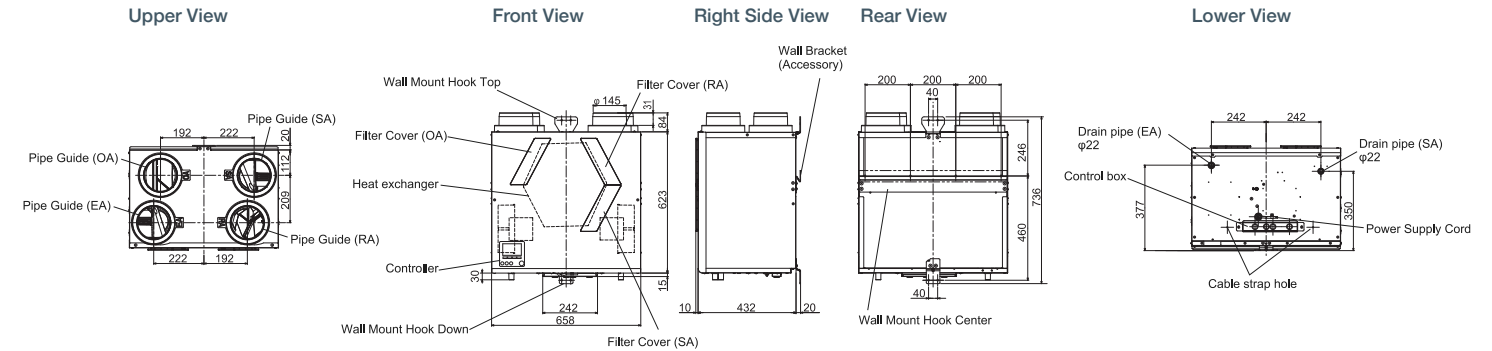

## Product Dimensions

### VL-500/520CZPVU-L/R-E

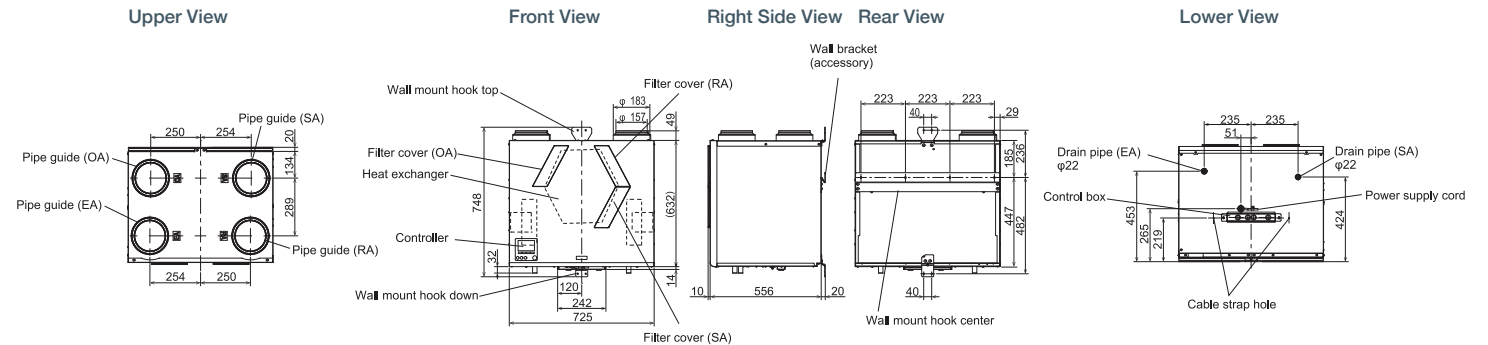

Notes: The above dimensional drawings are for a left sided unit. For the right sided unit dimensional drawings, please see the databook.

# CP-500CM-L/R

## Cooling Module



Enhance your home's protection against overheating with the **CP-500CM-L/R** cooling module - perfectly paired with the VL-500CZPVU-L/R-E and VL-520CZPVU-L/R-E residential Lossnay MVHR. This innovative system delivers tempered fresh air to help prevent overheating, supporting compliance with Part O building regulations.

Featuring a self-contained direct expansion system, advanced inverter technology, and lower GWP R32 refrigerant, it provides efficient cooling while meeting sustainability targets.

Designed with Part O compliance at its core, it offers flexible activation temperatures, customisable capacity steps, and overshoot temperature controls, giving you total confidence in maintaining compliant indoor conditions.

### Key Features & Benefits

- Multi-zone activation - connect up to four room temperature sensors to detect cooling requirements from different areas
- Low system height - efficient use of space, maximising a home's floor area by allowing other services to be placed underneath the system
- Quiet performance - enjoy a restful nights sleep even in the hottest summer's without the distraction of excess noise
- Eco-friendly & efficient - the inverter-controlled compressor uses lower GWP R32 refrigerant, delivering powerful cooling while reducing environmental impact
- Hassle-free installation - designed for simplicity, ensuring a smooth and efficient setup process
- Flexible airflow - operational airflow as low as 50l/s allows precise capacity selection for each home's unique needs
- Behind-the-scenes control - ensures adherence to Part O regulations, while preventing unnecessary end-user adjustments



MODEL		CP-500CM-L/R
OPERATION AIR FLOW (l/s)		50 - 140
DIMENSIONS (mm)	Module	725 x 556 x 500
(Width x Depth x Height)	System	725 x 586 x 1182
WEIGHT (kg)	Module	38
	System	77
REFRIGERANT CHARGE (kg)		0.55
COMPRESSOR MANAGEMENT		Inverter
SOUND PRESSURE LEVEL (dB(A)) <sup>*1</sup>		33
DUCT SPIGOT SIZE (mm)		160
ELECTRICAL SUPPLY		220-240v, 50Hz
MAX RUNNING CURRENT (A)		7.6
FUSE RATING (BS88) - HRC (A)		10

Notes: \*1 Sound pressure level at 3m calculated from sound power spectrum measured at 80 l/s and 350 Pa with VL-520CZPVU-L/R-E. Full sound power spectrum at duty conditions available for breakout and in-duct upon request.


MODEL		PROCON OVERHEAT THERMOSTAT (OHT)
DESCRIPTION		Manages activation and operation of cooling function. Reads internal temperature against set activation point, and manages interlock signals and system status
CONNECT TO		VL-500CZPVU-L/R-E and VL-520CZPVU-L/R-E CP-500CM-L/R
ELECTRICAL SUPPLY		Powered via Lossnay MVHR CN105
DIMENSIONS (mm)	Width x Depth x Height	190 x 42 x 180
WEIGHT (kg)		1.1
CONTROL	Temperature Input	Up to 4x 10K3A1 <sup>*1</sup>
	Heating Interlock	VFC
	Manual Activation	VFC
	Block	VFC

Notes: \*1 1 x 10K3A1 temperature sensor supplied with Procon OHT.  
VFC: Volt Free Contact


COOLING MODULE

LOSSNAY + COOLING MODULE


Upper View

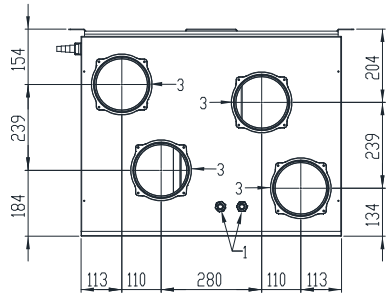





Right Side View



Front View

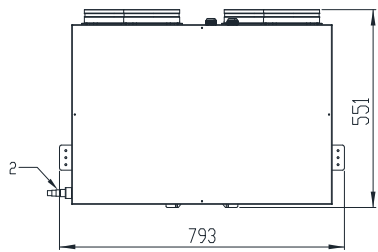

Left Side View

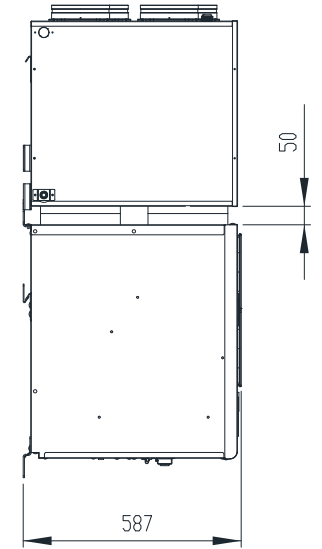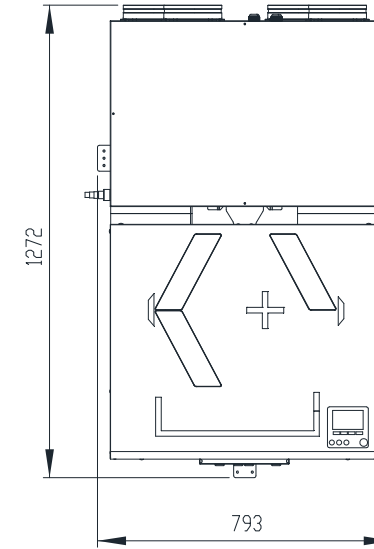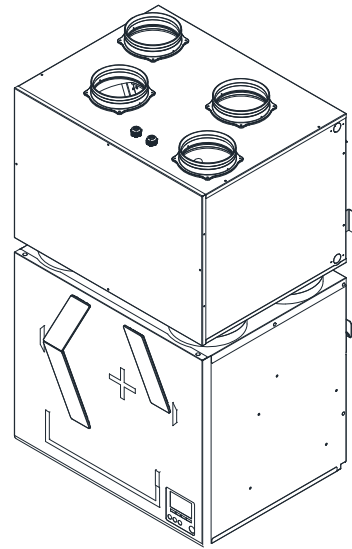

# s-AIRME-G07 HR-P C

## Air Handling Unit

The Mitsubishi Electric AIRME Compact Air Handling Units (AHU's) incorporate a frameless structure to achieve a line-up of units that are as compact as possible, maximising air tightness and improving thermal properties.

The **s-AIRME-G07 HR-P** range of AHU's utilises a combination of Mr Slim R32 Power Inverter heat pump technology, energy efficient plate heat exchanger heat recovery technology, and an integrated control system. This integration of technologies results in highly advanced, efficient systems that are easy to install and commission, making them ideal for offices, shopping centres, theatres and other large, open spaces.

### Key Features & Benefits

- Mr Slim R32 Power Inverter heat pump technology enables energy efficient tempering of fresh air
- Plate heat exchanger for effective heat recovery
- Self-supporting, one-piece construction for maximum air tightness and minimal thermal bridging
- Constant volume EC plug fans for greater efficiency and cost savings
- Easy air flow commissioning with selectable target air volume control
- Fully integrated controls and single point power supply, regardless of accessories, for ease of installation
- Wide range of optional accessories, making these units a perfect solution for a variety of applications





MODEL	s-AIRME-G07 HR-P C 3000	s-AIRME-G07 HR-P C 5000	s-AIRME-G07 HR-P C 7500	s-AIRME-G07 HR-P C 10000	s-AIRME-G07 HR-P C 12500	s-AIRME-G07 HR-P C 15000	
RATED AIR VOLUME (m <sup>3</sup> /s)	0.83	1.38	2.08	2.77	3.47	4.16	
AIR VOLUME RANGE (m <sup>3</sup> /s)	0.56 - 0.83	0.91-1.38	1.19 - 2.08	1.73 - 2.77	2.19 - 3.47	2.35 - 4.16	
EXTERNAL STATIC PRESSURE (Pa)	Standard fans	500	500	500	300 / 500 <sup>1</sup>	500	
	Up-rated fans	-	500	-	500	-	
COOLING CAPACITY (kW)	DX Coil Capacity	19.5	31.5	43.5	63.4	77.9	87.5
	Heat Recovery Capacity	8.89	14.8	22.7	30	37.3	44.5
	Total Capacity	28.39	46.3	66.2	93.4	115.2	132
HEATING CAPACITY (kW)	DX Coil Capacity	16.7	27.2	36.6	53.5	66.8	73.2
	Heat Recovery Capacity	20.6	34.3	53.1	70.1	87.2	110
	Total Capacity	37.3	61.5	89.7	123.6	154	183.2
HEAT RECOVERY EFFICIENCY (%)	Cooling	73.8	73.5	75.3	74.6	74.3	73.9
	Heating	72.7	72.7	74.6	74	73.6	73.9
SPECIFIC FAN POWER (SFP <sub>int</sub> ) (W/(l/s))	0.775	0.936	0.812	0.736	0.81	0.691	
SOUND POWER LEVEL (dB(A))	Fresh/Outdoor	82	89	85	85	86	88
	Supply	82	89	85	85	86	88
	Return	80	88	84	85	86	87
	Exhaust	80	88	84	85	86	87
	Breakout	64	74	67	67	71	70
UNIT DIMENSIONS (WxDxH) (mm)	2950 x 1385 x 1675	2950 x 1785 x 1675	3200 x 1885 x 2200	3650 x 2185 x 2280	3775 x 2385 x 2480	3946 x 2585 x 2480	
BASE WEIGHT (kg)	750	950	1250	1600	1750	2100	
STANDARD FILTRATION	Fresh air 1st stage	ISO Coarse 50% / G4					
	Fresh air 2nd stage	ISO ePM1 50% / F7 Bag Filter					
	Return air	ISO Coarse 50% / G4					
CONSTRUCTION	Panels	60mm sandwich panels with thermal break, galvanised steel sheets with a pre-painted external finish					
	Insulation	45 kg/m <sup>3</sup> density polyurethane foam					
EN1886 ACHIEVED CLASSES (Deflection/Leakage/Thermal transmittance/Thermal bridging/Filter bypass leakage)	D1(M) / L1(M) / T2 / TB2 / F9(M)						
ELECTRICAL POWER REQUIREMENTS	400VAC / 3ph+Positive Earth / 50Hz						
REQUIRED OUTDOOR UNITS	Power Inverter (R32)	1 x PUZ-ZM200	1 x PUZ-ZM125 1 x PUZ-ZM200	1 x PUZ-ZM200 1 x PUZ-ZM250	2 x PUZ-ZM200 1 x PUZ-ZM250	4 x PUZ-ZM200 2 x PUZ-ZM250	
OUTDOOR UNIT PIPE RUN (m)		30	30	30	30	30	



Note: Please refer to Mr Slim section for outdoor unit specification data. The specification data is based on the rated conditions below, at the rated air flows. \*1 300Pa for the supply fan, 500Pa for the return fan.

RATED CONDITIONS	SUMMER		WINTER	
INDOOR	23°C DB	50% RH	21°C DB	50% RH
OUTDOOR	35°C DB	50% RH	-5°C DB	85% RH

Front View

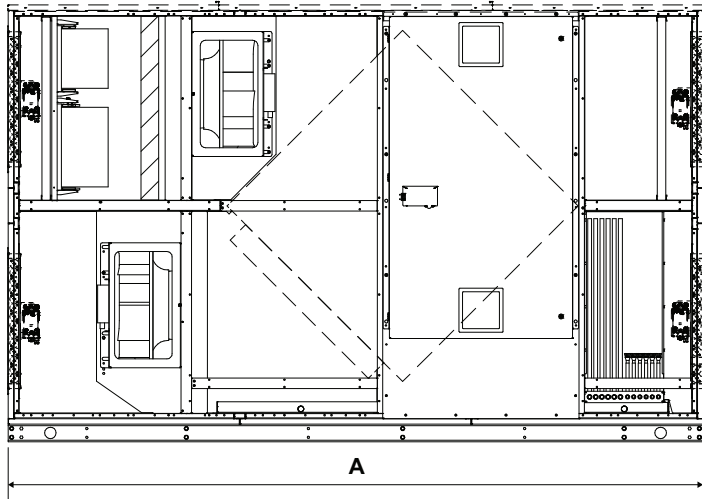


Side View

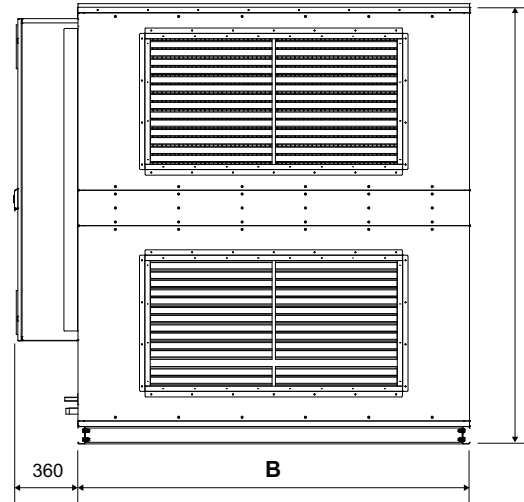

POST HEATING OPTION

Upper View

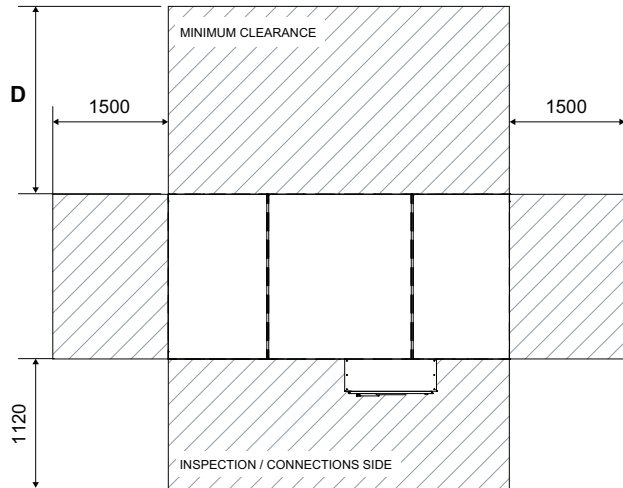

Model	A (mm)	B (mm)	C (mm)	D (mm)
3000	2950	1025	1675	1225
5000	2950	1425	1675	1625
7500	3200	1525	2200	1725
10000	3650	1825	2280	2025
12500	3755	2025	2480	2225
15000	3946	2225	2480	2425

Note: Base unit. Options may change dimensions and/or weight.

# Ventilation Accessories / Optional Extras

DESCRIPTION	MODEL REF.
<b>Remote Controllers</b>	
Lossnay Remote Controller for LGH-RVX3-E, LGH-RVXT3-E and LGH-RVS-E	PZ-62DR-EB
<b>LGH-RVX3-E</b>	
Standard replacement filter (Coarse 60%) for LGH-15RVX3-E	PZ-15RF3-E
Standard replacement filter (Coarse 60%) for LGH-25RVX3-E	PZ-25RF3-E
Standard replacement filter (Coarse 60%) for LGH-35RVX3-E	PZ-35RF3-E
Standard replacement filter (Coarse 60%) for LGH-50RVX3-E	PZ-50RF3-E
Standard replacement filter (Coarse 60%) for LGH-65RVX3-E	PZ-65RF3-E
Standard replacement filter (Coarse 60%) for LGH-80RVX3-E / LGH-160RVX3-E (2 sets required)	PZ-80RF3-E
Standard replacement filter (Coarse 60%) for LGH-100RVX3-E / LGH-200RVX3-E (2 sets required)	PZ-100RF3-E
ePM <sub>1</sub> 75% grade filter for LGH-15RVX3-E	PZ-15RFP3-E
ePM <sub>1</sub> 75% grade filter for LGH-25RVX3-E	PZ-25RFP3-E
ePM <sub>1</sub> 75% grade filter for LGH-35RVX3-E	PZ-35RFP3-E
ePM <sub>1</sub> 75% grade filter for LGH-50RVX3-E	PZ-50RFP3-E
ePM <sub>1</sub> 75% grade filter for LGH-65RVX3-E	PZ-65RFP3-E
ePM <sub>1</sub> 75% grade filter for LGH-80RVX3-E / LGH-160RVX3-E (2 sets required)	PZ-80RFP3-E
ePM <sub>1</sub> 75% grade filter for LGH-100RVX3-E / LGH-200RVX3-E (2 sets required)	PZ-100RFP3-E
Wall mounted plug and play CO <sub>2</sub> sensor with traffic light signals for LGH-RVX3-E	PZ-70CSW-E
Duct mounted plug and play CO <sub>2</sub> sensor for LGH-RVX3-E	PZ-70CSD-E
Vertical mounting bracket for LGH-15-50RVX3-E	PZ-1VS-E
Vertical mounting bracket for LGH-65-100RVX3-E	PZ-2VS-E
External signal relay for LGH-RVX3-E	PZ-4GS-E
Constant pressure transducer for LGH-RVX3-E	PTH-3202
<b>LGH-RVXT3-E</b>	
Standard replacement filter (coarse 60%) for LGH-RVXT3-E	PZ-250TRF-E
ISO 16890 ePM <sub>1</sub> 75%, ePM <sub>2,5</sub> 80%, ePM <sub>10</sub> 95% filter for LGH-RVXT3-E	PZ-250TPF-E
Wall mounted plug and play CO <sub>2</sub> sensor with traffic light signals for LGH-RVXT3-E	PZ-70CSW-E
Duct mounted plug and play CO <sub>2</sub> sensor for LGH-RVXT3-E	PZ-70CSD-E
External signal relay for LGH-RVXT3-E	PZ-4GS-E
Constant pressure transducer for LGH-RVXT3-E	PTH-3202
<b>LGH-RVS-E</b>	
Replacement Coarse 35% / G3 filter for LGH-50RVS-E	PZ-S50RF-E
Replacement Coarse 35% / G3 filter for LGH-80RVS-E	PZ-S80RF-E
Replacement Coarse 35% / G3 filter for LGH-100RVS-E	PZ-S100RF-E
ePM <sub>10</sub> 80% / M6 filter for LGH-50RVS-E	PZ-S50RFM-E
ePM <sub>10</sub> 80% / M6 filter for LGH-80RVS-E	PZ-S80RFM-E
ePM <sub>10</sub> 80% / M6 filter for LGH-100RVS-E	PZ-S100RFM-E
ePM <sub>1</sub> 65% / F8 filter for LGH-50RVS-E	PZ-S50RFH-E
ePM <sub>1</sub> 65% / F8 filter for LGH-80RVS-E	PZ-S80RFH-E
ePM <sub>1</sub> 65% / F8 filter for LGH-100RVS-E	PZ-S100RFH-E
Wall mounted plug and play CO <sub>2</sub> sensor with traffic light signals for LGH-RVS-E	PZ-70CSW-E
Duct mounted plug and play CO <sub>2</sub> sensor for LGH-RVS-E	PZ-70CSD-E
External signal relay for LGH-RVS-E	PZ-4GS-E
Constant pressure transducer for LGH-RVS-E	PTH-3202
<b>Weather Proof Housings</b>	
Lossnay weather proof housing for LGH-25RVX3-E	KS4-KWH25RVX
Lossnay weather proof housing for LGH-35RVX3-E	KS4-KWH35RVX
Lossnay weather proof housing for LGH-50RVX3-E	KS4-KWH50RVX
Lossnay weather proof housing for LGH-65RVX3-E	KS4-KWH65RVX3
Lossnay weather proof housing for LGH-80RVX3-E	KS4-KWH80RVX
Lossnay weather proof housing for LGH-100RVX3-E	KS4-KWH100RVX
Lossnay weather proof housing for LGH-160RVX3-E	KS4-KWH150RVX
Lossnay weather proof housing for LGH-200RVX3-E	KS4-KWH200RVX

# Ventilation Accessories / Optional Extras

DESCRIPTION	MODEL REF.
<b>GUX-MS-E</b>	
Standard white wired remote controller for GUX-MS-E	PAR-42MAAB
Standard black wired remote controller for GUX-MS-E	PAR-42MAAPB
Centralised controller for GUX-MS-E	AE-C400E
<b>VL-CZPVU-E</b>	
Replacement Coarse 55% / G3 filter for VL-250CZPVU-E	P-250F-E
Replacement Coarse 55% / G3 filter for VL-350CZPVU-E	P-350F-E
Replacement Coarse 55% / G3 filter for VL-500/520CZPVU-E	P-500F-E
ePM <sub>2.5</sub> 50% / M6 filter for VL-250CZPVU-E	P-250PF-E
ePM <sub>2.5</sub> 50% / M6 filter for VL-350CZPVU-E	P-350PF-E
ePM <sub>2.5</sub> 50% / M6 filter for VL-500/520CZPVU-E	P-500PF-E
NOx 90% supply air filter for VL-250CZPVU-E	P-250NF-E
NOx 90% supply air filter for VL-350CZPVU-E	P-350NF-E
NOx 90% supply air filter for VL-500/520CZPVU-E	P-500NF-E
Acoustic top box for VL-250CZPVU-E	P-250SB-E
Acoustic top box for VL-350CZPVU-E	P-350SB-E
Acoustic top box for VL-500/520CZPVU-E	P-500SB-E
Remote controller cover and 1m cable with noise filter for VL-CZPVU-E (extendable to 200m)	P-RCC-E
Wall mounted CO <sub>2</sub> sensor for VL-CZPVU-E	P-09CSW-E
Duct mounted plug and play humidity sensor for VL-CZPVU-E	P-09HSD-E
<b>s-AIRME-G07 HR-P C</b>	
<b>Fans &amp; Airflow</b>	
High static pressure supply fan (500 Pa)	B503
High static pressure exhaust fan (500 Pa)	B513
Night Purge	B931
<b>Dampers</b>	
Fresh Air	B551
Supply Air	B561
Return Air	B571
Exhaust Air	B581
<b>Pre/Post Heating</b>	
Pre-heating electric coil	B531
Post-heating electrical coil* <sup>1</sup>	1333
Pre-heating water coil	B532
Post-heating water coil* <sup>1</sup>	1331
<b>Filters</b>	
Bag Filters F9 ePM1 85%	2521A
Activated charcoal filters	2529
<b>Connectivity and Integration</b>	
Modbus connection for BEMS	4181
Bacnet TCP-IP connection for BEMS	4185
Fan operation output signal	3591
Remote keyboard - wiring up to 200m	C9261063
Remote keyboard - wiring up to 500m	C9261064
<b>Structural</b>	
Weather canopy for outdoor installation	B541
Weather protection grille on fresh air intake	B621
Left handed configuration	2963

Note: \*1 Post heating elements increase unit length size.



# Controls

Control Solutions





# Contents

<b>The Importance of Controls</b>	<b>6.4</b>
<b>Which Controls Product for Which Application?</b>	<b>6.7</b>
<b>Which Controls Product for Which Function?</b>	<b>6.8</b>
<b>Centralised Controllers</b>	<b>6.10</b>
<b>Remote Controllers</b>	<b>6.16</b>
<b>Solution Interfaces</b>	<b>6.22</b>
<b>Simple Interfaces</b>	<b>6.29</b>
<b>Advanced Interfaces</b>	<b>6.33</b>
<b>BEMS Interfaces</b>	<b>6.39</b>
<b>Screen Examples</b>	<b>6.44</b>
<b>How to Quote</b>	<b>6.46</b>

# The Importance of Controls

## Time to take control

Operating an air conditioning, ventilation or heating system without effective controls can be costly in more ways than one. Not only are you likely to face higher monthly energy bills, it will also lead to an increase in carbon emissions - something that will become ever more important as businesses strive to keep up with tougher environmental legislation.

The right controls take building performance to the next level. With them, building systems become more responsive, easier to automate, monitor and maintain, and less costly to operate in the long-term.

The right controls can deliver a cost-effective solution that helps manage, monitor and report on the performance of all building services systems.

In order to achieve the UK's national objective of net-zero carbon emissions by 2050, commercial buildings will have to become much more energy efficient, and building controls will have a significant part in ensuring that happens.

Control technology is now widely available for buildings of all sizes, so it is possible to access the benefits whatever the scale or scope of your project.



## Mitsubishi Electric technology


Mitsubishi Electric has been dedicated to producing energy efficient technology for over ninety years. Controls are an essential part of that. Mitsubishi Electric has long heritage in factory automation where the company leads the field in providing controls that enhance productivity, efficiency and energy use.

We have taken this extensive knowledge and experience and transferred it to the heart of our building services equipment.

We were also one of the first manufactures to provide an open gateway to our products to make integration easier for our customers. This enables direct connection of equipment into many common building energy management system (BEMS) platforms.

Mitsubishi Electric now offer the MELCloud platform to help you control, monitor and service your HVAC equipment. This includes performance and energy monitoring, as well as remote management of one or multiple systems, in order to save energy, cost and downtime.

**From a simple hand-held controller to a centralised BEMS, Mitsubishi Electric puts its customers in control.**

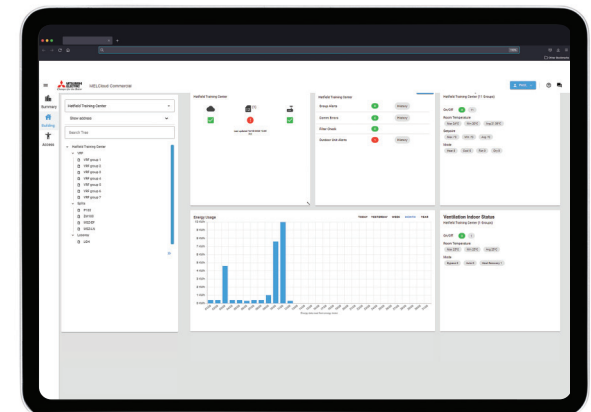

## The European Standard EN 15232

“Energy Performance of Buildings - Impact of Building Automation, Controls and Building Management” was compiled in conjunction with the Europe-wide implementation of the directive for energy efficiency in buildings (Energy Performance of Buildings Directive EPBD) 2002/91/EG.

The Standard is incorporated into UK law and describes methods for evaluating the influence of building automation and technical building management on the energy consumption of buildings.

Four efficiency classes A to D have been introduced to this purpose. After a building has been equipped with building automation and control systems, it will be assigned one of these classes. The potential savings for thermal and electrical energy can be calculated for each class based on the building type and building purpose. The values of the energy class C are used as the reference for comparing the efficiency.

The diagram on the right, shows the differences in energy consumption for three building types in the energy efficiency classes A, B and D relative to the basis values in rating C. For example, by using class A, 30 % of the thermal energy can be saved in offices.

BS EN 15232: Function list and assignment to energy performance classes

	Heating / Cooling Control	Ventilation / Air Conditioning Control	Lighting	Sun Protection
A	<ul style="list-style-type: none"> <li>Individual room control with communication between controllers</li> <li>Indoor temperature control of distribution network water temperature</li> <li>Total interlock between heating and cooling control</li> </ul>	<ul style="list-style-type: none"> <li>Demand or presence dependent air flow control at room level</li> <li>Variable set point with load dependant compensation of supply temperature control</li> <li>Room or exhaust or supply air humidity control</li> </ul>	<ul style="list-style-type: none"> <li>Automatic daylight control</li> <li>Automatic occupancy detection manual on / auto off</li> <li>Automatic occupancy detection manual on / dimmed</li> <li>Automatic occupancy detection auto on / auto off</li> <li>Automatic occupancy detection auto on / dimmed</li> </ul>	<ul style="list-style-type: none"> <li>Combined light / blind / HVAC control</li> </ul>
B	<ul style="list-style-type: none"> <li>Individual room control with communication between controllers</li> <li>Indoor temperature control of distribution network water temperature</li> <li>Partial interlock between heating and cooling control (dependent on HVAC system)</li> </ul>	<ul style="list-style-type: none"> <li>Time dependent air flow control at room level</li> <li>Variable set point with outdoor temperature compensation of supply temperature control</li> <li>Room or exhaust or supply air humidity control</li> </ul>	<ul style="list-style-type: none"> <li>Manual daylight control</li> <li>Automatic occupancy detection manual on / auto off</li> <li>Automatic occupancy detection manual on / dimmed</li> <li>Automatic occupancy detection auto on / auto off</li> <li>Automatic occupancy detection auto on / dimmed</li> </ul>	<ul style="list-style-type: none"> <li>Motorised operation with automatic blind control</li> </ul>
C	<ul style="list-style-type: none"> <li>Individual room control with communication between controllers</li> <li>Indoor temperature control of distribution network water temperature</li> <li>Partial interlock between heating and cooling control (dependent on HVAC system)</li> </ul>	<ul style="list-style-type: none"> <li>Time dependent air flow control at room level</li> <li>Constant set point of supply temperature control</li> <li>Supply air humidity limitation</li> </ul>	<ul style="list-style-type: none"> <li>Manual daylight control</li> <li>Manual on / off switch + additional sweeping extinction signal</li> <li>Manual on / off switch</li> </ul>	<ul style="list-style-type: none"> <li>Motorised operation with manual blind control</li> </ul>
D	<ul style="list-style-type: none"> <li>No automatic control</li> <li>No control of distribution network water temperature</li> <li>No interlock between heating and cooling control</li> </ul>	<ul style="list-style-type: none"> <li>No air flow control at room level</li> <li>No supply temperature control</li> <li>No air humidity control</li> </ul>	<ul style="list-style-type: none"> <li>Manual daylight control</li> <li>Manual on/off switch + additional sweeping extinction signal</li> <li>Manual on/off switch</li> </ul>	<ul style="list-style-type: none"> <li>Manual operation for blinds</li> </ul>

Section from table 1 of the BSEN 15232:2007 [D]

Building Automation and Control (BAC) efficiency classes to EN 15232

	Efficiency factor for thermal energy			Efficiency factor for electrical energy		
	Office	School	Hotel	Office	School	Hotel
A High energy performance building automation and control system (BACS) and technical building management (TBM)	0.70	0.80	0.68	0.87	0.86	0.90
B Advanced BACS and TBM	0.80	0.88	0.85	0.93	0.93	0.95
C Standard BACS	1	1	1	1	1	1
D Non energy efficient BACS	1.51	1.20	1.31	1.10	1.07	1.07



## The Importance of Controls

### The Internet of Things

The Internet of Things (or IoT) describes the revolution already under way, with a growing number of internet-enabled devices that can network and communicate with each other and with other web-enabled devices.

Mitsubishi Electric is at the forefront of this revolution and all our products are now connectable to the internet using the following solutions.



Features	MELCloud Home	MELCloud Commercial

Connect to	Wi-Fi	Ethernet or Cellular
Compatibility	Air Conditioning and Heating	Air Conditioning and Ventilation
Third party control	X	✓ (with option PAC-YG60/63MCA/66DCA)
SIM card provided	X	✓ (eSIM)
Smartphone application	✓	✓
Tablet application	✓	✓
Web portal	✓	✓

# Which Controls Product for Which Application?

Good controls will benefit any application. With a wide portfolio of control products, it is important to select the right control solution for each application.



APPLICATION	SIZE	TYPICAL PRODUCT INSTALLED	CONTROL SOLUTIONS	CASE STUDY
OFFICE	SMALL	City Multi VRF Systems Mr Slim Split-Systems Mr Slim IT Room Applications	PAR-42MAAB AE-C400E or AT-50B PAC-YG66DCA or PAC-YG60MCA MELCloud Commercial MELCOBEMS SIP+	Wholesaler PACAIR uses a Mitsubishi Electric Centralised Controller to provide complete control of the office air conditioning. The 10.4" touch screen controller and easy to use interface gives PACAIR the ability to set up a weekly time schedule, as well as offering a host of energy saving features.
	LARGE	City Multi VRF Systems City Multi Air Curtains City Multi PWFY Heat Pumps	PAR-42MAAB AE-C400E or AT-50B MELCloud Commercial MELCOBEMS SIP+	Mitsubishi Electric's Hatfield headquarters has been updated to new AE-C400E / EW-C50E controls to monitor and control all of the air conditioning equipment across 3 floors and 2 wings. This enables the system to operate as efficiently as possible, incorporating easy to use controls and allows for fully programmable scheduling that accommodates flexible working patterns.
HOTEL	SMALL	City Multi VRF Systems	PAR-CT01MAA-S/PB AE-C400E MELCloud Commercial MELCOBEMS SIP+	The luxury 4-star Kingsmills Hotel provides a chic and contemporary venue for discerning Highlands travellers and focuses on relaxation, revitalisation and calm. The centralised controller delivers the efficiency and flexibility that both the hotel and its guests need, with air conditioning integrated with the room key card system combined with simple to use room controllers.
	LARGE	City Multi VRF Systems	PAR-CT01MAA-S/PB AE-C400E MELCOTEL2™ MELCloud Commercial MELCOBEMS SIP+	The Premier Inn Hotel, Leicester uses the MELCOTEL2™ control interface to efficiently and effectively control air conditioning that provides heating and cooling to 135 bedrooms, the bar, restaurant and back offices. A variety of control strategies were implemented and monitored and analysed, resulting in a 30% decrease in average monthly system running costs and CO <sub>2</sub> emissions.
RETAIL	SMALL	Mr Slim Split-System Mr Slim Air Curtains	MELCORETAIL MINI MELCloud Commercial MELCOBEMS SIP+	Costa Coffee was one of the first to make use of the MELCORETAIL MINI to capitalise on its energy saving feature whilst ensuring that customers and staff were comfortable in the overall coffee shop environment. Across a year of monitoring the MELCORETAIL MINI helped achieve a 20% reduction in energy use, giving it a payback period of less than 2 months.
	LARGE	City Multi VRF Systems City Multi Air Curtains	MELCloud Commercial MELCOBEMS SIP+	A pilot site for a major high street retail chain has demonstrated how connecting MELCloud Commercial to air conditioning can highlight ways of reducing energy or identify unnecessary use. Significant savings throughout the store were made by employing MELCloud Commercial, providing a consistent return on investment on a monthly basis.
LEISURE	SMALL	Mr Slim Split-System Mr Slim Air Curtains	MELCOBEMS MINI (A1M+) MELCloud Commercial MELCOBEMS SIP+	The Castle golf course at St Andrews need a heating and cooling system that was as controllable and efficient as possible. The M2M interface controls and monitors the air conditioning to make sure it maximises energy saving, whilst allowing for continuous fine-tuning according to the golf clubs needs.
	LARGE	Mr Slim Split-System Mr Slim Air Curtains City Multi VRF Systems City Multi Air Curtains	MELCOBEMS MELCloud Commercial MELCOBEMS SIP+	Fitness First uses monitoring BEMS to communicate with the air conditioning using Modbus, across its UK network. Dedicated Modbus Interfaces offer complete monitoring and control of the system and highlights the flexibility and potential for reducing running costs that our control systems have when working in conjunction with third party BEMS.
RESIDENTIAL	SMALL	Ecodan	MELCloud Home	A WW2 veteran has shown the way to a sustainable future with the installation of a hybrid Ecodan air source heat pump to work alongside his existing gas boiler. The hybrid system is designed specifically to work in conjunction with conventional boilers and the MELCloud Home Wi-Fi system also allows the heat pump to be monitored and controlled remotely
	LARGE	Ecodan	MELCloud Home AE-C400E	The renewable heating system for St Mungo's in Lewisham needs to cope with different heating loads and deal effectively with regular changes in tenancy and occupied hours. It also had to offer tenants the ability to alter the temperature of their individual flats, whilst allowing the charity full central control of the system.

# Which Controls Product for Which Function?

With a wide portfolio of control products, many functions are available. It is important to select the right control solution for each function.

FUNCTION	SYSTEM SIZE					NOTES
	SMALL OPTION 1	OPTION 2	OPTION 3	OPTION 4	LARGE OPTION 5	
Remote On/Off or fire alarm	PAC-SA89TA	KTR-53A	MELCORETAIL MINI	AT-50B and PAC-YT51HAA	AE-C400E and PAC-YG10HA	On/Off remote controller button lock except KTR-53A
Monitor run and faults	PAC-SA88HA	MELCORETAIL MINI	AT-50B and PAC-YT51HAA	AE-C400E / EW-C50E and PAC-YG10HA	-	Relays or power supply may be required
Window interlocking	PAC-SA89TA	KTR-53A	-	-	-	Controller will be centrally controlled when window opened
Setpoint limit	PAR-42MAAB	PAR-U02MEDA	AT-50B	AE-C400E / EW-C50E	AE-C400E	Available in Heat, Cool and Auto modes
Weekly timer	PAR-42MAAB PAR-U02MEDA	AT-50B	AE-C400E / EW-C50E	AE-C400E	-	Setpoint, On/Off can be reset
Night set back	KTR-53A	PAR-42MAAB PAR-U02MEDA	AE-C400E / EW-C50E / AT-50B	AE-C400E	-	KTR-53A requires thermostat, time switch, 12/24v AC/DC power supply
Energy monitoring	AE-C400E / EW-C50E Total Energy Measurement	AE-C400E / EW-C50E PAC-YG60MCA Total Energy Management	AE-C400E and EW-C50E Energy Apportioning	AE-C400E / EW-C50E PAC-YG60MCA Energy Apportioning	-	Different options for each choice. Meters required
Load shedding	EW-C50E and PAC-YG60MCA	AE-C400E and PAC-YG60MCA	-	-	-	Energy meters required
Trend logging	EW-C50E and PAC-YG60MCA	AE-C400E	-	-	-	CSV data available on a spreadsheet

Notes: The PAC-SA89TA is also known as a 3 wire adaptor and the PAC-SA88HA is also known as a 5 wire adaptor. Disclaimer: These options are for guidance only.

# Which Controls Product for Which Function?

With a wide portfolio of control products, many functions are available. It is important to select the right control solution for each function.

FUNCTION	SYSTEM SIZE			NOTES
	SMALL OPTION 1	OPTION 2	LARGE OPTION 3	
Night mode	PAC-SA89TA	EW-C50E	AE-C400E	PAC-SA89TA requires a third party timer
Ambient tracking	AE-C400E and PAC-YG63MCA	MELCOBEMS MINI (A1M+)	AE-C400E	Option 1 is only available in cooling mode
Key card interlock for hotel	AE-C400E and PAC-SA89TA	AE-C400E / EW-C50E, MELCOTEL2™ and PAC-SA89TA	-	Volt free contact for key card normally open
Window sensor interlock for hotel	AE-C400E and PAC-SA89TA	AE-C400E / EW-C50E, MELCOTEL2™ and PAC-SA89TA	-	Volt free contact for window sensor normally closed
2 setpoints (1 for cool and 1 for heat)	-	MELCOMMS MINI	AE-C400E	For instance, 19°C heat and 23°C cool. Fan only in between
Duty / Standby	PAR-42MAAB	MELCOMMS MINI MELCOBEMS MINI (A1M+)	-	Backup, rotate, join in and high temperature function
A/C faults via Modbus and BACnet	MELCOBEMS MINI (A1M+)	-	-	SIM card not supplied
Optimised start	AE-C400E	-	-	-
Mini BEMS	MELCOBEMS MINI (A1M+)	AE-C400E	-	-
Occupancy sensor	PAR-U02MEDA	-	-	-

Notes: The PAC-SA89TA is also known as a 3 wire adaptor and the PAC-SA88HA is also known as a 5 wire adaptor. Disclaimer: These options are for guidance only.

# Centralised Controllers

A wide range of centralised controllers are available to monitor and control our equipment efficiently. Some of our centralised controllers can also be used to monitor and control third party equipment.

## Key Features & Benefits

### AT-50B



- 5" basic touch screen
- Centralised controller
- Monitor and control up to 50 indoor units
- Monitor and control general equipment

### AE-C400E



- 12.1" capacitive touch screen, including high sensitivity, multi-touch support, better durability and improved clarity
- Centralised controller
- Monitor and control up to 50 indoor units (or up to 400 with EW-C50E)
- Designed for cloud connectivity - MELCloud ready
- USB C port
- Browser based
- 4G Ready - SIM or Antenna
- 3rd party energy meter inputs
- BMS connection ready - fixed IP address
- WEB-USER Pin code pre-installed

### EW-C50E



- Extends capability of AE-C400E
- Web based controller
- Monitor and control up to 50 indoor units
- Monitor and control general equipment
- Energy monitoring, load shedding
- Onboard web browser
- Optional direct BACnet connection
- USB C port

### MITSU10001-ROUTER-CPT



- QuSpot antenna cellular solution, including router
- Integrated solution with multi band antennas in one enclosure
- Perfect for sites where LAN connection is not available
- 4G LTE
- IP 67
- Mounting brackets included
- Versatile use (mobile and fixed installations)

### PAC-SC51KUA



- M-NET power supply




### PAC-SF46EPA



- M-NET transmission booster

# Centralised Controllers

## Technical Specification


CENTRALISED CONTROLLERS	AT-50B	AE-C400E	KS10-RFFI
			
Description	5" Touch Screen Controller	12.1 Capacitive Touch Screen Controller	AE-C400E Interface
Connect to	M-NET Network	M-NET Network	AE-C400E and EW-C50E
Max Number of Units	50	50 and 4 Pulse Meters	-
Compatibility	M Series, Mr Slim, City Multi and Lossnay	M Series, Mr Slim, City Multi, Lossnay, e-Series, MEHITS Chillers <sup>1</sup> and Ecodan QAHV/CAHV/CRHV	-
Power Supply	Via PAC-SC51KUA	220-240v, 50Hz	220-240v, 50Hz
Dimensions (mm) (WxDxH)	180 x 30 x 120	306 x 71.8 x 211	130 x 30 x 80
Control			
On/Off	✓	✓	-
Mode	✓	✓	-
Setpoint	✓	✓	-
Fan Speed	✓	✓	-
Air Direction	✓	✓	-
Permit/Prohibit	✓	✓	-
Filter Sign	✓	✓	-
Monitor			
On/Off	✓	✓	✓
Mode	✓	✓	-
Setpoint	✓	✓	-
Fan Speed	✓	✓	-
Air Direction	✓	✓	-
Permit/Prohibit	✓	✓	-
Filter Sign	✓	✓	-
Fault Codes	✓	✓	✓
Room Temperature	✓	✓	-
Weekly Schedule	✓	✓	-
Annual Schedule	x	✓	-
Night Set Back	✓	✓	-
Web Pages	x	✓	-
Optimised Start	x	✓	-
Automatic Setpoint Adjustment	x	✓	-
Load Shedding	x	✓	-
Occupied / Unoccupied Settings Reset	x	x	-
Remote Monitoring with M2M	x	✓	-
Simple Energy Monitoring	x	✓	-
Advanced Energy Monitoring	x	✓	-

### PIN CODES:

- CENTRAL CONTROL ENERGY APPORTION CHARGE PIN
- CENTRAL CONTROL BACNET PIN

Notes: <sup>1</sup> MEHITS adaptor required.

### AE-C400E ACCESSORIES



#### PAC-YK92TB-J

##### Wall Mounting Attachment

Used to attach the AE-C400E on to the surface of a wall. Ideal accessory where a recess in the wall isn't available.

Dimensions (mm): 304 x 94 x 209

#### PAC-YK94UTB-J

##### Electrical Box - In-wall Enclosure

Use to help protect and contain the AE-C400E within the wall.

Dimensions (mm): 346 x 60 x 230

#### PAC-YK96TK-J

##### Mounting Kit for Control Panel

For use when the AE-C400E is required to be installed inside a control panel enclosure with DIN Rail.

Dimensions (mm): 299 x 73 x 203

#### PAC-YK91RF-J





##### Replacement Wall Mounting Attachment

Replacement kit for mounting an AE-C400E to the wall.

Dimensions (mm): 293 x 20 x 203

# Centralised Controllers

## Technical Specification

CENTRALISED CONTROLLERS		EW-C50E	MITSU10001-ROUTER-CPT	PAC-SC51KUA	PAC-SF46EPA
					
Description		Web Interface and AE-C400E expansion controller	QuSpot antenna cellular solution, including router	M-NET Power Supply	M-NET Transmission Booster
Connect to		M-NET Network	-	M-NET Network	M-NET Network
Max Number of Units		50 and 4 Pulse Meters	-	50	-
Compatibility		M Series, Mr Slim, City Multi, Lossnay, e-Series, MEHITS Chillers <sup>*1</sup> and Ecodan QAHV/CAHV/CRHV	AE-C400E, EW-C50E, MCC-50E	AT-50B, EW-C50E and AE-C400E	M Series, Mr Slim and City Multi
Power Supply		220-240V, 50Hz	-	220-240V, 50Hz	220-240V, 50Hz
Dimensions (mm) (WxDxH)		185 x 60.3 x 278	160 x 160 x 243 160 x 189 x 347 (with brackets/accessories)	271 x 72 x 169	360 x 59 x 340
Control	On/Off	✓	-	-	-
	Mode	✓	-	-	-
	Setpoint	✓	-	-	-
	Fan Speed	✓	-	-	-
	Air Direction	✓	-	-	-
	Permit/Prohibit	✓	-	-	-
	Filter Sign	✓	-	-	-
Monitor	On/Off	✓	-	-	-
	Mode	✓	-	-	-
	Setpoint	✓	-	-	-
	Fan Speed	✓	-	-	-
	Air Direction	✓	-	-	-
	Permit/Prohibit	✓	-	-	-
	Filter Sign	✓	-	-	-
	Fault Codes	✓	-	-	-
	Room Temperature	✓	-	-	-
Weekly Schedule		✓	-	-	-
Annual Schedule		✓	-	-	-
Night Set Back		✓	-	-	-
Web Pages		✓	-	-	-
Optimised Start		✓	-	-	-
Automatic Setpoint Adjustment		✓	-	-	-
Load Shedding		✓	-	-	-
Occupied / Unoccupied Settings Reset		x	-	-	-
Remote Monitoring with M2M		✓	-	-	-
Simple Energy Monitoring		✓	-	-	-
Advanced Energy Monitoring		✓	-	-	-


### PIN CODES:

■ CENTRAL CONTROL ENERGY APPORTION CHARGE PIN


■ CENTRAL CONTROL BACNET PIN

Notes: \*1 MEHITS adaptor required.


System Diagram AT-50B

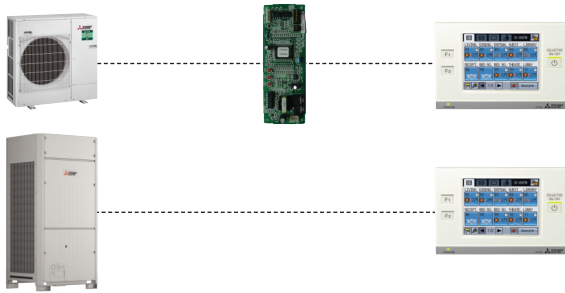


System Diagram AE-C400E

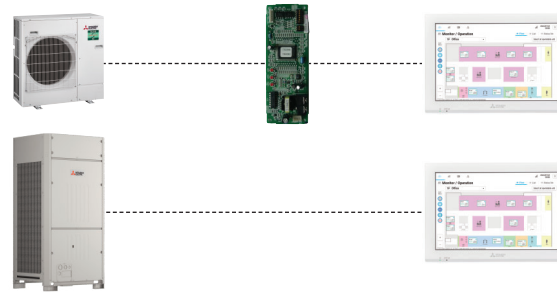

System Diagram EW-C50E

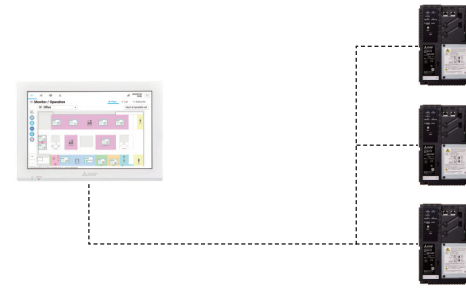


System Diagram EW-C50E

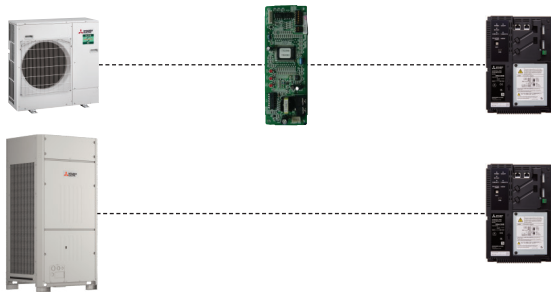

System Diagram MITSU10001-Router-CPT




System Diagram PAC-SC51KUA




System Diagram PAC-SF46EPA




**Product Dimensions** AT-50B

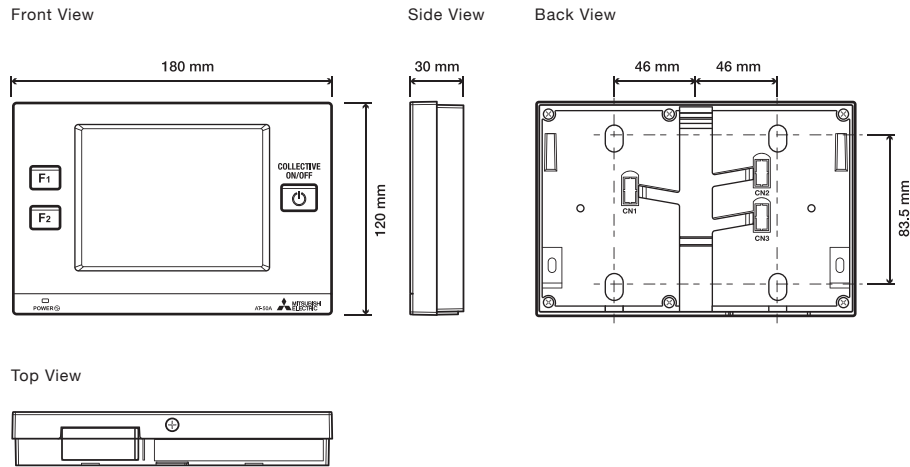


**Product Dimensions** AE-C400E

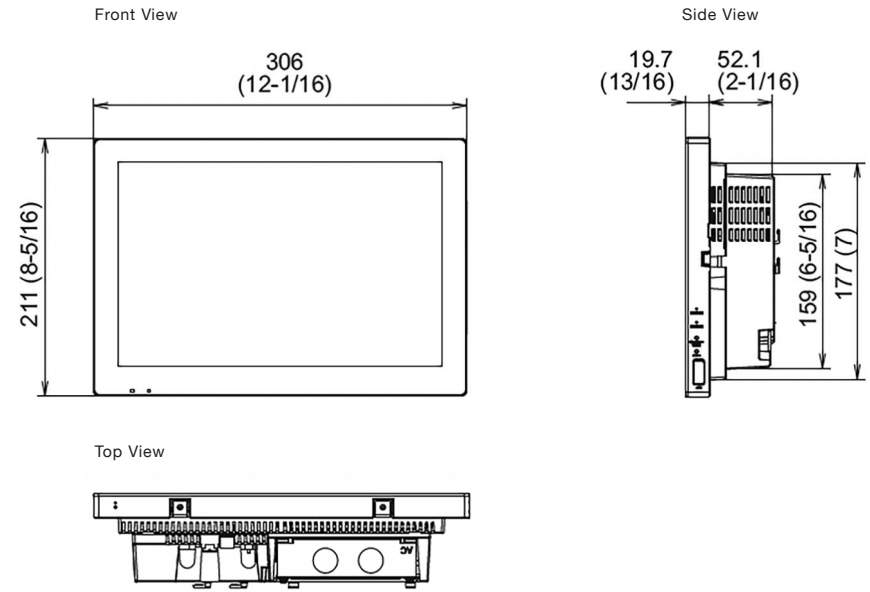

**Product Dimensions** EW-C50E

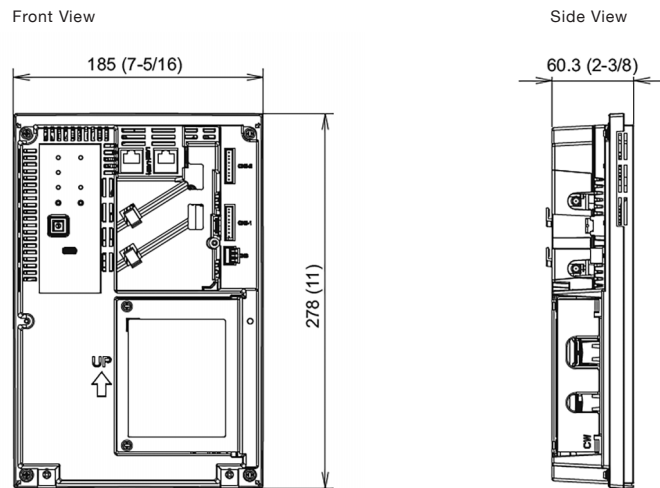


**Product Dimensions** MITSU10001-Router-CPT

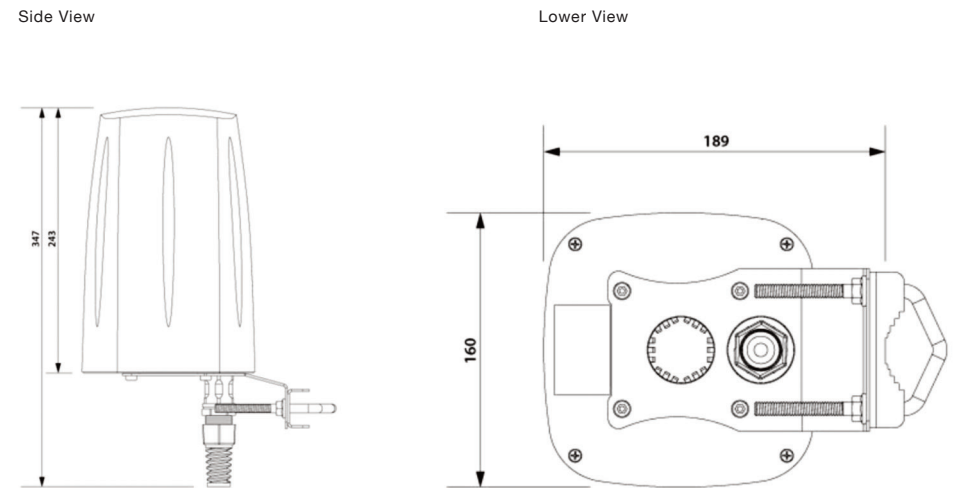


Product Dimensions

PAC-YK92TB-J

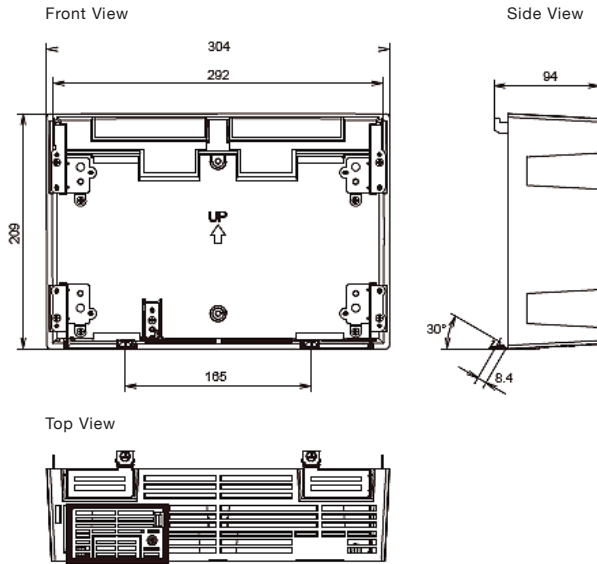


Product Dimensions

PAC-YK94UTB-J

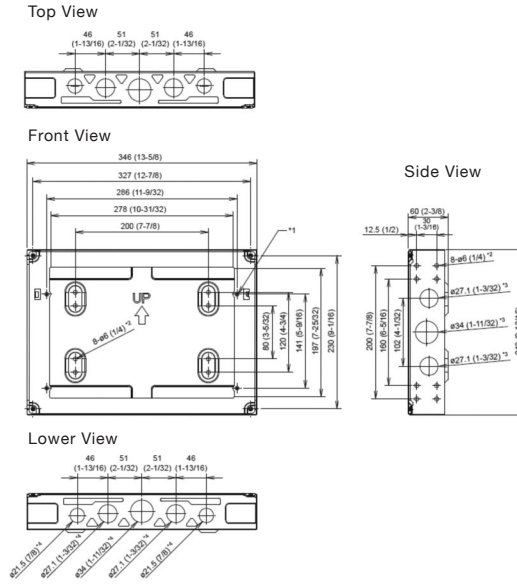


Product Dimensions

PAC-YK96TK-J

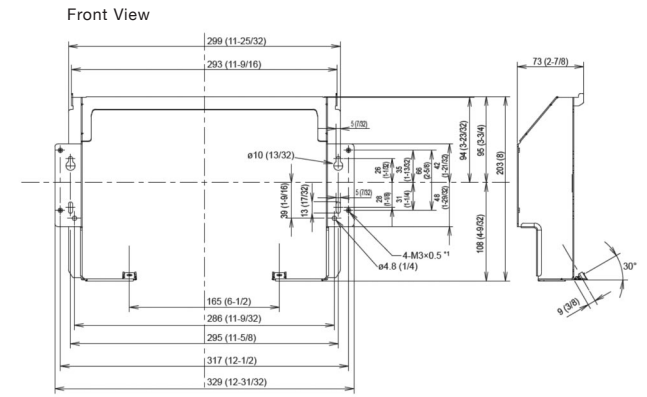


Product Dimensions

PAC-YK91RF-J

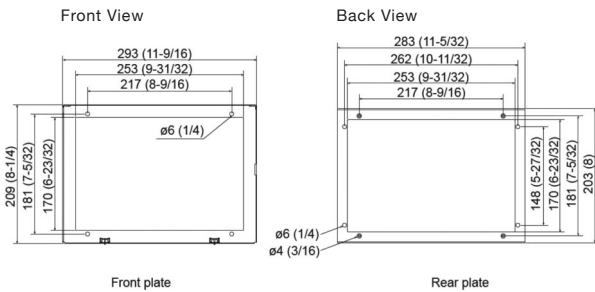


Product Dimensions

PAC-SC51KUA

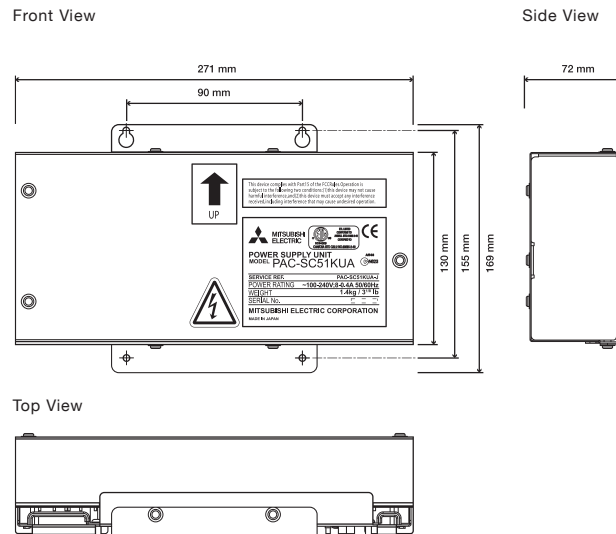

Product Dimensions

PAC-SF46EPA

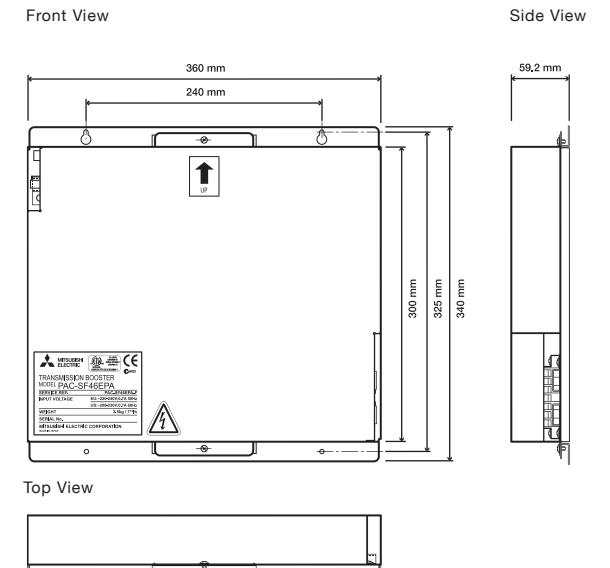

# Remote Controllers

From a simplified controller perfect for hotel applications to a full backlight touch screen controller, we have the right remote controller to choose from.


## Key Features & Benefits

### PAR-CT01MAA-SB / PAR-CT01MAA-PB



- Simple to use
- Touch screen
- 180 colour screen
- 180 colour font display
- Backlight
- Fully configurable via smartphone App
- Customisable display
- Ability to display customer logos

### PAR-U02MEDA



- Touch screen M-Net Controller
- Night set back, scheduling, setpoint limitation
- Built in occupancy/brightness sensor
- Backlight
- 0.5°C Set Point adjustment
- Dual Set Point

### PAR-42MAAB / PAR-42MAAPB



- Audible and visual leak alarm
- Displays model name and serial number on Mr Slim
- Night set back, scheduling, setpoint limitation
- 0.5°C Set Point adjustment
- Dual Set Point
- Run/Standby for Mr Slim
- Contact number under fault condition
- Backlight (White / Black options)
- Daylight saving function

### PAR-FL32MA / PAR-FA32MA



- Infrared solution
- Controller and receiver
- Controller able to control more than one receiver

### PZ-62DR-EB



- Dedicated Lossnay controller
- Night set back, scheduling
- Flexible night purge
- Backlight

### PAR-SL103A-E



- Wireless controller
- Weekly timer
- 3D Total Airflow for PLA-ZM/M
- 14°C cooling
- Individual vane setting for PLA-ZM/M/SM
- Dual Set Point
- Backlight

### PAR-W31MAA / PAR-W21MAA




- Dedicated remote controller (see technical specification on page 7.18)
- Button lock
- Contact number under fault condition
- Fault codes

### PAR-WT60R-E / PAR-WR61R-E



- Ecodan wireless controller
- New sleek flat panel design
- Backlight
- Ecodan receiver









### PAC-IF082B-E



- Ecodan controller
- Touch Screen

# Remote Controllers







## Technical Specification

REMOTE CONTROLLERS	PAR-CT01MAA-SB	PAR-CT01MAA-PB	PAR-U02MEDA	PAR-42MAAB	PAR-42MAAPB	PAR-FL32MA	PAR-FA32MA	PZ-62DR-EB
								
Description	Simplified Touch Screen Wired Remote Controller	Simplified Touch Screen Wired Remote Controller (Premium Finish)	Touch Screen Remote Controller	Standard White Wired Remote Controller	Standard Black Wired Remote Controller	Infrared Remote Controller	Infrared Receiver	Lossnay Wired Remote Controller
Connect to	Indoor	Indoor	M-NET Network	Indoor	Indoor	-	Indoor	Indoor
Max Number of Units	16	16	16	16	16	-	16	15
Compatibility	Mr Slim, City Multi and M Series via MAC-497IF-E	Mr Slim, City Multi and M Series via MAC-497IF-E	City Multi YNW (M Series and Mr Slim via A2M adaptor)*1	Mr Slim, City Multi and M Series via MAC-497IF-E or MAC-334IF-E	Mr Slim, City Multi and M Series via MAC-497IF-E or MAC-334IF-E	Mr Slim, City Multi and M Series via MAC-497IF-E	Mr Slim, City Multi and M Series via MAC-497IF-E	Lossnay LGH-RVX3(T)-E LGH-RVS-E
Dimensions (mm) (WxDxH)	65 x 14.1 x 120	65 x 14.1 x 120	140 x 25 x 120	120 x 14.5 x 120	120 x 14.5 x 120	57 x 18 x 157	70 x 18 x 120	120 x 19 x 120
Control								
On/Off	✓	✓	✓	✓	✓	✓	-	✓
Mode	✓	✓	✓	✓	✓	✓	-	✓
Setpoint	✓	✓	✓ (0.5°C)	✓ (0.5°C)	✓ (0.5°C)	✓	-	-
Fan Speed	✓	✓	✓	✓	✓	✓	-	✓
Air Direction	✓	✓	✓	✓	✓	✓	-	-
Permit/Prohibit	✓	✓	✓	✓	✓	x	-	✓
Filter Sign	✓	✓	✓	✓	✓	x	-	✓
Monitor								
On/Off	✓	✓	✓	✓	✓	✓	-	✓
Mode	✓	✓	✓	✓	✓	✓	-	✓
Setpoint	✓	✓	✓ (0.5°C)	✓ (0.5°C)	✓ (0.5°C)	✓	-	x
Fan Speed	✓	✓	✓	✓	✓	✓	-	✓
Air Direction	✓	✓	✓	✓	✓	✓	-	-
Permit/Prohibit	✓	✓	✓	✓	✓	✓	-	✓
Filter Sign	✓	✓	✓	✓	✓	x	-	✓
Fault Codes	✓	✓	✓	✓	✓	x	LED	✓
Room Temperature	✓	✓	✓ (0.5°C)	✓ (0.5°C)	✓	x	-	-
Leak Detection Buzzer	x	x	x	✓	✓	x	x	x
Backlight	✓	✓	✓	✓	✓	x	-	✓
Setpoint Limitation	✓	✓	✓	✓	✓	x	-	-
Independent Vane Control	x	x	x	✓	✓	x	-	-
Contact Number under Fault Condition	x	x	x	✓	✓	x	-	x
Scheduling	✓	✓	Weekly	Weekly	Weekly	x	-	Weekly
Night Set Back	x	x	✓	✓	✓	x	-	-
Button Lock	✓	✓	✓	✓	✓	x	-	✓
Easy Maintenance with Mr Slim	x	x	x	✓	✓	x	-	-
Run / Standby with Mr Slim	x	x	x	✓	✓	x	-	-
Silent Mode with Mr Slim	x	x	x	✓	✓	x	-	-
Energy Saving with Mr Slim	x	x	x	✓	✓	x	-	-
Occupancy Sensor (PIR)	x	x	✓	x	x	x	-	-
3D Total Airflow with Mr Slim	x	x	x	✓	✓	x	-	-
Model Name and Serial Number Display with Mr Slim	x	x	x	✓	✓	x	-	-
Energy Consumption Monitoring with Mr Slim	x	x	x	✓	✓	x	-	-
2+1 Backup Rotation with Mr Slim	x	x	x	✓	✓	x	-	-
Smart Defrost with Mr Slim	x	x	x	✓	✓	x	-	-
14°C Cooling with Mr Slim	x	x	x	✓	✓	x	-	-

Notes: Permit/Prohibit is via Centralised Controllers. ✓ = Yes, x = No, - = Not applicable. \*1 M-NET Power Supply Required via PAC-SC51KUA for M Series & Mr Slim

# Remote Controllers

## Technical Specification

REMOTE CONTROLLERS	PAR-SL103A-E	PAR-W31MAA	PAR-W21MAA	PAR-WT60R-E	PAR-WR61R-E	PAC-IF082B-E
						
Description	Wireless Remote Controller	Standard Wired Remote Controller	Standard Wired Remote Controller	Wireless Remote Controller Transmitter	Wireless Remote Controller Receiver	Flow Temperature Controller FTC7
Connect to	-	e-Series and Ecodan CAHV/QAHV	City Multi PWFY	Ecodan PUZ	Ecodan PUZ	Ecodan PUZ
Max Number of Units	-	6 (depends on unit connected)	16	8	1	1
Compatibility	Mr Slim PLA-ZM/M/SM PKA-M	e-Series and Ecodan CAHV/QAHV	PWFY and Ecodan CRHV	Ecodan PUZ	Ecodan PUZ	Ecodan PUZ
Dimensions (mm) (WxDxH)	66 x 22 x 188	120 x 19 x 120	130 x 19 x 120	100 x 23 x 100	100 x 30 x 80	120 x 14.1 x 65
Control						
On/Off	✓	✓	✓	x	-	✓
Mode	✓	✓	✓	✓	-	✓
Setpoint	✓	✓	✓	✓	-	✓
Fan Speed	✓	x	x	x	-	x
Air Direction	✓	x	x	x	-	x
Permit/Prohibit	x	x	-	x	-	x
Filter Sign	x	x	x	x	-	x
Monitor						
On/Off	✓	✓	✓	✓	-	✓
Mode	✓	✓	✓	✓	-	✓
Setpoint	✓	✓	✓	✓	-	✓
Fan Speed	✓	x	x	x	-	x
Air Direction	✓	x	x	x	-	x
Permit/Prohibit	✓	x	x	x	-	x
Filter Sign	x	x	x	x	-	x
Fault Codes	x	✓	✓	✓	-	✓
Room Temperature	x	x	x	✓	-	✓
Backlight	✓	✓	x	✓	-	x
Setpoint Limitation	x	x	✓	✓	-	x
Independent Vane Control	✓	x	x	x	-	x
Contact Number under Fault Condition	x	✓	✓	x	-	x
Scheduling	Weekly	Weekly	Weekly	Weekly	-	Weekly
Night Set Back	x	x	x	✓	-	✓
Button Lock	x	x	✓	x	-	✓
Easy Maintenance with Mr Slim	x	x	x	-	-	-
Run / Standby with Mr Slim	x	x	x	-	-	-
Silent Mode with Mr Slim	x	x	x	-	-	-
Energy Saving with Mr Slim	x	x	x	-	-	-
Occupancy Sensor (PIR)	x	x	x	-	-	-
3D Total Airflow with Mr Slim	✓	x	x	-	-	-
14°C Cooling with Mr Slim	✓	x	x	-	-	-

Notes: Prohibit is via Centralised Controllers. ✓ = Yes, x = No, - = Not applicable.

**System Diagram** PAR-CT01MAA-SB / PAR-CT01MAA-PB




**System Diagram** PAR-U02MEDA



**System Diagram** PAR-42MAAB / PAR-42MAAPB



**System Diagram** PAR-FL32MA / PAR-FA32MA

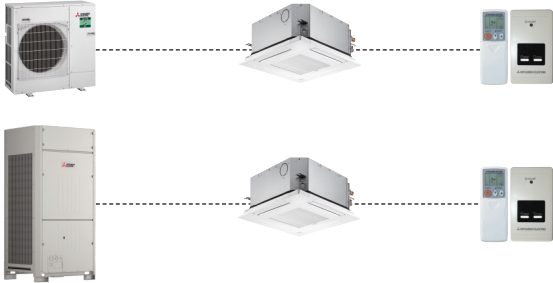

**System Diagram** PZ-62DR-EB



**System Diagram** PAR-SL103A-E



**System Diagram** PAR-W31MAA




**System Diagram** PAR-W21MAA




**System Diagram** PAR-WT60R-E / PAR-WR61R-E




**System Diagram** PAC-IF082B-E

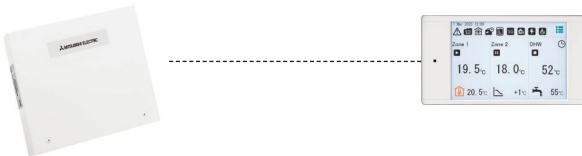


**Product Dimensions** PAR-CT01MAA-SB / PAR-CT01MAA-PB

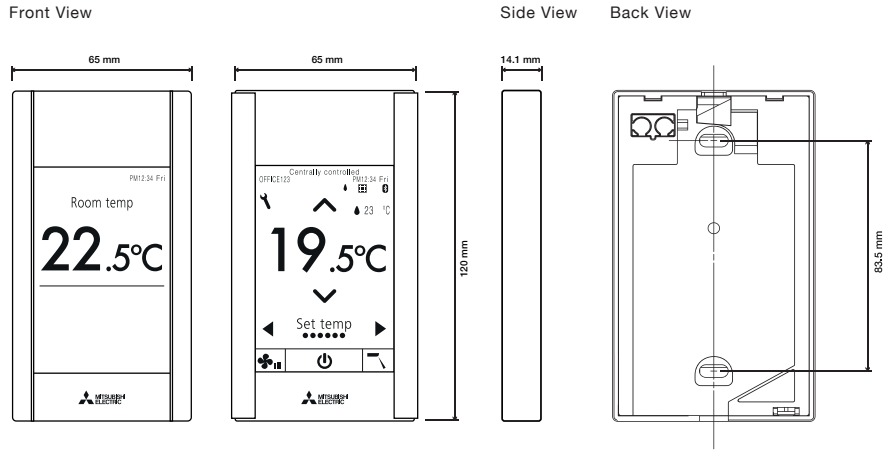


**Product Dimensions** PAR-U02MEDA

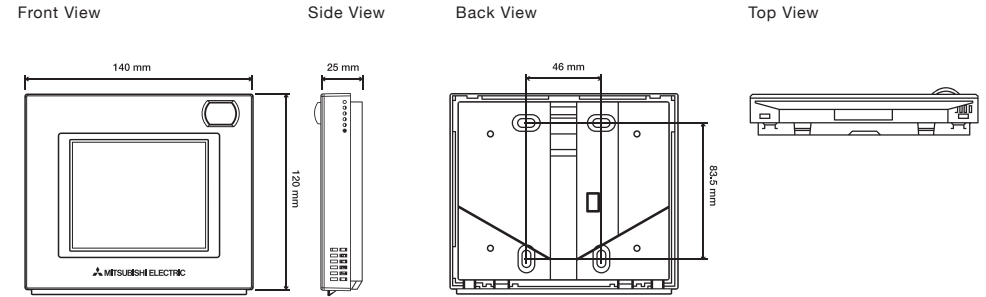


**Product Dimensions** PAR-42MAAB / PAR-42MAAPB

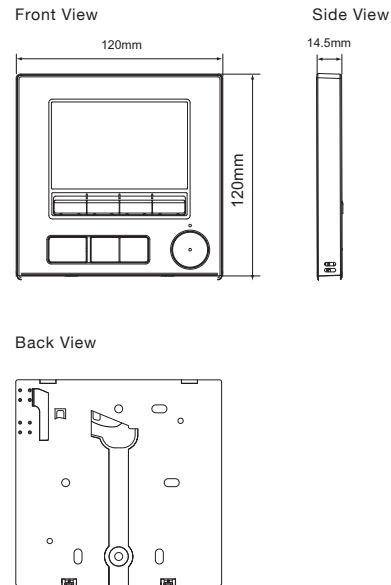


**Product Dimensions** PAR-FL32MA

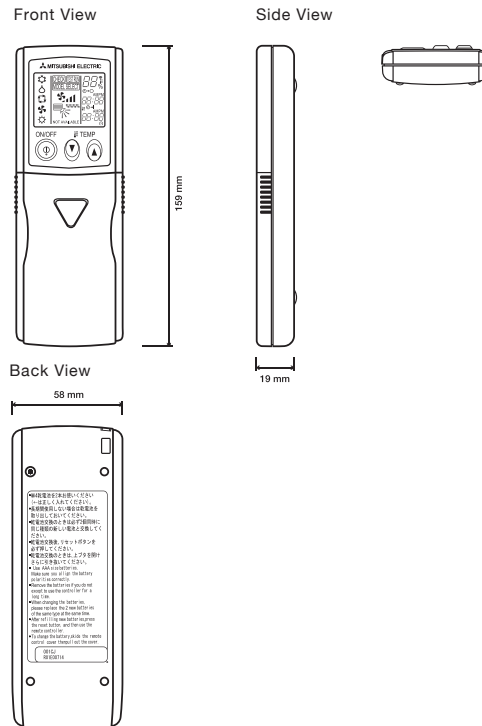


**Product Dimensions** PAR-FA32MA

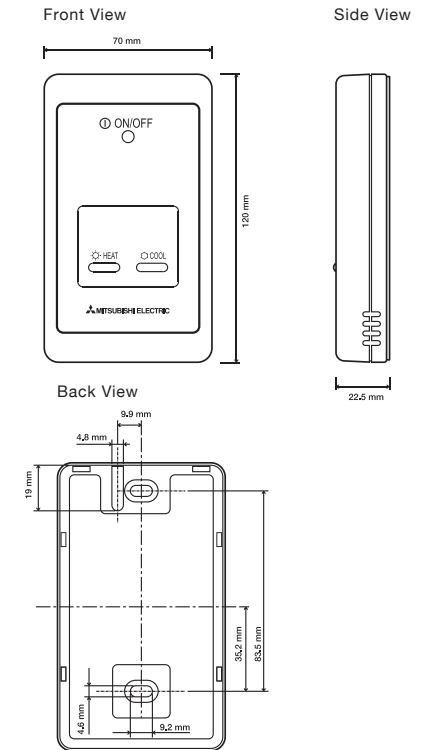


**Product Dimensions** PZ-62DR-EB / PAR-W31MAA

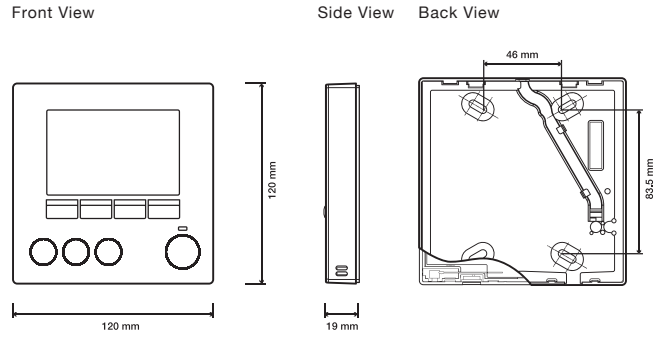


**Product Dimensions** PAR-SL103A-E

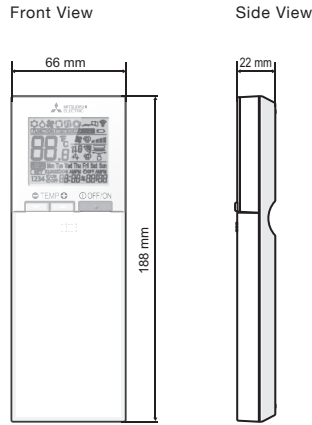


**Product Dimensions** PAR-W21MAA

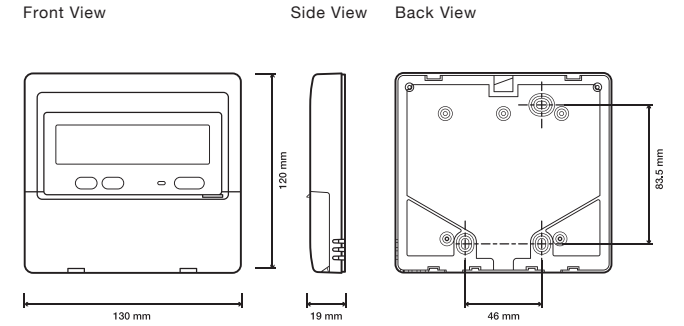


**Product Dimensions** PAR-WT60R-E

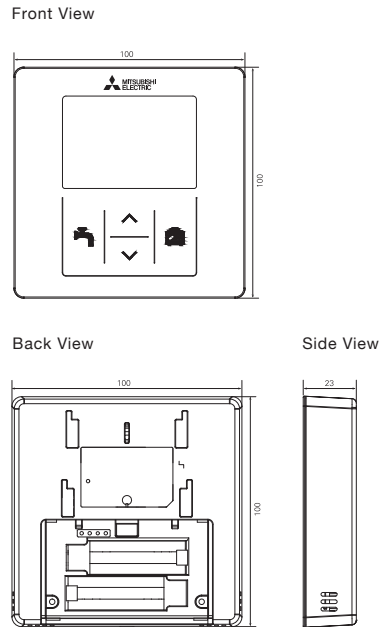

**Product Dimensions** PAR-WR61R-E

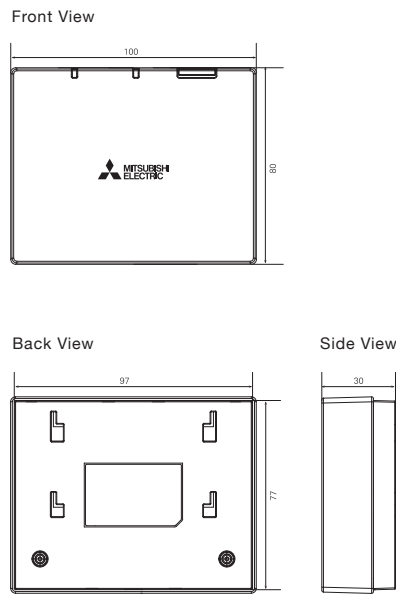

**Product Dimensions** PAC-IF082B-E

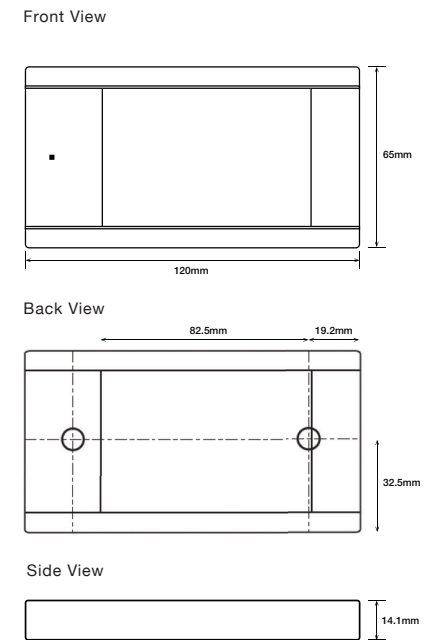

# Solution Interfaces

Our dedicated solution interfaces now include new sector specific products such as our new **MELCloud Commercial** offering.

## Key Features & Benefits

### MELCLOUD COMMERCIAL



- Advanced remote control of indoor units across one or multiple sites
- Smart monitoring of outdoor unit performance for one or multiple buildings
- Energy monitoring via in-built CT Clamps or Modbus Energy Meters, for improved energy consumption & cost savings
- Real-time system data of indoor and outdoor units facilitates performance analysis, service, and ongoing maintenance
- Choice of subscription packages to meet customer requirements

### MELCLOUD-CL-HA1-A1



- IoT Interface - MELCloud Home and MELCloud Commercial\*
- LAN or Cellular options. Cellular and MELCloud Home option includes data plan\*\* via eSIM
- Remotely control indoor and outdoor units
- Remote service and maintenance\*
- Update interface software OTA (over the air)
- Wall mountable - bracket supplied

### MELCOTEL2



- Monitor and control up to 200 indoor units
- Dedicated hotel interface
- Key card and non key card integration
- Automatic Setpoint adjustment
- Occupied / Unoccupied Settings Reset

### MCC-50E



- Compatible with M Series, Mr Slim, City Multi and Lossnay ranges
- Cloud system connection device - MELCloud Commercial IoT platform
- 4G or LAN connection
- Remote access to control, monitor and provide service & maintenance for up to 50 indoor units

### MELCOMMS MINI



- Monitor and control up to 8 indoor units
- Run / Standby panel
- Includes 2 x MELCOBEMS MINI (A1M+) Interfaces

### ENERGY METERS







- Backlit LCD display
- Single-phase energy analyser
- DIN-rail mount




# Solution Interfaces


## Technical Specification

ENERGY METERS	EM511 SINGLE-PHASE PULSE ENERGY METER EM511DINAV81XO1X	EM112 SINGLE-PHASE MODBUS ENERGY METER EM112DINAV01XS1X	EM540 THREE-PHASE PULSE ENERGY METER EM540DINAV23XO1X	EM340 THREE-PHASE MODBUS ENERGY METER EM340DINAV23XS1X
				
Description	Single-phase LCD Energy Meter 230 V L-N, 5 (100) A, Pulse output	Single-phase LCD Energy Meter 230 V L-N, 5 (100) A, RS485 Modbus RTU	Three-phase LCD Energy Meter, 120 to 230 V L-N, 208 to 400 V L-L, 5 (65) A, Pulse output	Three-phase LCD Energy Meter, 120 to 230 V L-N, 208 to 400 V L-L, 5 (65) A, RS485 Modbus RTU
Compatibility	<ul style="list-style-type: none"> <li>■ PAC-YG60MCA</li> <li>■ AE-C400E</li> <li>■ EW-C50E</li> <li>■ MCC-50E</li> </ul>	<ul style="list-style-type: none"> <li>■ AE-C400E</li> <li>■ EW-C50E</li> <li>■ MCC-50E</li> </ul>	<ul style="list-style-type: none"> <li>■ PAC-YG60MCA</li> <li>■ AE-C400E</li> <li>■ EW-C50E</li> <li>■ MCC-50E</li> </ul>	<ul style="list-style-type: none"> <li>■ AE-C400E</li> <li>■ EW-C50E</li> <li>■ MCC-50E</li> </ul>
Features	<ul style="list-style-type: none"> <li>■ Backlit LCD Display</li> <li>■ Single-phase energy analyser</li> <li>■ DIN-rail mount</li> <li>■ Connect up to 4 directly to PAC-YG60MCA</li> </ul>	<ul style="list-style-type: none"> <li>■ Backlit LCD Display</li> <li>■ Single-phase energy analyser</li> <li>■ DIN-rail mount</li> <li>■ Connect up to 4 directly to AE-C400E, EW-C50E or MCC-50E</li> </ul>	<ul style="list-style-type: none"> <li>■ Backlit LCD Display</li> <li>■ Three-phase energy analyser</li> <li>■ DIN-rail mount</li> <li>■ Connect up to 4 directly to PAC-YG60MCA</li> </ul>	<ul style="list-style-type: none"> <li>■ Backlit LCD Display</li> <li>■ Three-phase energy analyser</li> <li>■ DIN-rail mount</li> <li>■ Connect up to 4 directly to AE-C400E, EW-C50E or MCC-50E</li> </ul>
Dimensions (mm) (WxDxH)	18 x 58 x 90	35 x 63 x 90	54 x 63 x 90	54 x 63 x 91


**System Diagram** MELCLOUD COMMERCIAL

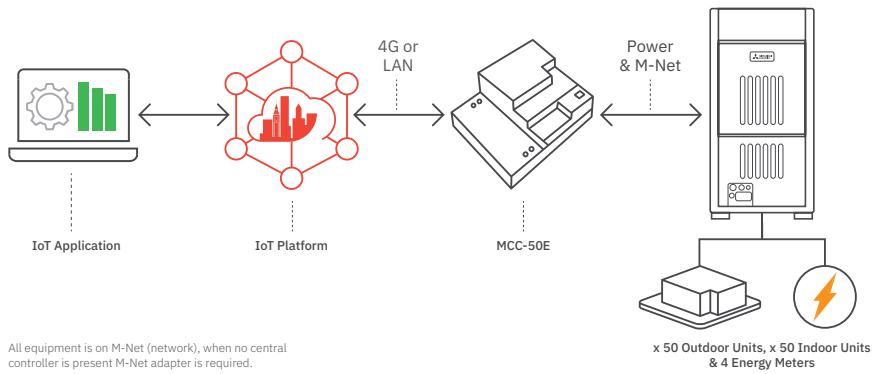

**System Diagram** MCC-50E

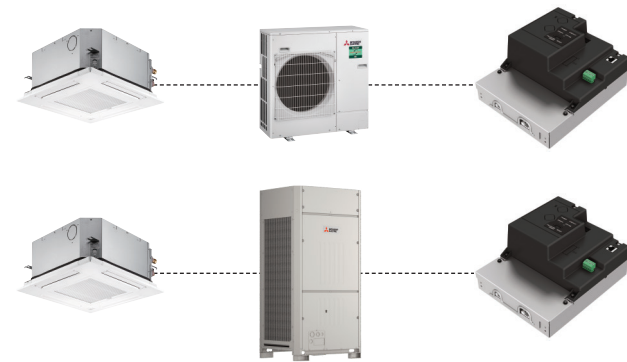

**System Diagram** MELCLOUD-CL-HA1-A1

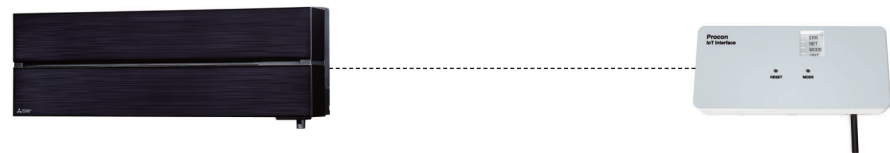


**System Diagram** MELCOMMS MINI




**System Diagram** MELCOTEL2




**System Diagram** EM511 Single-phase PULSE Energy Meter EM511DINAV81XO1X

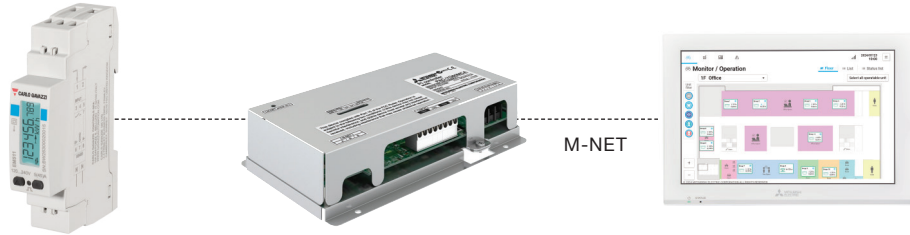


**System Diagram** EM540 Three-phase PULSE Energy Meter EM540DINAV23XO1X

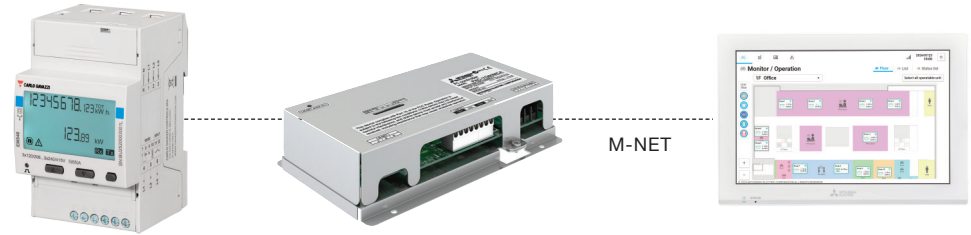

**System Diagram** EM112 Single-phase MODBUS Energy Meter EM112DINAV01XS1X

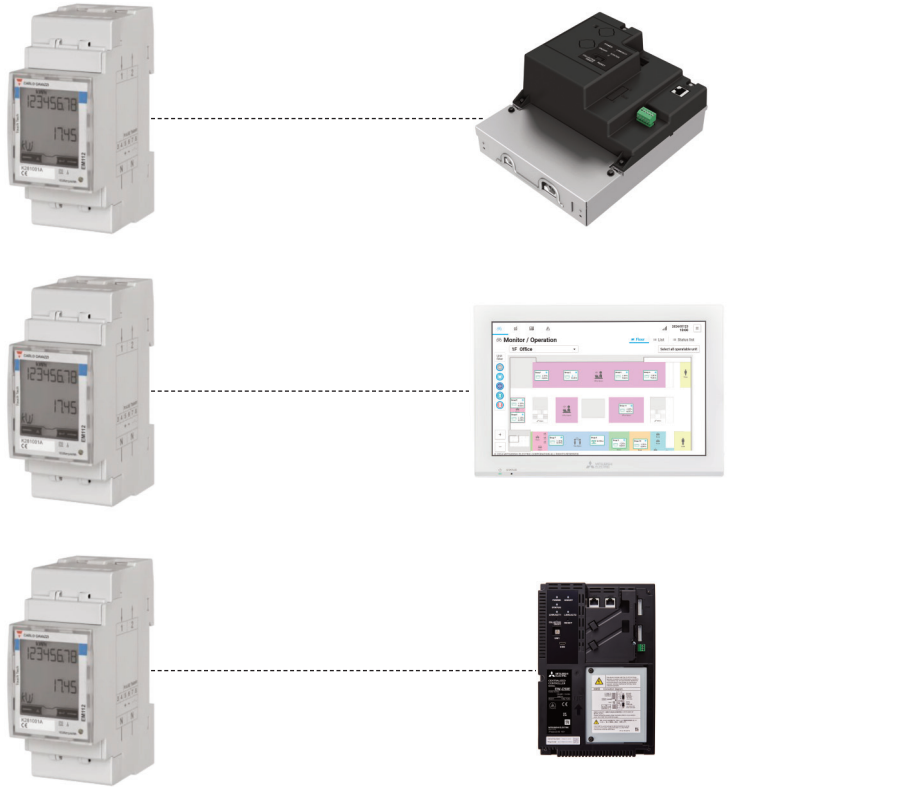


**System Diagram** EM340 Three-phase MODBUS Energy Meter EM340DINAV23XS1X

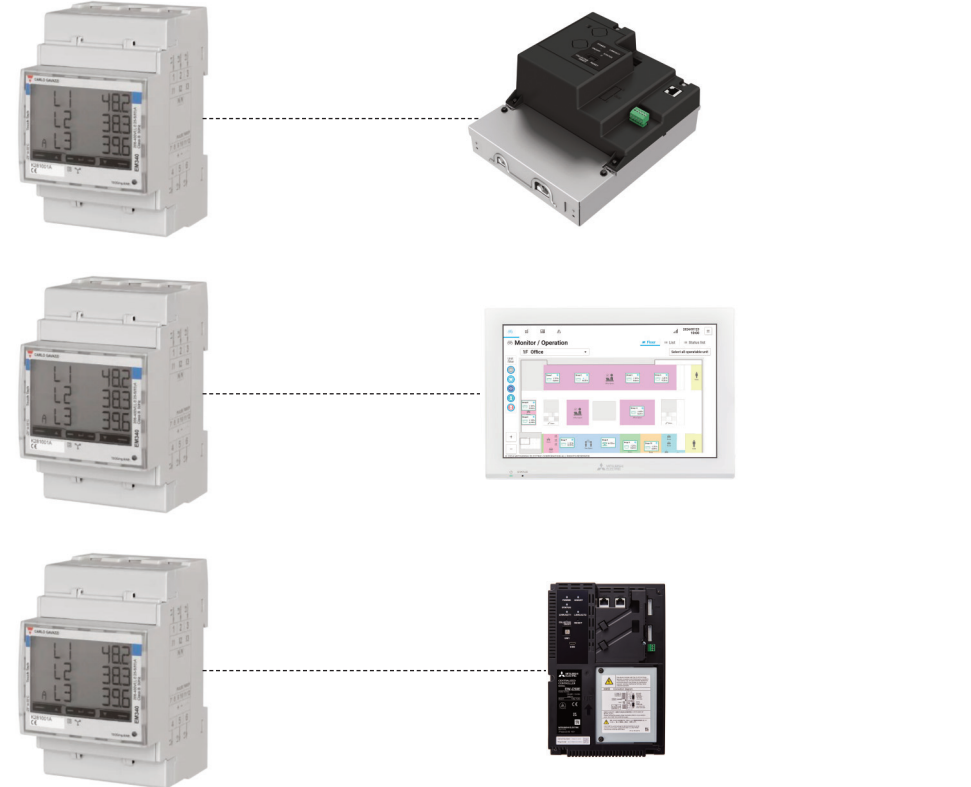

## Product Dimensions


MCC-50E

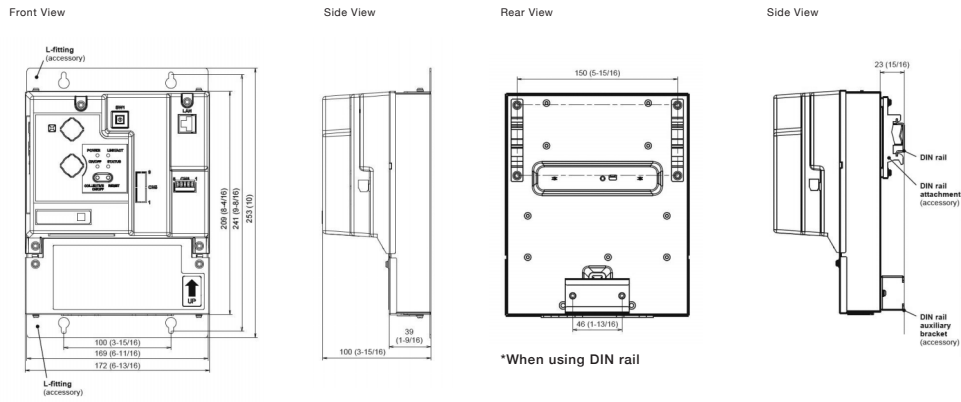

\*When using L-fittings


## Product Dimensions

MELCLOUD-CL-HA1-A1

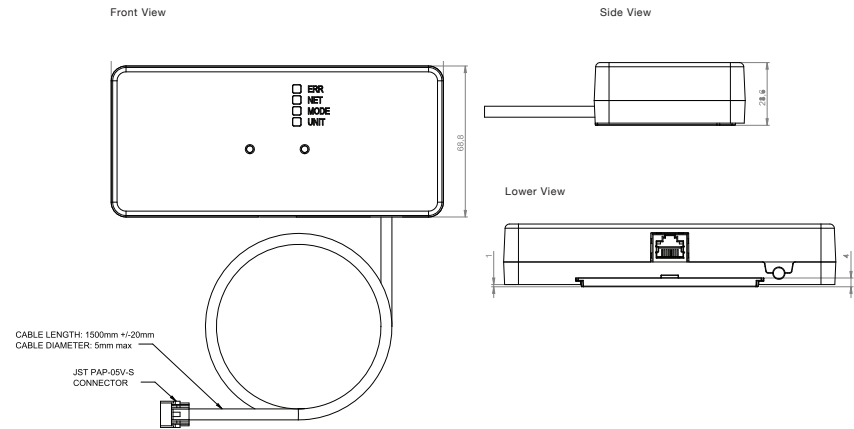


## Product Dimensions





MELCOMMS MINI

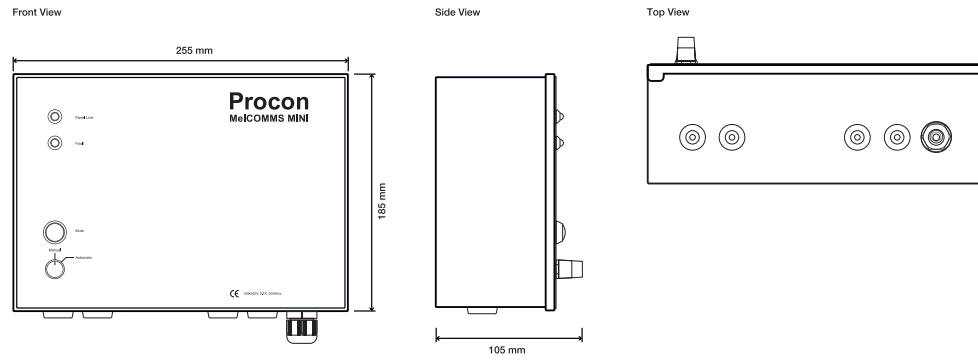

## Product Dimensions

MELCOTEL2

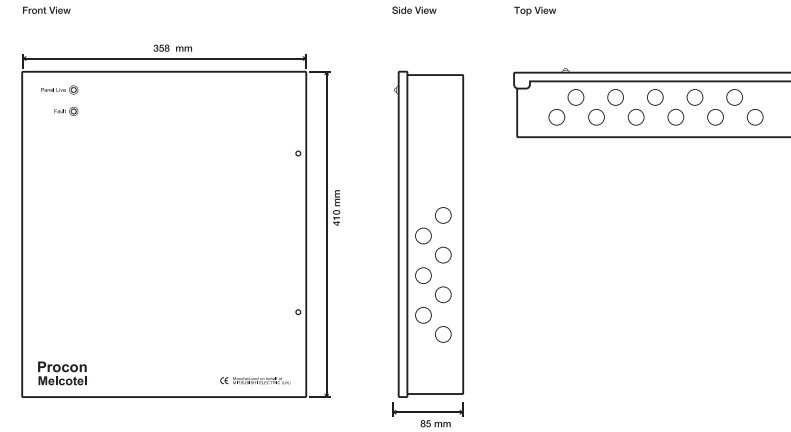

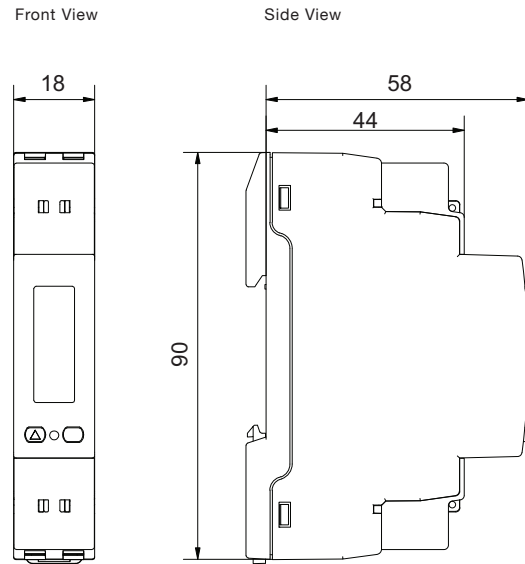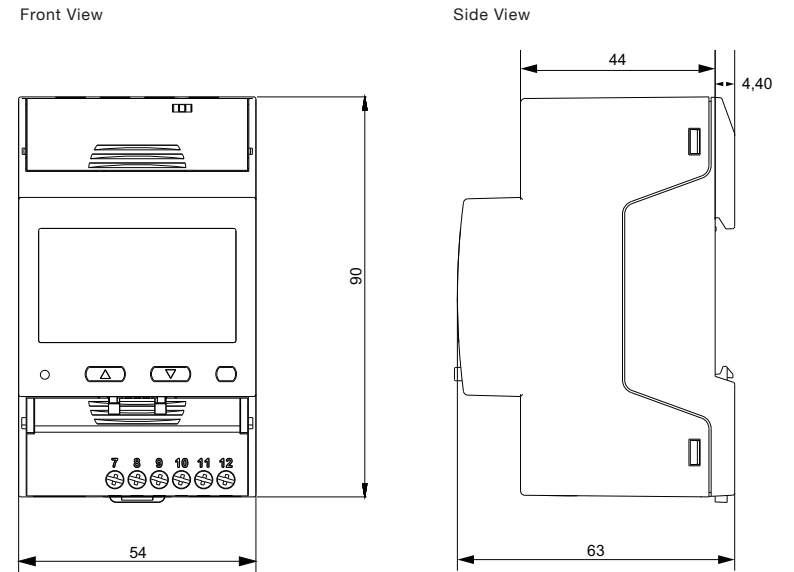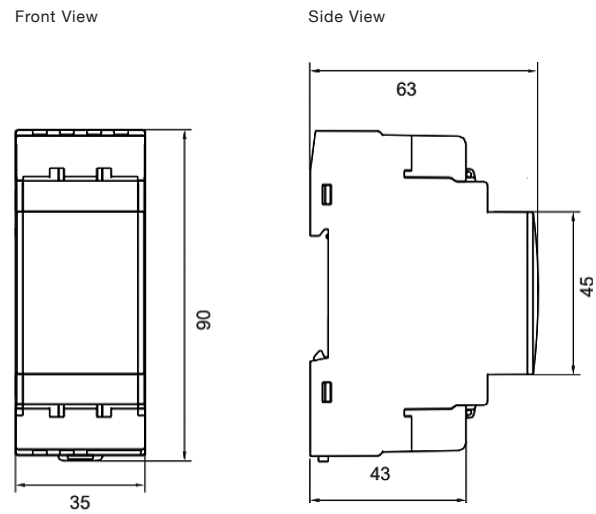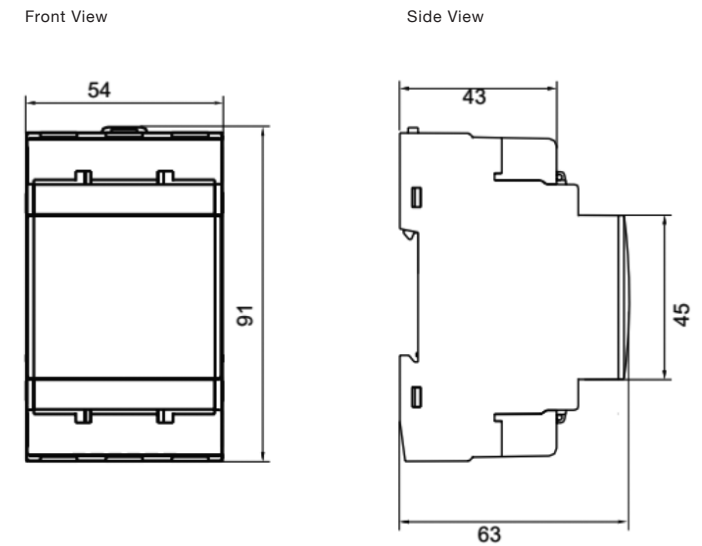**Product Dimensions** EM511 Single-phase PULSE Energy Meter EM511DINAV81XO1X

**Product Dimensions** EM540 Three-phase PULSE Energy Meter EM540DINAV23XO1X

**Product Dimensions** EM112 Single-phase MODBUS Energy Meter EM112DINAV01XS1X

**Product Dimensions** EM340 Three-phase MODBUS Energy Meter EM340DINAV23XS1X


# Simple Interfaces

A wide range of interfaces are available to allow third party equipment to monitor and control our units. Some interfaces are also available to monitor and control third party equipment from our centralised controllers.


## Key Features & Benefits

### PAC-SA89TA



- Also known as 3 wire adaptor
- Remote on/off
- Fire alarm input
- Night mode
- Demand control

### PAC-SA88HA



- Heating and cooling signal
- Run and fault signal

### PAC-YT51HAA



- Remote on/off
- Fire alarm input
- Common run and fault signal

### PAC-YG10HA



- Remote on/off
- Fire alarm input
- Common run and fault signal

### PAC-SK15MA-E



- Adaptor to connect Mr Slim PUZ-ZM35/50 units to M-NET

### PAC-SJ95MA-E



- Adaptor to connect Mr Slim units to M-NET











### PAC-SL16MA-E



- Adaptor to connect Mr Slim PUZ-ZM100-140 / PUZ-M200/250 units to M-NET


# Simple Interfaces

## Technical Specification

SIMPLE INTERFACES	PAC-SA89TA	PAC-SA89TA	PAC-SA88HA	PAC-SA88HA	PAC-SA88HA	PAC-YT51HAA	PAC-YG10HA	PAC-SK15MA-E	PAC-SJ95MA-E	PAC-SL16MA-E
										
Description	On/Off Adaptor (3 wire adaptor)	Night Mode and Demand Control (3 wire adaptor)	Run and Fault Adaptor (5 wire adaptor)	Heat and Cool Adaptor (5 wire adaptor)	Run and Fault Adaptor (5 wire adaptor)	On/Off Run and Fault Adaptor	On/Off Run and Fault Adaptor (9 wire adaptor)	M-NET Converter	M-NET Converter	M-NET Converter
Connect to	Indoor	Outdoor	Indoor	Indoor	Outdoor	AT-50B	AE-C400E and EW-C50E	Outdoor	Outdoor	Outdoor
Max Number of Units	1	1	1	1	1	1	1	1	1	1
Compatibility	Mr Slim and City Multi	Mr Slim and City Multi	Mr Slim and City Multi	City Multi	City Multi	AT-50B	AE-C400E and EW-C50E	Mr Slim PUZ-ZM35/50 Outdoor	Mr Slim Outdoor <sup>1</sup>	Mr Slim PUZ-ZM100-140 / PUZ-M200/250 Outdoor
Dimensions (mm) (WxDxH)	-	-	-	-	-	-	-	120 x 44 x 321	140 x 15 x 50	140 x 15 x 50
Control										
On/Off	✓	✓	x	x	x	✓	✓	-	-	-
Mode	x	x	x	x	x	x	x	-	-	-
Setpoint	x	x	x	x	x	x	x	-	-	-
Fan Speed	x	x	x	x	x	x	x	-	-	-
Air Direction	x	x	x	x	x	x	x	-	-	-
Permit/Prohibit	x	x	x	x	x	x	x	-	-	-
Filter Sign	x	x	x	x	x	x	x	-	-	-
Monitor										
On/Off	x	x	✓	x	✓	✓	✓	-	-	-
Mode	x	x	x	✓	x	x	x	-	-	-
Setpoint	x	x	x	x	x	x	x	-	-	-
Fan Speed	x	x	x	x	x	x	x	-	-	-
Air Direction	x	x	x	x	x	x	x	-	-	-
Permit/Prohibit	x	x	x	x	x	x	x	-	-	-
Filter Sign	x	x	x	x	x	x	x	-	-	-
Fault Codes	x	x	✓	✓	✓	✓	✓	-	-	-
Room Temperature	x	x	x	x	x	x	x	-	-	-
Fire Alarm	✓	✓	x	x	x	✓	✓	-	-	-
On/Off but Centrally Controlled	VFC	x	x	x	x	VFC	Via 24VDC	-	-	-
On/Off but NOT Centrally Controlled	x	x	x	x	x	x	x	-	-	-
Run and Fault Output	x	x	12VDC	x	12VDC	Via 24VDC	Via 24VDC	-	-	-
Heat and Cool Output	x	x	x	12VDC	x	x	x	-	-	-
Night Mode and Demand Control	x	VFC	x	x	x	x	x	-	-	-
Connect Mr Slim to M-NET	-	-	-	-	-	-	-	✓	✓	✓

Notes: VFC: Volt free contact. <sup>1</sup> PAC-SJ95MA-E M-NET adaptor for PUZ-ZM60/71, PUZ-ZM200/250, PUZ-M100-140, PUZ-SM100-140.  
 ✓ = Yes, x = No, - = Not applicable.


System Diagram PAC-SA89TA

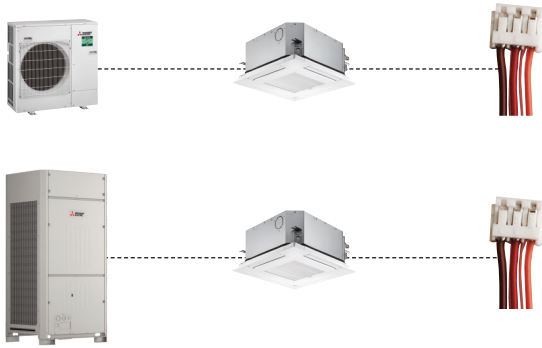

System Diagram PAC-SA88HA



System Diagram PAC-YT51HAA

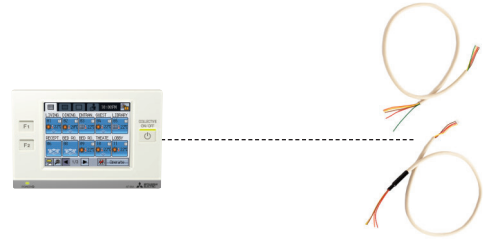

System Diagram PAC-YG10HA



System Diagram PAC-SK15MA-E




System Diagram PAC-SJ95MA-E



System Diagram PAC-SL16MA-E




**Wiring Diagram PAC-SA89TA**

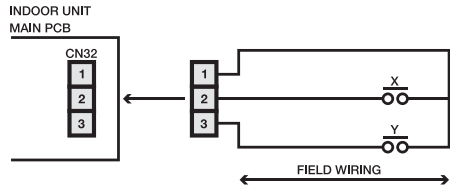

**NOTE**  
 - ON / OFF BUTTON ON THE REMOTE CONTROLLER NOT AVAILABLE  
 - ADAPTER WIRE COLOURS MAY VARY  
 - RELAYS NOT SUPPLIED

**OPERATION**  
 - X AND Y CLOSED TO START UNIT


**Wiring Diagram PAC-SA88HA**

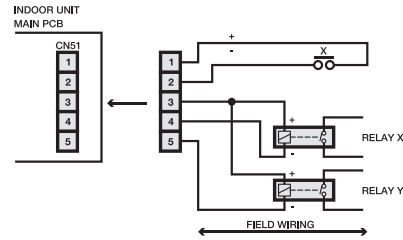


**NOTE**  
 - RELAYS NOT SUPPLIED  
 - X REQUIRES A PULSE SIGNAL TO START / STOP UNIT

**OPERATION**  
 - RELAY X SUPPLIED WITH 12V DC WHEN UNIT IS ON  
 - RELAY Y SUPPLIED WITH 12V DC WHEN UNIT IN FAULT


**Wiring Diagram PAC-YT51HAA**

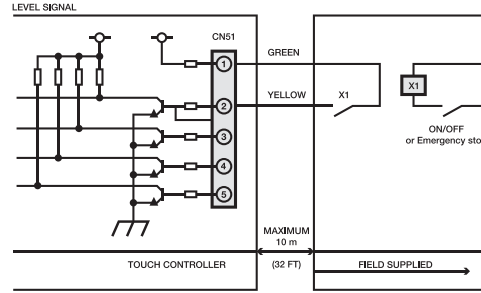

**Wiring Diagram PAC-YG10HA**

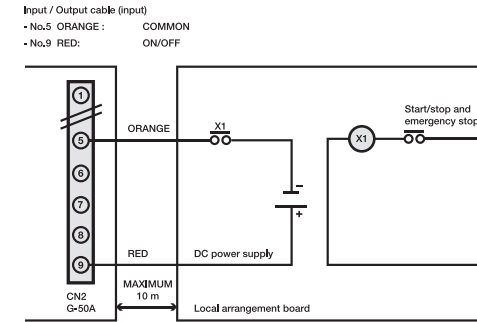


**Wiring Diagram PAC-SA89TA**



**NOTE**  
 X : Low noise mode or demand  
 Y : Demand  
 X, Y : Relay Contact rating voltage >= 15VDC  
 Contact rating current >=0.1A  
 Minimum applicable load <= 1mA at DC


**Wiring Diagram PAC-SA88HA**

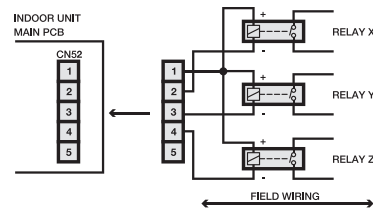


**NOTE**  
 - RELAYS NOT SUPPLIED

**OPERATION**  
 - RELAY X SUPPLIED WITH 12V DC WHEN FAN IS RUNNING  
 - RELAY Y SUPPLIED WITH 12V DC WHEN UNIT IS IN COOLING MODE AND THE REMOTE CONTROLLER IS ON OR OFF  
 - RELAY Z SUPPLIED WITH 12V DC WHEN UNIT IS IN HEATING MODE AND THE REMOTE CONTROLLER IS ON OR OFF


**Wiring Diagram PAC-YT51HAA**

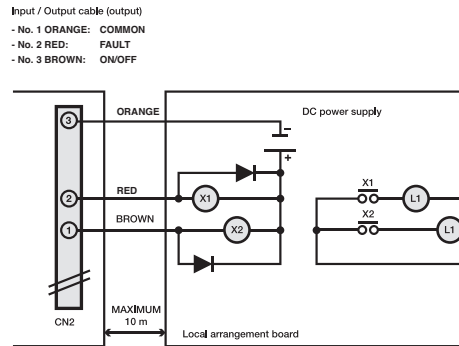

**Wiring Diagram PAC-YG10HA**

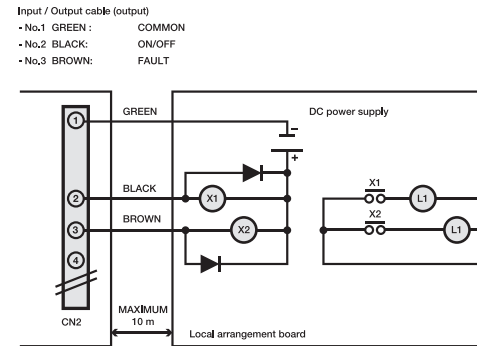


**Product Dimensions PAC-SK15MA-E**

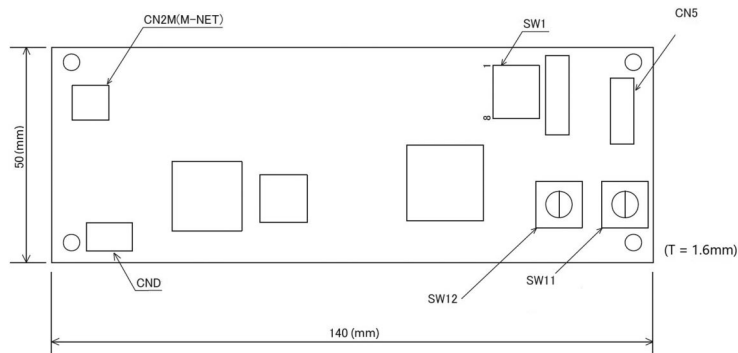

Notes: Dimensional drawing of board, for cover dimensions please see page 7.30

**Product Dimensions PAC-SJ95MA-E / PAC-SL16MA-E**

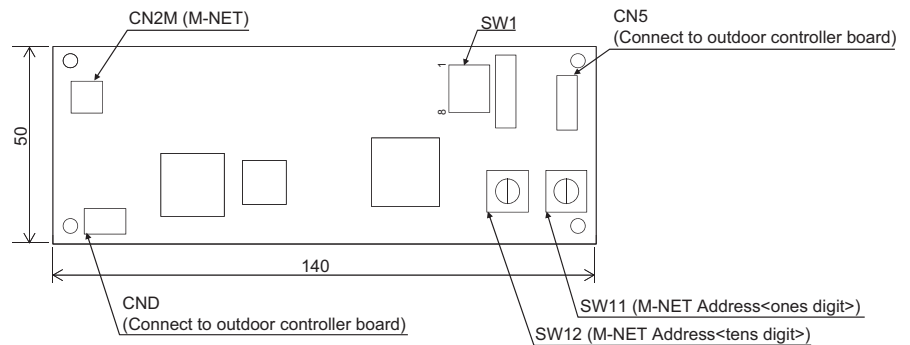

# Advanced Interfaces

A wide range of interfaces are available to allow third party equipment to monitor and control our units. Some interfaces are also available to monitor and control third party equipment from our centralised controllers.

## Key Features & Benefits

### KTR-53A



- Remote on/off
- Run and fault volt free outputs

### MELCORETAIL MINI



- On/off, fire alarm and lock input
- Setpoint and fan speed input
- Run, fault, heat and cool output
- 2 energy saving features

### PAC-YG60MCA



- Monitor up to 4 energy meters

### PAC-YG63MCA



- Monitor up to 2 temperature sensors

### PAC-YG66DCA



- Monitor and control up to 2 pieces of general equipment

### MAC-497IF-E




- Adaptor to connect remote controller to M Series
- Adaptor to connect M Series to M-NET

### MAC-334IF-E



- Adaptor to connect remote controller to M Series
- Adaptor to connect M Series to M-NET
- 3rd party heating interlock






### MAC-597IF-E



- Wi-Fi Interface for MELCloud Home solution
- ATA and ATW support
- WPS and Wi-Fi pin pairing
- WPS Push mode
- Setting via PAR-42MAAB / PAR-SL103A-E

# Advanced Interfaces

## Technical Specification

ADVANCED INTERFACES	KTR-53A	MELCORETAIL MINI	PAC-YG60MCA	PAC-YG63MCA	PAC-YG66DCA
					
Description	On/Off and Run/Fault Adaptor	Retail Control and Input / Output Interface	Pulse Meter Interface	Temperature and Humidity Interface	Third Party Control and Interface
Connect to	Indoor	Indoor	M-NET Network	M-NET Network	M-NET Network
Max Number of Units	1	1	4 Pulse Meters	1 PT100, 1 Humidity Sensor	2 General Equipment
Compatibility	Mr Slim and City Multi	M Series and Mr Slim	AE-C400E and EW-C50E	AE-C400E and EW-C50E	AE-C400E and EW-C50E
Power Supply	12/24VAC/DC	-	24VDC	24VDC	24VDC
Dimensions (mm) (WxDxH)	130 x 30 x 80	173 x 19 x 51	200 x 45 x 120	200 x 45 x 120	200 x 45 x 120
Control					
On/Off	✓	VFC	-	-	✓
Mode	-	0 to 10VDC	-	-	x
Setpoint	-	0 to 10VDC	-	-	x
Fan Speed	-	0 to 10VDC	-	-	x
Air Direction	-	-	-	-	x
Permit/Prohibit	-	VFC	-	-	x
Filter Sign	-	-	-	-	x
Monitor					
On/Off	✓	VFC	-	-	✓
Mode	-	VFC	-	-	x
Setpoint	-	-	-	-	x
Fan Speed	-	-	-	-	x
Air Direction	-	-	-	-	x
Permit/Prohibit	-	-	-	-	x
Filter Sign	-	-	-	-	x
Fault Codes	✓	VFC	-	-	✓
Room Temperature	-	-	-	-	x
On/Off but Centrally Controlled	Option Lock/Unlock	VFC	x	-	-
On/Off but NOT Centrally Controlled	12/24VAC/DC	VFC	x	-	-
Run Output	x	VFC	x	-	-
Fault Output	x	VFC	x	-	-
Energy Saving	x	VFC	x	-	-
Heat / Cool / Thermo Output	x	VFC	x	-	-
Pulse Weight	x	x	0.1, 1.0 and 10	-	-

Notes: VFC: Volt free contact. ✓ = Yes, x = No, - = Not applicable.

# Advanced Interfaces

## Technical Specification


ADVANCED INTERFACES	MAC-497IF-E	MAC-334IF-E	MAC-597IF-E
---------------------	-------------	-------------	-------------



			AIR CONDITIONING	ECODAN*
Description	Interface for MA Remote Controller	Interface for M-NET, MA Remote Controller, On/Off Input, Run/Fault Output and 3rd Party Heating Interlock (M Series)	MELCloud Home Wi-Fi Interface	MELCloud Home Wi-Fi Interface
Connect to	Indoor	Indoor	Indoor	Indoor
Max Number of Units	1	1	1	1
Compatibility	M Series and Mr Slim (SUZ)	M Series and Mr Slim (SUZ)	M Series, Mr Slim and City Multi	Ecodan FTC7 / FTC6
Power Supply	-	-	-	-
Dimensions (mm) (WxDxH)	128 x 30 x 76	160 x 55 x 70	41.5 x 18.5 x 73.5	41.5 x 18.5 x 73.5
Control	On/Off	x	✓	✓
	Mode	x	✓	✓
	Setpoint	x	✓	✓
	Fan Speed	x	✓	x
	Air Direction	x	✓	x
Monitor	On/Off	x	✓	✓
	Mode	x	✓	✓
	Setpoint	x	✓	✓
	Fan Speed	x	✓	✓
	Air Direction	x	✓	✓
	Filter Sign	x	✓	✓
	Fault Codes	x	✓	✓
Room Temperature	x	x	✓	✓
On/Off but Centrally Controlled	x	x	-	-
On/Off but NOT Centrally Controlled	x	✓	-	-
Heat / Cool / Thermo Output	x	✓	-	-
Set-Up of Room Temperature	✓	✓	-	-
Detector Position	✓	✓	-	-

Notes: VFC: Volt free contact. ✓ = Yes, x = No, - = Not applicable. \*For further technical specification on the MAC-597IF-E for Ecodan please refer to the Residential Heating Section of the Product Catalogue.

**System Diagram** KTR-53A

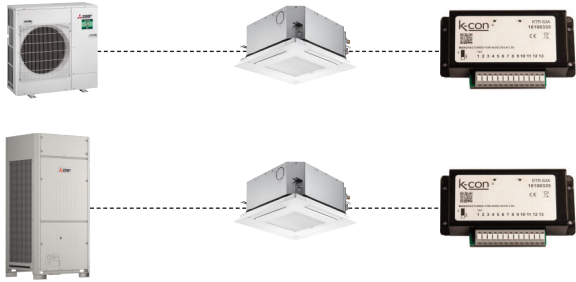

**System Diagram** MELCORETAIL MINI



**System Diagram** PAC-YG60MCA



**System Diagram** PAC-YG63MCA



**System Diagram** PAC-YG66DCA




**System Diagram** MAC-497IF-E




**System Diagram** MAC-334IF-E



**System Diagram** MAC-334IF-E Heating Interlock

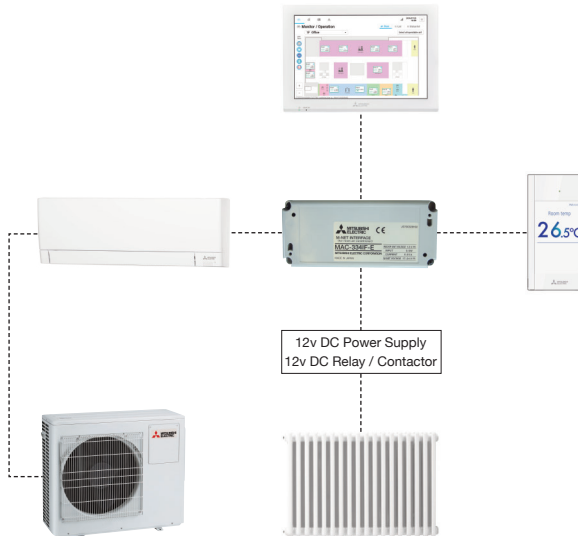


**System Diagram** MAC-597IF-E

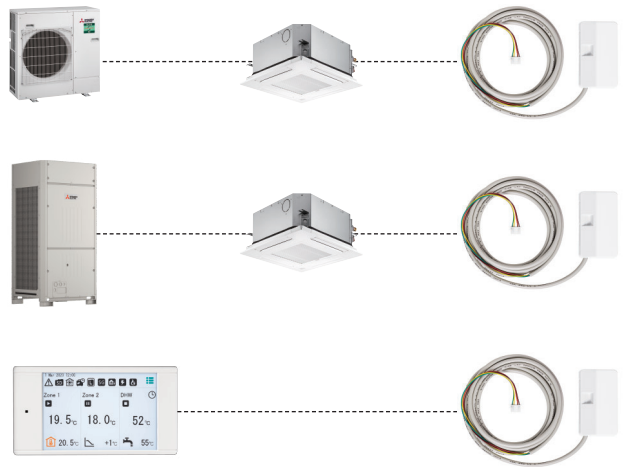


## Product Dimensions

KTR-53A

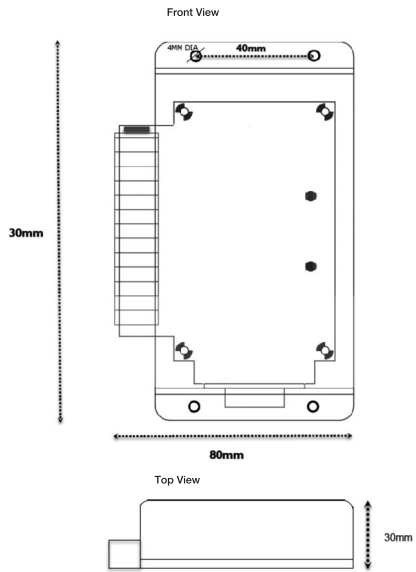


## Product Dimensions

MELCORETAIL MINI

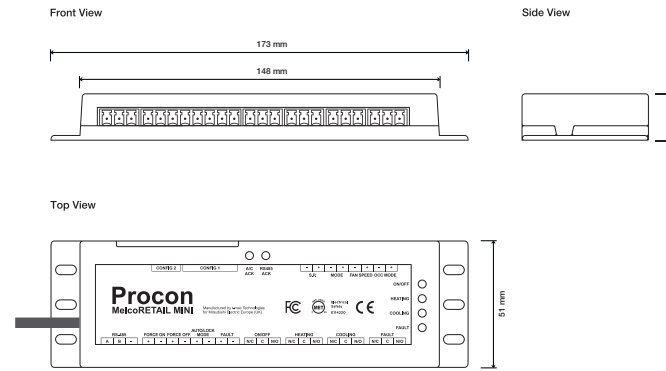


## Product Dimensions

PAC-YG60MCA

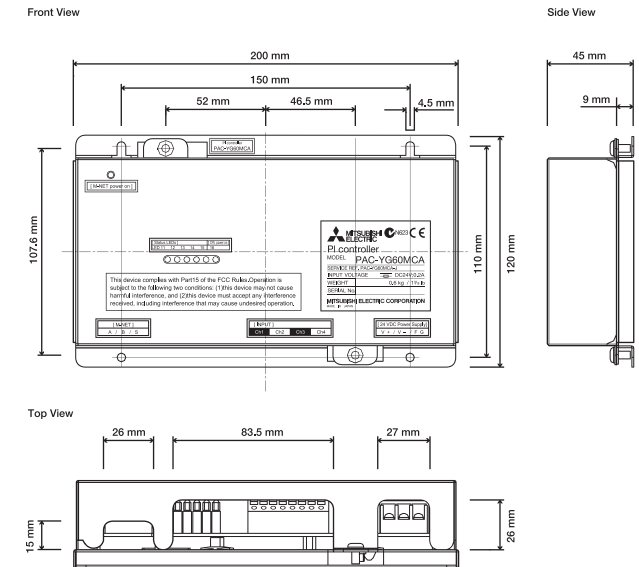


## Product Dimensions

PAC-YG63MCA

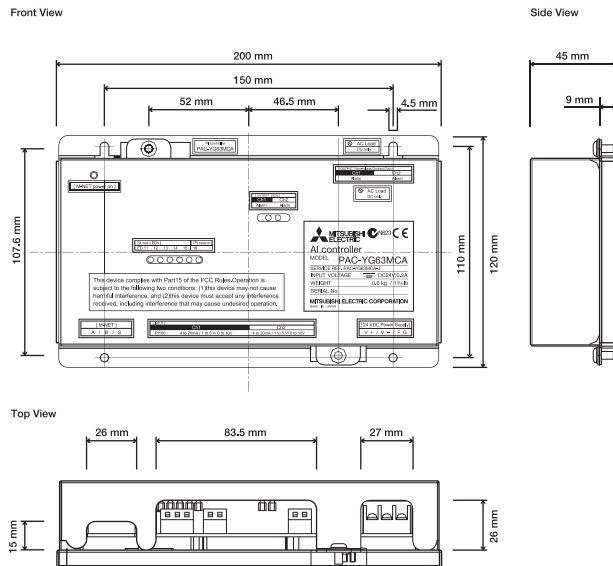


## Product Dimensions

PAC-YG66DCA

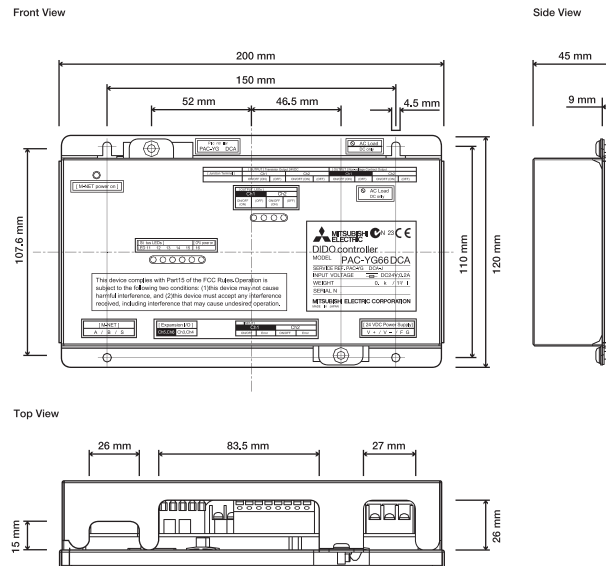


Product Dimensions

MAC-497IF-E

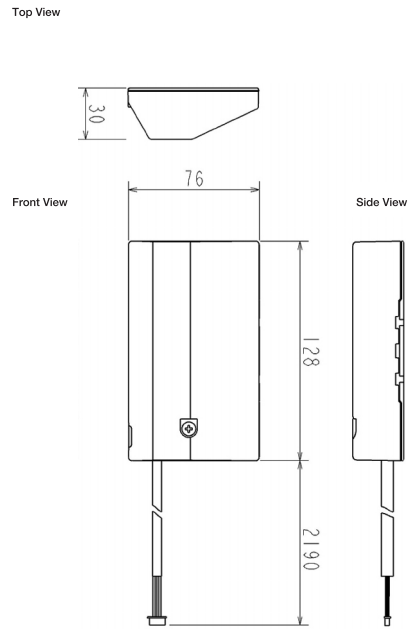


Product Dimensions

MAC-334IF-E

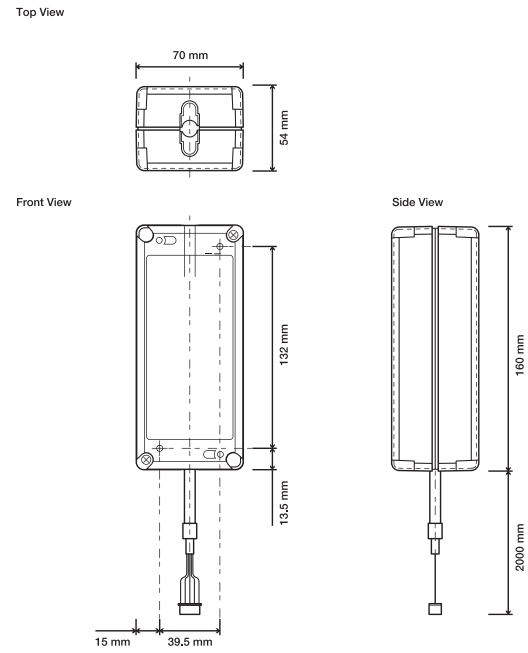

Product Dimensions

MAC-597IF-E

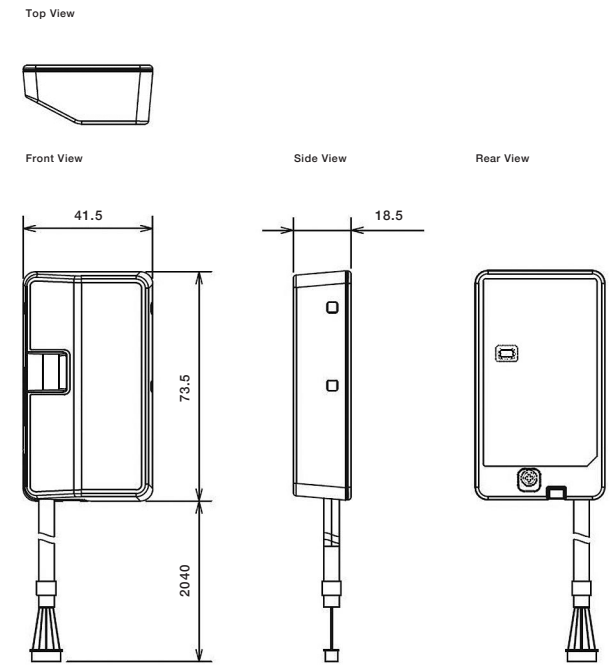

# BEMS Interfaces

Building Energy Management Systems (BEMS) will allow a building to run efficiently. A wide range of interfaces are available to connect our systems simply to a BEMS.

## Key Features & Benefits

### MELCOBEMS MINI (A1M+)



- BACnet / Modbus IP
- Configuration via onboard webpage (local network)
- Firmware update over Ethernet (local network)
- Individually monitor and control indoor and outdoor unit (1 x A1M+ per unit)
- DIN rail mount option

### MELCOBEMS MINI (KNX A1M+)



- KNX & BACnet / Modbus IP
- Configuration via onboard webpage (local network)
- Firmware update over Ethernet (local network)
- Individually monitor and control indoor and outdoor unit (1 x A1M+ per unit)
- DIN rail mount option

### MELCOBEMS2



- Monitor and control up to 50 indoor units
- Modbus and BACnet interface
- Energy monitoring

### MELCOBEMS SIP+



- Control and Monitor up to 50 indoor units (up to 200 with EW-C50E)
- Multiprotocol, allowing data to be disseminated to one or many BMS, EMS & IoT systems
- Energy Monitoring

### IQ4 XNC



- Monitor and control up to 50 indoor units
- Trend interface




### IQ5 XNC



- Monitor and control up to 50 indoor units
- Trend interface

# BEMS Interfaces
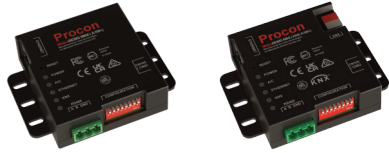
## Technical Specification

BEMS INTERFACES		MELCOBEMS MINI (A1M+) / (KNX A1M+)		MELCOBEMS2	MELCOBEMS SIP+
					
Description	Air to Air Splits Modbus/BACnet/KNX Interface. Air (Water) to Water & Lossnay Modbus/BACnet/KNX Interface		AE-C400E, EW-C50E Modbus BACnet Interface		Multiprotocol Gateway
Connect to	Indoor, Outdoor or Ecodan PCB		AE-C400E and EW-C50E		AE-C400E and EW-C50E
Max Number of Units	1		50		200
Compatibility	M Series, Mr Slim, City Multi, Ecodan FTC7/6/5/4, e-Series, Ecodan QAHV/CAHV/CRHV and Lossnay (LGH models)		M Series, Mr Slim and City Multi		M Series, Mr Slim, City Multi, e-Series, Lossnay and Ecodan
Power Supply	-		24VDC		24VDC
Dimensions (mm) (WxDxH)	95 x 22.7 x 78.6		45 x 60 x 110		108 x 60 x 90
Network	Modbus / BACnet IP / RS485 <sup>1</sup> / KNX		Modbus / BACnet RS485 and TCP/IP		Bacnet IP / Modbus Sub TCP/IP and Serial / MQTT and REST (IoT protocols)
BEMS Compatibility	Cylon, Satchwell, Crestron, Invensys, Interactive Homes, North BT, Andover, Siemens, WEMS, RDM		Cylon, Satchwell, Crestron, Invensys, Interactive Homes, North BT, Andover, Siemens, WEMS, RDM		Trend, Cylon, Satchwell, Crestron, Invensys, Interactive Homes, North BT, Andover, Siemens, WEMS, Andover Controls, York BMS, Siemens, Priva Building Intelligence, Delta Controls, RDM
Control		Air to Air Splits and Lossnay	Air (Water) to Water		
	On/Off	DI	AI	DI	DI
	Mode	AI	AI	AI	AI
	Setpoint	AI	AI	AI	AI
	Fan Speed	AI	-	AI	AI
	Air Direction	AI	-	AI	AI
	Permit/Prohibit	x	AI	DI	DI
	Filter Sign	DI	-	DI	DI
Monitor	On/Off	DO	DO	DO	DO
	Mode	AO	AO	AO	AO
	Setpoint	AO	AO	AO	AO
	Fan Speed	AO	-	AO	AO
	Air Direction	AO	-	AO	AO
	Permit/Prohibit	x	AO	DO	DO
	Filter Sign	DO	-	DO	DO
	Fault Codes	AO	AO	AO	AO
	Room Temperature	AO	AO	AO	AO
	Daily kW Energy	-	AO	With EW-C50E	With EW-C50E
	Monthly kW Energy	-	AO	With EW-C50E	With EW-C50E



Key: DI = Digital Input. DO = Digital Output. AI = Analogue Input. AO = Analogue Output.

Notes: <sup>1</sup> Function only available on M Series, Mr Slim and City Multi.

The MELCOBEMS2 can monitor indoor daily and monthly kWh when used in conjunction with AE-C400E, EW-C50E, PAC-YG60MCA on third party energy meters.

# BEMS Interfaces

## Technical Specification

BEMS INTERFACES	IQ4 XNC	IQ5 XNC
		
Description	AE-C400E and EW-C50E Trend Interface*1	AE-C400E and EW-C50E Trend Interface*1
Connect to	AE-C400E and EW-C50E	AE-C400E and EW-C50E
Max Number of Units	50	50
Compatibility	M Series, Mr Slim, City Multi and Lossnay	
Power Supply	220-240v, 50Hz	220-240v, 50Hz
Dimensions (mm) (WxDxH)	263 x 46 x 150	144.5 x 60 x 131
Network	Trend	Trend
BEMS Compatibility	Trend	
Control	On/Off DI Mode AI Setpoint AI Fan Speed AI Air Direction AI Permit/Prohibit DI Schedule - Filter Sign DI	DI AI AI AI AI DI - DI
Monitor	On/Off DO Mode AO Setpoint AO Fan Speed AO Air Direction AO Permit/Prohibit DO Cloud Communication - Filter Sign DO Fault Codes AO Room Temperature AO Daily kWh Energy - Monthly kWh Energy - Comfort Data -	DO AO AO AO AO DO - DO AO AO - - - -

Key: DI = Digital Input. DO = Digital Output. AI = Analogue Input. AO = Analogue Output.

**Notes:**


The PAC-YG\*\*\*CA are not compatible with MELCOBEMS2, IQ4 XNC and IQ5 XNC.

IQ4 XNC / IQ5 XNC controllers are not directly compatible with Mitsubishi Electric AE-C400E / EW-C50E controllers due to differing TLS versions used by each product.


A SIP IPe Melco Proxy device will need to be purchased along side the IQ4 XNC / IQ5 XNC device to enable communication.

\*1 Synapsys Solutions Ltd, 1 Woodlands Court, Albert Drive, Burgess Hill, West Sussex, RH15 9TN, Telephone 0845 680 0303

**System Diagram** MELCOBEMS MINI (A1M+)

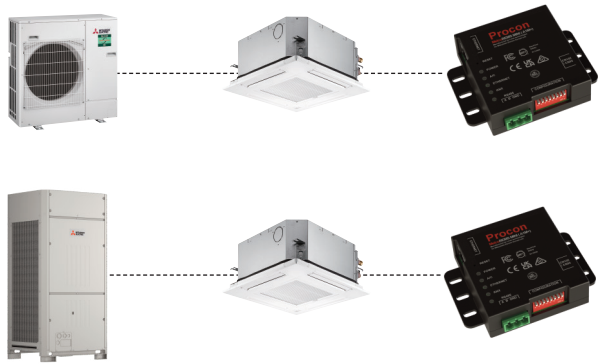

**System Diagram** MELCOBEMS MINI (KNX A1M+)

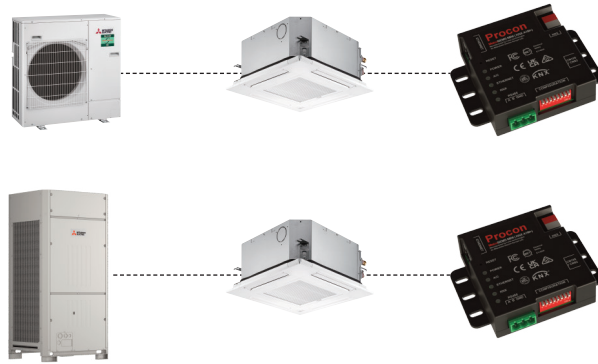


**System Diagram** MELCOBEMS2




**System Diagram** MELCOBEMS SIP+



**System Diagram** IQ4 XNC

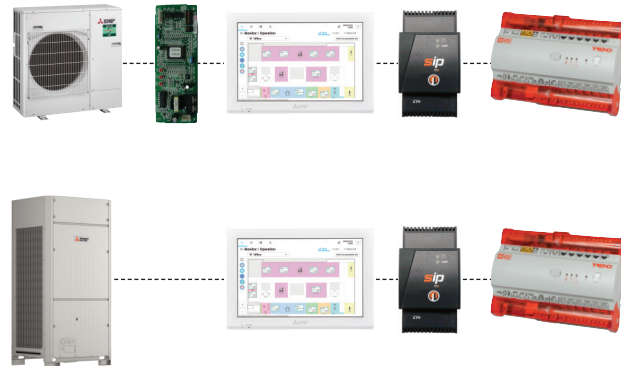

**System Diagram** IQ5 XNC

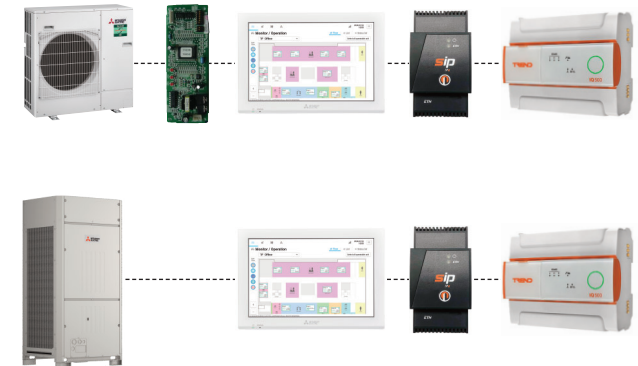





# MELCloud Commercial

## Monitor & Control App Screen Examples


Estate View

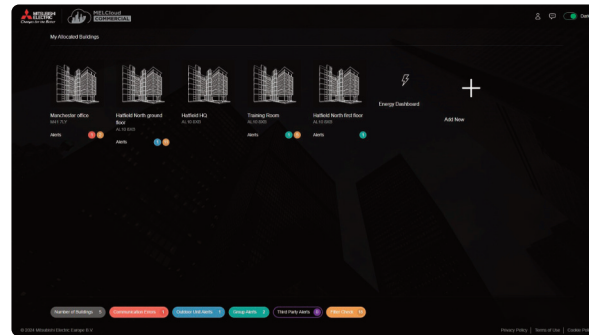


Building Level Monitoring & Energy Consumption

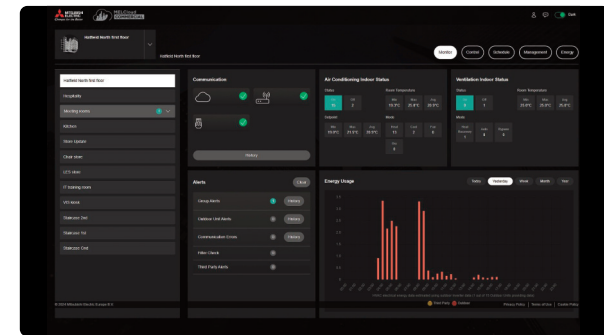


Room (Group) Level Monitoring

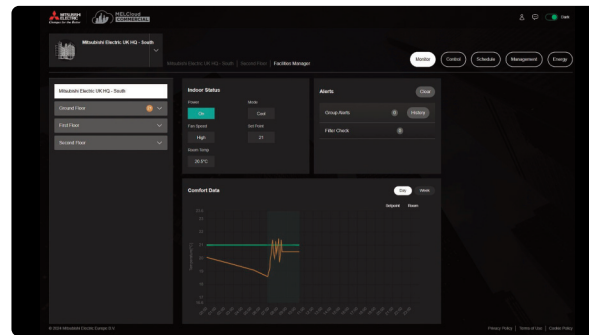


Building Level Control

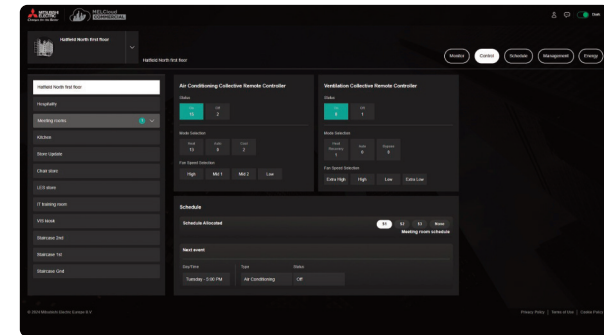

Room (Group) Level Monitoring

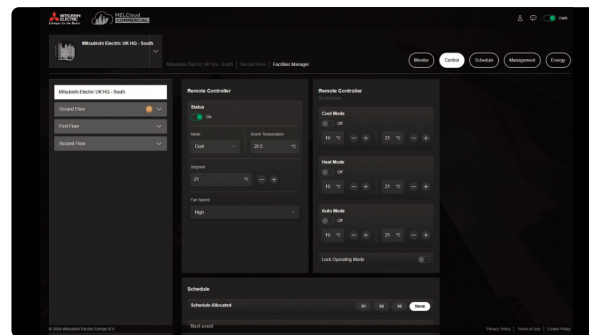


Building Level Scheduling

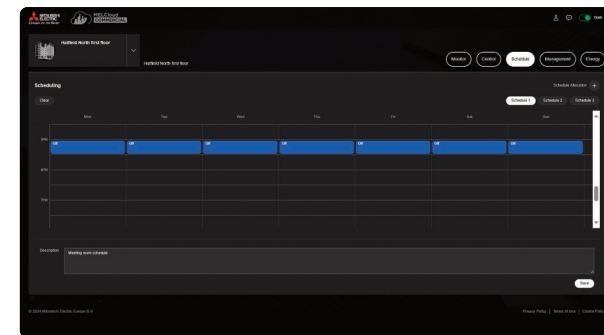

# MELCloud Commercial

## Advanced Energy Monitoring App Screen Examples


Estate Level Energy Monitoring

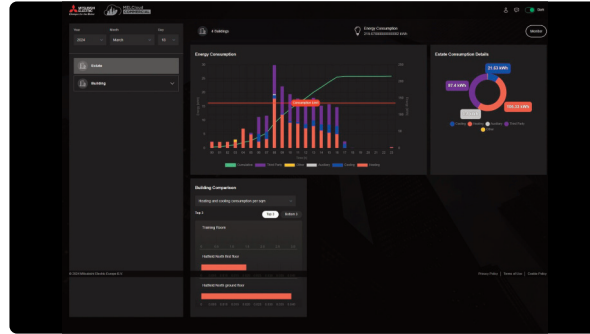


Building Level Energy Monitoring



Room (Group) Level Energy Monitoring

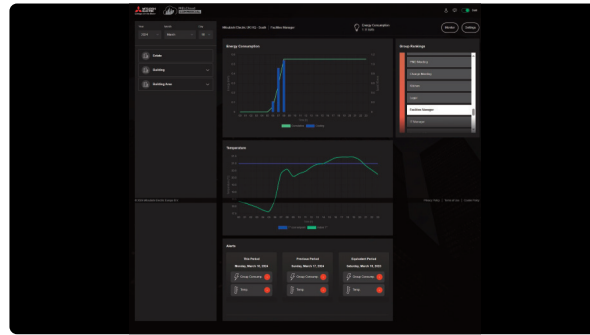


Room (Group) Level Temperature and Energy Limit Setting

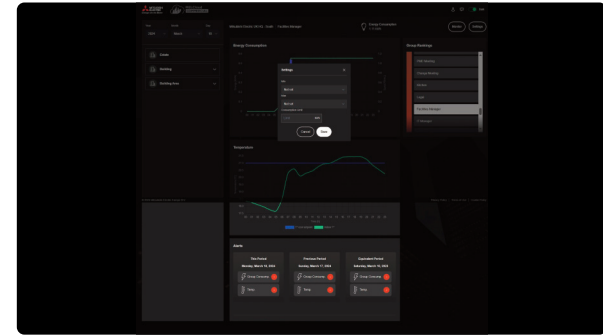

# MELCloud Commercial

## Service & Maintenance App Screen Examples

Service & Maintenance - System Diagram

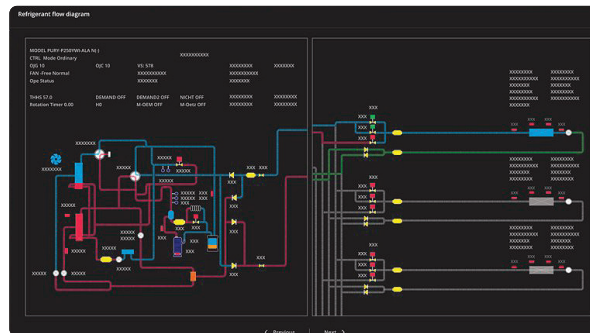


# How to Quote

## Energy Management

The AE-C400E and EW-C50E centralised controllers come with the Energy Management function. Please obtain a PIN to activate this via the Mitsubishi Electric MELServe Technical Services department.

- 4x Modbus Energy Meters can be connected directly to the centralised controller
- 4x Pulse Energy Meters can be connected to the centralised controller via PAC-YG60MCA PI Controller

## Modbus or Pulse Meter Connection

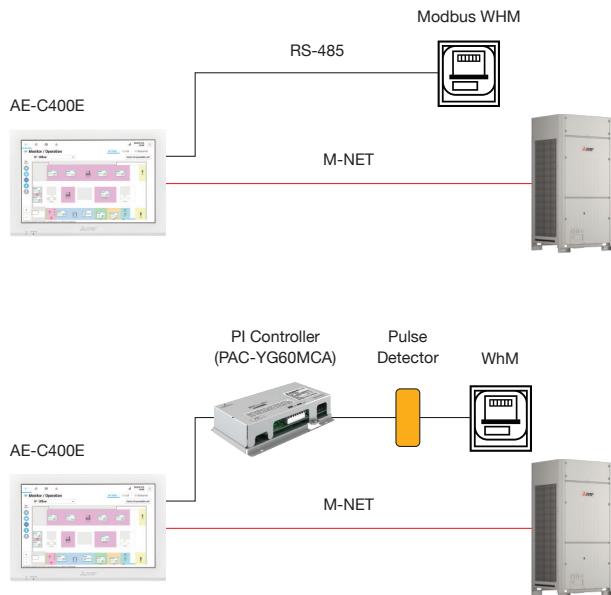

## How to quote an AE-C400E System Controller with Energy Monitoring


### How to Quote Energy Apportioning

**Note:** Must use Pulse Energy Meters for energy apportioning. Modbus Energy Meters will be compatible for energy apportioning from Q2 2026.



## Example of Energy Apportioning System


Recommend 1 x Pulse Energy Meter per outdoor unit to improve granularity of data.

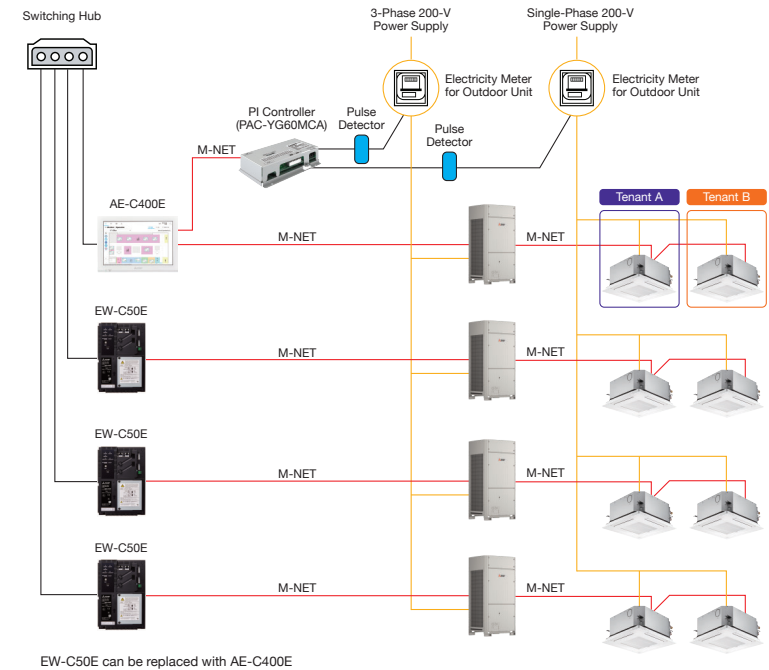


# How to Quote

## How to quote an AE-C400E System Controller & BACnet Option


How to quote up to 400 indoor units

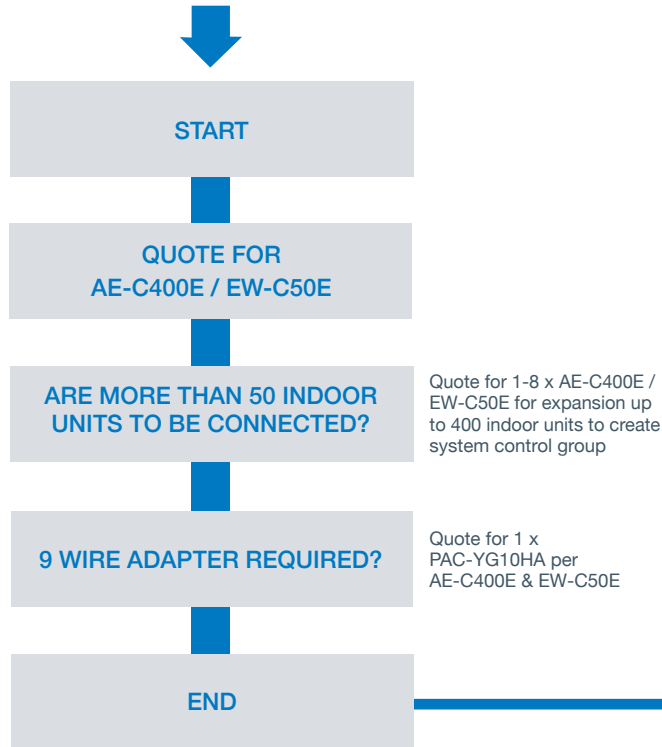

How to quote up to 2,000 indoor units

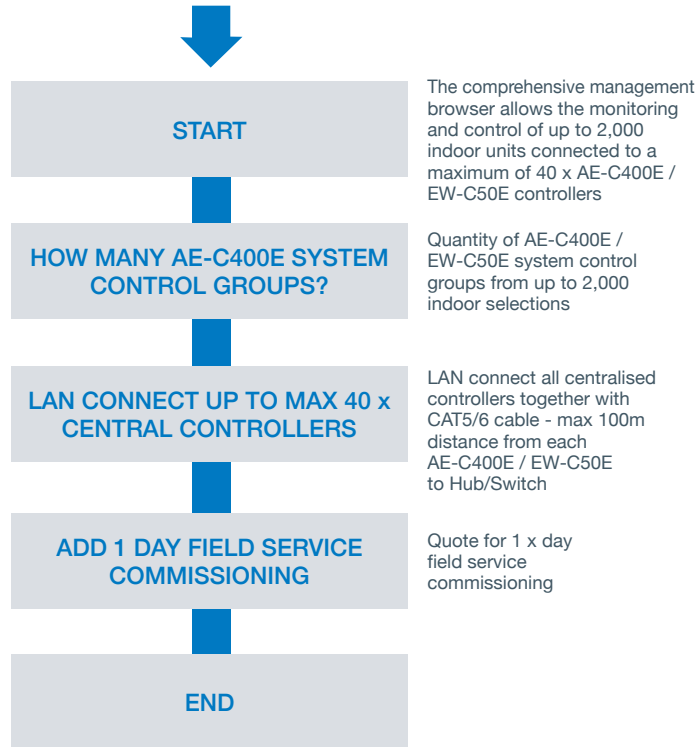

How to quote BACnet Option

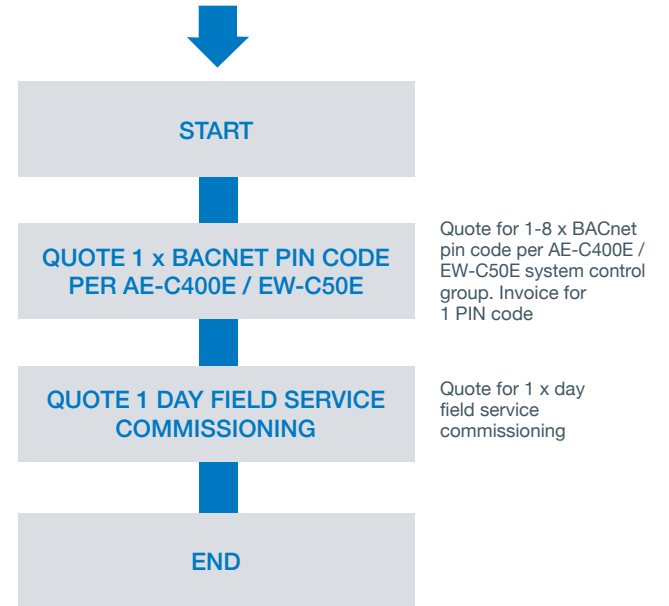



# Services

Support at every step of the way





## Support at every step of the way

At Mitsubishi Electric, we have not only developed an innovative range of cooling, heating, ventilation and control solutions, we have also examined how we support the market throughout the complete lifecycle of our products - from cradle to grave.

Whether in pre-sales design and specification, installation, or service and maintenance support, right through to our recycling programme, we can offer solutions that deliver the quality and excellence you would expect to make a world of difference.

# Contents

MELServe Technical Services	7.4
MELServe Chiller Service and Maintenance for Central Plant and IT Cooling	7.9
Mitsubishi Electric Product Training	7.10
Mitsubishi Electric Design and Consulting Services	7.11
Mitsubishi Electric Partner Programme	7.12
Mitsubishi Electric Deliveries	7.14
Mitsubishi Electric Website, Document Library and The Hub	7.15
Mitsubishi Electric CPD Information Guides	7.15

# MELServe Technical Services

## Advanced, reliable technical support at every step of the way

Meeting today's energy challenges for our commercial premises demands more integrated thinking from everyone involved in the design, supply, installation, commissioning and maintenance of essential building services - whether it is for an individual property or a national estate.

Ever increasing energy bills, the need to reduce carbon emissions and a raft of challenging legislation are driving the demand for increased energy efficiency and control in the cooling, heating, ventilation and associated technologies that we use.

As a manufacturer, we realise that product development alone is not enough. To keep our products working at their optimum, we have developed the MELServe approach to ensure our customers are able to maximise the energy efficiency of their building's services right from the start.

MELServe offers a range of support that includes:

- Site Services
- 24/7/365 Technical Help Desk
- Spare Parts, Warranty & Returns
- CPD Accredited Technical Product Training


**Whatever the challenge, we're here to help you meet it.**

### MELServe Customer Services & Support

**Telephone: 0161 866 6089**

**Option 2 followed by:**

- Option 1** - Technical Support
- Option 2** - Spares
- Option 3** - Warranty
- Option 4** - Site Visits
- Option 5** - Product Training

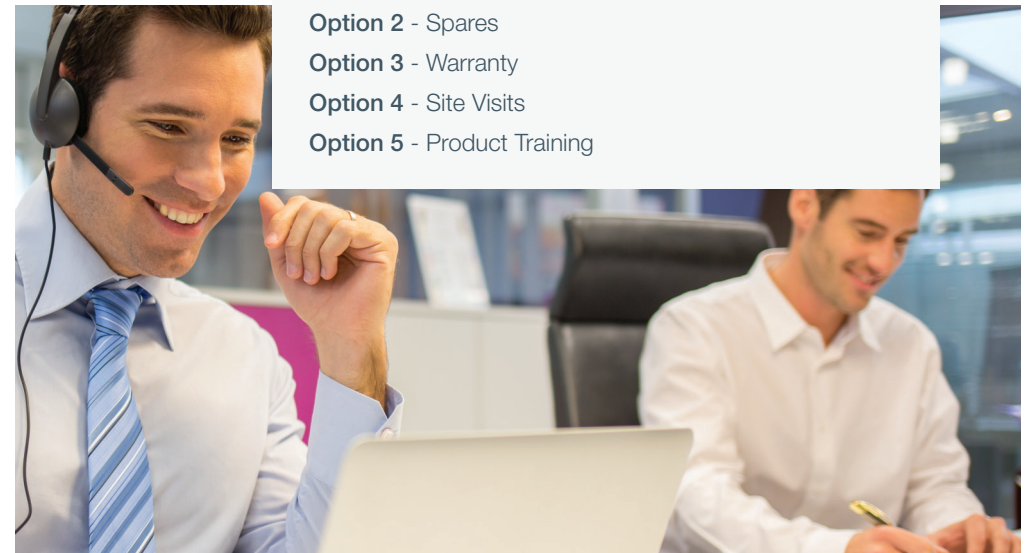

## Commissioning

Our assisted commissioning service is aimed at both new and existing customers; the objective is to demonstrate how to commission our systems effectively, so that customers can carry out these tasks unassisted in the future.

Our commissioning service is available across our full product range including: **Air Conditioning, Controls, Hybrid VRF, e-Series Chillers and Commercial Heating products.**

### During the commissioning process, our engineers will carry out the following tasks:

- Comprehensive inspection of the installed system to ensure the system meets Mitsubishi Electric specification
- Check the system addressing and advise on any incorrect settings
- For systems other than controls we will operate in both cooling and heating modes where applicable and record temperatures, pressures and water flow rates for the system



Type of Commissioning	Detail	Control System	Commissioning Days	Charge Pin Codes	BACnet Pin Code
Air Conditioning	Max 2 City Multi systems per day	1 x AE-C400E + 1-4 EW-C50E	1 day	1 - 5	1 - 5
Controls	1 x AE-C400E and up to 4 x EW-C50E per day	2 x AE-C400E + 1-4 EW-C50E	2 days	1 - 10	1 - 10
Hybrid VRF	Max 1 City Multi Hybrid VRF system per day	3 x AE-C400E + 1-4 EW-C50E	3 days	1 - 15	1 - 15
e-Series	Max 2 chillers per day	4 x AE-C400E + 1-4 EW-C50E	4 days	1 - 20	1 - 20
Commercial Heating	Ecodan CAHV - Max 2 units per day* Ecodan QAHV - 2 day commissioning visit (includes 1/2 day mid-install visit)*	5 x AE-C400E + 1-4 EW-C50E	5 days	1 - 25	1 - 25

Whilst our engineer will supervise the successful completion of all tasks and address any questions or skill gaps that present themselves, it is the responsibility of the installing contractor under supervision to carry out all of the listed tasks. It is the responsibility of the customer to complete and submit the commissioning logbooks to Mitsubishi Electric unless specified.

For BACnet and/or Energy commissioning, the above times are guidance only and may differ based on quantity of units/systems.

\*Transit bolts must be removed before we arrive on site. If transit bolts are not removed additional time and cost may be incurred.

## Services and Support

**MELSERVE**  
By Mitsubishi Electric

### Fault Finding

Our Fault Finding service is carried out on new and existing installations to identify problems and offer resolutions to ensure the system is returned to a fully operational condition in the shortest possible timeframe.

Our Fault Finding service is available across our entire product range. During the Fault Finding process, our engineers will carry out assessments of the following to determine a resolution:

- System design, application and specification
- Standard of installation
- Operational performance of equipment
- Current and historic fault codes

#### Product

#### Detail

##### Air Conditioning

One day per reported fault

##### Controls

One day per reported fault

##### Hybrid VRF

One day per reported fault

##### e-Series Chillers

One day per reported fault

##### Commercial Heating

One day per reported fault

**Note:** Whilst our engineers will carry out a thorough assessment of the system and provide recommendations to rectify any issues, they do not carry spare parts and cannot provide a same day resolution in the event of part failure. If equipment failure due to manufacturing is discovered, no cost will be raised and the visit will be carried out F.O.C. It is the responsibility of the customer to provide access to all of the affected equipment on site. Whilst our engineer will identify any installation and setup issues that are affecting performance, it is the responsibility of the contractor to rectify any problems.



## Health Checks

Our Health Check service is carried out on existing installations to ensure that the system is operating within our design parameters. The service is available to both new and existing customers and the objective is to establish a fully operational system.

Our Health Check service is available for the following product ranges: Air Conditioning including Hybrid VRF, e-Series Chillers and Commercial Heating products. During the Health Check process, our engineers will carry out the following tasks:

- Comprehensive visual inspection of the installed system to ensure the system meets Mitsubishi Electric specification
- Check the system addressing and advise on any incorrect settings
- Full operation in both cooling and heating modes where applicable
- Record operating data including temperatures, pressures and water flow rates of outdoor units, BC Boxes and indoor units to determine the correct operation








Product	Detail
Air Conditioning	Up to 3 systems per day
Hybrid VRF	Up to 2 systems per day
e-Series Chillers	Up to 4 systems per day
Commercial Heating	Up to 3 systems per day

**Note:** Whilst our engineer will ensure the successful completion of all tasks and address any questions or skill gaps that present themselves, it is the responsibility of the contractor to provide access to all equipment. Whilst our engineer will identify any installation and setup issues that are affecting performance, it is the responsibility of the contractor to rectify any problems.



## City Multi Stripdown

For installations where the City Multi outdoor unit(s) cannot be moved to the final location, Mitsubishi Electric offer a City Multi strip down service. Other products are available on request, please contact us for further information should you have a specific strip down requirement.

Product Range	Model Reference
	PURY-EM YXM-A PURY-M YXM-A PUHY-M YXM-A Small Module
	PURY-EM YXM-A PURY-M YXM-A PUHY-M YXM-A Large Module
	PURY-EM/EP YNW-A1/2 PURY-M/P YNW-A1/2 PUHY-P YNW-A2 Small Module
	PURY-EM/EP YNW-A1/2 PURY-M/P YNW-A1/2 PUHY-P YNW-A2 Large Module
	PURY-EM/EP YNW-A1/2 PURY-M/P YNW-A1/2 PUHY-P YNW-A2 Extra Large Module

### Chiller Service and Maintenance for Central Plant and IT Cooling

We are now able to bring Mitsubishi Electric quality to your service and maintenance contract, using the very latest technology for in-field reporting and diagnostics. Our highly trained and qualified chiller service and maintenance engineers are based nationwide, operating from our network of service offices. Our engineers are experienced in the servicing, maintenance and repair of chiller systems across the industry.

#### What we do:

- Comprehensive service and maintenance plans
- National coverage (four dedicated service centres)
- Fast response times
- Reactive-response and call-out service
- Spare parts
- F-Gas and REFCOM Elite accredited engineers
- 24/7 365 emergency call out service
- Service and maintenance for all manufacturers' applied products
- Commissioning / Start-up
- System checks
- Fault finding
- Extended warranties
- Strip-downs (model / application specific)



#### For further information and Service & Maintenance enquiries:

Telephone: 01707 278650

- Option 1 - Scotland
- Option 2 - London & South
- Option 3 - Manchester & North
- Option 4 - Midlands & Wales
- Option 5 - Applied Spares

#### Regional Office Emails:

- melservice.south@meuk.mee.com
- melservice.north@meuk.mee.com
- melservice.midlands@meuk.mee.com
- melservice.scotland@meuk.mee.com

Existing Customer Email: melservice.renewals@meuk.mee.com

New Customer Email: melservice@meuk.mee.com

Spare Parts Enquiries (CV/RC IT products) Email: melservice.appliedspares@meuk.mee.com

## Services and Support



### Product Training


Mitsubishi Electric provide specific, in-depth training at our state-of-the-art training centres across the UK, or via our award-winning online training, covering all aspects of installation, from design through to maintenance.

Providing product training for all levels of expertise, our courses are taught by experienced engineers, with a wealth of knowledge and are all CPD accredited. In addition to the CPD courses, we can also now offer LCL Level 3 Regulated Quality Framework (RQF) qualifications for heat pumps.



For bookings please telephone  
**0161 866 6089** (Option 2, Option 5)

Product Range	Course	Reference
City Multi (VRF)	Design and Application	CMDA
City Multi (Hybrid VRF)	Hybrid VRF Design, Application, Installation and Commissioning	HVRF
City Multi	Installation and Commissioning	CMPT1
City Multi	Service and Fault Finding	CMPT2
City Multi	Monitor Tool	MT
M Series	R290 Air to Air	R290A
M Series and Mr Slim	Installation, Service and Fault Finding	MPISF
M Series and Mr Slim	M&P Hands On	HO M&P
e-Series	e-Series (EAHV)	EAHV
Ecodan	Design and Application Part 1	ED&A
Ecodan	Installation and Commissioning Part 2	EI&C
Ecodan	Service and Fault Finding Part 3	ES&FF
Ecodan	Hands-on	EHO
Ecodan	Commercial Heating (CAHV)	CH
Ecodan	Ecodan R290	R290E
Lossnay	Design, Application, Installation and Commissioning	LOSS
Controls	AE-C400E	CON400
LCL Award L3 (RQF)	Low Temperature Heating and Hot Water Systems in Dwellings	LCL LTHWS
LCL Award L3 (RQF)	Installation and Maintenance of Air Source Heat Pump Systems (non-refrigerant circuits)	LCL ASHPS
LCL Award	Water Regulations	LCL WRAS

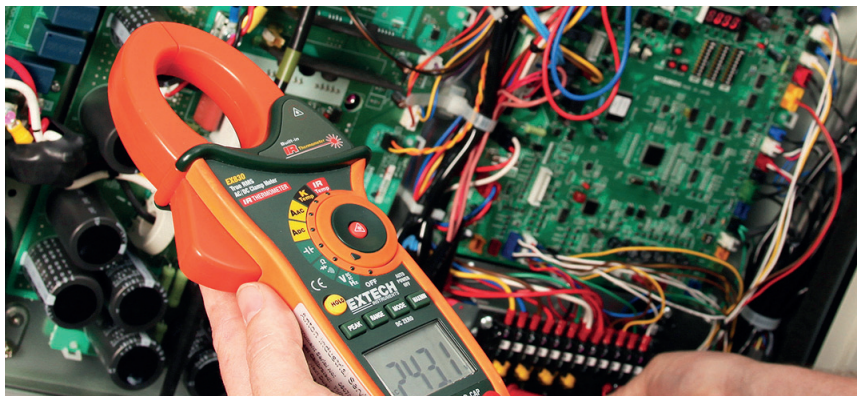

### Design and Consulting Services

As part of the Mitsubishi Electric commitment to supporting robust application of our leading technologies, a team of consultant sales professionals work nationally with mechanical building services specifiers and consultants to achieve early engagement in project design.

Clients are able to apply cooling, heating, ventilation and controls confidently within their individual projects, with the emphasis on a solution-based philosophy to support 'as-designed' performance and efficiencies.

This approach helps projects realise 'as-specified' performance and efficiency levels - all designed to achieve the most efficient and cost-effective outcome for the building operator, whilst reducing the overall environmental impact.

As initial designs move from the drawing board through planning, procurement, installation and commissioning, to on-going operation and use, we work closely with our customers to balance capital expenditure, system efficiencies, installation costs, control strategies and running costs.



### Working in the real world

At Mitsubishi Electric, we understand the real-world pressures of delivering commercial projects for your clients. Our dedicated team can support M&E contractors and help you tackle the challenges associated with a range of projects, including change of building layout (design evolution) without compromising the original design or performance criteria.

We also understand the link between effective design and achieving the best outcomes for building owners, operators, and users. The goal of our team is therefore to ensure robust design and implementation; every step of the way, from concept to commissioning.

Getting the right balance between capital cost, system efficiencies, installation costs and operating costs are key areas where we can support you. Each Business Development Manager has extensive product knowledge and application experience and is here to help with everything, including guidance on new and changing legislation.



## Services and Support

# PARTNER Programme

## Mitsubishi Electric Partner Programme

The Mitsubishi Electric Partner Programme is inclusive and open to all qualifying air conditioning and heating installation companies, large or small.


Using the world-renowned Mitsubishi Electric brand, we will train, support and promote all qualifying companies as part of our aim to drive the industry forwards. Mitsubishi Electric recognises the importance of forging lasting relationships with professional companies who install our equipment. Our Partner Programme enables us to do just that.

Established in 2005 and designed to raise industry standards, our industry leading Partner Programme assures end users of a consistently high level of installation and after sales service that supports our systems. To be eligible to join our scheme in the first instance, prospective installation Partners must comply with the necessary building regulations and meet specific industry, programme and CSR standards.

All Partners are reviewed on a regular basis to ensure they continue to meet the required standards that makes them eligible to be part of the Mitsubishi Electric Partner Programme.

Register now at: [les.mitsubishielectric.co.uk/installers/partner-programme](https://les.mitsubishielectric.co.uk/installers/partner-programme)

For any questions email: [Partner@meuk.mee.com](mailto:Partner@meuk.mee.com)

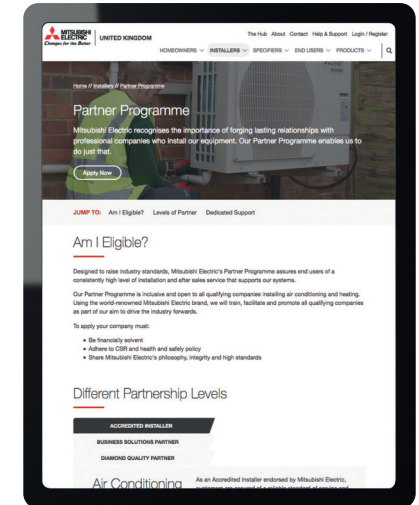

### Partner Programme Benefits

#### ■ Dedicated Partner Programme Team

Our dedicated Partner Programme Team are on hand to give Partners the support they need.

#### ■ Mitsubishi Electric Customer Portal

We have developed our Customer Portal to help our Partners grow their business by enhancing their online presence on channels such as social media and via their own website. Product images, social media copy, easy to follow strategy guides and marketing training videos are just a few examples of free content that can be accessed.

Take a look today and see how you can use this to grow your business:

[les.mitsubishielectric.co.uk/Security/login](https://les.mitsubishielectric.co.uk/Security/login)

#### ■ Co-Marketing / Relationship Development Fund (RDF)

We will work with Partners to promote our relationship and generate awareness of the unique business benefits of the Partner Programme to end-users. We operate a Partner Programme Relationship Development Fund (RDF) allocated in relation to their commercial activities with Mitsubishi Electric.

#### ■ Digital Marketing Packages

We're able to offer an exclusive and flexible digital marketing package for our Partners, using their RDF to increase their brand awareness.

#### ■ Online Workwear and Promotional Goods Portal

Partners can take advantage of their RDF to enhance their company image with dual branded work wear and promotional items. We offer items such as: RAB and The North Face jackets, beanies, polo shirts, Stanley cups, pens, notepads and so much more.

#### ■ Product and Industry Training

Our Partners receive a free allocation of training courses and additional courses can be funded from their Relationship Development Fund.

#### ■ Extended Warranty

Partners can offer their customers up to 10 year warranty on selected products. Subject to T&Cs.

#### ■ Committed Carbon Reduction Partner (CCRP)

Partners have access to a new accreditation reflecting a commitment towards sustainable practices. The CCRP accreditation will provide a competitive advantage for our Partners, showcasing a proven dedication to reducing the operational carbon footprint through an annually calculated reduction plan, helping them on the road to Net Zero.



#### ■ Carbon Footprint Calculation

Partners are invited to use their RDF to conduct a Carbon Footprint Calculation of their business, a crucial step on the road to net zero. We've made this a simple process via our Partner portal, with the calculation work conducted using an approved supplier.

#### ■ 24hr Technical Support

To assist our Partners in the maintenance of our equipment, we have a dedicated technical support team who will endeavour to speedily diagnose faults and offer solutions to the problems our Partners may encounter.

#### ■ Find An Installer

Mitsubishi Electric works to promote our Partners through our 'Find an installer' web page, highlighting specific Partners to contact, depending on the type of project a consumer has.

#### ■ Business Support Tools

We have made it easier to do business with Mitsubishi Electric through the introduction of new technologies and our business tools available to Partners.

#### ■ Factory Visits & Events

Our Partners and their clients will have the opportunity to witness first-hand the manufacture of air conditioning and Ecodan units at our manufacturing facility in Scotland. We organise regular factory visits to our manufacturing facility in Scotland, along with other events designed to develop our Partners expertise and support them in growing their business.



**Grow Your Business**  
with Mitsubishi Electric

## Services and Support

### Mitsubishi Electric Deliveries

At Mitsubishi Electric, we realise that our customers' businesses can depend on getting the right equipment on site at the right time.

That's why we have developed a comprehensive and flexible delivery programme with one of the longest delivery windows in the industry. With the ability to offer timed, weekend and Public Holiday deliveries, coupled with free 'Text Ahead' and 'Ring Ahead' functions, we aim to keep our customers informed every step of the way.

#### Delivery Notes

- Cut off for next day deliveries is 1.00pm on the working day prior to delivery, or 2.30pm for orders placed via e-shop
- Standard weekday delivery is between 8.00am and 5.30pm for pallet deliveries, and 7.00am and 7.00pm for parcel deliveries
- AM / PM / Timed / Weekend / Public Holiday deliveries are all available (additional notice needed and charges will apply - please refer to full delivery guidelines for further details)
- Standard delivery will normally be made on an 18T rigid lorry equipped with a tail lift and a single driver with a pump truck
- Other vehicle types will be utilised dependant on any site access issues and delivery size
- If there are access restrictions at your nominated delivery point and a vehicle other than an 18T lorry is required, this will need to be booked in advance and a charge may apply
- Our 'Text Ahead' and 'Ring Ahead' functions are available on most deliveries. For parcel providers, we offer 'Text Ahead' only
- Deliveries available via HIAB (Flatbed vehicle with crane) / with chapter 8 signage - require 48 hours' notice and extra charges may apply
- We offer a 2-man delivery service, removal of packaging and a stair walker - these require 48 hours' notice and extra charges will apply
- Mitsubishi Electric is an Associate Member of the Fleet Operator Recognition Scheme (FORS) and our dedicated fleet vehicles are FORS accredited to Bronze level
- Collection is also available from our Milton Keynes warehouse - this must be pre-arranged and require at least 3 hours' notice
- Returns to be notified within 30 working days - Terms and Conditions apply
- MEHITS product deliveries are subject to alternate delivery arrangements - Terms and Conditions apply
- Please ensure shortages or damages are marked on the delivery note and notified within 3 working days

# Mitsubishi Electric Website, Document Library and The Hub

## Website

For further information on any of our products and services please visit our website: [les.mitsubishielectric.co.uk](http://les.mitsubishielectric.co.uk) which has been designed to provide a detailed overview of the energy saving solutions we can provide you.

## Document Library

Our website: [library.mitsubishielectric.co.uk](http://library.mitsubishielectric.co.uk) features all current operating and installation manuals, as well as product literature, case studies, CPD guides and more. There is no requirement for visitors to login to our sites to download the latest product and technical information. A document library app is also available allowing visitors to access this information simply from their tablet or smart phone.

## The Hub - online content portal

The Hub is a new approach from Mitsubishi Electric which offers useful and informative comments and articles from both leading independent editors and technical experts on the issues affecting the built environment, please visit: [thehub.mitsubishielectric.co.uk](http://thehub.mitsubishielectric.co.uk)

## e-Shop

Online ordering is available to all credit account customers across both Finished Goods (M Series and Mr Slim) and Spare Parts.

## CPD Information Guides

Mitsubishi Electric is accredited by the Construction CPD Certification Service in many different areas, aimed at enhancing the knowledge of its customers and providing a view of the key issues facing our industry today. We have produced a number of Industry Information Guides that are available to download from our Document Library. We also run a number of CPD seminars and training courses across the UK. **To find out more, simply contact your local Mitsubishi Electric sales office.**



# Sales Contacts



Corporate Sales  
Tel: 0870 3000 070

Birmingham  
Tel: 0121 329 1970

Bristol  
Tel: 01454 202050

Wakefield  
Tel: 01924 241120

London North & East Anglia  
Tel: 01707 282480

London South  
Tel: 01737 387170

Manchester  
Tel: 0161 866 6060

Scotland  
Tel: 01506 444960

Ireland  
Tel: +353 (0)1 419 8800



Telephone: 01707 282880

MELServe Customer Services & Support: 0161 866 6089

Option 1 - Homeowners

Option 2 - Commercial Products

Option 3 - Residential Ecodan Installer  
or Service Provider

Commercial Product Options (following Option 2)

Option 1 - Technical Support

Option 2 - Spares

Option 3 - Warranty

Option 4 - Site Visits

Option 5 - Training

Middlesex: 020 8783 1008

Scotland: 01786 450 348

email: [livingenvironmentalsystems@meuk.mee.com](mailto:livingenvironmentalsystems@meuk.mee.com)

website: [les.mitsubishielectric.co.uk](http://les.mitsubishielectric.co.uk)

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division

Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England

General Enquiries Telephone: 01707 282880

IRELAND Mitsubishi Electric Europe Plunkett House, Grange Castle Business Park, Nangor Road, Dublin 22, Ireland


Telephone: Dublin (01) 419 8800 International code: (003531)

Country of origin: United Kingdom – Japan – Thailand – Malaysia. ©Mitsubishi Electric Europe 2026. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

**Note:** The fuse rating is for guidance only and please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R515B (GWP:292), R454C (GWP:148), R1234ze (GWP:7) or R1234yf (GWP:4). \*These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a hydrocarbon, R290 (GWP:0.02). \*These GWP values are based on IPCC 6th edition.



[www.greengateway.mitsubishielectric.co.uk](http://www.greengateway.mitsubishielectric.co.uk)  
Mitsubishi Electric UK's commitment  
to the environment




Follow us @meuk\_les  
Follow us @green\_gateway



Mitsubishi Electric  
Living Environmental Systems UK



mitsubishielectricuk\_les



Mitsubishi Electric  
Cooling and Heating UK



Mitsubishi Electric  
Living Environmental Systems UK



BLOG [thehub.mitsubishielectric.co.uk](http://thehub.mitsubishielectric.co.uk)