



2025 Product Catalogue

Market leading solutions to **cool, heat, ventilate & control** the nation's buildings

M&E Edition

les.mitsubishielectric.co.uk

Welcome to **Mitsubishi Electric**

Mitsubishi Electric is a market leader in providing solutions to cool, heat, ventilate and control our buildings.

As a major manufacturer of some of these pivotal technologies, we hold the UK's energy challenges close to our heart. We want to help the nation achieve its climate goals; we want to help individuals and businesses reduce the energy consumption of their buildings, whilst also helping to reduce their annual running costs.

At Mitsubishi Electric, we are constantly evolving and today our areas of expertise go way beyond the advanced air conditioning systems that formed the foundation of our business. Here in the UK, we provide advanced solutions that cool, heat, ventilate and control buildings in the most energy efficient and cost-effective ways possible. Through technical expertise, experience and an innovative product range, we enable buildings everywhere to significantly improve energy efficiency, reduce running costs and adhere to increasingly tough legislation. **We also provide a variety of additional services and benefits to our customers which include:**

- Product training and technical support
- Contractor Partner Programme
- CPD guides and presentations
- Design and consultancy services
- Apps and tools

Working towards a better use of energy in buildings

Mitsubishi Electric's global framework for realising a sustainable planet - **Environmental Sustainability Vision 2050** - is translated in the UK into our **Green Gateway philosophy**, which is central to the way we do business. With this initiative, we are seeking to use our position as a manufacturer of key technologies to increase awareness and improve energy use in the built environment.

By constantly challenging everyone involved to combat the issues we all face and encouraging constructive dialogue throughout the industry, we aim to help everyone address their energy use and to work towards a more sustainable future. Working within the construction industry in this way we are continually developing energy efficient cooling, heating and ventilation solutions - all managed by the most advanced control systems available.



Contents



Commercial Heat Pumps
& Chillers 1

IT Cooling 2

Residential Heating 3

Ventilation 4

Controls 5

Services 6



Commercial Heat Pumps & Chillers

A new generation of energy saving
and innovative technology





Contents

| | | | |
|---|-------------|--|-------------|
| Commercial Heat Pumps - An Overview | 1.4 | Chillers - An Overview | 1.46 |
| Ecodan Hydrodan EHWT17D-MHEDW R32 Water to Water Heat Pump | 1.6 | MECH-iB-G07 R32 Air Cooled Chiller | 1.48 |
| e-Series EAHV R32 Modular Air Source Heat Pump | 1.8 | MECH-iS-G07 R32 Modular Air Cooled Chiller | 1.50 |
| MEHP-iB-G07 R32 Air Source Heat Pump | 1.10 | MECH-iF-G05 R513A High Performance Air Cooled Chiller | 1.51 |
| MEHP-iS-G07 R32 Modular Air Source Heat Pump | 1.12 | MECH-iF-G04 R1234ze High Performance Air Cooled Chiller | 1.32 |
| Ecodan CAHV-Z R290 Air Source Heat Pump | 1.14 | e-Series EACV R32 Modular Air Cooled Chiller | 1.53 |
| Ecodan CAHV-R R454C Air Source Heat Pump | 1.16 | NX2-G06 R454B Air Cooled Chiller | 1.54 |
| Ecodan QAHV R744 Air Source Heat Pump | 1.18 | i-FX2-G05 R513A Air Cooled Chiller | 1.58 |
| NX2-N-G06 R454B Air Source Heat Pump | 1.20 | i-FX2-G04 R1234ze Air Cooled Chiller | 1.60 |
| i-FX-N-G05 R513A Air Source Heat Pump | 1.23 | FX2-G05 R513A Air Cooled Chiller | 1.64 |
| NX2-W-G06-H R454B Water-to-Water Heat Pump | 1.25 | FX2-G04 R1234ze Air Cooled Chiller | 1.69 |
| EW-HT-G05 R513A Water-to-Water Heat Pump | 1.26 | Accessories / Optional Extras | 1.70 |
| EW-HT R134a Water-to-Water Heat Pump | 1.27 | | |
| TX2-W-G04 /H R1234ze Water-to-Water Heat Pump | 1.28 | | |
| | | | |
| INTEGRA Simultaneous Heating and Cooling - An Overview | 1.30 | | |
| i-NX-Q R410A Air Source Polyvalent Unit | 1.32 | | |
| NX-Q-G06 R454B Air Source Polyvalent Unit | 1.34 | | |
| NX2-Q-G06 R454B Air Source Polyvalent Unit | 1.39 | | |
| i-FX-Q2-G05 R513A Air Source Polyvalent Unit | 1.42 | | |
| i-FX-WQ-G05 R513A Water Source Polyvalent Unit | 1.45 | | |

Commercial Heat Pumps & Chillers

The Innovative Commercial Heat Pump & Chiller Range

Mitsubishi Electric has developed a range of heat pumps and chillers specifically designed for heating and cooling commercial buildings.

The Ecodan® range provides renewable heating, challenging traditional heating solutions, whilst meeting the energy and carbon reduction demands of today and beyond. At the same time the e-Series modular chiller range provides a low-carbon, flexible and cost effective option, allowing up to six individual units to be connected together to provide a system capacity from 150kW to 1,080kW, in either cooling only or heat pump options.

In 2015 Mitsubishi Electric purchased Climaveneta, enhancing our product line up and marking our full scale entry into the chiller market.

Climaveneta is a strong European brand, supported by 45 years of customer trust and high quality production. Its range of energy-saving, low-noise and innovative heat pump and chiller technology further expands the application and customisation capabilities we are now able to offer.

Through our technical expertise, long experience and innovative product range, we enable building operators everywhere to significantly improve energy efficiency, reduce running costs and adhere to increasingly tough legislation.

**We believe that global climate challenges need local solutions.
Our aim is to help individuals and businesses reduce the energy consumption of their buildings and their running costs.**



ecodan[®]
Renewable Heating Technology

e-series

INTEGRA

CLIMAVENETA

Commercial Heat Pumps & Chillers

Our Commercial Heating range at a glance


The range of heat pumps on the market is now wider than it ever has been. This means it's possible to select exactly the right equipment for the specific application. Our commercial heat pumps fall into three broad ranges:



Mitsubishi Electric - Modular heat pumps manufactured to the highest quality standard, and suitable for a range of different applications.

Climaveneta - Commercial heat pumps that use a wide range of low and lower GWP refrigerants, alongside the latest fixed speed/inverter scroll and screw compressors.

Ecodan - A range of renewable heat pumps that efficiently and reliably generate sustainable space heating and hot water all year round.

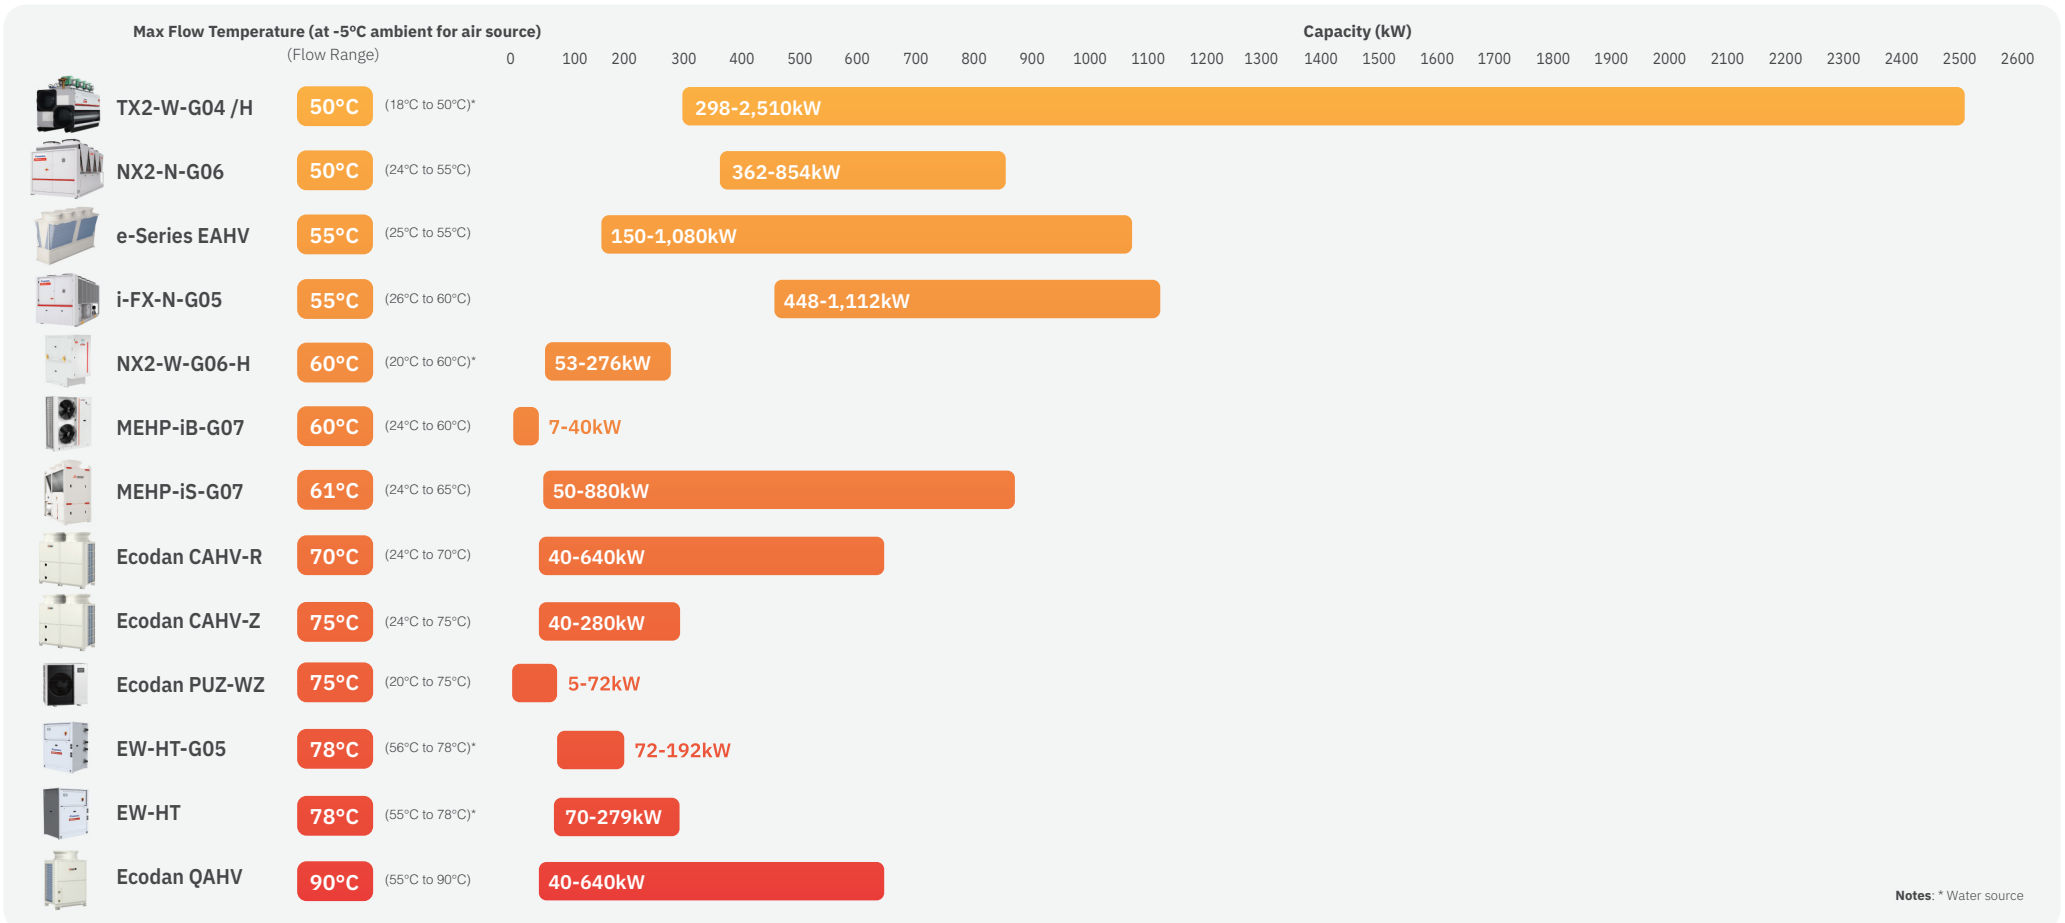



Hydrodan EHWT17D-MHEDW R32 Water to Water Heat Pump



The **Ecodan Hydrodan** is a water to water heat pump, designed to produce heating and hot water in residential apartments, and connect to a 5th generation ambient temperature heat network deployed throughout the building. The use of these networks helps to reduce overheating in apartments and also produces negligible distribution losses. The local heat network can be maintained at ambient temperature by a Mitsubishi Electric commercial heat pump, environmental source or connected to a district heat network.

Key Features & Benefits

- Removable heat pump module - simple for repairs
- Highly efficient heating and hot water production - low running costs for owners
- Low quantity R32 refrigerant - low environmental impact
- PIC valve network control - simple pressure balancing and flow control
- Ultra-low noise output - no disturbance for owners




| MODEL | EHWT17D-MHEDW | | | |
|------------------------|--|----------------------------|-------------------|-----------|
| CAPACITY INFORMATION | L20 / W35 | Heating Capacity (min-max) | kW | 1.2 - 8.0 |
| | | Power Input (min-max) | kW | 0.3 - 1.0 |
| | | COP (Nom.) | - | 9.2 |
| | L20 / W45 | Heating Capacity (min-max) | kW | 1.1 - 7.5 |
| | | Power Input (min-max) | kW | 0.5 - 1.3 |
| | | COP (Nom.) | - | 6.3 |
| | L20 / W55 (DHW) | Heating Capacity (DHW) | kW | 6.3 |
| | | Power Input (DHW) | kW | 1.3 |
| | | COP (DHW) | - | 5.0 |
| | L25 / W35 | Heating Capacity (min-max) | kW | 1.5 - 9.3 |
| | | Power Input (min-max) | kW | 0.2 - 1.0 |
| | | COP (Nom.) | - | 11.3 |
| | L25 / W45 | Heating Capacity (min-max) | kW | 1.3 - 8.5 |
| | | Power Input (min-max) | kW | 0.4 - 1.3 |
| COP (Nom.) | | - | 7.8 | |
| L25 / W55 (DHW) | Heating Capacity (DHW) | kW | 6.8 | |
| | Power Input (DHW) | kW | 1.5 | |
| | COP (DHW) | - | 5.4 | |
| | Heating Circuit Flow Rate (min - max) | l/min | 7.1 - 27.7 | |
| LOOP INFORMATION | Control Type | - | PICV + Actuator | |
| | Inlet Temperature Range (min - max) | °C | 10 - 30 | |
| | Flow Rate (min - max) | l/min | 7.2 - 24 | |
| | Maximum Loop Pressure Rating | bar | 10 | |
| | Pipe Connection Size | mm | 28 | |
| ELECTRICAL INFORMATION | Voltage/Phase/Frequency | v/ph/Hz | 230v/1ph/50Hz | |
| | Fuse Rating - Heat Pump/Immersion Heater | A | 16/20 | |
| | Number of Connections | - | 2 | |
| | Immersion Rating (Tank) | kW | 3 | |
| GENERAL INFORMATION | Start up Current | A | 3.1 | |
| | Unit Dimensions (WxDxH) | mm | 595 x 680 x 1750 | |
| | Compressor Type | - | Rotary compressor | |
| | Domestic Hot Water Tank Volume (net) | l | 170 | |
| | Weight (empty) | kg | 166 | |
| | Weight (full) | kg | 345 | |
| | Refrigerant | - | R32 | |
| | Volume of Refrigerant | kg | 0.9 | |
| | Heating Temperature Range | °C | 20 - 60 | |
| | Hot Water Temperature Range | °C | 40 - 60 | |
| | Internal Water Volume Loop Side / Heating Side | l | 3.16 / 5.47 | |
| | Sound Power Level | dBA | 38 | |
| | Sound Pressure Level @1m | dBA | 27 | |




Certificate Number: 037-0101-22
Product (Type): Heat Pumps (Water/Water)
Product Reference: EHWT17D-MHEDW


Rear View

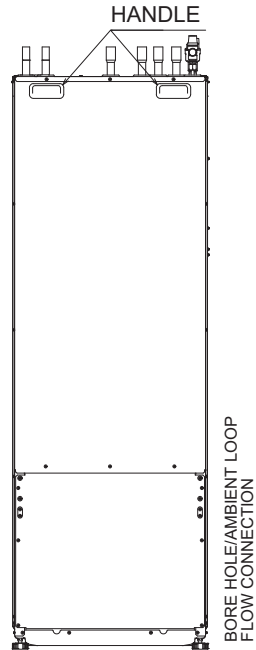


Left Side View

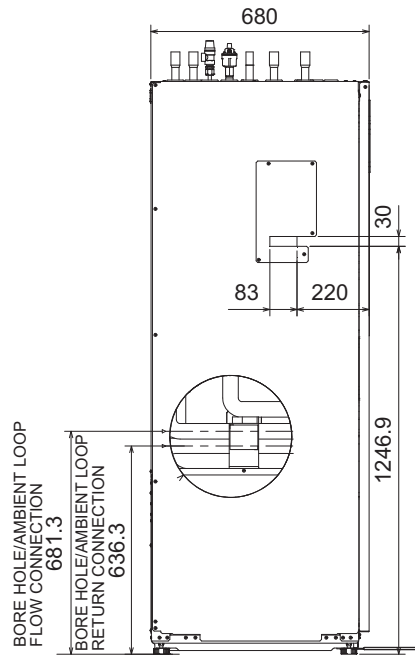


Front View

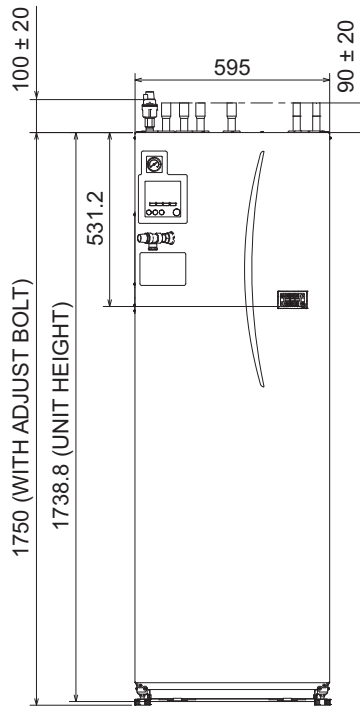

Right Side View

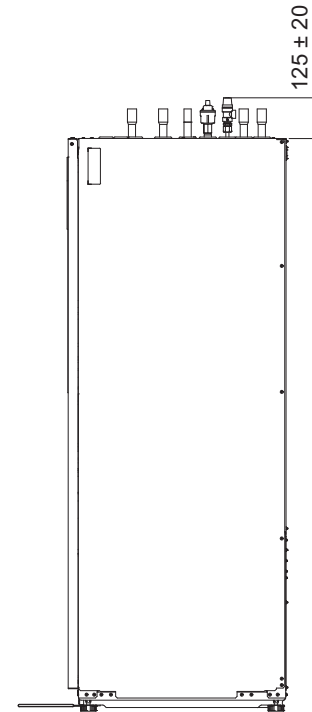

Upper View

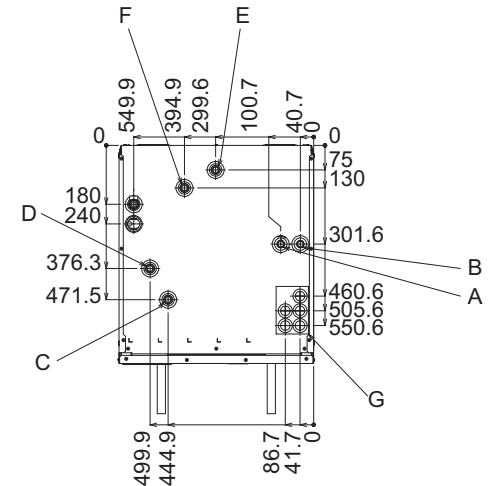

| Letter | Pipe description | Connection size/type |
|--------|---------------------------------|---|
| A | DHW outlet connection | 22 mm/Compression |
| B | Cold water inlet connection | 22 mm/Compression |
| C | Space heating return connection | 28 mm/Compression |
| D | Space heating flow connection | 28 mm/Compression |
| E | Ambient loop return connection | 28 mm/Compression |
| F | Ambient loop flow connection | 28 mm/Compression |
| G | Electrical cable inlets | For inlets 1 and 2, run low-voltage wires including external input wires and thermistor wires. For inlets 3, 4 and 5, run high-voltage wires including power cable, and external output wires. *For a wireless receiver (option) cable and ecodan Wi-Fi interface (option) cable, use inlet 1. |

e-series

EAHV R32 Modular Air Source Heat Pump

(150 to 1,080kW)

The R32 e-Series **EAHV** range allows for up to 6 individual units to be connected together to provide a system capacity from 150kW to 1,080kW. Using this modular approach reduces space requirements and simplifies lifting and installation.

Key Features & Benefits

- Highly efficient inverter scroll compressors
- Modular to maximise space saving
- Y-shaped heat exchangers allow for a greater surface area, maximising efficiency, whilst also keeping the units much narrower than conventional heat pumps

R32




| MODEL | | EAHV-M1500YCL-N | EAHV-M1800YCL-N |
|---|---|--------------------------------------|---|
| POWER SOURCE | | 3-phase 4-wire 380-400-415v 50/60Hz | |
| COOLING CAPACITY ¹ | | 150 | 180 |
| | Power Input | kW | 44.73 |
| | EER | | 3.35 |
| | IPLV ⁶ | | 6.42 |
| | Water Flow Rate | m ³ /h | 25.8 |
| COOLING CAPACITY (EN14511) ² | | 149.18 | 178.80 |
| | Power Input | kW | 45.55 |
| | EER | | 3.28 |
| | Eurovent Efficiency Class | | A |
| | SEER | | 5.52 |
| | Performance (η _{s,c}) | % | 217.8 |
| | Water Flow Rate | m ³ /h | 25.8 |
| HEATING CAPACITY ³ | | 150 | 180 |
| | Power Input | kW | 42.61 |
| | COP | | 3.52 |
| | Water Flow Rate | m ³ /h | 25.8 |
| HEATING CAPACITY (EN14511) ⁴ | | 150.82 | 181.20 |
| | Power Input | kW | 43.43 |
| | COP | | 3.47 |
| | SCOP Low/Medium ⁷ | | 3.31/2.88 |
| | Water Flow Rate | m ³ /h | 25.8 |
| CURRENT INPUT | | | |
| | Cooling Current 380-400-415V ¹ | A | 76 - 72 - 69 |
| | Heating Current 380-400-415V ³ | A | 72 - 68 - 66 |
| | Maximum Current | A | 120 |
| WATER PRESSURE DROP ¹ | | | |
| | Standard Piping | kPa | 56 |
| | Inside Header Piping | kPa | 134 |
| TEMP RANGE | | | |
| | Cooling | °C | Outlet water 4~30 |
| | Heating | °C | Outlet water 25~55 |
| | Outdoor (Cooling) | °C | -15~52 |
| | Outdoor (Heating) | °C | -20~43 |
| CIRCULATING WATER VOLUME RANGE | | m ³ /h | 12.9~43.0 |
| SOUND PRESSURE LEVEL (Measured in anechoic room) at 1m ¹ | | dB (A) | 65 |
| SOUND POWER LEVEL (Measured in anechoic room) ¹ | | dB (A) | 83 |
| DIAMETER OF WATER PIPE (Standard piping) | | Inlet | 65A (2 1/2B) housing type joint |
| | | Outlet | 65A (2 1/2B) housing type joint |
| DIAMETER OF WATER PIPE (Inside header piping) | | Inlet | 150A (6B) housing type joint |
| | | Outlet | 150A (6B) housing type joint |
| EXTERNAL FINISH | | Polyester powder coating steel plate | |
| EXTERNAL DIMENSION | | W x D x H | 3400 x 1080 x 2350 |
| NET WEIGHT | | Standard Piping | 1280 (2822) |
| | | Inside Header Piping | 1307 (2881) |
| DESIGN PRESSURE | | R32 | 4.15 |
| | | Water | 1.0 |
| HEAT EXCHANGER | | Water Side | Stainless steel plate and copper brazing |
| | | Air Side | Salt-resistant cross fin & aluminium tube |
| COMPRESSOR | | Type | Inverter scroll hermetic compressor |
| | | Starting Method | Inverter |
| | | Quantity | 4 |
| FAN | | Motor Output | 11.5 x 4 |
| | | Air Flow Rate | m ³ /min |
| | | | 270 x 4 |
| | | | L/s |
| | | | 4500 x 4 |
| | | | cfm |
| | | | 9534 x 4 |
| | | Type, Quantity | Propeller fan x 4 |
| | | Starting Method | Inverter |
| | | Motor Output | 0.92 x 4 |
| | | External Static Pressure | Pa |
| | | | 20 |
| REFRIGERANT | | Type x Charge | R32 x 11.5 (kg) x 4 ⁵ |
| | | Control | LEV |


Notes:

- Under normal cooling conditions at outdoor temp 35°CDB/24°CWB (95°FDB / 75.2°FWB) outlet water temp 7°C (44.6°F) inlet water temp 12°C (53.6°F). Pump input is not included in cooling capacity and power input.
- Under normal cooling conditions at outdoor temp 35°CDB/24°CWB (95°FDB/75.2°FWB) outlet water temp 7°C (44.6°F) inlet water temp 12°C (53.6°F). Pump input is included in cooling capacity and power input based on EN14511.
- Under normal heating conditions at outdoor temp 7°CDB/6°CWB (44.6°FDB/42.8°FWB) outlet water temp 45°C (113°F) inlet water temp 40°C (104°F). Pump input is not included in heating capacity and power input.
- Under normal heating conditions at outdoor temp 7°CDB/6°CWB (44.6°FDB/42.8°FWB) outlet water temp 45°C (113°F) inlet water temp 40°C (104°F). Pump input is included in heating capacity and power input based on EN14511.
- Amount of factory-charged refrigerant is 3 (kg) x 4. Please add the refrigerant at the field.
- IPLV is calculated in accordance with AHRI 550-590.
- This value is not certified by Eurovent.
- Please don't use the steel material for the water piping.
- Please always make water circulate, or pull the circulation water out completely when not in use.
- Please do not use groundwater or well water in direct.
- The water circuit must be closed circuit.
- Due to continuous improvement, the above specifications may be subject to change without notice.
- This model doesn't equip with a pump.


Front View

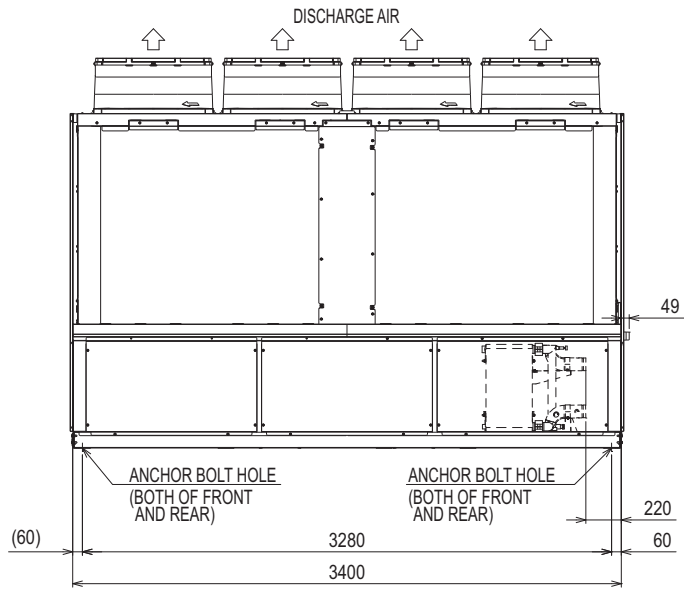

Side View

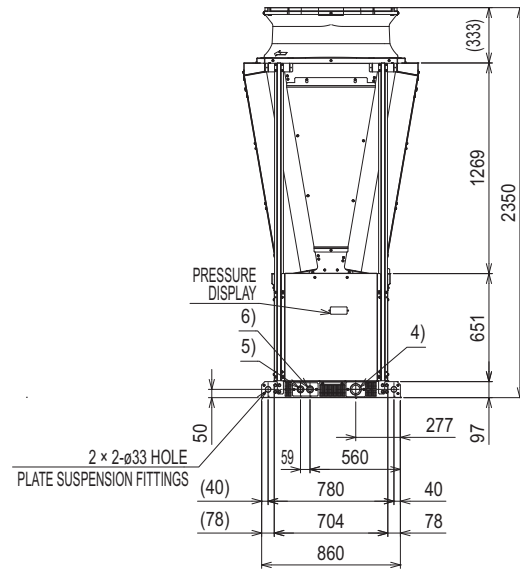

Upper View

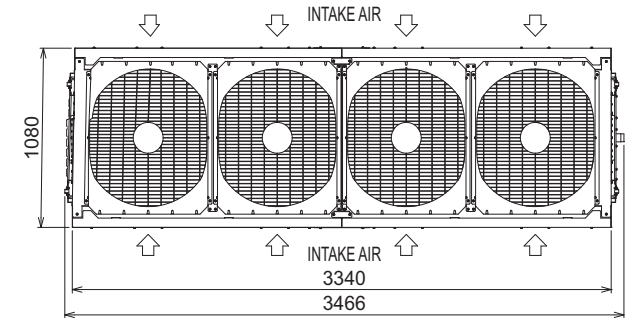

MEHP-iB-G07 R32 Air Source Heat Pump

(6 to 40kW)



Mitsubishi Electric's **MEHP-iB-G07** heat pump provides a compact and convenient solution to your small-scale heating needs. As a reversible heat pump it can provide both heating and cooling very efficiently, with inverter driven compressors and EC fans as standard, enhancing energy saving at part load conditions.

Key Features & Benefits

- Extended heating envelope
- Up to 60°C supply water temperature
- Operates down to -20°C ambient temperatures
- Smart defrost for improved efficiency and performance
- Exceptional SCOP LT (A+++)*
- Compact design


*Regulation (EU) No. 813/2013

R32


| MODEL | | 07V | 09V | 11V | 15V | 15Y | 18Y | 23Y | 27Y | 35Y | 40Y |
|--|-------------------|----------|----------|----------|----------|------------|------------|------------|------------|------------|------------|
| PERFORMANCE - HEATING ONLY | | | | | | | | | | | |
| GROSS VALUE ¹ | | | | | | | | | | | |
| TOTAL HEATING CAPACITY | kW | 6.74 | 8.77 | 11.24 | 15.04 | 15.27 | 17.24 | 23.80 | 27.23 | 34.19 | 40.86 |
| TOTAL POWER INPUT | kW | 2.05 | 2.46 | 3.28 | 4.50 | 4.24 | 4.85 | 6.72 | 8.02 | 10.69 | 11.56 |
| COP | kW/kW | 3.29 | 3.57 | 3.42 | 3.33 | 3.61 | 3.55 | 3.51 | 3.39 | 3.20 | 3.53 |
| EN14511 VALUES ^{1 2} | | | | | | | | | | | |
| TOTAL HEAT CAPACITY | kW | 6.68 | 8.72 | 11.20 | 15.00 | 15.20 | 17.10 | 23.70 | 27.10 | 34.00 | 40.70 |
| COP | kW/kW | 3.26 | 3.55 | 3.42 | 3.32 | 3.57 | 3.52 | 3.52 | 3.38 | 3.18 | 3.52 |
| SEASONAL PERFORMANCE - LOW TEMPERATURE³ | | | | | | | | | | | |
| RATED HEAT OUTPUT AT T _{design,h} | kW | 5 | 6 | 8 | 10 | 10 | 14 | 18 | 21 | 26 | 31 |
| SCOP | | 4.46 | 4.57 | 4.47 | 4.21 | 4.71 | 4.61 | 4.76 | 4.51 | 4.45 | 4.62 |
| PERFORMANCE η_s | % | 176 | 180 | 176 | 165 | 185 | 182 | 187 | 177 | 175 | 182 |
| SEASONAL PERFORMANCE - MEDIUM TEMPERATURE⁴ | | | | | | | | | | | |
| RATED HEAT OUTPUT AT T _{design,h} | | 4 | 6 | 8 | 9 | 9 | 12 | 15 | 19 | 23 | 29 |
| SCOP | | 2.85 | 3.2 | 3.21 | 2.85 | 3.21 | 3.25 | 3.42 | 3.21 | 3.21 | 3.48 |
| PERFORMANCE η_s | % | 111 | 125 | 126 | 111 | 125 | 127 | 134 | 125 | 125 | 136 |
| PERFORMANCE - COOLING ONLY | | | | | | | | | | | |
| GROSS VALUE ⁵ | | | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 6.20 | 7.72 | 10.37 | 13.49 | 13.52 | 15.62 | 19.70 | 25.85 | 30.90 | 35.82 |
| TOTAL POWER INPUT | kW | 2.04 | 2.67 | 3.49 | 4.36 | 4.25 | 5.57 | 6.98 | 8.71 | 11.16 | 12.33 |
| EER | kW/kW | 3.04 | 2.89 | 2.98 | 3.10 | 3.18 | 2.80 | 2.82 | 2.96 | 2.76 | 2.91 |
| EN14511 VALUES ^{5 2} | | | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 6.68 | 8.72 | 11.20 | 15.00 | 15.20 | 17.10 | 23.70 | 27.10 | 34.00 | 40.72 |
| EER | kW/kW | 3.26 | 3.55 | 3.42 | 3.32 | 3.57 | 3.52 | 3.52 | 3.38 | 3.18 | 3.52 |
| SEASONAL PERFORMANCE⁶ | | | | | | | | | | | |
| Prated,C | kW | 6.3 | 7.8 | 10.4 | 13.6 | 13.6 | 15.7 | 19.8 | 26.0 | 31.1 | 36.0 |
| SEER | | 4.74 | 4.68 | 4.73 | 4.45 | 5.17 | 5.01 | 4.88 | 4.82 | 4.81 | 4.93 |
| PERFORMANCE η_s | % | 187.0 | 184.0 | 186.0 | 175.0 | 204.0 | 197.0 | 192.0 | 190.0 | 189.0 | 194.0 |
| ELECTRICAL DATA | | | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 230/1/50 | 230/1/50 | 230/1/50 | 230/1/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 |
| F.L.A. ⁷ | Total | A | 19 | 20 | 25 | 30 | 12 | 13 | 17 | 24 | 32 |
| EXCHANGERS | | | | | | | | | | | |
| MINIMUM WATER FLOW | Heat Exchanger | l/s | 0.181 | 0.225 | 0.303 | 0.378 | 0.397 | 0.458 | 0.578 | 0.742 | 1.050 |
| MINIMUM WATER CONTENT | System | l | 36 | 60 | 75 | 71 | 74 | 80 | 113 | 181 | 193 |
| HEAT EXCHANGER USER SIDE IN HEATING | | | | | | | | | | | |
| WATER FLOW | | l/s | 0.325 | 0.423 | 0.543 | 0.726 | 0.737 | 0.832 | 1.149 | 1.314 | 1.65 |
| PRESSURE DROP ¹¹ | | kPa | 9.59 | 11.4 | 13 | 15.7 | 16.2 | 15.9 | 19.7 | 20.1 | 22.9 |
| HEAT EXCHANGER USER SIDE IN COOLING | | | | | | | | | | | |
| WATER FLOW | | l/s | 0.297 | 0.369 | 0.496 | 0.645 | 0.647 | 0.747 | 0.942 | 1.236 | 1.477 |
| PRESSURE DROP ¹⁵ | | kPa | 7.98 | 8.66 | 10.8 | 12.4 | 12.5 | 12.8 | 13.2 | 17.8 | 18.4 |
| REFRIGERANT CIRCUIT | | | | | | | | | | | |
| COMPRESSORS | No. | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| CIRCUITS | No. | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| REGULATION | | | | | | | | | | | |
| MINIMUM CAPACITY STEP | % | 32 | 41 | 40 | 28 | 29 | 28 | 29 | 40 | 33 | 29 |
| REFRIGERANT | | R32 | R32 | R32 | R32 | R32 | R32 | R32 | R32 | R32 | R32 |
| REFRIGERANT CHARGE ⁸ | kg | 1.90 | 3.50 | 3.60 | 3.90 | 3.90 | 4.55 | 6.20 | 6.90 | 8.85 | 9.30 |
| OIL CHARGE | | 0.35 | 0.40 | 0.70 | 1.20 | 1.00 | 1.00 | 1.00 | 2.30 | 2.30 | 2.30 |
| RC (ASHRAE) ⁹ | kg/kW | 0.31 | 0.46 | 0.35 | 0.29 | 0.29 | 0.29 | 0.32 | 0.27 | 0.29 | 0.26 |
| FANS | | | | | | | | | | | |
| QUANTITY | No. | 1 | 1 | 2 | 2 | 2 | 2 | 1 | 2 | 2 | 2 |
| AIRFLOW ¹¹ | m ³ /s | 0.93 | 1.02 | 1.84 | 1.84 | 1.84 | 1.95 | 2.34 | 4.52 | 4.35 | 4.75 |
| POWER INPUT | kW | 0.11 | 0.11 | 0.22 | 0.22 | 0.22 | 0.22 | 0.39 | 0.78 | 0.78 | 0.78 |
| NOISE LEVELS | | | | | | | | | | | |
| TOTAL SOUND PRESSURE ¹⁰ | dB(A) | 53 | 53 | 54 | 55 | 55 | 56 | 61 | 62 | 63 | 64 |
| TOTAL SOUND POWER LEVEL IN COOLING ^{11 12} | dB(A) | 67 | 68 | 69 | 70 | 70 | 71 | 76 | 78 | 79 | 80 |
| TOTAL SOUND POWER LEVEL IN HEATING ^{11 13} | dB(A) | 65 | 65 | 69 | 70 | 70 | 70 | 76 | 78 | 79 | 78 |
| SIZE AND WEIGHT¹⁴ | | | | | | | | | | | |
| WIDTH (A) | mm | 900 | 900 | 900 | 900 | 900 | 1450 | 1450 | 1450 | 1450 | 1700 |
| DEPTH (B) | mm | 370 | 420 | 420 | 420 | 420 | 550 | 550 | 550 | 550 | 650 |
| HEIGHT (H) | mm | 940 | 1240 | 1240 | 1390 | 1390 | 1200 | 1200 | 1700 | 1700 | 1700 |
| OPERATION WEIGHT | kg | 82 | 105 | 115 | 115 | 135 | 170 | 200 | 260 | 280 | 315 |

Notes:


1. Plant (side) heat exchanger water (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C -87% R.H.
2. Values in compliance with EN14511.
3. Seasonal space heating energy efficiency class Low Temperature [Regulation (EU) N. 813/2013]. Average Weather Conditions. Type of calculation with variable flow and variable temperature.
4. Seasonal space heating energy efficiency class Medium Temperature [Regulation (EU) N. 813/2013]. Average Weather Conditions. Type of calculation with variable flow and variable temperature.
5. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
6. Parameter calculated according to [Regulation (EU) N. 2016/2281].
7. Values calculated referring to the version with the maximum number of fans working at the max absorbed current. Safety values to be considered when cabling the unit for power supply and line-protection. Data valid for standard units without any additional options and only indicative. Refer to databook.
8. Theoretical - refer to serial plate for actual charge volumes.
9. Rate in accordance with AHRI standard 550/590.
10. Average sound pressure level at 1m distance, unit on a reflective surface; non-binding value calculated from the sound power level.
11. Sound power on the basis of measurement taken in compliance with ISO 9614.
12. Sound power level in cooling, outdoors.
13. Sound power level in heating, outdoors.
14. Unit in standard configuration, without optional accessories.

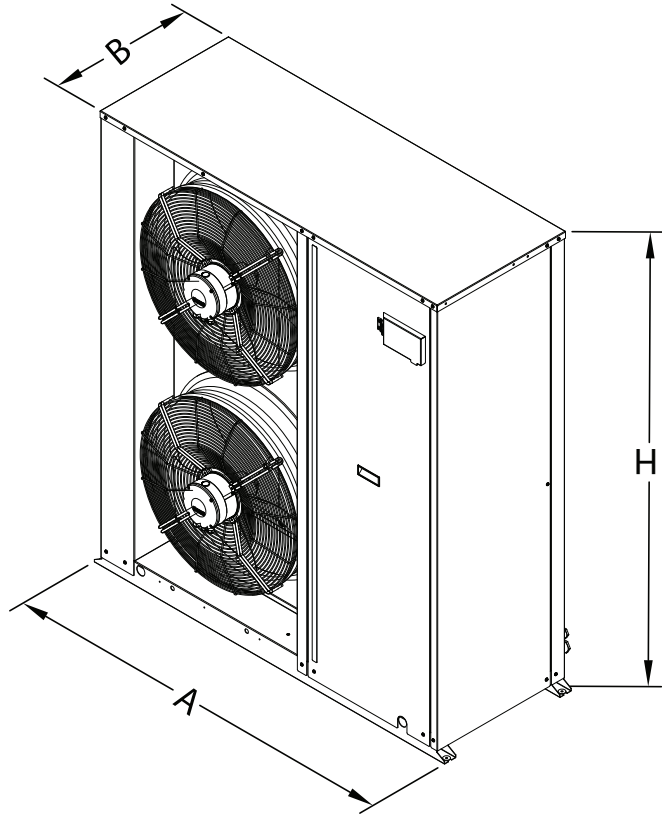

Front View

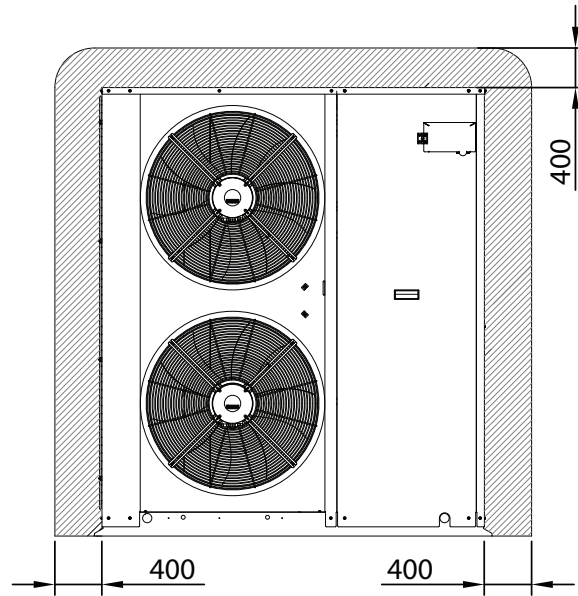

Top View

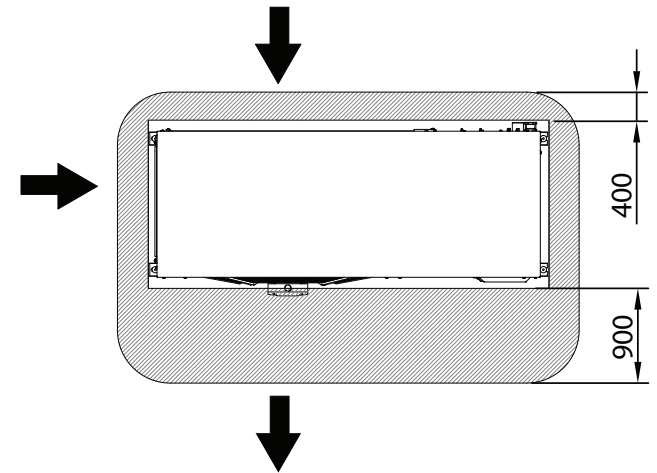

MEHP-iS-G07 R32 Modular Air Source Heat Pump

(50 to 880kW)



Mitsubishi Electric's **MEHP-iS-G07** heat pump range is manufactured to the highest quality standards. Featuring a compact design and modular expansion capabilities, it is suitable for many different applications, from comfort to industrial applications.

Key Features & Benefits

- Hot water up to 65°C
- Best-in-class for low noise levels
- Compact design and modular expansion
- New Smart Coordinated Defrost
- Exceptional performance at part load operating conditions

R32

| MODEL | | 0051 | 0061 | 0071 | 0082 | 0092 | 0102 | 0112 |
|--|-------------------|----------|----------|----------|----------|----------|----------|----------|
| PERFORMANCE - HEATING ONLY | | | | | | | | |
| EN14511 VALUES ^{1,2} | | | | | | | | |
| TOTAL HEATING CAPACITY | kW | 50.00 | 60.00 | 70.00 | 80.00 | 90.00 | 100.3 | 110.3 |
| COP | kW/kW | 3.44 | 3.38 | 3.15 | 3.32 | 3.12 | 3.35 | 3.18 |
| SEASONAL PERFORMANCE - LOW TEMPERATURE⁴ | | | | | | | | |
| RATED HEAT OUTPUT AT Tdesign, h | kW | 40.0 | 48.0 | 55.0 | 64.0 | 72.0 | 80.0 | 89.0 |
| SCOP | | 4.39 | 4.33 | 4.34 | 4.35 | 4.12 | 4.30 | 4.32 |
| PERFORMANCE ηs | % | 172 | 170 | 171 | 171 | 162 | 169 | 170 |
| SEASONAL PERFORMANCE - MEDIUM TEMPERATURE⁴ | | | | | | | | |
| RATED HEAT OUTPUT AT Tdesign, h | kW | 40.0 | 48.0 | 48.0 | 64.0 | 64.0 | 82.0 | 82.0 |
| SCOP | | 3.43 | 3.37 | 3.37 | 3.37 | 3.23 | 3.39 | 3.43 |
| PERFORMANCE ηs | % | 134 | 132 | 132 | 132 | 126 | 133 | 134 |
| PERFORMANCE - COOLING ONLY | | | | | | | | |
| EN14511 VALUE ^{1,3} | | | | | | | | |
| COOLING CAPACITY | kW | 48.00 | 53.00 | 60.00 | 68.30 | 74.10 | 85.90 | 93.80 |
| EER | kW/kW | 2.81 | 2.64 | 2.34 | 2.73 | 2.45 | 2.68 | 2.48 |
| SEASONAL PERFORMANCE⁵ | | | | | | | | |
| Prated,C | kW | 48.0 | 53.0 | 60.0 | 68.3 | 74.1 | 85.9 | 93.8 |
| SEER | | 4.63 | 4.58 | 4.46 | 4.49 | 4.46 | 4.81 | 4.75 |
| PERFORMANCE ηs | % | 182 | 180 | 175 | 177 | 175 | 189 | 187 |
| ELECTRICAL DATA | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| MAX F.L.A. ⁶ | Total | A | 52 | 60 | 60 | 78 | 93 | 93 |
| EXCHANGERS | | | | | | | | |
| MINIMUM WATER FLOW | l/s | 1.667 | 1.667 | 1.667 | 2.222 | 2.222 | 2.778 | 2.778 |
| MINIMUM WATER CONTENT | System | l | 400 | 480 | 560 | 640 | 800 | 880 |
| REFRIGERANT CIRCUIT | | | | | | | | |
| COMPRESSORS | No. | 1 | 1 | 1 | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| REFRIGERANT | | R32 | R32 | R32 | R32 | R32 | R32 | R32 |
| THEORETICAL REFRIGERANT CHARGE | kg | 13.50 | 13.50 | 12.00 | 17.50 | 17.00 | 21.50 | 20.50 |
| FANS | | | | | | | | |
| QUANTITY | No. | 2 | 2 | 2 | 3 | 3 | 4 | 4 |
| AIRFLOW | m ³ /s | 5.89 | 5.89 | 5.89 | 8.89 | 8.89 | 11.77 | 11.77 |
| NOISE LEVELS | | | | | | | | |
| TOTAL SOUND PRESSURE ⁷ | dB(A) | 59 | 60 | 62 | 62 | 63 | 63 | 63 |
| TOTAL SOUND POWER LEVEL IN COOLING ^{8,9} | dB(A) | 77 | 78 | 80 | 80 | 81 | 82 | 82 |
| TOTAL SOUND POWER LEVEL IN HEATING ^{8,10} | dB(A) | 77 | 78 | 80 | 80 | 81 | 82 | 82 |
| SIZE AND WEIGHT¹¹ | | | | | | | | |
| WIDTH (A) | mm | 2085 | 2085 | 2085 | 2600 | 2600 | 3225 | 3225 |
| DEPTH (B) | mm | 1100 | 1100 | 1100 | 1100 | 1100 | 1100 | 1100 |
| HEIGHT (H) | mm | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 |
| OPERATION WEIGHT | kg | 710 | 710 | 710 | 960 | 960 | 1085 | 1085 |

Notes:


1. Values in compliance with EN14511.
2. Plant (side) heat exchanger water (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
3. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
4. Seasonal space heating energy efficiency class [REGULATION (EU) N. 813/2013] - Average Weather Conditions. Calculation with variable waterflow and variable temperature.
5. Parameter calculated according to [REGULATION (EU) N. 2016/2281]
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
8. Sound power level on the basis of measurement taken in compliance with ISO 9614.
9. Sound power level in cooling, outdoors.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

ELCA Engine ver.4.8.7.0




Eurovent Certified Data

Chassis Size 1

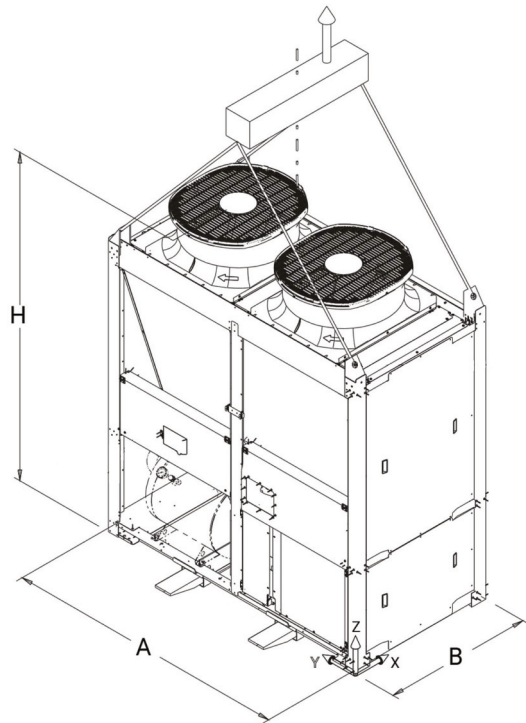


| SIZE | A [mm] | B [mm] | H [mm] |
|-----------------------|-----------|-----------|-----------|
| MEHP/MECH-iS-G07 0051 | 2085 | 1100 | 2400 |
| MEHP/MECH-iS-G07 0061 | 2085 | 1100 | 2400 |
| MEHP/MECH-iS-G07 0071 | 2085 | 1100 | 2400 |

Chassis Size 2

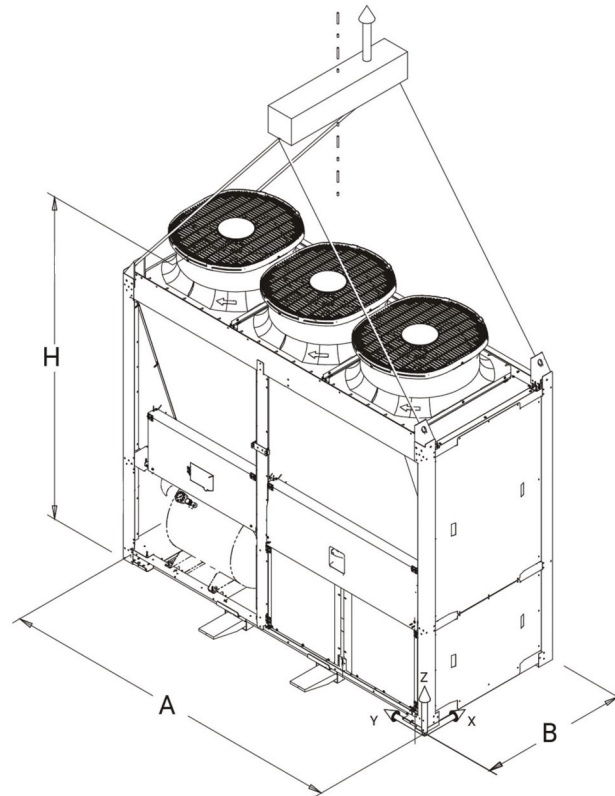

| SIZE | A [mm] | B [mm] | H [mm] |
|-----------------------|-----------|-----------|-----------|
| MEHP/MECH-iS-G07 0082 | 2600 | 1100 | 2400 |
| MEHP/MECH-iS-G07 0092 | 2600 | 1100 | 2400 |

Chassis Size 3

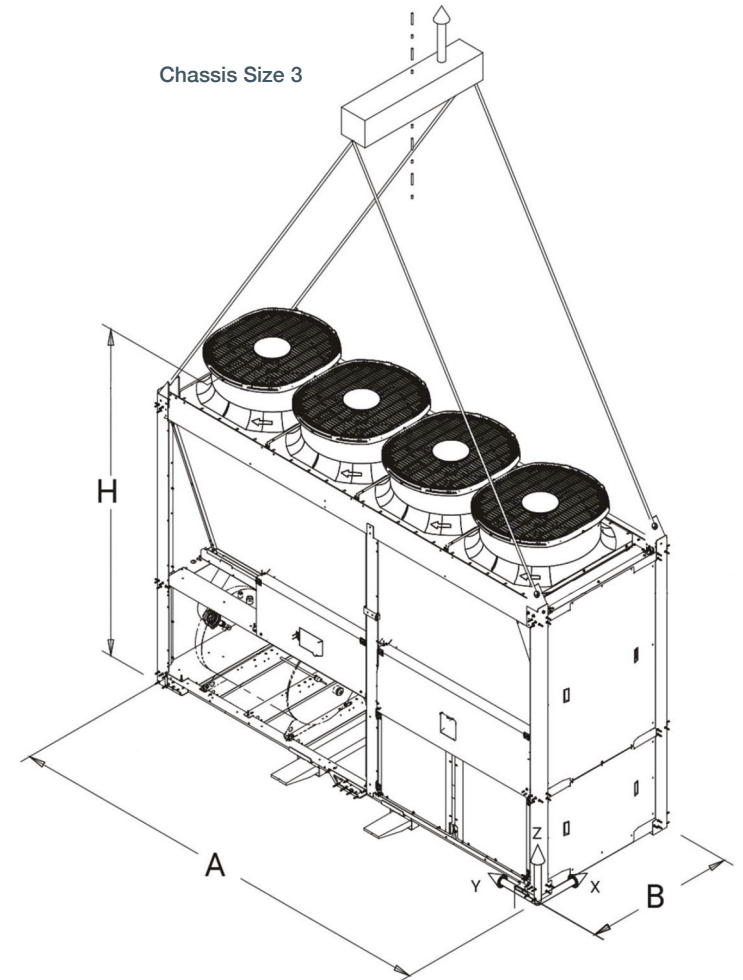

| SIZE | A [mm] | B [mm] | H [mm] |
|-----------------------|-----------|-----------|-----------|
| MEHP/MECH-iS-G07 0102 | 3225 | 1100 | 2400 |
| MEHP/MECH-iS-G07 0112 | 3225 | 1100 | 2400 |



CAHV-Z R290 Air Source Heat Pump

The Mitsubishi Electric Ecodan **CAHV-Z** air source heat pump utilises low GWP R290 refrigerant, offering a robust, low carbon system for the provision of sanitary hot water and space heating. This innovative heat pump solution can operate as a single system or form part of a multiple unit system, making it suitable for a wide range of commercial applications, including schools and hospitals.

A multiple unit system has the ability to cascade available units on and off to meet the load requirements of a building. As an example of this unique modulation, a 7 unit system allows increments of capacity all the way up to 280kW*. With cascade and rotation built in as standard, the Ecodan CAHV-Z is perfectly set up to reliably generate sustainable space heating and hot water all year round.

* At nominal conditions A7W35

Key Features & Benefits

- Low GWP R290 refrigerant and reduced embodied carbon helps achieve CSR targets
- Achieves 75°C outlet temperature down to -15°C ambient temperature for continuous heating provision
- Multiple unit cascade control up to 280kW* capacity provides design flexibility
- Water flow temperatures from 24°C to 75°C without boost heaters, results in cost and energy savings


R290




| MODEL | | CAHV-Z450YA-HPB(-BS) | |
|--|-------------------------------|----------------------|--|
| CAPACITY(EN14511) ¹ | | kW | 40 |
| TEMPERATURE RANGE | Outlet water temperature | | 24 - 75°C |
| | Outdoor temperature | D.B. | -25 - 43°C |
| WATER PIPE DIAMETER AND TYPE | Inlet | mm (in) | 38.1 (1 1/2"), screwed-type joint |
| | Outlet | mm (in) | 38.1 (1 1/2"), screwed-type joint |
| EXTERNAL FINISH | | | Acrylic painted steel sheet <Munsell 5Y 8/1 or similar> |
| EXTERNAL DIMENSIONS (Width X Depth X Height) | | mm | 1750 x 740 x 1710 |
| FAN | Type and quantity | | Propeller fan x 2 |
| | Control and driving mechanism | | Inverter control, direct driven by motor |
| REFRIGERANT | | | R290 |

Notes: 1. Under normal heating conditions at the outdoor temperature of 7°CDB/6°CWB, the outlet water temperature of 45°C, and the inlet water temperature of 40°C.


Upper View

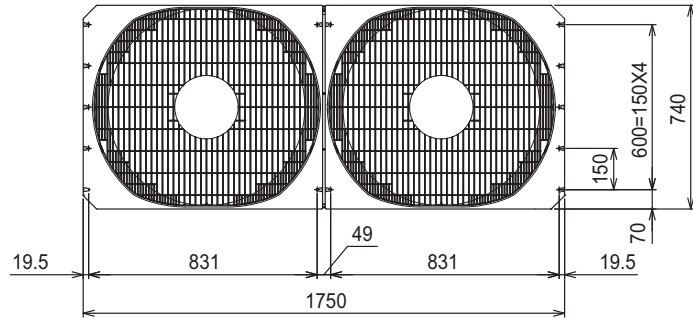

Front View

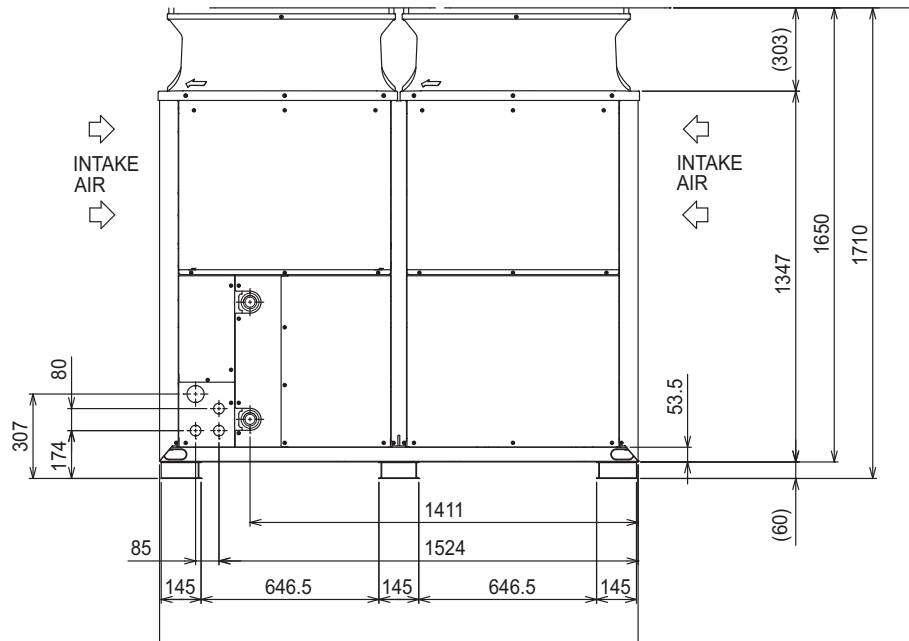

Side View

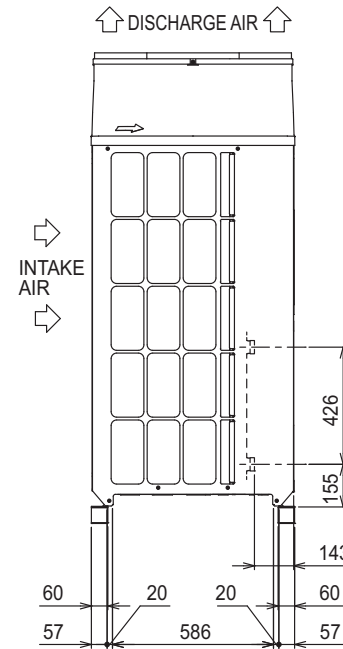

CAHV-R R454C Air Source Heat Pump



CERTIFIED

Certificate Number: 037-0113-23
Product (Type): Outdoor Air/Water
Product Reference: CAHV-R450YA-HPB

Certificate Number: 037-0113-23
Product Type: Air Source Heat Pump
Product Reference: CAHV-R450YA-HPB(-BS)

Notes:

- Under normal heating conditions at the outdoor temperature of 7°CDB/6°CWB, the outlet water temperature of 45°C, and the inlet water temperature of 40°C.
- Under normal heating conditions at the outdoor temperature of -5°CDB/-6°CWB and the outlet water temperature of 55°C.
- Under normal heating conditions at the outdoor temperature of 7°CDB/6°CWB when the unit is set to the "Capacity Priority" mode through the dry NC-contact.
- The sound pressure level is a value measured in an anechoic room in accordance with the conventional method in JRA4060.
-



Outdoor temp. -20°CDB/Outlet water temp. 45-65°C
Outdoor temp. -20°CDB/Outlet water temp. 35-70°C
Outdoor temp. 43°CDB/Outlet water temp. 24-70°C

6. 4.0 - 15.0 m³/h under the following conditions:

- When the outdoor temperature is below 0°C,
- When the outlet water temperature is 30°C or below AND the outdoor temperature is 6°C or below.

The Mitsubishi Electric Ecodan **CAHV-R** air source heat pump utilises low GWP R454C refrigerant, offering a robust, low carbon system for the provision of sanitary hot water and space heating. This innovative heat pump solution can operate as a single system or form part of a multiple unit system, making it suitable for a wide range of commercial applications, including schools and hospitals.

A multiple unit system has the ability to cascade available units on and off to meet the load requirements of a building. As an example of this unique modulation, a 16 unit system allows 0.5kW increments of capacity, from 7.8kW all the way up to 640kW*. With cascade and rotation built in as standard, the Ecodan CAHV-R is perfectly set up to reliably generate sustainable space heating and hot water all year round.

* At nominal conditions A7W35


Key Features & Benefits

- Low GWP R454C refrigerant and reduced embodied carbon helps achieve CSR targets
- Achieves 70°C outlet temperature down to -20°C ambient temperature for continuous heating provision
- Multiple unit cascade control from 7.8kW to 640kW* capacity provides design flexibility
- Water flow temperatures from 24°C to 70°C without boost heaters, results in cost and energy savings
- Advanced heat exchange design combined with the properties of R454C refrigerant enables a shorter defrost time


R454C

| MODEL | | CAHV-R450YA-HPB(-BS) | |
|---|-------------------------------|--|-----------------------------------|
| POWER SOURCE | | 3-phase 4-wire 380-400-415V 50/60 Hz | |
| CAPACITY(EN14511) ¹ | | | |
| | Power input | kW | 40 |
| | Current input | A | 23.7-22.5-21.7 |
| | COP (kW/kW) | | 2.85 |
| | SCOP Low/Medium | | 3.57/3.24 |
| CAPACITY ² | | | |
| | Power input | kW | 33.4 |
| | Current input | A | 28.0-26.6-25.7 |
| | COP (kW/kW) | | 2.01 |
| MAXIMUM CURRENT INPUT | | A | |
| WATER PRESSURE DROP ¹ | | 10.2 kPa (1.47 psi) | |
| TEMPERATURE RANGE ⁵ | | | |
| | Outlet water temperature | | 24 - 70°C |
| | Outdoor temperature | D.B. | -25 - 43°C |
| CIRCULATING WATER VOLUME RANGE ⁵ | | 25 l/min - 250 l/min | |
| SOUND PRESSURE LEVEL (measured 1m below the unit in an anechoic room) ^{11,4} | | dB(A) | 64 |
| SOUND PRESSURE LEVEL (measured 1m below the unit in an anechoic room) ^{3,4} | | dB(A) | 72 |
| WATER PIPE DIAMETER AND TYPE | | | |
| | Inlet | mm (in) | 38.1 (1 1/2"), housing type joint |
| | Outlet | mm (in) | 38.1 (1 1/2"), housing type joint |
| EXTERNAL FINISH | | Acrylic painted steel sheet <Munsell 5Y 8/1 or similar> | |
| EXTERNAL DIMENSIONS (Width x Depth x Height) | | mm | 1750 x 740 x 1710 |
| NET WEIGHT | | kg | 359 |
| DESIGN PRESSURE | | | |
| | R454C | MPa | 3.85 |
| | Water | MPa | 1.0 |
| HEAT EXCHANGER | | | |
| | Water-side | Copper brazed stainless steel sheet | |
| | Air-side | Plate fins and copper tubes | |
| COMPRESSOR | | | |
| | Type | Inverter scroll hermetic compressor | |
| | Manufacturer | MITSUBISHI ELECTRIC CORPORATION | |
| | Starting method | Inverter | |
| | Motor output | kW | 12.1 |
| | Lubricant | FVC32EA | |
| FAN | | | |
| | Air flow rate | L/s | 2500 × 2 |
| | External static pressure | 10 Pa (1mm H ₂ O) | |
| | Type and quantity | Propeller fan × 2 | |
| | Control and driving mechanism | Inverter control, direct driven by motor | |
| | Motor output | kW | 0.92 × 2 |
| HIC (HEAT INTER-CHANGER) CIRCUIT | | Copper pipe | |
| PROTECTION DEVICES | | | |
| | High pressure | High-pressure sensor and switch set at 3.85 MPa (643 psi) | |
| | Inverter circuit | Overheat and overcurrent protection | |
| | Compressor | Overheat protection | |
| | Fan motor | Thermal switch | |
| DEFROSTING METHOD | | Auto-defrost mode (Reversed refrigerant cycle) | |
| REFRIGERANT | | | |
| | Type and factory charge | kg | R454C, 9.0 kg |
| | Flow and temperature control | LEV and HIC circuit | |


Upper View

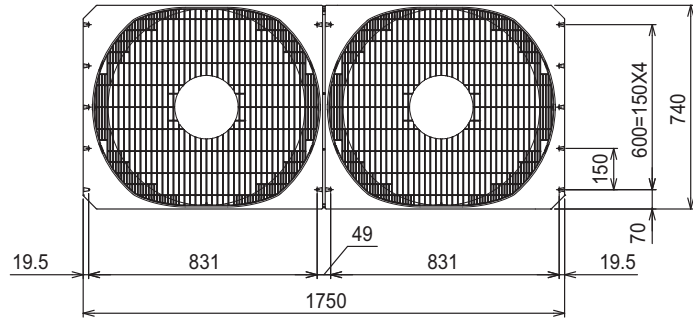

Front View

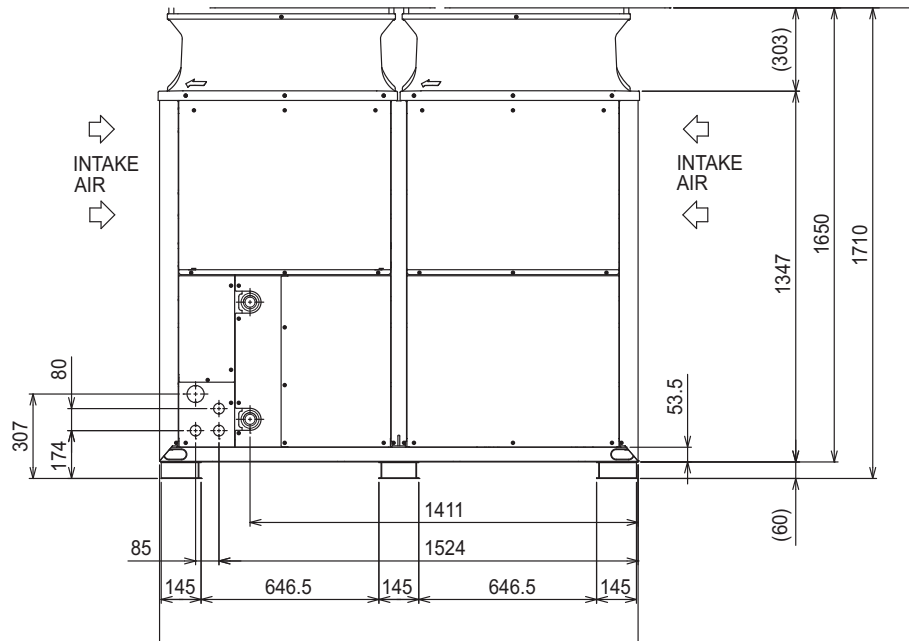

Side View

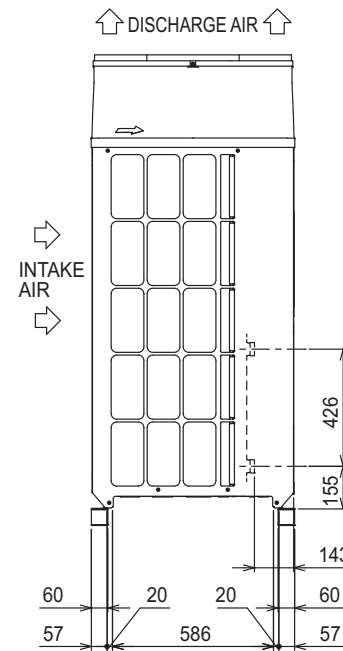



QAHV R744 Air Source Heat Pump



Specifically designed for commercial sanitary hot water application, where gas boilers, combined heat and power systems (CHP) or electric water heating have been traditionally utilised, the 40kW Ecodan **QAHV** provides a low carbon solution for hotels, apartment blocks, leisure centres, hospitals, care homes, restaurants and education.

Utilising the natural and stable refrigerant CO₂ (R744), the environmentally clean solution enables compliance to strict local planning laws and boosts BREEAM points. With the increasing decarbonisation of the electrical grid, the QAHV provides a high efficiency, low carbon hot water delivery solution with leaving water temperature up to 90°C.

Key Features & Benefits

- High efficiency at high flow temperatures
- Utilises CO₂ refrigerant which has a GWP of 1
- Uses a unique twisted and spiral gas cooler to enhance energy efficiency
- Full heating capacity down to -3°C outdoor temperature and operates down to -25°C
- Super low noise levels
- Able to utilise with an indirect system

R744


| MODEL | | QAHV-N560YA-HPB |
|--|--|-----------------------------------|
| WATER HEATING 65°C ¹ | CAPACITY (kW) | 40 |
| | POWER INPUT (kW) | 10.31 |
| | CURRENT INPUT (A) | 16.3 |
| | COP | 3.88 |
| WATER HEATING 65°C ² | CAPACITY (kW) | 40 |
| | POWER INPUT (kW) | 10.97 |
| | CURRENT INPUT (A) | 18.3 |
| | COP | 3.65 |
| WATER HEATING 65°C ³ | CAPACITY (kW) | 40 |
| | POWER INPUT (kW) | 11.6 |
| | CURRENT INPUT (A) | 18.7 |
| | COP | 3.44 |
| WATER HEATING ENERGY EFFICIENCY CLASS TEMPERATURE RANGE | FOR MEDIUM TEMPERATURE APPLICATION | A |
| | INLET WATER TEMPERATURE (°C) | 5 ~ 63 |
| | OUTLET WATER TEMPERATURE (°C) | 55 ~ 90 |
| | OUTDOOR TEMPERATURE (°C) | -25~43 |
| ELECTRICAL | MAX CURRENT INPUT (A) | 33.8 |
| | ELECTRICAL SUPPLY (V / Hz) | 380-415v, 50Hz |
| | PHASE | 3 |
| | FUSE RATING - MCB SIZES (A) ⁵ | 40 |
| WATER DETAIL | INLET / OUTLET (mm (in.)) | 19.05 (Rc 3/4") / 19.05 (Rc 3/4") |
| | ALLOWABLE EXTERNAL PUMP HEAD (kPa) | 77 |
| DIMENSIONS (mm) | WIDTH | 1220 |
| | DEPTH | 760 |
| | HEIGHT | 1837 (1777 without legs) |
| WEIGHT (kg) | | 400 |
| NOISE LEVEL | SOUND PRESSURE ⁴ (dB(A)) | 56 |
| REFRIGERANT | TYPE | R744 (GWP 1) |
| | REFRIGERANT CHARGE (kg) / CO ₂ EQUIVALENT (t) | 6.5 / 0.0065 |

Notes:


1. Under Normal heating conditions at the outdoor temp, 16°CDB/12°CWB, the outlet water temperature 65°C, and the inlet water temperature 17°C
2. Under Normal heating conditions at the outdoor temp, 7°CDB/6°CWB, the outlet water temperature 65°C, and the inlet water temperature 9°C
3. Under Normal heating conditions at the outdoor temp, 7°CDB/6°CWB, the outlet water temperature 65°C, and the inlet water temperature 15°C
4. Measured 1m from the front of the unit in an anechoic room
5. MCB Sizes BS EN60898-2 & BS EN60947-2




Upper View

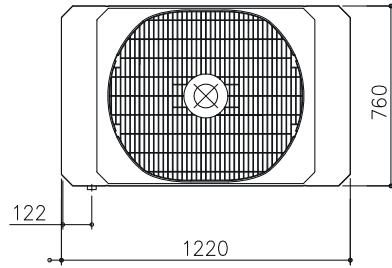

Front View

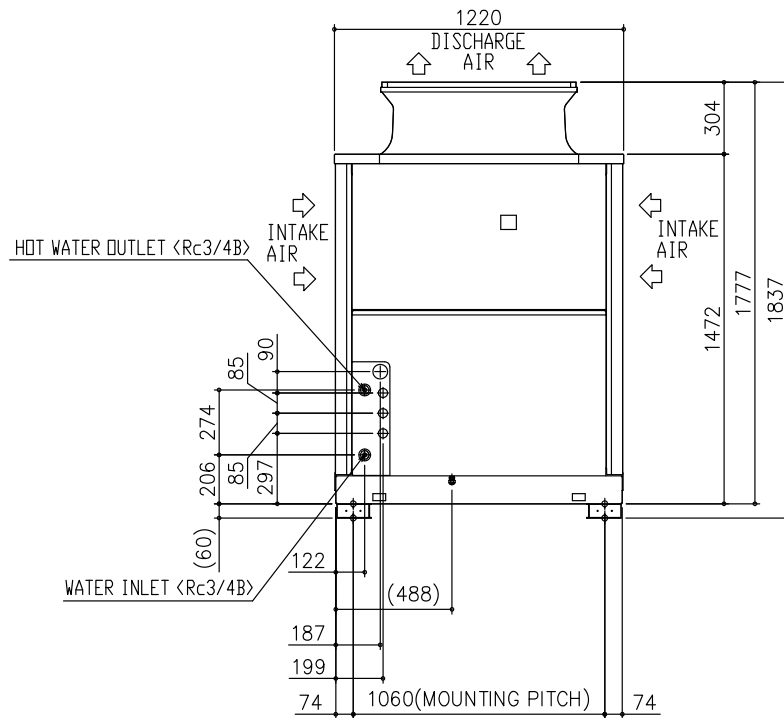

Side View

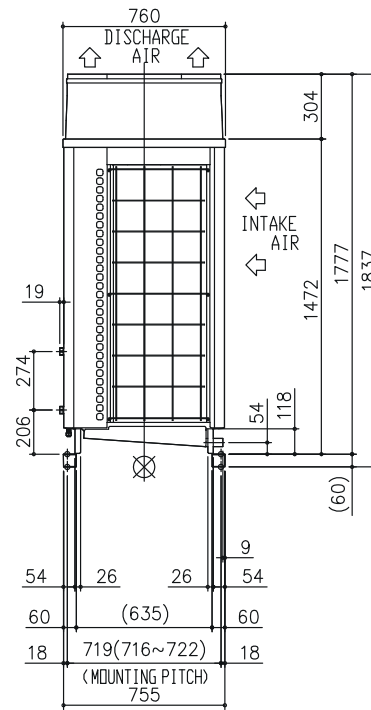

NX2-N-G06 R454B Air Source Heat Pump

(365 to 580kW)

Standard Version (/K)



CLIMVENETA

Mitsubishi Electric's **NX2-N-G06** is our flexible air source heat pump, using rotary scroll compressors, axial-flow fans, shell and tubes exchanger and an electronic expansion valve as standard.

Key Features & Benefits

- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors in a multi-circuit configuration
- EC fans available as an option for improved efficiency
- Low GWP refrigerant R454B

R454B

| MODEL | | 0344 | 0364 | 0404 | 0446 | 0506 | 0526 | 0546 |
|--|---------|----------|----------|----------|----------|----------|----------|----------|
| PERFORMANCE - HEATING ONLY^{2, 3} | | | | | | | | |
| TOTAL HEATING CAPACITY | kW | 365.2 | 387.0 | 415.4 | 470.0 | 513.3 | 560.7 | 580.5 |
| COP | kW/kW | 3.02 | 3.06 | 3.04 | 2.98 | 3.00 | 3.05 | 3.07 |
| SEASONAL PERFORMANCE HEATING (EN14825 VALUE) - LOW TEMPERATURE¹¹ | | | | | | | | |
| RATED HEAT OUTPUT AT Tdesign, h | kW | 268.0 | 294.0 | 323.0 | 369.0 | 388.0 | 363.0 | 373.0 |
| SCOP | | 3.60 | 3.70 | 3.73 | 3.66 | 3.53 | 3.49 | 3.53 |
| SEASONAL SPACE HEATING EFFICIENCY | % | 141 | 145 | 146 | 143 | 138 | 137 | 138 |
| PERFORMANCE - COOLING ONLY^{1, 2} | | | | | | | | |
| COOLING CAPACITY | kW | 334.3 | 354.7 | 382.0 | 430.2 | 475.1 | 515.9 | 533.1 |
| EER | kW/kW | 2.69 | 2.78 | 2.67 | 2.62 | 2.68 | 2.78 | 2.79 |
| SEASONAL EFFICIENCY IN COOLING (REG.EU 2016/2281)¹² | | | | | | | | |
| Prated,C | kW | 334.3 | 354.7 | 382.0 | 430.2 | 475.1 | 515.9 | 533.1 |
| SEER | | 3.93 | 4.04 | 4.07 | 4.01 | 3.93 | 4.07 | 4.10 |
| ELECTRICAL DATA | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| MAX F.L.A. ¹⁰ | Total A | 257 | 270 | 297 | 333 | 365 | 392 | 405 |
| EXCHANGERS | | | | | | | | |
| MINIMUM WATER FLOW | l/s | 10.58 | 11.31 | 12.33 | 13.89 | 13.89 | 17.50 | 17.50 |
| MINIMUM WATER CONTENT | l/s | 27.58 | 26.72 | 29.92 | 36.11 | 36.11 | 38.89 | 38.89 |
| REFRIGERANT CIRCUIT | | | | | | | | |
| COMPRESSORS | No. | 4 | 4 | 4 | 6 | 6 | 6 | 6 |
| CIRCUITS | No. | 2 | 2 | 2 | 3 | 3 | 3 | 3 |
| THEORETICAL REFRIGERANT CHARGE | kg | 65 | 68 | 68 | 84 | 87 | 98 | 113 |
| NOISE LEVELS | | | | | | | | |
| TOTAL SOUND PRESSURE ⁵ | dB(A) | 76 | 76 | 76 | 76 | 76 | 76 | 76 |
| TOTAL SOUND POWER LEVEL IN COOLING ^{6, 7} | dB(A) | 96 | 96 | 96 | 96 | 97 | 97 | 97 |
| TOTAL SOUND POWER LEVEL IN HEATING ^{6, 8} | dB(A) | 96 | 96 | 96 | 96 | 97 | 97 | 97 |
| SIZE AND WEIGHT⁹ | | | | | | | | |
| WIDTH (A) | mm | 3905 | 3905 | 3905 | 4515 | 5690 | 5690 | 5690 |
| DEPTH (B) | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT (H) | mm | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 |
| OPERATION WEIGHT | kg | 3030 | 3110 | 3150 | 4040 | 4400 | 4530 | 4600 |

Notes:

1. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C.

2. Values in compliance with EN14511.

3. Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C; Source (side) heat exchanger air (in) 7.0°C - 87% R.H.

4. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C; Plant (side) heat exchanger recovery water (in/out) 40.00°C/45.00°C.

5. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.

6. Sound power on the basis of measurements taken in compliance with ISO 9614.

7. Sound power level in cooling, outdoors.

8. Sound power level in heating, outdoors.

9. Unit in standard configuration, without optional accessories.

10. Values calculated referring to the version with the maximum number of fans working at the max absorbed current. Safety values to be considered when cabling the unit for power supply and line-protections. Data valid for standard units without any additional option.

11. Seasonal space heating energy efficiency class LOW TEMPERATURE [REGULATION (EU) N. 813/2013].

12. Parameter calculated according to [REGULATION (EU) N. 2016/2281].

■ Eurovent Certified Data

NX2-N-G06 R454B Air Source Heat Pump

(362 to 569kW)

Super-Low Noise Version (/SL)



Mitsubishi Electric's **NX2-N-G06** is our flexible air source heat pump, using rotary scroll compressors, axial-flow fans, shell and tubes exchanger and an electronic expansion valve as standard.

Key Features & Benefits

- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors in a multi-circuit configuration
- EC fans available as an option for improved efficiency
- Low GWP refrigerant R454B

R454B

| MODEL | | 0344 | 0364 | 0404 | 0446 | 0506 | 0526 | 0546 |
|--|---------|----------|----------|----------|----------|----------|----------|----------|
| PERFORMANCE - HEATING ONLY ^{2, 3} | | | | | | | | |
| TOTAL HEATING CAPACITY | kW | 362.5 | 379.6 | 420.6 | 471.4 | 511.7 | 552.6 | 569.4 |
| COP | kW/kW | 3.13 | 3.11 | 3.16 | 3.09 | 3.11 | 3.13 | 3.12 |
| SEASONAL PERFORMANCE HEATING (EN14825 VALUE) - LOW TEMPERATURE ¹¹ | | | | | | | | |
| RATED HEAT OUTPUT AT Tdesign, h | kW | 227.0 | 252.0 | 319.0 | 294.0 | 390.0 | 356.0 | 378.0 |
| SCOP | | 3.67 | 3.71 | 3.78 | 3.67 | 3.80 | 3.73 | 3.72 |
| SEASONAL SPACE HEATING EFFICIENCY | % | 144 | 145 | 148 | 144 | 149 | 146 | 146 |
| PERFORMANCE - COOLING ONLY ^{1, 2} | | | | | | | | |
| COOLING CAPACITY | kW | 316.0 | 336.4 | 370.2 | 409.0 | 443.6 | 486.1 | 505.7 |
| EER | kW/kW | 2.44 | 2.51 | 2.54 | 2.38 | 2.38 | 2.49 | 2.51 |
| SEASONAL EFFICIENCY IN COOLING (REG.EU 2016/2281) ¹² | | | | | | | | |
| Prated,C | kW | 316.0 | 336.4 | 370.2 | 409.0 | 443.6 | 486.1 | 505.7 |
| SEER | | 4.10 | 4.13 | 4.23 | 4.14 | 4.10 | 4.19 | 4.19 |
| ELECTRICAL DATA | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| MAX F.L.A. ¹⁰ | Total A | 257 | 270 | 297 | 333 | 365 | 392 | 405 |
| EXCHANGERS | | | | | | | | |
| MINIMUM WATER FLOW | l/s | 10.58 | 11.31 | 12.33 | 13.89 | 13.89 | 17.50 | 17.50 |
| MINIMUM WATER CONTENT | l/s | 27.58 | 26.72 | 29.92 | 36.11 | 36.11 | 38.89 | 38.89 |
| REFRIGERANT CIRCUIT | | | | | | | | |
| COMPRESSORS | No. | 4 | 4 | 4 | 6 | 6 | 6 | 6 |
| CIRCUITS | No. | 2 | 2 | 2 | 3 | 3 | 3 | 3 |
| THEORETICAL REFRIGERANT CHARGE | kg | 72 | 74 | 85 | 96 | 106 | 112 | 113 |
| NOISE LEVELS | | | | | | | | |
| TOTAL SOUND PRESSURE ⁵ | dB(A) | 68 | 68 | 68 | 68 | 68 | 69 | 69 |
| TOTAL SOUND POWER LEVEL IN COOLING ^{6, 7} | dB(A) | 88 | 88 | 88 | 89 | 89 | 90 | 90 |
| TOTAL SOUND POWER LEVEL IN HEATING ^{6, 8} | dB(A) | 89 | 89 | 89 | 90 | 90 | 91 | 91 |
| SIZE AND WEIGHT ⁹ | | | | | | | | |
| WIDTH (A) | mm | 4515 | 5080 | 5080 | 5690 | 5690 | 6865 | 7430 |
| DEPTH (B) | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT (H) | mm | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 |
| OPERATION WEIGHT | kg | 3330 | 3460 | 3630 | 4640 | 4750 | 5050 | 5170 |

Notes:

1. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C; Source (side) heat exchanger air (in) 7.0°C - 87% R.H.
4. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C; Plant (side) heat exchanger recovery water (in/out) 40.00°C/45.00°C.
5. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
6. Sound power on the basis of measurements taken in compliance with ISO 9614.
7. Sound power level in cooling, outdoors.
8. Sound power level in heating, outdoors.
9. Unit in standard configuration, without optional accessories.
10. Values calculated referring to the version with the maximum number of fans working at the max absorbed current. Safety values to be considered when cabling the unit for power supply and line-protections. Data valid for standard units without any additional option.
11. Seasonal space heating energy efficiency class LOW TEMPERATURE (REGULATION (EU) N. 813/2013).
12. Parameter calculated according to [REGULATION (EU) N. 2016/2281].

■ Eurovent Certified Data

NX2-N-G06 R454B Air Source Heat Pump

(376 to 854kW)

High Efficiency Version (/A)



Mitsubishi Electric's **NX2-N-G06** is our flexible air source heat pump, using rotary scroll compressors, axial-flow fans, shell and tubes exchanger and an electronic expansion valve as standard.

Key Features & Benefits

- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors in a multi-circuit configuration
- EC fans available as an option for improved efficiency
- Low GWP refrigerant R454B

R454B

| MODEL | | 0344 | 0364 | 0404 | 0446 | 0506 | 0526 | 0546 | 0606 | 0708 | 0738 | 0768 | 0808 |
|--|---------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| PERFORMANCE - HEATING ONLY ^{2, 3} | | | | | | | | | | | | | |
| TOTAL HEATING CAPACITY | kW | 376.8 | 397.7 | 427.2 | 493.1 | 531.6 | 574.2 | 596.6 | 640.6 | 753.4 | 795.3 | 826.0 | 854.1 |
| COP | kW/kW | 3.19 | 3.19 | 3.20 | 3.17 | 3.19 | 3.20 | 3.20 | 3.26 | 3.26 | 3.28 | 3.26 | 3.26 |
| SEASONAL PERFORMANCE HEATING (EN14825 VALUE) - LOW TEMPERATURE ¹¹ | | | | | | | | | | | | | |
| RATED HEAT OUTPUT AT Tdesign, h | kW | 271.0 | 296.0 | 321.0 | 368.0 | 386.0 | 356.0 | 371.0 | - | - | - | - | - |
| SCOP | | 3.76 | 3.83 | 3.79 | 3.90 | 3.81 | 3.80 | 3.83 | - | - | - | - | - |
| SEASONAL SPACE HEATING EFFICIENCY | % | 147 | 150 | 149 | 153 | 149 | 149 | 150 | - | - | - | - | - |
| PERFORMANCE - COOLING ONLY ^{1, 2} | | | | | | | | | | | | | |
| COOLING CAPACITY | kW | 344.9 | 361.1 | 399.3 | 446.0 | 499.5 | 525.3 | 543.0 | 598.8 | 696.0 | 724.2 | 761.4 | 798.6 |
| EER | kW/kW | 2.92 | 2.95 | 2.96 | 2.90 | 2.92 | 2.94 | 2.95 | 3.01 | 3.01 | 3.01 | 3.03 | 3.02 |
| SEASONAL EFFICIENCY IN COOLING (REG.EU 2016/2281) ¹² | | | | | | | | | | | | | |
| Prated,C | kW | 344.9 | 361.1 | 399.3 | 446.0 | 499.5 | 525.3 | 543.0 | 598.8 | 696.0 | 724.2 | 761.4 | 798.6 |
| SEER | | 4.28 | 4.39 | 4.44 | 4.36 | 4.28 | 4.37 | 4.37 | 4.56 | 4.56 | 4.56 | 4.58 | 4.56 |
| ELECTRICAL DATA | | | | | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| MAX F.L.A. ¹⁰ | Total A | 265 | 278 | 305 | 344 | 377 | 404 | 417 | 443 | 511 | 537 | 564 | 590 |
| EXCHANGERS | | | | | | | | | | | | | |
| MINIMUM WATER FLOW | l/s | 10.58 | 11.31 | 12.33 | 13.89 | 13.89 | 17.50 | 17.50 | 17.50 | 21.14 | 22.67 | 23.72 | 24.69 |
| MINIMUM WATER CONTENT | l/s | 27.58 | 26.72 | 29.92 | 36.11 | 36.11 | 38.89 | 38.89 | 41.67 | 51.72 | 56.67 | 56.67 | 60.36 |
| REFRIGERANT CIRCUIT | | | | | | | | | | | | | |
| COMPRESSORS | No. | 4 | 4 | 4 | 6 | 6 | 6 | 6 | 6 | 8 | 8 | 8 | 8 |
| CIRCUITS | No. | 2 | 2 | 2 | 3 | 3 | 3 | 3 | 3 | 4 | 4 | 4 | 4 |
| THEORETICAL REFRIGERANT CHARGE | kg | 81 | 86 | 87 | 109 | 112 | 124 | 133 | 133 | 162 | 173 | 174 | 176 |
| NOISE LEVELS | | | | | | | | | | | | | |
| TOTAL SOUND PRESSURE ⁵ | dB(A) | 77 | 77 | 77 | 76 | 77 | 77 | 77 | 78 | 77 | 78 | 78 | 78 |
| TOTAL SOUND POWER LEVEL IN COOLING ^{6, 7} | dB(A) | 97 | 97 | 97 | 97 | 98 | 98 | 98 | 99 | 99 | 100 | 100 | 100 |
| TOTAL SOUND POWER LEVEL IN HEATING ^{6, 8} | dB(A) | 97 | 97 | 97 | 97 | 98 | 98 | 98 | 0 | 0 | 0 | 0 | 0 |
| SIZE AND WEIGHT ⁹ | | | | | | | | | | | | | |
| WIDTH (A) | mm | 5080 | 5080 | 5080 | 6255 | 7430 | 7430 | 7430 | 7430 | 9780 | 9780 | 9780 | 9780 |
| DEPTH (B) | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT (H) | mm | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 |
| OPERATION WEIGHT | kg | 3350 | 3440 | 3480 | 4650 | 4900 | 5060 | 5140 | 5200 | 6580 | 6760 | 6800 | 6840 |

Notes:

1. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C.

2. Values in compliance with EN14511.

3. Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C; Source (side) heat exchanger air (in) 7.0°C - 87% R.H.

4. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C; Plant (side) heat exchanger recovery water (in/out) 40.00°C/45.00°C.

5. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.

6. Sound power on the basis of measurements taken in compliance with ISO 9614.

7. Sound power level in cooling, outdoors.

8. Sound power level in heating, outdoors.

9. Unit in standard configuration, without optional accessories.

10. Values calculated referring to the version with the maximum number of fans working at the max absorbed current. Safety values to be considered when cabling the unit for power supply and line-protections. Data valid for standard units without any additional option.

11. Seasonal space heating energy efficiency class LOW TEMPERATURE [REGULATION (EU) N. 613/2013].

12. Parameter calculated according to [REGULATION (EU) N. 2016/2281].

 Eurovent Certified Data

i-FX-N-G05 R513A Air Source Heat Pump

(453 to 1,112kW)

High Efficiency Version (/A)



Notes:

1. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C.
2. Values in compliance with EN14511
3. Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C; Source (side) heat exchanger air (in) 7.0°C - 87% R.H.
4. Seasonal space heating energy efficiency class [REGULATION (EU) N. 813/2013] - Average Weather Conditions. Calculation with variable water flow and variable temperature.
5. Parameter calculated according to [REGULATION (EU) N. 2016/2281] - EN14825.
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
8. Sound power level on the basis of measurement taken in compliance with ISO 9614.
9. Sound power level in cooling, outdoors.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

 Eurovent Certified Data

Mitsubishi Electric's **i-FX-N-G05** is our high performance reversible air source heat pump, complete with Variable Speed Drive (VSD) screw compressors and EC fans as standard.

Key Features & Benefits

- Very high seasonal efficiency in a compact footprint, offering full inverter technology
- High efficiency inverter screw compressors providing a dual refrigeration circuit resulting in lower running costs and resilient operation
- EC Fans supplied as standard
- Available options include; inbuilt hydronic pumps (fixed speed or inverter), thermal and energy meters, Smart LAN functions and many more
- Cu/Al Auxiliary Heat Exchangers supplied as standard, other protection coatings are available
- Smart defrost to increase operation time, increase COP and minimise impact on leaving water temperature

R513A

| MODEL | | 0472 | 0512 | 0572 | 0602 | 0652 | 0772 | 0902 | 1002 | 1152 |
|--|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| PERFORMANCE - HEATING ONLY ^{2 3} | | | | | | | | | | |
| TOTAL HEATING CAPACITY | kW | 453.2 | 506.8 | 547.9 | 575.7 | 664.3 | 748.1 | 872.0 | 1007 | 1112 |
| COP | kW/kW | 3.23 | 3.29 | 3.26 | 3.27 | 3.26 | 3.32 | 3.31 | 3.39 | 3.36 |
| SEASONAL EFFICIENCY IN HEATING - LOW TEMPERATURE ⁴ | | | | | | | | | | |
| RATED HEAT OUTPUT AT Tdesign, h | kW | 348.0 | 384.0 | - | - | - | - | - | - | - |
| SCOP | | 4.00 | 4.03 | - | - | - | - | - | - | - |
| PERFORMANCE - COOLING ONLY ^{1 2} | | | | | | | | | | |
| COOLING CAPACITY | kW | 464.6 | 517.4 | 549.4 | 590.4 | 669.4 | 763.6 | 898.8 | 1033 | 1153 |
| EER | kW/kW | 2.78 | 2.88 | 2.80 | 2.78 | 2.79 | 2.85 | 2.84 | 2.91 | 2.93 |
| SEASONAL EFFICIENCY IN COOLING ⁵ | | | | | | | | | | |
| Prated,C | kW | 464.6 | 517.4 | 549.4 | 590.4 | 669.4 | 763.6 | 898.8 | 1033 | 1153 |
| SEER | | 4.74 | 4.78 | 4.83 | 4.84 | 4.76 | 4.82 | 4.83 | 4.79 | 4.84 |
| PERFORMANCE η_s | % | 187 | 188 | 190 | 190 | 188 | 190 | 190 | 189 | 191 |
| ELECTRICAL DATA | | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| MAX F.L.A. ⁶ | Total A | 354 | 384 | 407 | 429 | 482 | 531 | 632 | 749 | 821 |
| EXCHANGERS | | | | | | | | | | |
| MINIMUM WATER FLOW | l/s | 11.67 | 14.69 | 14.69 | 14.25 | 15.50 | 18.06 | 22.22 | 22.22 | 27.78 |
| MINIMUM WATER CONTENT | System l | 1630 | 1800 | 1920 | 2070 | 2340 | 2670 | 3150 | 3620 | 4040 |
| REFRIGERANT CIRCUIT | | | | | | | | | | |
| COMPRESSORS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| THEORETICAL REFRIGERANT CHARGE | kg | 233 | 259 | 253 | 276 | 288 | 391 | 495 | 518 | 618 |
| NOISE LEVELS | | | | | | | | | | |
| TOTAL SOUND PRESSURE ⁷ | dB(A) | 80 | 81 | 81 | 81 | 81 | 81 | 81 | 82 | 82 |
| TOTAL SOUND POWER LEVEL IN COOLING ^{8 9} | dB(A) | 100 | 102 | 102 | 102 | 102 | 103 | 103 | 105 | 105 |
| TOTAL SOUND POWER LEVEL IN HEATING ^{8 10} | dB(A) | 101 | 103 | 103 | 103 | 103 | 104 | 104 | 106 | 106 |
| SIZE AND WEIGHT ¹¹ | | | | | | | | | | |
| WIDTH (A) | mm | 4900 | 5800 | 5800 | 5800 | 7000 | 7900 | 10000 | 11800 | 11800 |
| DEPTH (B) | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT (H) | mm | 2580 | 2580 | 2580 | 2580 | 2580 | 2580 | 2580 | 2580 | 2580 |
| OPERATION WEIGHT | kg | 6400 | 6894 | 7033 | 7256 | 7518 | 8551 | 9835 | 11578 | 12651 |

i-FX-N-G05 R513A Air Source Heat Pump

(448 to 1,101kW)

Super-Low Noise, High Efficiency
Version (/SL-A)



CLIMVENETA

Notes:

1. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger air (in) 35.0°C.
2. Values in compliance with EN14511
3. Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C; Source (side) heat exchanger air (in) 7.0°C - 87% R.H.
4. Seasonal space heating energy efficiency class [REGULATION (EU) N. 813/2013] - Average Weather Conditions. Calculation with variable waterflow and variable temperature.
5. Parameter calculated according to [REGULATION (EU) N. 2016/2281] - EN14825.
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
8. Sound power level on the basis of measurement taken in compliance with ISO 9614.
9. Sound power level in cooling, outdoors.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

 Eurovent Certified Data

Mitsubishi Electric's **i-FX-N-G05** is our high performance reversible air source heat pump, complete with Variable Speed Drive (VSD) screw compressors and EC fans as standard.

Key Features & Benefits

- Very high seasonal efficiency in a compact footprint, offering full inverter technology
- High efficiency inverter screw compressors providing a dual refrigeration circuit resulting in lower running costs and resilient operation
- EC Fans supplied as standard
- Available options include; inbuilt hydronic pumps (fixed speed or inverter), thermal and energy meters, Smart LAN functions and many more
- Cu/Al Auxiliary Heat Exchangers supplied as standard, other protection coatings are available
- Smart defrost to increase operation time, increase COP and minimise impact on leaving water temperature

R513A

| MODEL | | 0472 | 0512 | 0572 | 0602 | 0652 | 0772 | 0902 | 1002 | 1152 |
|--|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| PERFORMANCE - HEATING ONLY ^{2 3} | | | | | | | | | | |
| TOTAL HEATING CAPACITY | kW | 448.6 | 500.4 | 542.4 | 568.3 | 657.9 | 740.6 | 863.2 | 997.3 | 1101 |
| COP | kW/kW | 3.24 | 3.30 | 3.28 | 3.28 | 3.27 | 3.34 | 3.32 | 3.42 | 3.38 |
| SEASONAL EFFICIENCY IN HEATING - LOW TEMPERATURE ⁴ | | | | | | | | | | |
| RATED HEAT OUTPUT AT Tdesign, h | kW | 347.0 | 383.0 | - | - | - | - | - | - | - |
| SCOP | | 4.02 | 4.03 | - | - | - | - | - | - | - |
| PERFORMANCE - COOLING ONLY ^{1 2} | | | | | | | | | | |
| COOLING CAPACITY | kW | 443.6 | 497.1 | 531.4 | 570.3 | 648.7 | 740.2 | 869.6 | 997.3 | 1113 |
| EER | kW/kW | 2.62 | 2.77 | 2.67 | 2.61 | 2.67 | 2.74 | 2.73 | 2.79 | 2.79 |
| SEASONAL EFFICIENCY IN COOLING ⁵ | | | | | | | | | | |
| Prated, C | kW | 443.6 | 497.1 | 531.4 | 570.3 | 648.7 | 740.2 | 869.6 | 997.3 | 1113 |
| SEER | | 4.71 | 4.77 | 4.81 | 4.80 | 4.74 | 4.80 | 4.82 | 4.78 | 4.82 |
| PERFORMANCE η_s | % | 185 | 188 | 190 | 189 | 187 | 189 | 190 | 188 | 190 |
| ELECTRICAL DATA | | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| MAX F.L.A. ⁶ | Total A | 354 | 384 | 407 | 429 | 482 | 531 | 632 | 749 | 821 |
| EXCHANGERS | | | | | | | | | | |
| MINIMUM WATER FLOW | l/s | 11.67 | 14.69 | 14.69 | 14.25 | 15.50 | 18.06 | 22.22 | 22.22 | 27.78 |
| MINIMUM WATER CONTENT | System l | 1630 | 1800 | 1920 | 2070 | 2340 | 2670 | 3150 | 3620 | 4040 |
| REFRIGERANT CIRCUIT | | | | | | | | | | |
| COMPRESSORS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| THEORETICAL REFRIGERANT CHARGE | kg | 243 | 271 | 285 | 307 | 317 | 391 | 541 | 536 | 598 |
| NOISE LEVELS | | | | | | | | | | |
| TOTAL SOUND PRESSURE ⁷ | dB(A) | 72 | 73 | 73 | 73 | 73 | 73 | 73 | 74 | 74 |
| TOTAL SOUND POWER LEVEL IN COOLING ^{8 9} | dB(A) | 92 | 94 | 94 | 94 | 95 | 95 | 95 | 97 | 97 |
| TOTAL SOUND POWER LEVEL IN HEATING ^{8 10} | dB(A) | 93 | 95 | 95 | 95 | 95 | 96 | 96 | 98 | 98 |
| SIZE AND WEIGHT ¹¹ | | | | | | | | | | |
| WIDTH (A) | mm | 4900 | 5800 | 5800 | 5800 | 7000 | 7900 | 10000 | 11800 | 11800 |
| DEPTH (B) | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT (H) | mm | 2580 | 2580 | 2580 | 2580 | 2580 | 2580 | 2580 | 2580 | 2580 |
| OPERATION WEIGHT | kg | 6672 | 7155 | 7307 | 7550 | 7791 | 8921 | 10101 | 11840 | 15158 |

NX2-W-G06-H R454B Water-to-Water Heat Pump

(53 to 276kW)

Designed to accommodate a variety of applications, Climaveneta's **NX2-W-G06-H** is a compact and flexible water-to-water heat pump, which is reversible on the hydraulic side.

Key Features & Benefits

- Exceptional SEER and SCOP performance
- Rotary Scroll compressors with IDV technology
- Up to 60°C supply water temperature
- Advanced decentralised control options (MultiManager)
- Low GWP R454B refrigerant
- Inbuilt safety equipment for an A2L refrigerant
- Compatible with Variable Primary Flow (VPF)
- Compact design

R454B



| MODEL | | 0042 | 0052 | 0062 | 0072 | 0082 | 0092 | 0112 | 0122 | 0142 | 0162 | 0182 | 0202 | 0222 | 0242 |
|--|-----------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| PERFORMANCE - HEATING ONLY | | | | | | | | | | | | | | | |
| GROSS VALUE ¹ | | | | | | | | | | | | | | | |
| TOTAL HEATING CAPACITY | kW | 53.5 | 62.6 | 73.4 | 83.3 | 92.6 | 105.4 | 121.3 | 136.8 | 158.9 | 176.7 | 207.4 | 222.9 | 244.9 | 275.6 |
| TOTAL POWER INPUT | kW | 12.5 | 14.3 | 16.5 | 18.6 | 20.6 | 23.7 | 27.2 | 30.3 | 35.5 | 39.7 | 45.6 | 48.8 | 53.9 | 59.9 |
| COP | kW/kW | 4.28 | 4.38 | 4.45 | 4.48 | 4.50 | 4.45 | 4.46 | 4.52 | 4.48 | 4.45 | 4.55 | 4.57 | 4.54 | 4.60 |
| EN14511 VALUES ^{1,2} | | | | | | | | | | | | | | | |
| TOTAL HEAT CAPACITY | kW | 53.6 | 62.7 | 73.5 | 83.5 | 92.7 | 105.5 | 121.5 | 136.9 | 159.1 | 176.9 | 207.6 | 223.2 | 245.3 | 275.9 |
| COP | kW/kW | 4.04 | 4.12 | 4.23 | 4.25 | 4.32 | 4.28 | 4.29 | 4.35 | 4.31 | 4.28 | 4.35 | 4.39 | 4.34 | 4.36 |
| SEASONAL PERFORMANCE - LOW TEMPERATURE ³ | | | | | | | | | | | | | | | |
| RATED HEAT OUTPUT AT T _{designh} | kW | 63 | 74 | 87 | 99 | 110 | 125 | 144 | 163 | 189 | 210 | 247 | 265 | 291 | 325 |
| SCOP | | 6.29 | 6.51 | 6.74 | 6.71 | 6.87 | 6.89 | 6.83 | 6.83 | 6.83 | 6.78 | 6.81 | 6.81 | 7.13 | 6.61 |
| PERFORMANCE η_s | % | 243 | 254 | 262 | 261 | 267 | 268 | 265 | 265 | 265 | 263 | 264 | 264 | 277 | 256 |
| SEASONAL PERFORMANCE - MEDIUM TEMPERATURE ⁴ | | | | | | | | | | | | | | | |
| RATED HEAT OUTPUT AT T _{designh} | | 59 | 69 | 80 | 91 | 101 | 115 | 133 | 150 | 175 | 194 | 227 | 244 | 269 | 302 |
| SCOP | | 4.48 | 4.64 | 4.76 | 4.78 | 4.97 | 4.93 | 4.93 | 4.93 | 4.94 | 4.86 | 4.89 | 4.97 | 5.14 | 4.84 |
| PERFORMANCE η_s | % | 171 | 178 | 182 | 183 | 191 | 189 | 189 | 189 | 190 | 186 | 188 | 191 | 197 | 186 |
| PERFORMANCE - COOLING ONLY | | | | | | | | | | | | | | | |
| GROSS VALUE ⁵ | | | | | | | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 45.84 | 53.92 | 64.85 | 73.47 | 82.96 | 94.45 | 108.5 | 122.6 | 142.0 | 157.2 | 184.6 | 200.2 | 217.8 | 242.1 |
| TOTAL POWER INPUT | kW | 10.04 | 11.34 | 13.18 | 14.94 | 16.13 | 18.48 | 21.38 | 23.89 | 27.78 | 31.48 | 36.25 | 38.67 | 42.78 | 48.13 |
| EER | kW/kW | 4.58 | 4.77 | 4.91 | 4.93 | 5.16 | 5.10 | 5.70 | 5.13 | 5.11 | 4.99 | 5.10 | 5.17 | 5.09 | 5.03 |
| EN14511 VALUES ^{5,6} | | | | | | | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 45.7 | 53.8 | 64.7 | 73.3 | 82.8 | 94.3 | 108.3 | 122.4 | 141.7 | 156.9 | 184.3 | 199.8 | 217.4 | 241.7 |
| EER | kW/kW | 4.39 | 4.56 | 4.74 | 4.72 | 5.00 | 4.97 | 4.93 | 4.98 | 4.96 | 4.83 | 4.92 | 5.00 | 4.91 | 4.84 |
| SEASONAL PERFORMANCE ⁶ | | | | | | | | | | | | | | | |
| P _{rated,c} | kW | 45.7 | 53.8 | 64.7 | 73.3 | 82.8 | 94.3 | 108.3 | 122.4 | 141.7 | 156.9 | 184.3 | 199.8 | 217.4 | 241.7 |
| SEER | | 6.31 | 6.63 | 7.01 | 7.04 | 7.18 | 7.41 | 6.97 | 7.09 | 7.2 | 7.02 | 7.22 | 7.17 | 7.13 | 6.80 |
| PERFORMANCE η_s | % | 250 | 262 | 278 | 279 | 284 | 293 | 276 | 281 | 285 | 278 | 286 | 284 | 282 | 269 |
| ELECTRICAL DATA | | | | | | | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| FLA ⁷ | Total A | 32 | 37 | 42 | 48 | 53 | 59 | 68 | 76 | 91 | 99 | 113 | 121 | 135 | 149 |
| EXCHANGERS | | | | | | | | | | | | | | | |
| MINIMUM WATER FLOW | Evaporator l/s | 1.333 | 1.583 | 1.917 | 2.167 | 2.444 | 2.806 | 3.222 | 3.639 | 4.222 | 4.667 | 5.472 | 5.944 | 6.472 | 7.194 |
| MINIMUM WATER CONTENT | User Side l | 180 | 240 | 313 | 350 | 339 | 472 | 466 | 574 | 712 | 712 | 929 | 921 | 940 | 926 |
| MINIMUM WATER FLOW | Condenser l/s | 1.056 | 1.222 | 1.472 | 1.667 | 1.889 | 2.139 | 2.472 | 2.778 | 3.250 | 3.611 | 4.222 | 4.556 | 4.972 | 5.556 |
| HEAT EXCHANGER IN HEATING ¹¹ | | | | | | | | | | | | | | | |
| WATER FLOW | User Side l/s | 2.584 | 3.022 | 3.542 | 4.021 | 4.471 | 5.087 | 5.857 | 6.602 | 7.671 | 8.529 | 10.01 | 10.76 | 11.82 | 13.3 |
| PRESSURE DROP ² | User Side kPa | 25.3 | 25.2 | 29.0 | 34.4 | 35.3 | 42.6 | 46.6 | 57.4 | 71.2 | 71.2 | 92.9 | 92.1 | 94.0 | 92.6 |
| WATER FLOW | Source Side l/s | 3.331 | 3.92 | 4.609 | 5.243 | 5.837 | 6.622 | 7.632 | 8.631 | 10 | 11.11 | 13.1 | 14.11 | 15.48 | 17.47 |
| PRESSURE DROP ² | Source Side kPa | 84.1 | 91.1 | 55.8 | 55.3 | 54.3 | 54.2 | 59.4 | 60.1 | 61.2 | 62.0 | 71.2 | 63.4 | 75.7 | 94.6 |
| HEAT EXCHANGER USER SIDE IN COOLING ⁵ | | | | | | | | | | | | | | | |
| WATER FLOW | User Side l/s | 2.192 | 2.579 | 3.101 | 3.513 | 3.967 | 4.517 | 5.188 | 5.865 | 6.788 | 7.519 | 8.83 | 9.572 | 10.41 | 11.58 |
| PRESSURE DROP ² | User Side kPa | 36.4 | 39.4 | 25.3 | 24.8 | 25.1 | 25.2 | 27.4 | 27.7 | 28.2 | 28.4 | 32.3 | 29.2 | 34.3 | 41.5 |
| WATER FLOW | Source Side l/s | 2.66 | 3.107 | 3.716 | 4.21 | 4.721 | 5.38 | 6.186 | 6.981 | 8.086 | 8.988 | 10.52 | 11.38 | 12.41 | 13.82 |
| PRESSURE DROP ² | Source Side kPa | 26.8 | 26.6 | 32.0 | 37.7 | 17.1 | 17.0 | 17.5 | 18.3 | 18.9 | 23.0 | 23.7 | 25.3 | 26.0 | 31.9 |
| REFRIGERANT CIRCUIT | | | | | | | | | | | | | | | |
| COMPRESSORS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| CAPACITY STEPS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| REGULATION | | | | | | | | | | | | | | | |
| MINIMUM CAPACITY STEP | % | STEP | STEP | STEP | STEP | STEP | STEP | STEP | STEP | STEP | STEP | STEP | STEP | STEP | STEP |
| REFRIGERANT | | R454B | R454B | R454B | R454B | R454B | R454B | R454B | R454B | R454B | R454B | R454B | R454B | R454B | R454B |
| REFRIGERANT CHARGE ⁸ | kg | 3.4 | 4.7 | 5.0 | 6.0 | 7.2 | 8.6 | 9.9 | 11.3 | 12.5 | 13.3 | 16.3 | 19.3 | 19.7 | 19.8 |
| OIL CHARGE | | 6.0 | 6.3 | 6.3 | 6.9 | 6.9 | 9.4 | 9.7 | 9.7 | 12.2 | 12.2 | 12.2 | 12.2 | 12.2 | 12.2 |
| RC (ASHRAE) ⁹ | kg/kW | 0.08 | 0.09 | 0.08 | 0.08 | 0.09 | 0.09 | 0.09 | 0.09 | 0.09 | 0.09 | 0.09 | 0.10 | 0.09 | 0.08 |
| NOISE LEVELS | | | | | | | | | | | | | | | |
| TOTAL SOUND PRESSURE ¹⁰ | dB(A) | 57 | 58 | 59 | 61 | 61 | 63 | 63 | 63 | 69 | 70 | 70 | 70 | 72 | 72 |
| TOTAL SOUND POWER LEVEL IN COOLING ¹¹ | dB(A) | 73 | 74 | 75 | 77 | 77 | 80 | 80 | 80 | 86 | 87 | 87 | 87 | 89 | 89 |
| TOTAL SOUND POWER LEVEL IN HEATING ¹¹ | dB(A) | 74 | 75 | 76 | 78 | 78 | 81 | 81 | 81 | 87 | 88 | 88 | 88 | 90 | 90 |
| SIZE AND WEIGHT ¹² | | | | | | | | | | | | | | | |
| WIDTH | mm | 885 | 885 | 885 | 885 | 885 | 885 | 885 | 885 | 885 | 885 | 885 | 885 | 885 | 885 |
| DEPTH | mm | 1320 | 1320 | 1320 | 1320 | 1320 | 1640 | 1640 | 1640 | 1640 | 1640 | 1640 | 1640 | 1640 | 1640 |
| HEIGHT | mm | 1495 | 1495 | 1495 | 1495 | 1495 | 1805 | 1805 | 1805 | 1805 | 1805 | 1805 | 1805 | 1805 | 1805 |
| OPERATING WEIGHT | kg | 470 | 490 | 510 | 530 | 560 | 670 | 690 | 700 | 770 | 820 | 860 | 890 | 960 | 970 |

Notes:

1. User side exchanger hot water temperature (in/out) 40°C/45°C; Source side exchanger water temperature (in/out) 10°C / 7°C (or maximum calculated temperature coming from the maximum flow rate allowed).
2. Values in compliance with EN14511.
3. Seasonal space heating energy efficiency class Low Temperature [Regulation (EU) N. 813/2013]. Average Weather Conditions. Type of calculation with variable flow and variable temperature.
4. Seasonal space heating energy efficiency class Medium Temperature [Regulation (EU) N. 813/2013]. Average Weather Conditions. Type of calculation with variable flow and variable temperature.
5. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger water (in/out) 30°C/35°C.
6. Parameter calculated according to [Regulation (EU) N. 2016/2281].
7. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
8. Theoretical - refer to serial plate for actual charge volumes.
9. Rate in accordance with AHRI standard 550/590.
10. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
11. Sound power on the basis of measurement taken in compliance with ISO 9614.
12. Unit in standard configuration, without optional accessories.

Eurovent Certified Data

1.25

Commercial Heat Pumps & Chillers

i-FX-N-G05 R513A Air Source Heat Pump, Super-Low Noise, High Efficiency Version
NX2-W-G06-H R454B Water-to-Water Heat Pump

EW-HT-G05 R513A High Temperature Water-to-Water Heat Pump

(72 to 129kW)



Notes:

1. Plant (side) heat exchanger water (in/out) 70°C/78°C; Source (side) heat exchanger water (in/out) 45°C/40°C.
2. Values in compliance with EN14511.
3. Seasonal space heating energy efficiency class MEDIUM TEMPERATURE in AVERAGE climate conditions. [REGULATION (EU) N. 813/2013].
4. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
5. Sound power on the basis of measurements made in compliance with ISO 9614.
6. Sound power level in heating, indoors.
7. Unit in standard configuration/execution, without optional accessories.
8. Seasonal space heating energy efficiency.
9. Fixed flow rate and variable temperature calculation.

The Climaveneta **EW-HT-G05** is perfect for applications requiring high temperature water of up to 78°C, a key feature for your decarbonisation project by complementing your air source heat pumps to create a cascade system, replacing fossil fuel heating systems.

Key Features & Benefits

- High temperature water (78°C) for replacing fossil fuel heating systems
- Low GWP Refrigerant R513A (GWP100 = 631)*
- Compact footprint of only 1m²
- High temperature supply water of up to 78°C
- Advanced controls with W3000+ microprocessor
- Reliable and efficient with 2 independent refrigerant circuits
- Compatible with Master-Client controls, Keyboard In Pocket (KIP) interface and Building Energy Management System (BEMS) via interface cards
- Factory fitted options such as refrigerant leak detection, touch screen display, energy meter and additional soundproofing available

*IPCC AR4

| MODEL | | 0182 | 0202 | 0262 | 0302 |
|--|-------------|----------|----------|----------|----------|
| PERFORMANCE - HEATING ONLY | | | | | |
| GROSS VALUE ¹ | | | | | |
| TOTAL HEATING CAPACITY | kW | 72.9 | 85.9 | 105 | 129 |
| TOTAL POWER INPUT | kW | 19.8 | 22.9 | 28.6 | 34.3 |
| COP | kW/kW | 3.68 | 3.75 | 3.68 | 3.77 |
| EN14511 VALUES ^{1,2} | | | | | |
| TOTAL HEAT CAPACITY | kW | 73.0 | 86.0 | 105.2 | 129.3 |
| COP | kW/kW | 3.64 | 3.71 | 3.64 | 3.73 |
| SEASONAL PERFORMANCE - MEDIUM TEMPERATURE^{3,9} | | | | | |
| RATED HEAT OUTPUT AT Tdesignh | kW | 42 | 48.0 | 60 | 74 |
| SCOP | | 3.15 | 3.11 | 3.10 | 3.19 |
| PERFORMANCE ηs ⁸ | % | 118 | 116 | 116 | 120 |
| ELECTRICAL DATA | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| FLA ⁷ | Total | A | 38 | 43 | 49 |
| EXCHANGERS | | | | | |
| MINIMUM WATER CONTENT | User Side | l | 270 | 319 | 390 |
| MINIMUM WATER FLOW | Source Side | l/s | 1.33 | 1.65 | 1.98 |
| HEAT EXCHANGER IN HEATING¹ | | | | | |
| WATER FLOW | User Side | l/s | 2.23 | 2.63 | 3.21 |
| PRESSURE DROP ² | User Side | kPa | 15.90 | 14.00 | 15.80 |
| WATER FLOW | Source Side | l/s | 2.62 | 3.11 | 3.78 |
| PRESSURE DROP ² | Source Side | kPa | 19.3 | 17.7 | 18.2 |
| REFRIGERANT CIRCUIT | | | | | |
| COMPRESSORS | No. | 2 | 2 | 2 | 2 |
| NO. OF CAPACITY STEPS | No. | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 |
| REGULATION | | | | | |
| MINIMUM CAPACITY STEP | % | 50 | 50 | 50 | 50 |
| REFRIGERANT | | R513A | R513A | R513A | R513A |
| REFRIGERANT CHARGE | kg | 8.40 | 8.80 | 10.50 | 10.90 |
| OIL CHARGE | | 6.80 | 6.80 | 6.60 | 6.80 |
| NOISE LEVELS | | | | | |
| TOTAL SOUND PRESSURE ⁴ | dB(A) | 58 | 58 | 60 | 60 |
| TOTAL SOUND POWER LEVEL IN HEATING ^{5,9} | dB(A) | 74 | 74 | 76 | 76 |
| SIZE AND WEIGHT⁷ | | | | | |
| WIDTH (A) | mm | 1223 | 1223 | 1223 | 1223 |
| DEPTH (B) | mm | 877 | 877 | 877 | 877 |
| HEIGHT (H) | mm | 1496 | 1496 | 1496 | 1496 |
| OPERATION WEIGHT | kg | 380 | 390 | 415 | 430 |

EW-HT R134a High Temperature Water-to-Water Heat Pump

(70 to 279kW)



Notes:

1. Plant (side) heat exchanger water (in/out) 70°C/78°C; Source (side) heat exchanger water (in/out) 45°C/40°C.
2. Values in compliance with EN14511.
3. Seasonal space heating energy efficiency class MEDIUM TEMPERATURE in AVERAGE climate conditions. [REGULATION (EU) N. 813/2013].
4. Average sound pressure level at 1m distant, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
5. Sound power on the basis of measurements made in compliance with ISO 9614.
6. Sound power level in heating, indoors.
7. Unit in standard configuration/execution, without optional accessories.
8. Seasonal space heating energy efficiency.
9. Fixed flow rate and variable temperature calculation.

The Climaveneta **EW-HT** is perfect for applications requiring high temperature water of up to 78°C, a key feature for your decarbonisation project by complementing your air source heat pumps to create a cascade system, replacing fossil fuel heating systems.

Key Features & Benefits

- High temperature water (78°C) for replacing fossil fuel heating systems
- Compact footprint of only 1m²
- High temperature supply water of up to 78°C
- Advanced controls with W3000+ microprocessor
- Reliable and efficient with 2 independent refrigerant circuits
- Compatible with Master-Client controls, Keyboard In Pocket (KIP) interface and Building Energy Management System (BEMS) via interface cards
- Factory fitted options such as refrigerant leak detection, touch screen display, energy meter and additional soundproofing available

R134a

| MODEL | | 0152 | 0182 | 0202 | 0262 | 0302 | 0412 | 0512 | 0612 |
|--|-------------|----------|----------|----------|----------|----------|----------|----------|----------|
| PERFORMANCE - HEATING ONLY | | | | | | | | | |
| GROSS VALUE ¹ | | | | | | | | | |
| TOTAL HEATING CAPACITY | kW | 70.2 | 79.3 | 92.5 | 113 | 139 | 181 | 225 | 279 |
| TOTAL POWER INPUT | kW | 17.0 | 18.9 | 22.0 | 27.9 | 34.2 | 43.7 | 55.1 | 67.6 |
| COP | kW/kW | 4.13 | 4.20 | 4.20 | 4.05 | 4.08 | 4.14 | 4.08 | 4.13 |
| EN14511 VALUES ^{1,2} | | | | | | | | | |
| TOTAL HEAT CAPACITY | kW | 70.4 | 79.5 | 92.7 | 113 | 140 | 181 | 225 | 280 |
| COP | kW/kW | 4.01 | 4.07 | 4.08 | 3.94 | 3.98 | 4.04 | 4.01 | 4.06 |
| SEASONAL PERFORMANCE - MEDIUM TEMPERATURE^{3,9} | | | | | | | | | |
| RATED HEAT OUTPUT AT Tdesignh | kW | 38.6 | 43.6 | 50.0 | 61.6 | 78.1 | 104 | 128 | 157 |
| SCOP | | 3.27 | 3.39 | 3.45 | 3.30 | 3.30 | 3.25 | 3.27 | 3.3 |
| PERFORMANCE ηs ⁸ | % | 123 | 128 | 130 | 124 | 124 | 122 | 123 | 124 |
| ELECTRICAL DATA | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| FLA ⁷ | Total | A | 35 | 38 | 43 | 49 | 64 | 79 | 125 |
| EXCHANGERS | | | | | | | | | |
| MINIMUM WATER CONTENT | User Side | l | 250 | 290 | 330 | 410 | 530 | 680 | 1050 |
| MINIMUM WATER FLOW | Source Side | l/s | 0.94 | 1.06 | 1.22 | 1.50 | 2.03 | 2.69 | 4.08 |
| HEAT EXCHANGER IN HEATING¹ | | | | | | | | | |
| WATER FLOW | User Side | l/s | 2.15 | 2.42 | 2.83 | 3.45 | 4.26 | 5.52 | 8.54 |
| PRESSURE DROP ² | User Side | kPa | 23.9 | 25 | 24.2 | 24.2 | 19.7 | 19.8 | 20.1 |
| WATER FLOW | Source Side | l/s | 2.62 | 2.97 | 3.47 | 4.19 | 5.18 | 6.74 | 10.41 |
| PRESSURE DROP ² | Source Side | kPa | 45.4 | 46.7 | 51.8 | 53.8 | 49.7 | 50.1 | 37.6 |
| REFRIGERANT CIRCUIT | | | | | | | | | |
| COMPRESSORS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| NO. OF CAPACITY STEPS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| REGULATION | | | | | | | | | |
| MINIMUM CAPACITY STEP | % | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 |
| REFRIGERANT | | R134a | R134a | R134a | R134a | R134a | R134a | R134a | R134a |
| REFRIGERANT CHARGE | kg | 6.00 | 7.00 | 8.10 | 9.10 | 9.90 | 11.0 | 13.2 | 14.3 |
| OIL CHARGE | | 5.30 | 6.80 | 6.80 | 6.80 | 6.80 | 9.40 | 13.6 | 12.6 |
| NOISE LEVELS | | | | | | | | | |
| TOTAL SOUND PRESSURE ⁴ | dB(A) | 58 | 58 | 58 | 60 | 60 | 62 | 62 | 64 |
| TOTAL SOUND POWER LEVEL IN HEATING ^{5, 9} | dB(A) | 74 | 74 | 74 | 76 | 76 | 78 | 78 | 80 |
| SIZE AND WEIGHT⁷ | | | | | | | | | |
| WIDTH (A) | mm | 1223 | 1223 | 1223 | 1223 | 1223 | 1223 | 1223 | 1223 |
| DEPTH (B) | mm | 877 | 877 | 877 | 877 | 877 | 877 | 877 | 877 |
| HEIGHT (H) | mm | 1496 | 1496 | 1496 | 1496 | 1496 | 1496 | 1496 | 1496 |
| OPERATION WEIGHT | kg | 365 | 380 | 390 | 415 | 430 | 610 | 675 | 740 |

TX2-W-G04 /H R1234ze Water-to-Water Heat Pump

(298 to 2,510kW)



Notes:

- Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger water (in/out) 30.00°C/35.00°C.
- Plant (side) exchanger hot water temperature (in/out) 40.00°C/45.00°C; Source (side) exchanger water temperature (in/out) 10.00°C/6.71°C (or the maximum calculated temperature coming from the maximum flow rate allowed).
- Values in compliance with EN14511.
- Unit performance with inverter compressor at maximum speeds.
- Unit performance with inverter compressor at nominal speed.
- Parameter calculated according to [Regulation (EU) N. 2016/2281].
- Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
- Theoretical - refer to serial plate for actual charge volumes.
- Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
- Sound power level in cooling, indoors, on the basis of measurement taken in compliance with ISO 9614.
- Unit in standard configuration, without optional accessories.

Eurovent Certified Data

The Climaveneta **TX2-W-G04 /H** is a high performance water source reversible (on the hydraulic side) heat pump optimised for comfort heating and cooling. It uses state of the art oil free centrifugal compressors and low GWP refrigerant R1234ze, ensuring high efficiency and silent operation.

Key Features & Benefits


- Exceptional efficiency in a compact footprint
- Silent operation achieved using state of the art oil free centrifugal compressors optimised for R1234ze
- High quality shell and tube heat exchangers
- Low GWP refrigerant (GWP₁₀₀ = 1)*
- Large variety of sizes to suit a wide variety of applications
- Flexible composition with water connections to the evaporator and condenser that can be deployed on the right or left, to fit any application

*IPCC AR5



R1234ze

| MODEL | | 0251 | 0351 | 0551 | 0602 | 0702 | 0872 | 1022 | 1203 | 1314 | 1363 | 1404 | 1553 | 1584 | 1914 | 2064 |
|--|-------------|----------|-----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| PERFORMANCE - HEATING ONLY (GROSS VALUE) ^{2,3,4} | | | | | | | | | | | | | | | | |
| TOTAL HEATING CAPACITY | kW | 297.9 | 406.7 | 643.6 | 731.1 | 828.8 | 1034.0 | 1269.0 | 1398.0 | 1576.0 | 1650.0 | 1691.0 | 1905.0 | 1869.0 | 2342.0 | 2510.0 |
| TOTAL POWER INPUT | kW | 59.3 | 84.3 | 137.4 | 144.7 | 169.7 | 220.6 | 272.4 | 299.6 | 309.8 | 357.0 | 334.5 | 391.4 | 383.2 | 474.7 | 523.2 |
| COP | kW/kW | 5.02 | 4.82 | 4.68 | 5.05 | 4.88 | 4.69 | 4.66 | 4.67 | 5.09 | 4.62 | 5.06 | 4.87 | 4.88 | 4.93 | 4.80 |
| PERFORMANCE - HEATING ONLY ^{2,3,5} | | | | | | | | | | | | | | | | |
| TOTAL HEAT CAPACITY | kW | 263.6 | 366.2 | 546.0 | 642.2 | 743.4 | 907.5 | 1,091.0 | 1,245.0 | 1,394.0 | 1,448.0 | 1,494.0 | 1,623.0 | 1,639.0 | 2,009.0 | 2,146.0 |
| COP | kW/kW | 5.04 | 4.93 | 5.30 | 5.14 | 4.98 | 5.12 | 5.24 | 5.01 | 5.21 | 5.09 | 5.21 | 5.41 | 5.20 | 5.38 | 5.37 |
| PERFORMANCE - COOLING ONLY ^{1,3,5} | | | | | | | | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 209.3 | 299.8 | 425.2 | 511.6 | 601.6 | 725.4 | 850.5 | 1,016.0 | 1,108.0 | 1,146.0 | 1,197.0 | 1,264.0 | 1,319.0 | 1,571.0 | 1,681.0 |
| EER | kW/kW | 5.67 | 5.78 | 6.04 | 5.87 | 5.79 | 5.88 | 5.98 | 5.75 | 6.07 | 5.83 | 6.13 | 6.20 | 6.08 | 6.19 | 6.16 |
| SEASONAL PERFORMANCE - AMBIENT REFRIGERATION ⁶ | | | | | | | | | | | | | | | | |
| Prated,C | kW | 209.3 | 299.8 | 425.2 | 511.6 | 601.6 | 725.4 | 850.5 | 1016.0 | 1108.0 | 1146.0 | 1197.0 | 1264.0 | 1319.0 | 1571.0 | 1681.0 |
| SEER | | 8.99 | 9.15 | 9.77 | 9.36 | 9.25 | 9.53 | 10.02 | 9.33 | 9.50 | 9.31 | 9.65 | 10.16 | 9.54 | 9.83 | 10.13 |
| ELECTRICAL DATA | | | | | | | | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/500 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| FLA:7 | Total | A | 117 | 165 | 231 | 282 | 330 | 396 | 462 | 561 | 612 | 627 | 660 | 693 | 726 | 858 |
| EXCHANGERS | | | | | | | | | | | | | | | | |
| MINIMUM WATER FLOW IN COOLING ¹¹ | Evaporator | l/s | 17.61 | 17.61 | 40.28 | 45.83 | 40.28 | 50.00 | 72.22 | 61.94 | 85.28 | 87.78 | 85.28 | 108.30 | 85.28 | 134.20 |
| MINIMUM WATER FLOW IN HEATING ² | Condenser | l/s | 8.61 | 11.67 | 18.61 | 21.11 | 21.11 | 28.61 | 35.28 | 38.06 | 44.44 | 41.39 | 48.06 | 50.83 | 48.06 | 69.17 |
| HEAT EXCHANGER IN HEATING ² | | | | | | | | | | | | | | | | |
| PRESSURE DROP AT HEAT EXCHANGER | User Side | kPa | 28.50 | 29.70 | 25.20 | 28.00 | 37.50 | 30.80 | 29.80 | 26.20 | 29.30 | 29.70 | 29.00 | 31.00 | 34.90 | 34.10 |
| WATER FLOW | User Side | l/s | 12.71 | 17.66 | 26.34 | 30.98 | 35.86 | 43.78 | 52.62 | 60.07 | 67.26 | 69.88 | 72.08 | 78.33 | 79.09 | 96.95 |
| PRESSURE DROP AT HEAT EXCHANGER | Source Side | kPa | 77.40 | 80.40 | 64.90 | 68.10 | 80.70 | 82.60 | 80.70 | 67.10 | 82.90 | 66.90 | 82.90 | 81.50 | 82.90 | 84.00 |
| WATER FLOW | Source Side | l/s | 17.28 | 17.61 | 36.11 | 42.21 | 40.28 | 50.00 | 72.03 | 61.94 | 85.28 | 87.78 | 85.28 | 107.90 | 85.28 | 133.40 |
| HEAT EXCHANGER IN COOLING ¹¹ | | | | | | | | | | | | | | | | |
| PRESSURE DROP AT HEAT EXCHANGER | User Side | kPa | 26.10 | 53.40 | 20.60 | 22.90 | 41.30 | 39.80 | 25.80 | 41.30 | 32.00 | 26.10 | 37.40 | 25.60 | 45.40 | 26.40 |
| WATER FLOW | User Side | l/s | 10.03 | 14.36 | 20.35 | 24.48 | 28.79 | 34.72 | 40.70 | 48.61 | 53.01 | 54.82 | 57.29 | 60.49 | 63.11 | 75.18 |
| PRESSURE DROP AT HEAT EXCHANGER | Source Side | kPa | 24.10 | 26.50 | 20.20 | 23.60 | 32.70 | 26.10 | 24.00 | 23.30 | 24.40 | 24.80 | 24.40 | 24.70 | 29.70 | 27.40 |
| WATER FLOW | Source Side | l/s | 11.70 | 16.69 | 23.58 | 28.47 | 33.50 | 40.32 | 47.21 | 56.67 | 61.36 | 63.83 | 66.22 | 69.85 | 72.96 | 86.83 |
| REFRIGERANT CIRCUIT | | | | | | | | | | | | | | | | |
| COMPRESSORS | No. | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 4 | 3 | 4 | 3 | 4 | 4 | 4 |
| CIRCUITS | No. | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| REFRIGERANT CHARGE ⁸ | kg | 140 | 180 | 177 | 237 | 247 | 358 | 310 | 624 | 730 | 565 | 1036 | 617 | 1036 | 890 | 876 |
| NOISE LEVELS | | | | | | | | | | | | | | | | |
| TOTAL SOUND PRESSURE ⁹ | dB(A) | 75 | 76 | 78 | 76 | 77 | 78 | 79 | 79 | 78 | 80 | 78 | 79 | 79 | 80 | 80 |
| TOTAL SOUND POWER LEVEL IN COOLING ^{11,5,10} | dB(A) | 93 | 94 | 96 | 95 | 96 | 97 | 98 | 98 | 98 | 99 | 98 | 99 | 99 | 100 | 100 |
| TOTAL SOUND POWER LEVEL IN HEATING ^{2,5,10} | dB(A) | 93 | 94 | 96 | 95 | 96 | 97 | 98 | 98 | 98 | 99 | 98 | 99 | 99 | 100 | 100 |
| SIZE AND WEIGHT ¹¹ | | | | | | | | | | | | | | | | |
| WIDTH (A) | mm | 2910 | 2910 | 2910 | 2910 | 2910 | 3050 | 3050 | 3710 | 4690 | 3710 | 4690 | 4690 | 4720 | 4720 | 4720 |
| DEPTH (B) | mm | 1000 | 1000 | 1000 | 1560 | 1560 | 1620 | 1620 | 1710 | 1660 | 1710 | 1890 | 1660 | 1890 | 1890 | 1890 |
| HEIGHT (H) | mm | 1950 | 1950 | 1950 | 2190 | 2190 | 2190 | 2190 | 2260 | 2260 | 2260 | 2400 | 2260 | 2400 | 2400 | 2400 |
| OPERATION WEIGHT | kg | 2280 | 2430 | 2630 | 3780 | 3010 | 4880 | 4910 | 7060 | 8520 | 7040 | 9760 | 7950 | 9760 | 10130 | 10340 |

Front View

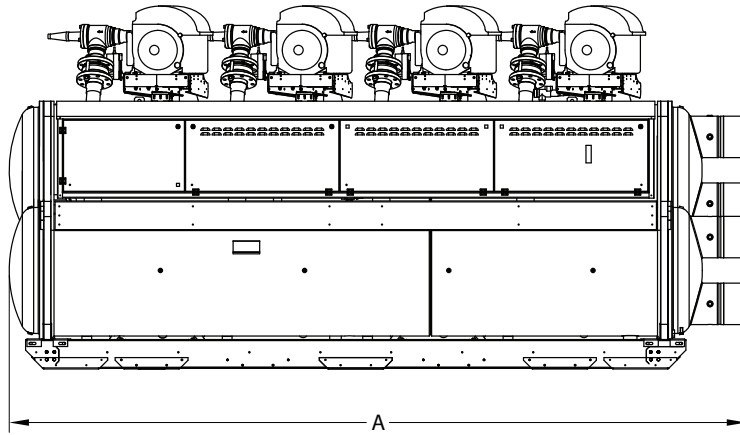

Side View

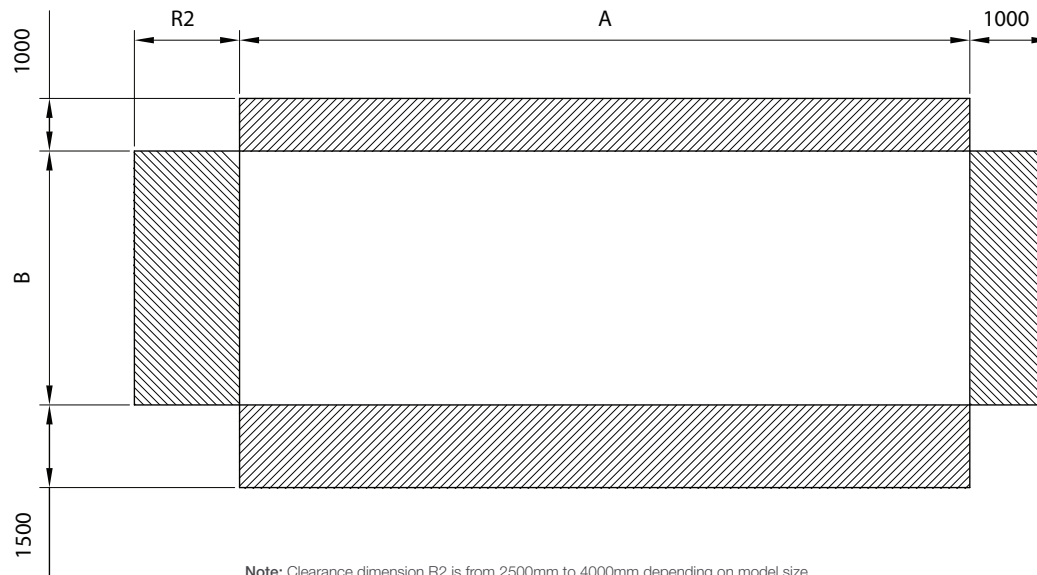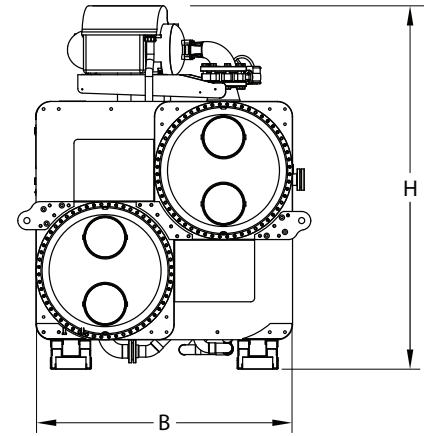

Note: Clearance dimension R2 is from 2500mm to 4000mm depending on model size.

Commercial Heat Pumps & Chillers

Our INTEGRA Simultaneous Heating & Cooling Range - An Overview

INTEGRA polyvalent heat pumps units, commonly known as 4-pipe systems, offer an innovative and efficient solution for customers requiring both heating and cooling at the same time.

Their ability to recover heat from the cooling circuit gives them exceptional versatility, combined with high energy efficiency and makes them an ideal choice for a wide range of buildings, such as large offices, hotels and hospitals alongside other premises with variable temperature control needs. The systems can be customised to adapt to the specific demands of each environment.

TER Value

In all cases where INTEGRA simultaneously produces hot and cold water, the real efficiency of the unit must be considered as the sum of heating and cooling. Measuring efficiency through traditional EER and COP indices is therefore limiting.

To objectively measure the performance in contemporary loads conditions, we calculate TER - Total Efficiency Ratio. TER is calculated as the ratio of the sum of the heating and cooling power and electrical power input. TER reaches its maximum value when the loads are completely balanced and is the most effective way to represent the real efficiency of the unit.



INTEGRA

CLIMVENETA

Commercial Heat Pumps & Chillers


Our INTEGRA range at a glance

INTEGRA polyvalent heat pumps units, commonly known as 4-pipe systems, offer an innovative and efficient solution for customers requiring both heating and cooling at the same time.



Climaveneta

Commercial polyvalent heat pumps that use a range of low GWP refrigerants, alongside the latest inverter scroll and screw compressors.

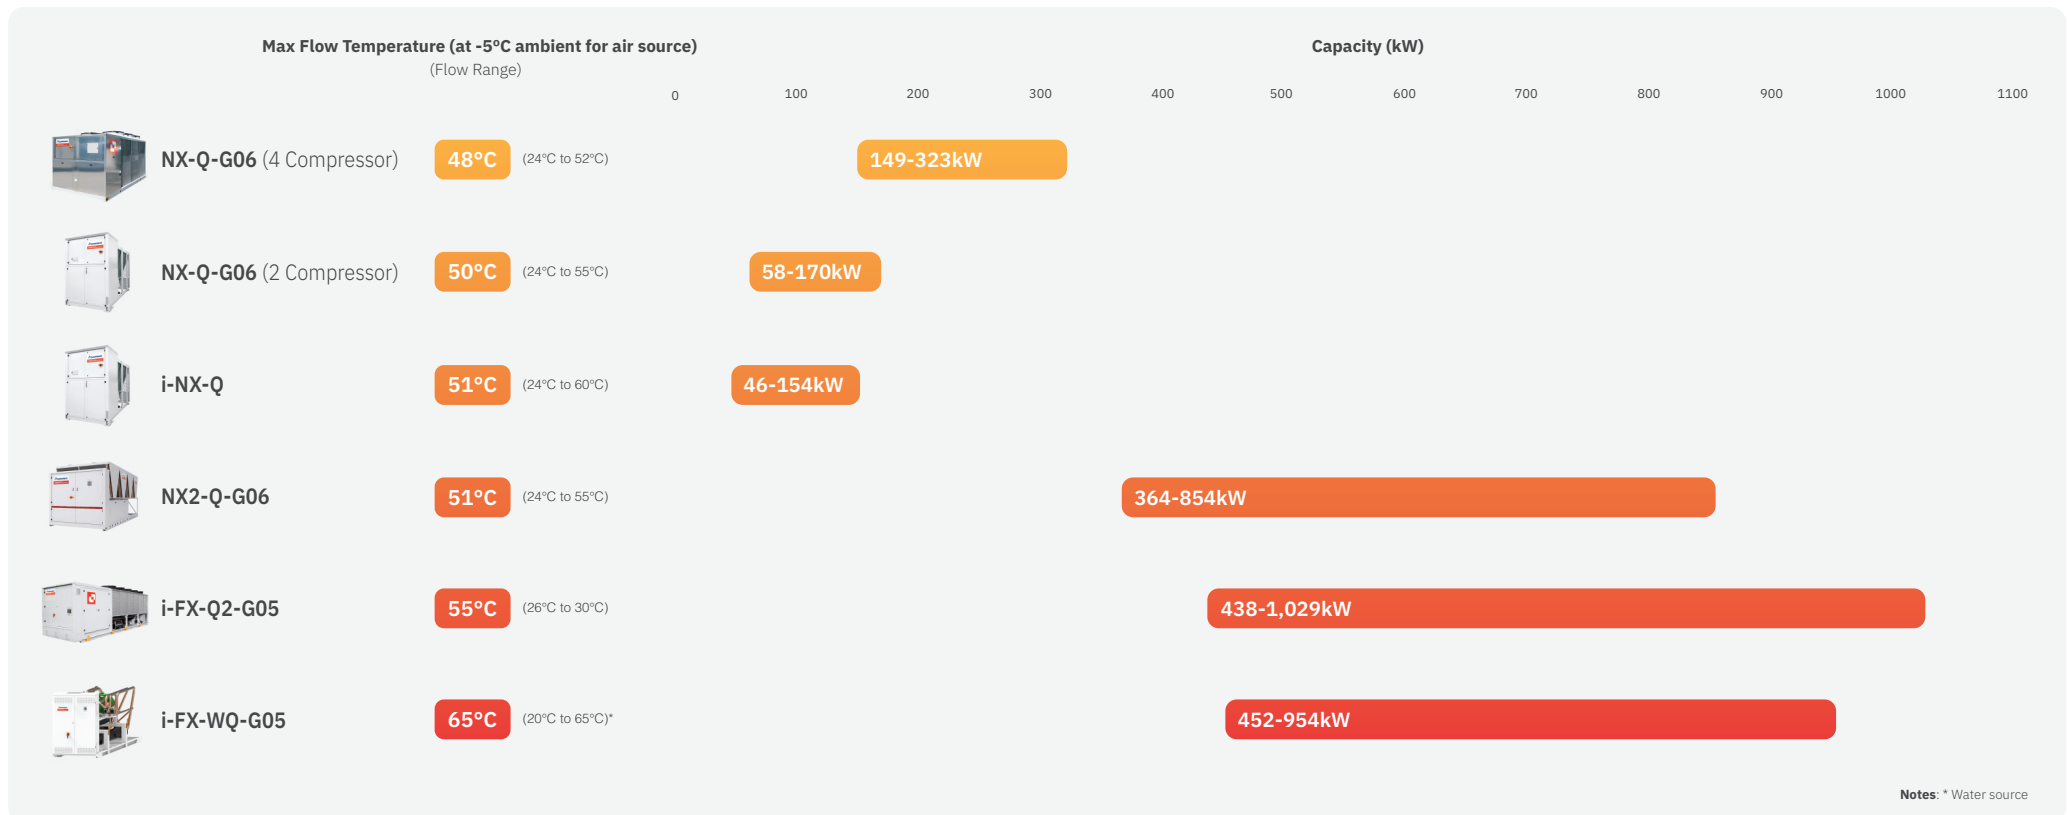

Notes: * Water source

i-NX-Q

R410A Air Source Polyvalent Unit

(48 to 165kW)

Mitsubishi Electric's **i-NX-Q** is our range of air source simultaneous heating and cooling (polyvalent / 4-pipe) using Variable Speed Drive (VSD) scroll compressors as standard.

Key Features & Benefits

- Best-in-class seasonal efficiency in a compact footprint
- High efficiency inverter scroll compressors providing a dual refrigeration circuit
- Wide range of options available including: inbuilt hydronic pumps, dual pressure relief valves, BEMS interface cards, EC Fans and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

R410A



| MODEL | | 0152P | 0182P | 0202P | 0252P | 0262P | 0302P | 0352P | 0402P | 0502P | 0552P |
|---|----------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| COOLING WITH HEAT RECOVERY^{1 2 3} | | | | | | | | | | | |
| COOLING CAPACITY | kW | 47.02 | 52.96 | 61.43 | 68.63 | 79.78 | 89.07 | 101.9 | 116.3 | 134.7 | 154.3 |
| RECOVERY HEAT EXCHANGER CAPACITY | kW | 60.15 | 68.75 | 79.38 | 89.70 | 103.6 | 116.8 | 131.1 | 151.2 | 175.6 | 200.4 |
| TOTAL POWER INPUT | kW | 14.08 | 16.98 | 19.25 | 22.64 | 25.54 | 29.85 | 31.46 | 37.66 | 44.18 | 49.98 |
| TER | kW/kW | 7.612 | 7.170 | 7.315 | 6.992 | 7.178 | 6.898 | 7.406 | 7.102 | 7.024 | 7.096 |
| PERFORMANCE - HEATING ONLY^{4 2} | | | | | | | | | | | |
| TOTAL HEAT CAPACITY | kW | 48.10 | 56.10 | 66.30 | 74.10 | 85.70 | 95.50 | 108.30 | 122.9 | 143.6 | 165.2 |
| COP | kW/kW | 3.190 | 3.16 | 3.21 | 3.12 | 3.29 | 3.22 | 3.35 | 3.28 | 3.30 | 3.29 |
| PERFORMANCE - COOLING ONLY^{1 2} | | | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 44.7 | 51.2 | 60.8 | 67.5 | 79.0 | 87.8 | 100.7 | 114.0 | 132.9 | 151.7 |
| EER | kW/kW | 2.93 | 2.84 | 2.99 | 2.78 | 2.93 | 2.74 | 3.07 | 2.86 | 2.92 | 2.95 |
| SEASONAL PERFORMANCE⁵ | | | | | | | | | | | |
| RATED HEAT OUTPUT AT Tdesignh | kW | 33.0 | 40.0 | 47.0 | 53.0 | 64.0 | 71.0 | 81.0 | 91.0 | 107.0 | 123.0 |
| SCOP | | 3.85 | 3.97 | 3.87 | 3.97 | 3.94 | 3.96 | 4.08 | 4.11 | 4.12 | 4.16 |
| ELECTRICAL DATA | | | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 |
| MAX F.L.A. ⁶ | Total A | 69 | 69 | 76 | 76 | 75 | 75 | 109 | 109 | 111 | 113 |
| EXCHANGERS | | | | | | | | | | | |
| MINIMUM WATER FLOW IN COOLING ⁴ | Evaporator l/s | 1.056 | 1.222 | 1.417 | 1.583 | 1.861 | 2.083 | 2.389 | 2.722 | 3.167 | 3.639 |
| MINIMUM WATER FLOW IN HEATING ¹ | Condenser l/s | 1.333 | 1.528 | 1.750 | 1.944 | 2.250 | 2.528 | 2.611 | 3.056 | 3.528 | 4.056 |
| REFRIGERANT CIRCUIT | | | | | | | | | | | |
| COMPRESSORS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| REFRIGERANT CHARGE ⁷ | kg | 16.4 | 20.6 | 22.2 | 22.6 | 30.6 | 30.8 | 38.4 | 38.8 | 53.2 | 60.0 |
| NOISE LEVELS | | | | | | | | | | | |
| TOTAL SOUND PRESSURE ⁸ | dB(A) | 52 | 53 | 55 | 55 | 55 | 56 | 56 | 57 | 59 | 61 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁹ | dB(A) | 84 | 85 | 87 | 87 | 87 | 88 | 88 | 89 | 91 | 93 |
| TOTAL SOUND POWER LEVEL IN HEATING ¹⁰ | dB(A) | 84 | 85 | 87 | 87 | 87 | 88 | 88 | 89 | 91 | 93 |
| SIZE AND WEIGHT¹¹ | | | | | | | | | | | |
| WIDTH (A) | mm | 2000 | 2000 | 2625 | 2625 | 2625 | 2625 | 3250 | 3250 | 3875 | 4500 |
| DEPTH (B) | mm | 1350 | 1350 | 1350 | 1350 | 1350 | 1350 | 1350 | 1350 | 1350 | 1350 |
| HEIGHT (H) | mm | 2070 | 2070 | 2070 | 2070 | 2070 | 2070 | 2070 | 2070 | 2070 | 2070 |
| OPERATION WEIGHT | kg | 800 | 820 | 930 | 930 | 1050 | 1050 | 1290 | 1300 | 1480 | 1630 |

Notes:

- Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
- Values in compliance with EN14511.
- Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
- Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
- Seasonal space heating energy efficiency class LOW TEMPERATURE (REGULATION (EU) N. 813/2013) - Average Weather Conditions.
- Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
- Theoretical - refer to serial plate for actual charge volumes.
- Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
- Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
- Sound power level in heating, outdoors.
- Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

INTEGRATA

CLIMAVENETA

i-NX-Q R410A Air Source Polyvalent Unit

(51 to 153kW)

Super-Low Noise Version (/SL)

Mitsubishi Electric's **i-NX-Q** is our range of air source simultaneous heating and cooling (polyvalent / 4-pipe) using Variable Speed Drive (VSD) scroll compressors as standard.

Key Features & Benefits

- Best-in-class seasonal efficiency in a compact footprint
- High efficiency inverter scroll compressors providing a dual refrigeration circuit
- Wide range of options available including: inbuilt hydronic pumps, dual pressure relief valves, BEMS interface cards, EC Fans and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

R410A



| MODEL | | 0152P | 0182P | 0202P | 0252P | 0262P | 0302P | 0352P | 0402P | 0502P | 0552P |
|---|----------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| COOLING WITH HEAT RECOVERY^{1 2 3} | | | | | | | | | | | |
| COOLING CAPACITY | kW | 46.05 | 52.93 | 57.65 | 65.09 | 75.01 | 84.46 | 94.47 | 109.2 | 126.20 | 145.2 |
| RECOVERY HEAT EXCHANGER CAPACITY | kW | 59.22 | 68.77 | 74.09 | 84.59 | 96.84 | 110.2 | 120.9 | 141.2 | 164.0 | 188.1 |
| TOTAL POWER INPUT | kW | 14.14 | 17.04 | 17.62 | 20.92 | 23.40 | 27.71 | 28.37 | 34.43 | 40.58 | 46.15 |
| TER | kW/kW | 7.447 | 7.142 | 7.477 | 7.154 | 7.343 | 7.026 | 7.591 | 7.272 | 7.151 | 7.222 |
| PERFORMANCE - HEATING ONLY^{4 2} | | | | | | | | | | | |
| TOTAL HEAT CAPACITY | kW | 51.20 | 59.00 | 62.50 | 70.70 | 78.50 | 93.10 | 98.10 | 114.2 | 132.4 | 153.2 |
| COP | kW/kW | 3.370 | 3.31 | 3.40 | 3.29 | 3.38 | 3.37 | 3.45 | 3.35 | 3.36 | 3.38 |
| PERFORMANCE - COOLING ONLY^{1 2} | | | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 45.6 | 52.3 | 56.3 | 62.9 | 70.9 | 84.0 | 89.5 | 105.0 | 119.9 | 138.4 |
| EER | kW/kW | 3.23 | 3.03 | 3.01 | 2.77 | 2.73 | 2.87 | 2.90 | 2.81 | 2.72 | 2.78 |
| SEASONAL PERFORMANCE⁵ | | | | | | | | | | | |
| RATED HEAT OUTPUT AT Tdesignh | kW | 37.0 | 43.0 | 45.0 | 52.0 | 59.0 | 70.0 | 74.0 | 79.0 | 97.0 | 115.0 |
| SCOP | | 3.93 | 3.97 | 3.98 | 4.00 | 3.97 | 4.04 | 4.09 | 4.01 | 4.11 | 4.13 |
| ELECTRICAL DATA | | | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 |
| MAX F.L.A ⁶ | Total A | 71 | 71 | 76 | 76 | 75 | 77 | 109 | 111 | 111 | 113 |
| EXCHANGERS | | | | | | | | | | | |
| MINIMUM WATER FLOW IN COOLING ⁴ | Evaporator l/s | 1.056 | 1.222 | 1.417 | 1.583 | 1.861 | 2.083 | 2.389 | 2.722 | 3.167 | 3.639 |
| MINIMUM WATER FLOW IN HEATING ¹ | Condenser l/s | 1.333 | 1.528 | 1.750 | 1.944 | 2.250 | 2.528 | 2.611 | 3.056 | 3.528 | 4.056 |
| REFRIGERANT CIRCUIT | | | | | | | | | | | |
| COMPRESSORS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| REFRIGERANT CHARGE ⁷ | kg | 26.7 | 27.3 | 27.8 | 29.2 | 31.2 | 43.8 | 40.6 | 45.8 | 53.4 | 60.0 |
| NOISE LEVELS | | | | | | | | | | | |
| TOTAL SOUND PRESSURE ⁸ | dB(A) | 47 | 47 | 48 | 49 | 49 | 50 | 50 | 51 | 53 | 55 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁹ | dB(A) | 79 | 79 | 80 | 81 | 81 | 82 | 82 | 83 | 85 | 87 |
| TOTAL SOUND POWER LEVEL IN HEATING ¹⁰ | dB(A) | 79 | 79 | 80 | 81 | 81 | 82 | 82 | 83 | 85 | 87 |
| SIZE AND WEIGHT¹¹ | | | | | | | | | | | |
| WIDTH (A) | mm | 2625 | 2625 | 2625 | 2625 | 2625 | 3250 | 3250 | 3250 | 3875 | 4500 |
| DEPTH (B) | mm | 1350 | 1350 | 1350 | 1350 | 1350 | 1350 | 1350 | 1350 | 1350 | 1350 |
| HEIGHT (H) | mm | 2070 | 2070 | 2070 | 2070 | 2070 | 2070 | 2070 | 2070 | 2070 | 2070 |
| OPERATION WEIGHT | kg | 960 | 960 | 990 | 990 | 1080 | 1210 | 1330 | 1440 | 1520 | 1660 |

Notes:

- Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
- Values in compliance with EN14511.
- Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
- Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
- Seasonal space heating energy efficiency class LOW TEMPERATURE (REGULATION (EU) N. 813/2013) - Average Weather Conditions.
- Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
- Theoretical - refer to serial plate for actual charge volumes.
- Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
- Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
- Sound power level in heating, outdoors.
- Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

INTEGRA

CLIMAVENETA

NX-Q-G06

R454B 2 Compressor

Air Source Polyvalent Unit

(58 to 170kW)

Mitsubishi Electric's **NX-Q-G06** is our range of air source simultaneous heating and cooling (polyvalent / 4-pipe) using two high efficiency scroll compressors as standard.

Key Features & Benefits

- Low GWP refrigerant R454B provides an environmentally friendly solution
- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors providing a dual refrigeration circuit
- Wide range of options available including: inbuilt hydronic pumps, dual pressure relief valves, BEMS interface cards, EC Fans and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

R454B



| MODEL | | 0202P | 0252P | 0262P | 0302P | 0402P | 0502P | 0602P |
|---|----------------|------------|------------|------------|------------|------------|------------|------------|
| COOLING WITH HEAT RECOVERY^{1 2 3} | | | | | | | | |
| COOLING CAPACITY | kW | 56.4 | 61.6 | 70.0 | 83.3 | 107.3 | 133.9 | 169.3 |
| RECOVERY HEAT EXCHANGER CAPACITY | kW | 70.3 | 76.8 | 87.5 | 103.9 | 134.1 | 168.7 | 213.9 |
| TOTAL POWER INPUT | kW | 14.79 | 16.32 | 18.64 | 22.07 | 28.72 | 37.33 | 47.98 |
| TER | kW/kW | 8.575 | 8.485 | 8.456 | 8.483 | 8.404 | 8.108 | 7.987 |
| PERFORMANCE - HEATING ONLY^{4 2} | | | | | | | | |
| TOTAL HEAT CAPACITY | kW | 58.3 | 64.7 | 72.3 | 86.6 | 110.8 | 139.3 | 170.6 |
| COP | kW/kW | 3.55 | 3.58 | 3.59 | 3.61 | 3.60 | 3.58 | 3.48 |
| PERFORMANCE - COOLING ONLY^{1 2} | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 55.7 | 61.4 | 68.6 | 82.0 | 106.1 | 132.1 | 161.5 |
| EER | kW/kW | 3.37 | 3.41 | 3.29 | 3.41 | 3.38 | 3.32 | 3.04 |
| SEASONAL PERFORMANCE⁵ | | | | | | | | |
| Prated,C | kW | 55.7 | 61.4 | 68.6 | 82.0 | 106.1 | 132.1 | 161.5 |
| SEER | | 4.03 | 4.16 | 3.99 | 4.11 | 4.09 | 4.02 | 3.70 |
| ELECTRICAL DATA | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 |
| MAX F.L.A ⁶ | A | 40 | 43 | 48 | 59 | 79 | 98 | 123 |
| EXCHANGERS | | | | | | | | |
| MINIMUM WATER FLOW IN COOLING ⁴ | Evaporator l/s | 1.639 | 1.750 | 2.000 | 2.361 | 3.056 | 3.889 | 4.778 |
| MINIMUM WATER FLOW IN HEATING ¹ | Condenser l/s | 1.639 | 1.750 | 2.000 | 2.361 | 3.056 | 3.889 | 4.778 |
| REFRIGERANT CIRCUIT | | | | | | | | |
| COMPRESSORS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| REFRIGERANT CHARGE ⁷ | kg | 20.6 | 25.6 | 27.8 | 33.4 | 48.2 | 54.4 | 54.9 |
| NOISE LEVELS | | | | | | | | |
| TOTAL SOUND PRESSURE ⁸ | dB(A) | 53 | 53 | 53 | 54 | 55 | 56 | 56 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁹ | dB(A) | 85 | 85 | 85 | 86 | 87 | 88 | 88 |
| TOTAL SOUND POWER LEVEL IN HEATING ¹⁰ | dB(A) | 85 | 85 | 85 | 86 | 87 | 88 | 88 |
| SIZE AND WEIGHT¹¹ | | | | | | | | |
| WIDTH (A) | mm | 2625 | 2625 | 2625 | 3250 | 3875 | 4500 | 4500 |
| DEPTH (B) | mm | 1350 | 1350 | 1350 | 1350 | 1350 | 1350 | 1350 |
| HEIGHT (H) | mm | 2070 | 2070 | 2070 | 2070 | 2070 | 2070 | 2070 |
| OPERATION WEIGHT | kg | 950 | 990 | 1000 | 1130 | 1310 | 1620 | 1650 |

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Parameter calculated according to [Regulation (EU) N. 2016/2281.
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes. b
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

INTO GRA

CLIMAVENETA

NX-Q-G06 R454B 2 Compressor Air Source Polyvalent Unit (59 to 135kW)

Super-Low Noise Version (/SL)

Mitsubishi Electric's **NX-Q-G06** is our range of air source simultaneous heating and cooling (polyvalent / 4-pipe) using two high efficiency scroll compressors as standard.

Key Features & Benefits

- Low GWP refrigerant R454B provides an environmentally friendly solution
- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors providing a dual refrigeration circuit
- Wide range of options available including: inbuilt hydronic pumps, dual pressure relief valves, BEMS interface cards, EC Fans and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

R454B



| MODEL | | 0202P | 0252P | 0262P | 0302P | 0402P | 0502P |
|---|----------------|------------|------------|------------|------------|------------|------------|
| COOLING WITH HEAT RECOVERY^{1, 2, 3} | | | | | | | |
| COOLING CAPACITY | kW | 56.4 | 61.6 | 70.0 | 83.3 | 107.3 | 134.0 |
| RECOVERY HEAT EXCHANGER CAPACITY | kW | 70.3 | 76.8 | 87.5 | 103.9 | 134.1 | 168.7 |
| TOTAL POWER INPUT | kW | 14.80 | 16.31 | 18.65 | 22.07 | 28.72 | 37.22 |
| TER | kW/kW | 8.568 | 8.488 | 8.448 | 8.482 | 8.403 | 8.135 |
| PERFORMANCE - HEATING ONLY^{4, 2} | | | | | | | |
| TOTAL HEAT CAPACITY | kW | 59.8 | 64.5 | 73.8 | 87.6 | 111.8 | 135.8 |
| COP | kW/kW | 3.66 | 3.62 | 3.70 | 3.69 | 3.68 | 3.61 |
| PERFORMANCE - COOLING ONLY^{1, 2} | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 56.1 | 60.6 | 68.6 | 81.3 | 104.0 | 125.3 |
| EER | kW/kW | 3.46 | 3.33 | 3.32 | 3.40 | 3.32 | 3.02 |
| SEASONAL PERFORMANCE⁵ | | | | | | | |
| Prated,C | kW | 56.1 | 60.6 | 68.6 | 81.3 | 104.0 | 125.3 |
| SEER | | 4.14 | 4.08 | 4.04 | 4.11 | 4.02 | 3.70 |
| ELECTRICAL DATA | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 |
| MAX F.L.A. ⁶ | Total A | 42 | 45 | 50 | 61 | 82 | 98 |
| EXCHANGERS | | | | | | | |
| MINIMUM WATER FLOW IN COOLING ⁴ | Evaporator l/s | 1.611 | 1.750 | 2.000 | 2.389 | 3.056 | 3.889 |
| MINIMUM WATER FLOW IN HEATING ¹ | Condenser l/s | 1.611 | 1.750 | 2.000 | 2.389 | 3.056 | 3.889 |
| REFRIGERANT CIRCUIT | | | | | | | |
| COMPRESSORS | No. | 2 | 2 | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 |
| REFRIGERANT CHARGE ⁷ | kg | 25.9 | 26.9 | 37.8 | 44.0 | 49.7 | 53.5 |
| NOISE LEVELS | | | | | | | |
| TOTAL SOUND PRESSURE ⁸ | dB(A) | 48 | 48 | 48 | 49 | 50 | 52 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁹ | dB(A) | 80 | 80 | 80 | 81 | 82 | 84 |
| TOTAL SOUND POWER LEVEL IN HEATING ¹⁰ | dB(A) | 80 | 80 | 80 | 81 | 82 | 84 |
| SIZE AND WEIGHT¹¹ | | | | | | | |
| WIDTH (A) | mm | 3250 | 3250 | 3250 | 3875 | 4500 | 4500 |
| DEPTH (B) | mm | 1350 | 1350 | 1350 | 1350 | 1350 | 1350 |
| HEIGHT (H) | mm | 2070 | 2070 | 2070 | 2070 | 2070 | 2070 |
| OPERATION WEIGHT | kg | 1060 | 1060 | 1120 | 1270 | 1490 | 1630 |

Notes:

- Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
- Values in compliance with EN14511.
- Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
- Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
- Parameter calculated according to [Regulation (EU) N. 2016/2281].
- Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
- Theoretical - refer to serial plate for actual charge volumes. b
- Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
- Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
- Sound power level in heating, outdoors.
- Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

INTEGRA

CLIMAVENETA

1.35

Commercial Heat
Pumps & Chillers

NX-Q-G06 R454B 2 Compressor Air Source Polyvalent Unit
NX-Q-G06 R454B 2 Compressor Air Source Polyvalent Unit, Super-Low Noise Version

NX-Q-G06

R454B 4 Compressor

Air Source Polyvalent Unit

(157 to 323kW)

Mitsubishi Electric's **NX-Q-G06** is our range of air source simultaneous heating and cooling (polyvalent / 4-pipe) using four high efficiency scroll compressors as standard.

Key Features & Benefits

- Low GWP refrigerant R454B provides an environmentally friendly solution
- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors providing a dual refrigeration circuit
- Wide range of options available including: inbuilt hydronic pumps, dual pressure relief valves, BEMS interface cards, EC Fans and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

R454B



| MODEL | | 0604 | 0704 | 0804 | 0904 | 1004 | 1104 | 1204 |
|---|----------------|----------|----------|----------|----------|----------|----------|----------|
| COOLING WITH HEAT RECOVERY^{1 2 3} | | | | | | | | |
| COOLING CAPACITY | kW | 144.6 | 165.6 | 186.1 | 210.9 | 235.9 | 269.0 | 303.7 |
| RECOVERY HEAT EXCHANGER CAPACITY | kW | 188.8 | 216.0 | 243.1 | 274.6 | 306.3 | 350.8 | 395.0 |
| TOTAL POWER INPUT | kW | 47.72 | 54.57 | 61.63 | 68.87 | 76.32 | 88.71 | 99.91 |
| TER | kW/kW | 6.987 | 6.993 | 6.963 | 7.049 | 7.105 | 6.987 | 7.003 |
| PERFORMANCE - HEATING ONLY^{4 2} | | | | | | | | |
| TOTAL HEAT CAPACITY | kW | 157.5 | 174.6 | 197.1 | 220.5 | 250.9 | 288.4 | 323.7 |
| COP | kW/kW | 2.92 | 2.90 | 2.94 | 2.98 | 2.94 | 2.99 | 3.00 |
| PERFORMANCE - COOLING ONLY^{1 2} | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 143.5 | 159.3 | 180.9 | 202.3 | 230.1 | 265.6 | 298.0 |
| EER | kW/kW | 2.58 | 2.45 | 2.53 | 2.52 | 2.55 | 2.62 | 2.63 |
| SEASONAL PERFORMANCE⁵ | | | | | | | | |
| Prated,C | kW | 143.5 | 159.3 | 180.9 | 202.3 | 230.1 | 265.6 | 298.0 |
| SEER | | 3.52 | 3.52 | 3.67 | 3.75 | 3.59 | 3.75 | 3.83 |
| ELECTRICAL DATA | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| MAX F.L.A. ⁶ | Total A | 115 | 133 | 152 | 169 | 193 | 218 | 243 |
| EXCHANGERS | | | | | | | | |
| MINIMUM WATER FLOW IN COOLING ⁴ | Evaporator l/s | 4.444 | 4.917 | 5.611 | 6.278 | 7.139 | 8.250 | 9.250 |
| MINIMUM WATER FLOW IN HEATING ¹ | Condenser l/s | 4.444 | 4.917 | 5.611 | 6.278 | 7.139 | 8.250 | 9.250 |
| REFRIGERANT CIRCUIT | | | | | | | | |
| COMPRESSORS | No. | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| REFRIGERANT CHARGE ⁷ | kg | 38.3 | 38.4 | 54.2 | 57.3 | 60.5 | 72.5 | 97.2 |
| NOISE LEVELS | | | | | | | | |
| TOTAL SOUND PRESSURE ⁸ | dB(A) | 60 | 60 | 60 | 61 | 62 | 63 | 63 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁹ | dB(A) | 92 | 92 | 92 | 93 | 94 | 95 | 95 |
| TOTAL SOUND POWER LEVEL IN HEATING ¹⁰ | dB(A) | 92 | 92 | 92 | 93 | 94 | 95 | 95 |
| SIZE AND WEIGHT¹¹ | | | | | | | | |
| WIDTH (A) | mm | 3110 | 3110 | 3110 | 4110 | 4110 | 4110 | 4110 |
| DEPTH (B) | mm | 2220 | 2220 | 2220 | 2220 | 2220 | 2220 | 2220 |
| HEIGHT (H) | mm | 2150 | 2150 | 2150 | 2150 | 2150 | 2150 | 2150 |
| OPERATION WEIGHT | kg | 1660 | 1730 | 1850 | 2130 | 2370 | 2540 | 2680 |

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Parameter calculated according to [Regulation (EU) N. 2016/2281.
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes.
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

INTEGR

CLIMAVENETA

NX-Q-G06 R454B 4 Compressor Air Source Polyvalent Unit (150 to 304kW)

Low Noise Version (/LN)



Mitsubishi Electric's **NX-Q-G06** is our range of air source simultaneous heating and cooling (polyvalent / 4-pipe) using four high efficiency scroll compressors as standard.

Key Features & Benefits

- Low GWP refrigerant R454B provides an environmentally friendly solution
- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors providing a dual refrigeration circuit
- Wide range of options available including: inbuilt hydronic pumps, dual pressure relief valves, BEMS interface cards, EC Fans and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

R454B

| MODEL | | 0604 | 0704 | 0804 | 0904 | 1004 | 1104 | 1204 |
|---|----------------|----------|----------|----------|----------|----------|----------|----------|
| COOLING WITH HEAT RECOVERY^{1 2 3} | | | | | | | | |
| COOLING CAPACITY | kW | 144.8 | 165.7 | 186.3 | 211.1 | 236.1 | 269.3 | 304.1 |
| RECOVERY HEAT EXCHANGER CAPACITY | kW | 188.8 | 216.1 | 243.2 | 274.6 | 306.4 | 351.0 | 396.1 |
| TOTAL POWER INPUT | kW | 47.50 | 54.31 | 61.35 | 68.60 | 75.96 | 88.27 | 99.33 |
| TER | kW/kW | 7.023 | 7.031 | 7.000 | 7.080 | 7.143 | 7.027 | 7.050 |
| PERFORMANCE - HEATING ONLY^{4 2} | | | | | | | | |
| TOTAL HEAT CAPACITY | kW | 150.2 | 165.8 | 186.4 | 212.2 | 238.7 | 273.2 | 304.9 |
| COP | kW/kW | 2.98 | 2.94 | 2.96 | 3.02 | 2.99 | 3.00 | 2.98 |
| PERFORMANCE - COOLING ONLY^{1 2} | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 137.0 | 150.5 | 169.7 | 190.8 | 217.9 | 249.9 | 278.8 |
| EER | kW/kW | 2.47 | 2.27 | 2.30 | 2.31 | 2.39 | 2.40 | 2.36 |
| SEASONAL PERFORMANCE⁵ | | | | | | | | |
| Prated,C | kW | 137.0 | 150.5 | 169.7 | 190.8 | 217.9 | 249.9 | 278.8 |
| SEER | | 3.59 | 3.56 | 3.57 | 3.70 | 3.60 | 3.75 | 3.72 |
| ELECTRICAL DATA | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| MAX F.L.A. ⁶ | Total A | 115 | 133 | 152 | 169 | 193 | 218 | 243 |
| EXCHANGERS | | | | | | | | |
| MINIMUM WATER FLOW IN COOLING ⁴ | Evaporator l/s | 4.444 | 4.917 | 5.611 | 6.278 | 7.139 | 8.250 | 9.250 |
| MINIMUM WATER FLOW IN HEATING ¹ | Condenser l/s | 4.444 | 4.917 | 5.611 | 6.278 | 7.139 | 8.250 | 9.250 |
| REFRIGERANT CIRCUIT | | | | | | | | |
| COMPRESSORS | No. | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| REFRIGERANT CHARGE ⁷ | kg | 38 | 38 | 54 | 57 | 61 | 73 | 97 |
| NOISE LEVELS | | | | | | | | |
| TOTAL SOUND PRESSURE ⁸ | dB(A) | 54 | 54 | 54 | 55 | 56 | 57 | 57 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁹ | dB(A) | 86 | 86 | 86 | 87 | 88 | 89 | 89 |
| TOTAL SOUND POWER LEVEL IN HEATING ¹⁰ | dB(A) | 87 | 87 | 87 | 88 | 89 | 90 | 90 |
| SIZE AND WEIGHT¹¹ | | | | | | | | |
| WIDTH (A) | mm | 3110 | 3110 | 3110 | 4110 | 4110 | 4110 | 4110 |
| DEPTH (B) | mm | 2220 | 2220 | 2220 | 2220 | 2220 | 2220 | 2220 |
| HEIGHT (H) | mm | 2150 | 2150 | 2150 | 2150 | 2150 | 2150 | 2150 |
| OPERATION WEIGHT | kg | 1660 | 1730 | 1850 | 2130 | 2370 | 2540 | 2680 |

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Parameter calculated according to [Regulation (EU) N. 2016/2281].
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes.
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

INTEGR

CLIMAVENETA

NX-Q-G06 R454B 4 Compressor Air Source Polyvalent Unit

(149 to 310kW)

Super-Low Noise Version (/SL)

Mitsubishi Electric's **NX-Q-G06** is our range of air source simultaneous heating and cooling (polyvalent / 4-pipe) using four high efficiency scroll compressors as standard.

Key Features & Benefits

- Low GWP refrigerant R454B provides an environmentally friendly solution
- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors providing a dual refrigeration circuit
- Wide range of options available including: inbuilt hydronic pumps, dual pressure relief valves, BEMS interface cards, EC Fans and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

R454B



| MODEL | | 0604 | 0704 | 0804 | 0904 | 1004 | 1104 | 1204 |
|---|----------------|----------|----------|----------|----------|----------|----------|----------|
| COOLING WITH HEAT RECOVERY^{1 2 3} | | | | | | | | |
| COOLING CAPACITY | kW | 144.8 | 165.7 | 186.2 | 211.1 | 236.1 | 269.2 | 304.0 |
| RECOVERY HEAT EXCHANGER CAPACITY | kW | 188.8 | 216.1 | 243.1 | 274.6 | 306.4 | 350.9 | 396.0 |
| TOTAL POWER INPUT | kW | 47.48 | 54.37 | 61.53 | 68.63 | 75.93 | 88.35 | 99.48 |
| TER | kW/kW | 7.027 | 7.021 | 6.978 | 7.077 | 7.146 | 7.019 | 7.037 |
| PERFORMANCE - HEATING ONLY^{4 2} | | | | | | | | |
| TOTAL HEAT CAPACITY | kW | 149.8 | 167.6 | 193.2 | 213.1 | 238.1 | 277.2 | 310.6 |
| COP | kW/kW | 3.05 | 3.03 | 3.01 | 3.00 | 3.05 | 3.10 | 3.03 |
| PERFORMANCE - COOLING ONLY^{1 2} | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 136.0 | 153.0 | 175.7 | 192.4 | 216.0 | 250.0 | 281.8 |
| EER | kW/kW | 2.48 | 2.40 | 2.46 | 2.33 | 2.39 | 2.45 | 2.42 |
| SEASONAL PERFORMANCE⁵ | | | | | | | | |
| PRated,C | kW | 136.0 | 153.0 | 175.7 | 192.4 | 216.0 | 250.0 | 281.8 |
| SEER | | 3.72 | 3.79 | 3.67 | 3.67 | 3.73 | 3.91 | 3.76 |
| ELECTRICAL DATA | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| MAX F.L.A. ⁶ | A | 115 | 133 | 160 | 176 | 193 | 218 | 251 |
| EXCHANGERS | | | | | | | | |
| MINIMUM WATER FLOW IN COOLING ⁴ | Evaporator l/s | 4.444 | 4.917 | 5.611 | 6.278 | 7.139 | 8.250 | 9.250 |
| MINIMUM WATER FLOW IN HEATING ¹ | Condenser l/s | 4.444 | 4.917 | 5.611 | 6.278 | 7.139 | 8.250 | 9.250 |
| REFRIGERANT CIRCUIT | | | | | | | | |
| COMPRESSORS | No. | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| REFRIGERANT CHARGE ⁷ | kg | 49.5 | 63.1 | 63.2 | 63.3 | 73.8 | 99.0 | 99.0 |
| NOISE LEVELS | | | | | | | | |
| TOTAL SOUND PRESSURE ⁸ | dB(A) | 50 | 50 | 51 | 51 | 51 | 53 | 54 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁹ | dB(A) | 82 | 82 | 83 | 83 | 83 | 85 | 86 |
| TOTAL SOUND POWER LEVEL IN HEATING ¹⁰ | dB(A) | 83 | 83 | 84 | 84 | 84 | 86 | 87 |
| SIZE AND WEIGHT¹¹ | | | | | | | | |
| WIDTH (A) | mm | 3110 | 3110 | 4110 | 4110 | 4110 | 5110 | 5110 |
| DEPTH (B) | mm | 2220 | 2220 | 2220 | 2220 | 2220 | 2220 | 2220 |
| HEIGHT (H) | mm | 2150 | 2150 | 2150 | 2150 | 2150 | 2150 | 2150 |
| OPERATION WEIGHT | kg | 1750 | 1850 | 2070 | 2230 | 2480 | 2810 | 2930 |

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Parameter calculated according to [Regulation (EU) N. 2016/2281.
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes.
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

INTEGR

CLIMAVENETA

NX2-Q-G06 R454B Air Source Polyvalent Unit

(367 to 583kW)

Standard Version (/K)

Mitsubishi Electric's **NX2-Q-G06** is our range of air source simultaneous heating and cooling (polyvalent / 4-pipe) using high efficiency scroll compressors.

Key Features & Benefits

- Smart and independent management of the defrost cycles
- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors providing a dual refrigeration circuit
- Electronic expansion valve supplied as standard
- Wide range of options available including: inbuilt hydronic pumps, dual pressure relief valves, BEMS interface cards, EC Fans and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

R454B



| MODEL | | 0344 | 0364 | 0404 | 0446 | 0506 | 0526 | 0546 |
|--|----------------|----------|----------|----------|----------|----------|----------|----------|
| COOLING WITH HEAT RECOVERY ^{1,2,3} | | | | | | | | |
| COOLING CAPACITY | kW | 346.9 | 366.8 | 403.0 | 451.8 | 494.3 | 533.0 | 550.6 |
| RECOVERY HEAT EXCHANGER CAPACITY | kW | 445.5 | 468.8 | 514.9 | 581.4 | 633.4 | 691.2 | 704.1 |
| TOTAL POWER INPUT | kW | 107.0 | 110.3 | 121.3 | 140.3 | 151.2 | 160.6 | 166.5 |
| TER | kW/kW | 7.41 | 7.57 | 7.57 | 7.36 | 7.46 | 7.56 | 7.53 |
| PERFORMANCE - HEATING ONLY ^{4,2} | | | | | | | | |
| TOTAL HEAT CAPACITY | kW | 367.0 | 388.9 | 417.5 | 472.3 | 515.9 | 563.5 | 583.4 |
| COP | kW/kW | 3.03 | 3.08 | 3.06 | 3.00 | 3.02 | 3.06 | 3.08 |
| PERFORMANCE - COOLING ONLY ^{1,2} | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 334.3 | 354.7 | 382.0 | 430.2 | 475.1 | 515.9 | 533.1 |
| EER | kW/kW | 2.69 | 2.78 | 2.67 | 2.62 | 2.68 | 2.78 | 2.79 |
| SEASONAL PERFORMANCE ⁵ | | | | | | | | |
| Prated,C | kW | 334.3 | 354.7 | 382.0 | 430.2 | 475.1 | 515.9 | 533.1 |
| SEER | | 3.92 | 4.04 | 4.06 | 4.00 | 3.93 | 4.07 | 4.09 |
| ELECTRICAL DATA | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| MAX FLA ⁶ | Total A | 257 | 270 | 297 | 333 | 365 | 392 | 405 |
| EXCHANGERS | | | | | | | | |
| MINIMUM WATER FLOW IN COOLING ⁴ | Evaporator l/s | 10.58 | 11.31 | 12.33 | 13.89 | 13.89 | 17.50 | 17.50 |
| MINIMUM WATER FLOW IN HEATING ¹ | Condenser l/s | 10.58 | 11.31 | 12.33 | 13.89 | 13.89 | 17.50 | 17.50 |
| REFRIGERANT CIRCUIT | | | | | | | | |
| COMPRESSORS | No. | 4 | 4 | 4 | 6 | 6 | 6 | 6 |
| CIRCUITS | No. | 2 | 2 | 2 | 3 | 3 | 3 | 3 |
| REFRIGERANT CHARGE ⁷ | kg | 77.4 | 93.6 | 93.6 | 97.2 | 108 | 124 | 125 |
| NOISE LEVELS | | | | | | | | |
| TOTAL SOUND PRESSURE ⁸ | dB(A) | 64 | 64 | 64 | 64 | 65 | 65 | 65 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁹ | dB(A) | 96 | 96 | 96 | 96 | 97 | 97 | 97 |
| TOTAL SOUND POWER LEVEL IN HEATING ¹⁰ | dB(A) | 96 | 96 | 96 | 96 | 97 | 97 | 97 |
| SIZE AND WEIGHT ¹¹ | | | | | | | | |
| WIDTH (A) | mm | 3905 | 3905 | 3905 | 4515 | 5690 | 5690 | 5690 |
| DEPTH (B) | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT (H) | mm | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 |
| OPERATION WEIGHT | kg | 3400 | 3490 | 3530 | 4670 | 5030 | 5170 | 5230 |

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Parameter calculated according to [Regulation (EU) N. 2016/2281].
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes.
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

 Eurovent Certified Data

INT_ΣGRA

CLIMAVENETA

1.39

Commercial Heat
Pumps & Chillers

NX-Q-G06 R454B 4 Compressor Air Source Polyvalent Unit, Super-Low Noise Version
NX2-Q-G06 R454B Air Source Polyvalent Unit, Standard Version

NX2-Q-G06 R454B Air Source Polyvalent Unit

(364 to 572kW)

Super-Low Noise Version (/SL)

Mitsubishi Electric's **NX2-Q-G06** is our range of air source simultaneous heating and cooling (polyvalent / 4-pipe) using high efficiency scroll compressors.

Key Features & Benefits

- Smart and independent management of the defrost cycles
- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors providing a dual refrigeration circuit
- Electronic expansion valve supplied as standard
- Wide range of options available including: inbuilt hydronic pumps, dual pressure relief valves, BEMS interface cards, EC Fans and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

R454B



| MODEL | | 0344 | 0364 | 0404 | 0446 | 0506 | 0526 | 0546 |
|--|----------------|----------|----------|----------|----------|----------|----------|----------|
| COOLING WITH HEAT RECOVERY ^{1,2,3} | | | | | | | | |
| COOLING CAPACITY | kW | 346.9 | 366.8 | 403.0 | 451.8 | 494.3 | 533.0 | 550.5 |
| RECOVERY HEAT EXCHANGER CAPACITY | kW | 445.4 | 468.8 | 514.9 | 581.4 | 633.4 | 681.2 | 704.0 |
| TOTAL POWER INPUT | kW | 106.8 | 110.2 | 121.3 | 140.1 | 150.9 | 160.3 | 166.2 |
| TER | kW/kW | 7.42 | 7.59 | 7.57 | 7.37 | 7.47 | 7.57 | 7.55 |
| PERFORMANCE - HEATING ONLY ^{4,2} | | | | | | | | |
| TOTAL HEAT CAPACITY | kW | 364.3 | 381.5 | 422.7 | 473.7 | 514.2 | 555.4 | 572.2 |
| COP | kW/kW | 3.15 | 3.13 | 3.18 | 3.10 | 3.12 | 3.15 | 3.13 |
| PERFORMANCE - COOLING ONLY ^{1,2} | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 316.0 | 336.4 | 370.2 | 409.0 | 443.6 | 486.1 | 505.7 |
| EER | kW/kW | 2.44 | 2.51 | 2.54 | 2.38 | 2.38 | 2.49 | 2.51 |
| SEASONAL PERFORMANCE ⁵ | | | | | | | | |
| Prated,C | kW | 316.0 | 336.4 | 370.2 | 409.0 | 443.6 | 486.1 | 505.7 |
| SEER | | 4.09 | 4.13 | 4.23 | 4.13 | 4.10 | 4.19 | 4.19 |
| ELECTRICAL DATA | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| MAX FLA ⁶ | Total A | 249 | 265 | 291 | 325 | 350 | 381 | 397 |
| EXCHANGERS | | | | | | | | |
| MINIMUM WATER FLOW IN COOLING ⁴ | Evaporator l/s | 10.58 | 11.31 | 12.33 | 13.89 | 13.89 | 17.50 | 17.50 |
| MINIMUM WATER FLOW IN HEATING ¹ | Condenser l/s | 10.58 | 11.31 | 12.33 | 13.89 | 13.89 | 17.50 | 17.50 |
| REFRIGERANT CIRCUIT | | | | | | | | |
| COMPRESSORS | No. | 4 | 4 | 4 | 6 | 6 | 6 | 6 |
| CIRCUITS | No. | 2 | 2 | 2 | 3 | 3 | 3 | 3 |
| REFRIGERANT CHARGE ⁷ | kg | 87.3 | 92.7 | 107 | 113 | 128 | 128 | 128 |
| NOISE LEVELS | | | | | | | | |
| TOTAL SOUND PRESSURE ⁸ | dB(A) | 56 | 56 | 56 | 57 | 57 | 57 | 57 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁹ | dB(A) | 88 | 88 | 88 | 89 | 89 | 90 | 90 |
| TOTAL SOUND POWER LEVEL IN HEATING ¹⁰ | dB(A) | 89 | 89 | 89 | 90 | 90 | 91 | 91 |
| SIZE AND WEIGHT ¹¹ | | | | | | | | |
| WIDTH (A) | mm | 4515 | 5080 | 5080 | 5690 | 5690 | 6865 | 7430 |
| DEPTH (B) | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT (H) | mm | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 |
| OPERATION WEIGHT | kg | 3700 | 3840 | 4010 | 5280 | 5390 | 5690 | 5800 |

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Parameter calculated according to [Regulation (EU) N. 2016/2281].
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes.
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

 Eurovent Certified Data

INT_ΣGRA

 CLIMAVENETA

NX2-Q-G06 R454B Air Source Polyvalent Unit

(378 to 854kW)

High Efficiency Version (/A)

Mitsubishi Electric's **NX2-Q-G06** is our range of air source simultaneous heating and cooling (polyvalent / 4-pipe) using high efficiency scroll compressors.

Key Features & Benefits

- Smart and independent management of the defrost cycles
- Exceptional seasonal efficiency in a compact footprint
- High efficiency scroll compressors providing a dual refrigeration circuit
- Electronic expansion valve supplied as standard
- Wide range of options available including: inbuilt hydronic pumps, dual pressure relief valves, BEMS interface cards, EC Fans and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

R454B



| MODEL | | 0344 | 0364 | 0404 | 0446 | 0506 | 0526 | 0546 | 0606 | 0708 | 0738 | 0768 | 0808 | |
|--|------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|-------|
| COOLING WITH HEAT RECOVERY ^{1,2,3} | | | | | | | | | | | | | | |
| COOLING CAPACITY | kW | 346.9 | 366.8 | 403.0 | 451.8 | 494.3 | 533.0 | 550.6 | 605.6 | 695.7 | 734.1 | 769.7 | 807.2 | |
| RECOVERY HEAT EXCHANGER CAPACITY | kW | 445.5 | 468.9 | 515.0 | 581.4 | 633.4 | 681.3 | 704.1 | 772.6 | 890.9 | 938.6 | 983.8 | 1030.0 | |
| TOTAL POWER INPUT | kW | 107.2 | 110.5 | 121.6 | 140.7 | 151.6 | 160.8 | 166.8 | 181.5 | 212.1 | 221.4 | 232.1 | 241.8 | |
| TER | kW/kW | 7.39 | 7.56 | 7.55 | 7.35 | 7.44 | 7.55 | 7.52 | 7.59 | 7.48 | 7.56 | 7.55 | 7.60 | |
| PERFORMANCE - HEATING ONLY ^{4,2} | | | | | | | | | | | | | | |
| TOTAL HEAT CAPACITY | kW | 378.7 | 399.7 | 429.4 | 495.5 | 534.2 | 577.0 | 599.6 | 640.6 | 753.4 | 795.3 | 826.0 | 854.1 | |
| COP | kW/kW | 3.20 | 3.21 | 3.21 | 3.19 | 3.20 | 3.21 | 3.21 | 3.26 | 3.26 | 3.28 | 3.26 | 3.26 | |
| PERFORMANCE - COOLING ONLY ^{1,2} | | | | | | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 344.9 | 361.1 | 399.3 | 446.0 | 499.5 | 525.3 | 543.0 | 598.8 | 696.0 | 724.2 | 761.4 | 798.6 | |
| EER | kW/kW | 2.92 | 2.95 | 2.96 | 2.90 | 2.92 | 2.94 | 2.95 | 3.01 | 3.01 | 3.01 | 3.03 | 3.02 | |
| SEASONAL PERFORMANCE ⁵ | | | | | | | | | | | | | | |
| Prated,C | kW | 344.9 | 361.1 | 399.3 | 446.0 | 499.5 | 525.3 | 543.0 | 598.8 | 696.0 | 724.2 | 761.4 | 798.6 | |
| SEER | | 4.28 | 4.38 | 4.44 | 4.36 | 4.28 | 4.37 | 4.36 | 4.56 | 4.56 | 4.56 | 4.58 | 4.56 | |
| ELECTRICAL DATA | | | | | | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | |
| MAX FLA ⁶ | Total | A | 265 | 278 | 305 | 344 | 377 | 404 | 417 | 443 | 511 | 537 | 590 | |
| EXCHANGERS | | | | | | | | | | | | | | |
| MINIMUM WATER FLOW IN COOLING ⁴ | Evaporator | l/s | 10.58 | 11.31 | 12.33 | 13.89 | 13.89 | 17.50 | 17.50 | 17.50 | 21.14 | 22.67 | 23.72 | 24.69 |
| MINIMUM WATER FLOW IN HEATING ¹ | Condenser | l/s | 10.58 | 11.31 | 12.33 | 13.89 | 13.89 | 17.50 | 17.50 | 17.50 | 21.14 | 22.67 | 23.72 | 24.69 |
| REFRIGERANT CIRCUIT | | | | | | | | | | | | | | |
| COMPRESSORS | No. | 4 | 4 | 4 | 6 | 6 | 6 | 6 | 6 | 8 | 8 | 8 | 8 | |
| CIRCUITS | No. | 2 | 2 | 2 | 3 | 3 | 3 | 3 | 3 | 4 | 4 | 4 | 4 | |
| REFRIGERANT CHARGE ⁷ | kg | 100 | 101 | 107 | 128 | 128 | 137 | 142 | 142 | 178 | 190 | 190 | 190 | |
| NOISE LEVELS | | | | | | | | | | | | | | |
| TOTAL SOUND PRESSURE ⁸ | dB(A) | 65 | 65 | 65 | 64 | 65 | 65 | 65 | 66 | 66 | 67 | 67 | 67 | |
| TOTAL SOUND POWER LEVEL IN COOLING ⁹ | dB(A) | 97 | 97 | 97 | 97 | 98 | 98 | 98 | 99 | 99 | 100 | 100 | 100 | |
| TOTAL SOUND POWER LEVEL IN HEATING ¹⁰ | dB(A) | 97 | 97 | 97 | 97 | 98 | 98 | 98 | | | | | | |
| SIZE AND WEIGHT ¹¹ | | | | | | | | | | | | | | |
| WIDTH (A) | mm | 5080 | 5080 | 5080 | 6255 | 7430 | 7430 | 7430 | 7430 | 9780 | 9780 | 9780 | 9780 | |
| DEPTH (B) | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | |
| HEIGHT (H) | mm | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 | 2450 | |
| OPERATION WEIGHT | kg | 3720 | 3820 | 3860 | 5290 | 5530 | 5700 | 5780 | 5840 | 7440 | 7640 | 7680 | 7720 | |

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Parameter calculated according to [Regulation (EU) N. 2016/2281].
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes.
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

INT_ΣGRA

CLIMAVENETA

1.41

Commercial Heat
Pumps & Chillers

NX2-Q-G06 R454B Air Source Polyvalent Unit, Super-Low Noise Version
NX2-Q-G06 R454B Air Source Polyvalent Unit, High Efficiency Version

i-FX-Q2-G05 R513A Air Source Polyvalent Unit

(463 to 1,029kW)

High Efficiency Version (/CA)



INT₂GRA

CLIMAVENETA

Mitsubishi Electric's **i-FX-Q2-G05** is our flagship range for air source simultaneous heating and cooling (polyvalent / 4-pipe). Thanks to its Variable Speed Drive (VSD) screw compressors and EC fans fitted as standard it brings exceptional seasonal efficiency by recovering heat from the cooling circuit to be used in the heating circuit.

Key Features & Benefits

- Best-in-class seasonal efficiency in a compact footprint
- High efficiency inverter screw compressors providing a dual refrigeration circuit
- EC fans supplied as standard
- Low GWP refrigerant R513A
- Wide range of options available including: inbuilt hydronic pumps, thermal and energy meters, Smart LAN functions and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

R513A

| MODEL | | 0502 | 0532 | 0602 | 0652 | 0702 | 0802 | 0902 | 1002 | 1102 |
|---|----------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| COOLING WITH HEAT RECOVERY^{1,2,3} | | | | | | | | | | |
| COOLING CAPACITY | kW | 488.1 | 532.5 | 570.1 | 623.5 | 682.1 | 783.9 | 913.9 | 986.8 | 1101 |
| RECOVERY HEAT EXCHANGER CAPACITY | kW | 623.1 | 681.2 | 728.8 | 795.2 | 872.3 | 1002 | 1168 | 1257 | 1405 |
| TOTAL POWER INPUT | kW | 145.7 | 160.5 | 170.6 | 185.6 | 205.6 | 234.7 | 275.7 | 292.5 | 329.6 |
| TER | kW/kW | 7.63 | 7.56 | 7.62 | 7.65 | 7.56 | 7.61 | 7.55 | 7.67 | 7.60 |
| PERFORMANCE - HEATING ONLY^{4,2} | | | | | | | | | | |
| TOTAL HEAT CAPACITY | kW | 463.4 | 491.5 | 531.3 | 599.0 | 659.5 | 765.3 | 871.2 | 938.3 | 1029 |
| COP | kW/kW | 3.31 | 3.27 | 3.00 | 3.34 | 3.32 | 3.38 | 3.33 | 3.36 | 3.35 |
| PERFORMANCE - COOLING ONLY^{1,2} | | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 487.0 | 530.8 | 569.5 | 626.3 | 688.4 | 786.9 | 914.4 | 984.6 | 1082 |
| EER | kW/kW | 2.99 | 2.99 | 2.99 | 2.99 | 2.99 | 2.99 | 3.03 | 3.01 | 2.86 |
| SEASONAL PERFORMANCE⁵ | | | | | | | | | | |
| Prated,C | kW | 487.0 | 530.8 | 569.5 | 626.3 | 688.4 | 786.9 | 914.4 | 984.6 | 1082 |
| SEER | | 5.16 | 5.10 | 5.12 | 5.09 | 5.13 | 5.03 | 4.74 | 4.67 | 4.65 |
| ELECTRICAL DATA | | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| MAX F.L.A. ⁶ | Total A | 362 | 362 | 387 | 458 | 484 | 515 | 576 | 625 | 699 |
| EXCHANGERS | | | | | | | | | | |
| MINIMUM WATER FLOW IN COOLING ⁴ | Evaporator l/s | 11.11 | 11.11 | 16.39 | 16.39 | 16.39 | 25.00 | 25.00 | 30.56 | 30.56 |
| MINIMUM WATER FLOW IN HEATING ¹ | Condenser l/s | 10.97 | 10.97 | 16.08 | 17.83 | 14.31 | 17.67 | 17.67 | 22.19 | 29.69 |
| REFRIGERANT CIRCUIT | | | | | | | | | | |
| COMPRESSORS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| REFRIGERANT CHARGE ⁷ | kg | 255 | 255 | 300 | 305 | 370 | 460 | 475 | 420 | 425 |
| NOISE LEVELS | | | | | | | | | | |
| TOTAL SOUND PRESSURE ⁸ | dB(A) | 67 | 67 | 68 | 69 | 69 | 68 | 70 | 70 | 70 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁹ | dB(A) | 100 | 100 | 101 | 102 | 102 | 101 | 103 | 103 | 103 |
| TOTAL SOUND POWER LEVEL IN HEATING ¹⁰ | dB(A) | 100 | 100 | 101 | 102 | 102 | 101 | 103 | 103 | 103 |
| SIZE AND WEIGHT¹¹ | | | | | | | | | | |
| WIDTH (A) | mm | 8150 | 8150 | 8900 | 9650 | 10400 | 10400 | 10750 | 12250 | 12250 |
| DEPTH (B) | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT (H) | mm | 2530 | 2530 | 2530 | 2530 | 2530 | 2530 | 2530 | 2530 | 2530 |
| OPERATION WEIGHT | kg | 8350 | 8380 | 9080 | 9590 | 10060 | 11010 | 12490 | 14170 | 14210 |

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Seasonal space heating energy efficiency class LOW TEMPERATURE (REGULATION EU N. 813/2013) - Average Weather Conditions.
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes.
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

 Eurovent Certified Data

i-FX-Q2-G05 R513A Air Source Polyvalent Unit

(459 to 1,018kW)

Super-Low Noise, High Efficiency
Version (/SL-CA)



INT₂GRA

CLIMAVENETA

Mitsubishi Electric's **i-FX-Q2-G05** is our flagship range for air source simultaneous heating and cooling (polyvalent / 4-pipe). Thanks to its Variable Speed Drive (VSD) screw compressors and EC fans fitted as standard it brings exceptional seasonal efficiency by recovering heat from the cooling circuit to be used in the heating circuit.

Key Features & Benefits

- Best-in-class seasonal efficiency in a compact footprint
- High efficiency inverter screw compressors providing a dual refrigeration circuit
- EC fans supplied as standard
- Low GWP refrigerant R513A
- Wide range of options available including: inbuilt hydronic pumps, thermal and energy meters, Smart LAN functions and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

R513A

| MODEL | | 0502 | 0532 | 0602 | 0652 | 0702 | 0802 | 0902 | 1002 | 1102 |
|---|----------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| COOLING WITH HEAT RECOVERY^{1,2,3} | | | | | | | | | | |
| COOLING CAPACITY | kW | 488.1 | 532.6 | 570.1 | 623.5 | 682.1 | 783.8 | 913.9 | 986.8 | 1100 |
| RECOVERY HEAT EXCHANGER CAPACITY | kW | 623.1 | 681.4 | 728.8 | 795.2 | 872.3 | 1002 | 1168 | 1257 | 1405 |
| TOTAL POWER INPUT | kW | 145.5 | 160.3 | 170.4 | 185.3 | 205.4 | 234.5 | 274.6 | 291.6 | 329.3 |
| TER | kW/kW | 7.64 | 7.57 | 7.62 | 7.66 | 7.57 | 7.61 | 7.58 | 7.70 | 7.61 |
| PERFORMANCE - HEATING ONLY^{4,2} | | | | | | | | | | |
| TOTAL HEAT CAPACITY | kW | 459.0 | 486.8 | 526.4 | 593.3 | 653.7 | 756.8 | 860.7 | 929.0 | 1018 |
| COP | kW/kW | 3.33 | 3.28 | 3.31 | 3.35 | 3.34 | 3.39 | 3.33 | 3.38 | 3.36 |
| PERFORMANCE - COOLING ONLY^{4,2} | | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 467.1 | 508.0 | 548.6 | 603.6 | 664.5 | 765.1 | 880.5 | 951.2 | 1038 |
| EER | kW/kW | 2.86 | 2.85 | 2.88 | 2.92 | 2.94 | 2.91 | 2.85 | 2.87 | 2.66 |
| SEASONAL PERFORMANCE⁵ | | | | | | | | | | |
| Prated,C | kW | 467.1 | 508.0 | 548.6 | 603.6 | 664.5 | 765.1 | 880.5 | 951.2 | 1038 |
| SEER | | 5.11 | 5.08 | 5.08 | 5.08 | 5.13 | 4.97 | 4.71 | 4.63 | 4.61 |
| ELECTRICAL DATA | | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| MAX F.L.A. ⁶ | Total A | 362 | 362 | 387 | 458 | 484 | 515 | 576 | 625 | 699 |
| EXCHANGERS | | | | | | | | | | |
| MINIMUM WATER FLOW IN COOLING ⁴ | Evaporator l/s | 11.11 | 11.11 | 16.39 | 16.39 | 16.39 | 25.00 | 25.00 | 30.56 | 30.56 |
| MINIMUM WATER FLOW IN HEATING ¹ | Condenser l/s | 10.97 | 10.97 | 16.08 | 17.83 | 14.31 | 17.67 | 17.67 | 22.19 | 29.69 |
| REFRIGERANT CIRCUIT | | | | | | | | | | |
| COMPRESSORS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| REFRIGERANT CHARGE ⁷ | kg | 255 | 255 | 300 | 305 | 370 | 460 | 475 | 420 | 425 |
| NOISE LEVELS | | | | | | | | | | |
| TOTAL SOUND PRESSURE ⁸ | dB(A) | 57 | 58 | 58 | 59 | 59 | 59 | 61 | 61 | 59 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁹ | dB(A) | 90 | 91 | 91 | 92 | 92 | 92 | 94 | 94 | 92 |
| TOTAL SOUND POWER LEVEL IN HEATING ¹⁰ | dB(A) | 90 | 91 | 91 | 92 | 92 | 92 | 94 | 94 | 92 |
| SIZE AND WEIGHT¹¹ | | | | | | | | | | |
| WIDTH (A) | mm | 8150 | 8150 | 8900 | 9650 | 10400 | 10400 | 10750 | 12250 | 12250 |
| DEPTH (B) | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT (H) | mm | 2530 | 2530 | 2530 | 2530 | 2530 | 2530 | 2530 | 2530 | 2530 |
| OPERATION WEIGHT | kg | 8800 | 8830 | 9530 | 10040 | 10510 | 11450 | 12940 | 14620 | 14660 |

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Seasonal space heating energy efficiency class LOW TEMPERATURE (REGULATION) (EU N. 813/2013) - Average Weather Conditions.
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes.
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

i-FX-Q2-G05 R513A Air Source Polyvalent Unit

(438 to 898kW)

Extra-Low Noise, High Efficiency
Version (XL-CA)



INT₂GRA

CLIMAVENETA

Mitsubishi Electric's **i-FX-Q2-G05** is our flagship range for air source simultaneous heating and cooling (polyvalent / 4-pipe). Thanks to its Variable Speed Drive (VSD) screw compressors and EC fans fitted as standard it brings exceptional seasonal efficiency by recovering heat from the cooling circuit to be used in the heating circuit.

Key Features & Benefits

- Best-in-class seasonal efficiency in a compact footprint
- High efficiency inverter screw compressors providing a dual refrigeration circuit
- EC fans supplied as standard
- Low GWP refrigerant R513A
- Wide range of options available including: inbuilt hydronic pumps, thermal and energy meters, Smart LAN functions and many more
- Copper/Aluminium auxiliary heat exchanger with other protection coating options available

R513A

| MODEL | | 0502 | 0532 | 0602 | 0652 | 0702 | 0802 | 0902 | 1002 |
|---|----------------|----------|----------|----------|----------|----------|----------|----------|----------|
| COOLING WITH HEAT RECOVERY^{1,2,3} | | | | | | | | | |
| COOLING CAPACITY | kW | 463.2 | 507.6 | 547.7 | 589.8 | 649.8 | 750.6 | 882.2 | 920.2 |
| RECOVERY HEAT EXCHANGER CAPACITY | kW | 590.9 | 648.3 | 696.5 | 752.2 | 829.8 | 959.9 | 1126 | 1178 |
| TOTAL POWER INPUT | kW | 137.2 | 151.5 | 159.7 | 174.6 | 193.8 | 224.9 | 262.8 | 278.0 |
| TER | kW/kW | 7.68 | 7.63 | 7.79 | 7.69 | 7.63 | 7.61 | 7.64 | 7.55 |
| PERFORMANCE - HEATING ONLY^{4,2} | | | | | | | | | |
| TOTAL HEAT CAPACITY | kW | 438.6 | 466.8 | 507.3 | 566.3 | 627.3 | 728.8 | 834.0 | 898.0 |
| COP | kW/kW | 3.35 | 3.31 | 3.35 | 3.37 | 3.36 | 3.41 | 3.37 | 3.41 |
| PERFORMANCE - COOLING ONLY^{4,2} | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 442.5 | 483.0 | 525.3 | 571.2 | 632.0 | 731.4 | 847.1 | 911.7 |
| EER | kW/kW | 2.87 | 2.83 | 2.90 | 2.94 | 2.95 | 2.91 | 2.86 | 2.87 |
| SEASONAL PERFORMANCE⁵ | | | | | | | | | |
| Prated,C | kW | 442.5 | 483.0 | 525.3 | 571.2 | 632.0 | 731.4 | 847.1 | 911.7 |
| SEER | | 5.10 | 5.08 | 5.10 | 5.04 | 5.19 | 5.00 | 4.60 | 4.56 |
| ELECTRICAL DATA | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| MAX F.L.A. ⁶ | Total A | 333 | 352 | 387 | 420 | 464 | 515 | 576 | 625 |
| EXCHANGERS | | | | | | | | | |
| MINIMUM WATER FLOW IN COOLING ⁴ | Evaporator l/s | 11.11 | 11.11 | 16.39 | 16.39 | 16.39 | 25.00 | 25.00 | 30.56 |
| MINIMUM WATER FLOW IN HEATING ¹ | Condenser l/s | 10.97 | 10.97 | 16.08 | 17.83 | 14.31 | 17.67 | 17.67 | 22.19 |
| REFRIGERANT CIRCUIT | | | | | | | | | |
| COMPRESSORS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| REFRIGERANT CHARGE ⁷ | kg | 255 | 255 | 300 | 305 | 370 | 460 | 475 | 420 |
| NOISE LEVELS | | | | | | | | | |
| TOTAL SOUND PRESSURE ⁸ | dB(A) | 53 | 54 | 55 | 55 | 55 | 56 | 55 | 56 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁹ | dB(A) | 86 | 87 | 88 | 88 | 88 | 89 | 88 | 89 |
| TOTAL SOUND POWER LEVEL IN HEATING ¹⁰ | dB(A) | 87 | 88 | 89 | 89 | 89 | 90 | 89 | 90 |
| SIZE AND WEIGHT¹¹ | | | | | | | | | |
| WIDTH (A) | mm | 8150 | 8150 | 8900 | 9650 | 10400 | 10400 | 10750 | 12250 |
| DEPTH (B) | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT (H) | mm | 2530 | 2530 | 2530 | 2530 | 2530 | 2530 | 2530 | 2530 |
| OPERATION WEIGHT | kg | 8800 | 8830 | 9530 | 10040 | 10510 | 11450 | 12940 | 14620 |

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 12°C/7°C; Plant (side) heat exchanger water (in/out) 40°C / 45°C.
4. Plant (side) exchanger hot water temperature (in/out) 40°C/45°C; Source (side) heat exchanger air (in) 7°C - 87% R.H.
5. Seasonal space heating energy efficiency class LOW TEMPERATURE (REGULATION (EU) N. 813/2013) - Average Weather Conditions.
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Theoretical - refer to serial plate for actual charge volumes.
8. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
9. Sound power level in cooling, outdoors, on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in heating, outdoors.
11. Unit in standard configuration, without optional accessories.

 Eurovent Certified Data

i-FX-WQ-G05 R513A Water Source Polyvalent Unit

(451 to 953kW)



INT₂GRA

CLIMAVENETA

Mitsubishi Electric's **i-FX-WQ-G05** is our high performance water source simultaneous heating and cooling unit (Polyvalent / 6-pipe) that is fitted with Variable Speed Drive (VSD) screw compressors as standard.

Key Features & Benefits

- Compact and considered design
- Exceptional efficiency with inverter screw compressors across twin circuits
- High quality shell and tube heat exchangers
- Dual Pressure Relief Valves (PRV) and Electronic Expansion Valves (EEV) as standard
- Low GWP refrigerant R513A
- A wide range of options including; acoustic enclosure, thermal and energy meters, smart LAN functions and many more

R513A

| MODEL | | 0402 | 0452 | 0532 | 0592 | 0632 | 0702 | 0792 | 0852 |
|--|----------------|----------|----------|----------|----------|----------|----------|----------|----------|
| COOLING WITH HEAT RECOVERY^{1,2} | | | | | | | | | |
| COOLING CAPACITY | kW | 353.9 | 401.5 | 471.2 | 520.7 | 558.6 | 626.9 | 700.7 | 750.4 |
| RECOVERY HEAT EXCHANGER CAPACITY | kW | 451.9 | 512.9 | 597.0 | 662.0 | 712.0 | 800.2 | 888.8 | 953.9 |
| TOTAL POWER INPUT | kW | 106.1 | 120.7 | 136.1 | 153.3 | 166.3 | 187.8 | 203.4 | 220.5 |
| TER | kW/kW | 7.59 | 7.57 | 7.85 | 7.71 | 7.64 | 7.59 | 7.81 | 7.73 |
| PERFORMANCE - HEATING ONLY^{3,2} | | | | | | | | | |
| TOTAL HEAT CAPACITY | kW | 451.9 | 512.9 | 597.0 | 662.0 | 712.0 | 800.2 | 888.8 | 953.9 |
| COP | kW/kW | 4.29 | 4.28 | 4.42 | 4.35 | 4.31 | 4.29 | 4.40 | 4.36 |
| PERFORMANCE - COOLING ONLY^{1,2} | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 407.6 | 462.3 | 544.5 | 602.9 | 648.0 | 725.8 | 813.3 | 871.5 |
| EER | kW/kW | 5.03 | 5.01 | 5.22 | 5.15 | 5.10 | 5.06 | 5.21 | 5.14 |
| SEASONAL PERFORMANCE IN COOLING - AMBIENT REFRIGERATION | | | | | | | | | |
| Prated,C | kW | 394.4 | 447.3 | 526.2 | 582.2 | 624.8 | 700.1 | 784.4 | 840.7 |
| SEER | | 6.48 | 6.49 | 6.51 | 6.57 | 6.53 | 6.52 | 6.54 | 6.54 |
| ELECTRICAL DATA | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| MAX FLA ⁹ | Total A | 241 | 270 | 304 | 338 | 381 | 428 | 454 | 480 |
| EXCHANGERS | | | | | | | | | |
| MINIMUM WATER FLOW IN COOLING ⁴ | Evaporator l/s | 12.50 | 15.28 | 17.22 | 17.22 | 21.67 | 24.44 | 26.11 | 26.11 |
| MINIMUM WATER FLOW TO HEAT EXCHANGER | Source l/s | 7.02 | 7.97 | 9.16 | 10.06 | 11.00 | 12.25 | 13.83 | 15.00 |
| MINIMUM WATER FLOW IN HEATING ¹ | Condenser l/s | 12.50 | 15.28 | 17.22 | 17.22 | 21.67 | 24.44 | 26.11 | 26.11 |
| REFRIGERANT CIRCUIT | | | | | | | | | |
| COMPRESSORS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| THEORETICAL REFRIGERANT CHARGE | kg | 80 | 80 | 102 | 102 | 126 | 152 | 152 | 137 |
| NOISE LEVELS | | | | | | | | | |
| TOTAL SOUND PRESSURE ⁷ | dB(A) | 65 | 65 | 66 | 67 | 67 | 67 | 67 | 67 |
| TOTAL SOUND POWER LEVEL IN COOLING ^{8,9} | dB(A) | 97 | 97 | 98 | 99 | 99 | 99 | 99 | 99 |
| TOTAL SOUND POWER LEVEL IN HEATING ^{8,10} | dB(A) | 97 | 97 | 98 | 99 | 99 | 99 | 99 | 99 |
| SIZE AND WEIGHT¹¹ | | | | | | | | | |
| WIDTH (A) | mm | 5000 | 5000 | 5000 | 5000 | 5000 | 5550 | 5550 | 5550 |
| DEPTH (B) | mm | 1400 | 1400 | 1400 | 1400 | 1400 | 1400 | 1400 | 1400 |
| HEIGHT (H) | mm | 1950 | 1950 | 2050 | 2050 | 2050 | 2050 | 2050 | 2050 |
| OPERATION WEIGHT | kg | 4010 | 4030 | 5520 | 5860 | 5984 | 6414 | 6884 | 7294 |

Notes:

1. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Source (side) heat exchanger water (in/out) 14.00°C/30.00°C.
2. Values in compliance with EN14511.
3. Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C; Source (side) heat exchanger water (in/out) 14.00°C/7.00°C.
4. Plant (side) cooling exchanger water (in/out) 12.00°C/7.00°C; Plant (side) heat exchanger water (in/out) 40.00°C/45.00°C.
5. Plant (side) cooling exchanger water /7.00°C (same water flow rate found during the cooling mode); Plant (side) heat exchanger water /45.00°C (same water flow rate found during the heating mode).
6. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to databook.
7. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
8. Sound power on the basis of measurements taken in compliance with ISO 9614.
9. Sound power level in cooling.
10. Sound power level in heating.
11. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

1.45

Commercial Heat
Pumps & Chillers

i-FX-Q2-G05 R513A Air Source Polyvalent Unit, Extra-Low Noise, High Efficiency Version
i-FX-WQ-G05 R513A Water Source Polyvalent Unit

Commercial Heat Pumps & Chillers

Our Chiller Range - An Overview

Consisting of a wide range of models, the Mitsubishi Electric range of chillers are a new generation of water chiller designed for comfort and process cooling applications.

Modern multi-function buildings, shopping centres, large business centres and process cooling are just some of the examples where increased comfort and precision control are required. The Mitsubishi Electric range of chillers can deliver all of this and more through their ability to be easily integrated into ever increasingly complex building systems.

In order to maximise performance, reliability and overall system efficiency, the Mitsubishi Electric range of products bring advanced technology and know-how together in customisable packages to aid design, specification, installation and on-going operation.

- Advanced modular technology
- Scalable and fully customisable
- Air source and water cooled versions
- Plate or Shell & Tube heat exchanger options



Flexible Application Options

Comfort Cooling

By using hydronic terminals, a simple application of a chiller can include cooling a space or environment to a set temperature. By using water as the medium of energy, high sensible cooling and stable room temperatures can be achieved.

- | | |
|------------------------------------|--------------------------|
| ■ Retail stores / Shopping centres | ■ Schools / Universities |
| ■ Airports | ■ Museums |
| ■ Offices | ■ Hotels and Resorts |
| ■ Cinemas / Theatres | ■ Hospitals / Healthcare |

Process Cooling

During manufacturing processes, many substances become hot and if overheated can negatively effect the productivity and efficiency of the process. By correctly applying a chiller it is possible to ensure optimum temperatures and conditions are maintained at a steady state.

- Manufacturing processes
- Automotive and Electronic processes
- Energy and Power generation
- Industrial technology
- IT Cooling



CLIMAVENETA

Commercial Heat Pumps & Chillers

Our Chiller range at a glance

A wide range of advanced, customisable models for use in efficiently cooling a space or an environment to a set temperature. Our chillers fall into two broad ranges:




Mitsubishi Electric - Modular chillers manufactured to the highest quality standard, and suitable for a range of different applications, from comfort to industrial and even IT cooling processes.

Climaveneta - Chillers that use a wide range of low and lower GWP refrigerants, alongside the latest fixed speed/inverter scroll and screw compressors.



MECH-iB-G07 R32 Air Cooled Chiller

(15 to 38kW)



Mitsubishi Electric's **MECH-iB-G07** chiller provides a compact and convenient solution to your small-scale cooling needs. Designed to meet the highest of quality standards, the range uses variable speed scroll compressors optimised for using the lower GWP refrigerant R32.

Key Features & Benefits

- Extended cooling envelope
- Compact design
- Providing fluid leaving temperatures as low as -12°C
- Operates down to -20°C ambient temperatures
- Low GWP R32 Refrigerant
- High seasonal efficiency (EER, SEER, SEPR)
- Plug & Play with Integrated hydronic pump, flow switch and expansion vessel


R32

| MODEL | | 15Y | 18Y | 23Y | 27Y | 35Y | 40Y |
|--|----------------|-------------------|------------|------------|------------|------------|------------|
| PERFORMANCE - COOLING ONLY | | | | | | | |
| GROSS VALUE ¹ | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 14.93 | 17.79 | 21.03 | 27.73 | 32.51 | 38.19 |
| TOTAL POWER INPUT | kW | 4.83 | 5.23 | 6.50 | 8.42 | 9.90 | 11.88 |
| EER | kW/kW | 3.09 | 3.40 | 3.23 | 3.29 | 3.28 | 3.21 |
| EN14511 VALUES ^{1,2} | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 15.00 | 17.90 | 21.10 | 27.80 | 32.70 | 38.40 |
| EER | kW/kW | 3.10 | 3.40 | 3.25 | 3.31 | 3.30 | 3.23 |
| SEASONAL PERFORMANCE ³ | | | | | | | |
| Prated, C | kW | 15.0 | 17.9 | 21.1 | 27.8 | 32.7 | 38.4 |
| SEER | | 5.23 | 5.4 | 5.66 | 5.39 | 5.46 | 5.24 |
| PERFORMANCE HS | % | 206.0 | 213.0 | 223.0 | 212.0 | 215.0 | 207.0 |
| ELECTRICAL DATA | | | | | | | |
| POWER SUPPLY | Total | V/ph/Hz | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 |
| F.L.A. ⁴ | | A | 11 | 12 | 15 | 20 | 28 |
| EXCHANGERS | | | | | | | |
| MINIMUM WATER FLOW | Heat Exchanger | l/s | 0.389 | 0.464 | 0.581 | 0.728 | 0.856 |
| MINIMUM WATER CONTENT | System | l | 75 | 90 | 115 | 140 | 165 |
| HEAT EXCHANGER USER SIDE IN COOLING ^{1,2} | | | | | | | |
| WATER FLOW | | l/s | 0.714 | 0.851 | 1.005 | 1.326 | 1.554 |
| PRESSURE DROP | | kPa | 15.2 | 21.6 | 15.1 | 20.5 | 25.1 |
| REFRIGERANT CIRCUIT | | | | | | | |
| COMPRESSORS | | l/s | 1 | 1 | 1 | 1 | 1 |
| CIRCUITS | | kPa | 1 | 1 | 1 | 1 | 1 |
| REGULATION | | | | | | | |
| MINIMUM CAPACITY STEP | | % | 32 | 34 | 29 | 30 | 26 |
| REFRIGERANT | | | R32 | R32 | R32 | R32 | R32 |
| REFRIGERANT CHARGE ⁵ | | kg | 2.10 | 2.83 | 3.60 | 4.74 | 5.67 |
| OIL CHARGE | | | 1.00 | 1.00 | 1.00 | 2.30 | 2.30 |
| RC (ASHRAE) ⁶ | | kg/kW | 0.14 | 0.16 | 0.17 | 0.17 | 0.18 |
| FANS | | | | | | | |
| QUANTITY | | No. | 2 | 2 | 1 | 2 | 2 |
| AIRFLOW | | m ³ /s | 1.84 | 1.95 | 2.34 | 4.52 | 4.35 |
| POWER INPUT | | kW | 0.22 | 0.22 | 0.39 | 0.78 | 0.78 |
| NOISE LEVELS | | | | | | | |
| TOTAL SOUND PRESSURE ⁷ | | dB(A) | 39 | 40 | 45 | 46 | 47 |
| TOTAL SOUND POWER LEVEL IN COOLING ^{8,9} | | dB(A) | 70 | 71 | 76 | 78 | 79 |
| SIZE AND WEIGHT ¹⁰ | | | | | | | |
| WIDTH (A) | | mm | 900 | 900 | 1450 | 1450 | 1700 |
| DEPTH (B) | | mm | 420 | 420 | 550 | 550 | 650 |
| HEIGHT (H) | | mm | 1390 | 1390 | 1200 | 1700 | 1700 |
| OPERATION WEIGHT | | kg | 144 | 155 | 207 | 256 | 306 |


Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C
2. Values in compliance with EN14511
3. Parameter calculated according to [Regulation (EU) N. 2016/2281]
4. Values calculated referring to the version with the maximum number of fans working at the max absorbed current. Safety values to be considered when cabling the unit for power supply and line-protection. Data valid for standard units without any additional options and only indicative. Refer to databook.
5. Theoretical - refer to serial plate for actual charge volumes
6. Rate in accordance with AHRI standard 550/590
7. Average sound pressure level at 1m distance, unit in a free field on a reflective surface;
8. non-binding value calculated from the sound power level.
9. Sound power on the basis of measurement taken in compliance with ISO 9614.
10. Sound power level in cooling, outdoors.
10. Unit in standard configuration, without optional accessories.


 Eurovent Certified Data

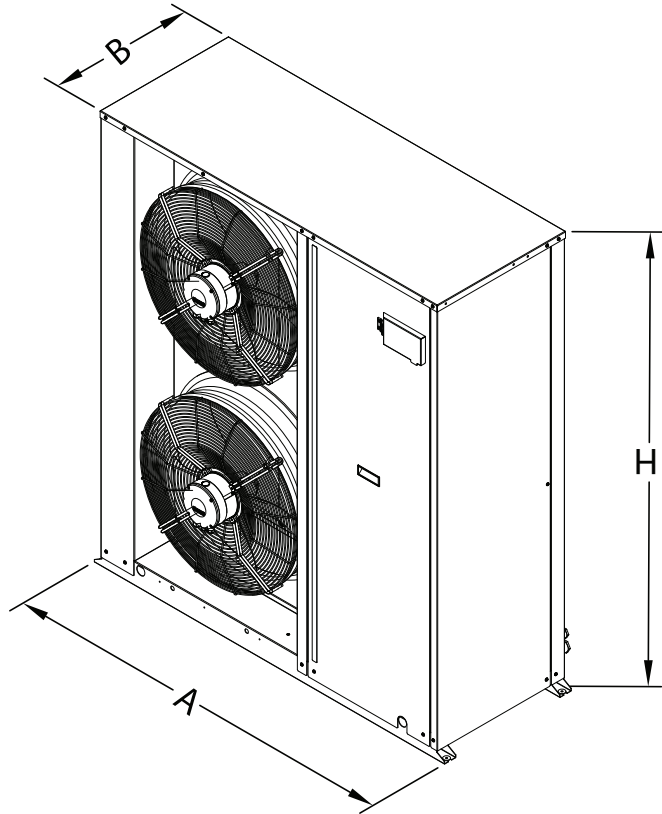

Front View

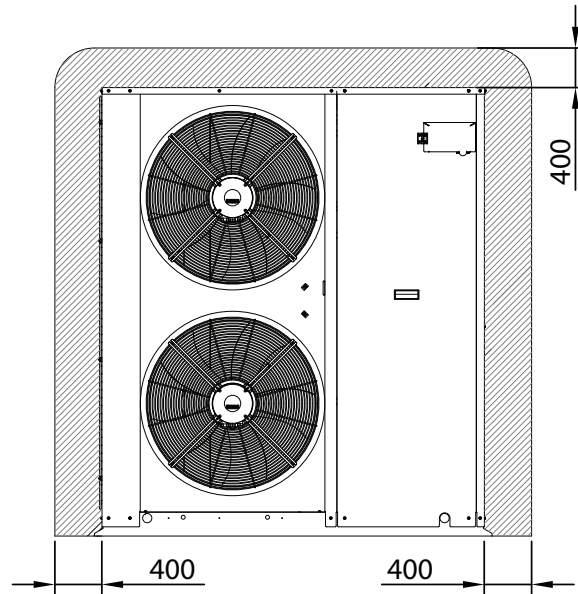

Top View

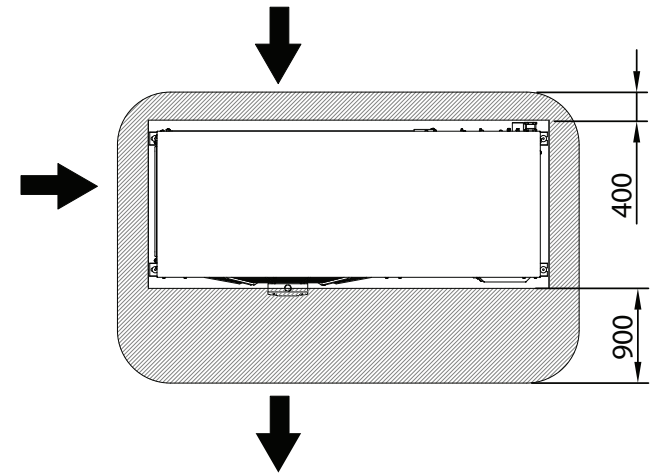

MECH-iS-G07 R32 Modular Air Cooled Chiller

(50 to 880kW)



Mitsubishi Electric's **MECH-iS-G07** chiller range is manufactured to the highest quality standards. Featuring a compact design and modular expansion capabilities, it is suitable for many different applications, from comfort to industrial applications and even IT cooling processes.

Key Features & Benefits

- Industry leading seasonal performance (SEER)
- Extremely quiet unit in a compact design
- Wide operating envelope down to -20°C ambient*
- Variable speed fans with Brushless DC motors (BLDC) and inverter compressors in an acoustic enclosure as standard
- Lower GWP Refrigerant R32
- Wide range of options available including: inbuilt hydronic pumps, buffer vessels, energy meters, Smart LAN functions and many more
- Aluminum micro-channel heat exchangers as standard with options for copper/aluminum coils with protection coating

*Additional low temperature protections may be required.

R32

| MODEL | | 0051 | 0061 | 0071 | 0082 | 0092 | 0102 | 0112 |
|---|--------------------|----------|----------|----------|----------|----------|----------|----------|
| PERFORMANCE - COOLING ONLY | | | | | | | | |
| EN 14511 VALUES ^{1,2} | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 50.0 | 60.0 | 70.0 | 80.0 | 90.0 | 100.0 | 110.0 |
| EER | kW/kW | 3.28 | 3.11 | 2.58 | 3.02 | 2.74 | 3.15 | 2.87 |
| SEASONAL PERFORMANCE ³ | | | | | | | | |
| Prated,C | kW | 50.0 | 60.0 | 70.0 | 80.0 | 90.0 | 100.0 | 110.0 |
| SEER | | 5.29 | 5.28 | 4.98 | 5.15 | 5.12 | 5.32 | 5.29 |
| PERFORMANCE η_s | % | 209.0 | 208.0 | 196.0 | 203.0 | 202.0 | 210.0 | 209.0 |
| ELECTRICAL DATA | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| F.L.A. ⁴ | Total A | 52 | 60 | 60 | 78 | 78 | 93 | 93 |
| EXCHANGERS | | | | | | | | |
| MINIMUM WATER FLOW | Heat Exchanger l/s | 1.67 | 1.67 | 1.67 | 2.22 | 2.22 | 2.78 | 2.78 |
| MINIMUM WATER CONTENT | System l | 200 | 200 | 280 | 360 | 360 | 440 | 440 |
| REFRIGERANT CIRCUIT | | | | | | | | |
| COMPRESSORS | No. | 1 | 1 | 1 | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| REFRIGERANT | | R32 | R32 | R32 | R32 | R32 | R32 | R32 |
| THEORETICAL REFRIGERANT CHARGE | kg | 8 | 8 | 8 | 11 | 11 | 13 | 13 |
| FANS | | | | | | | | |
| QUANTITY | No. | 2 | 2 | 2 | 3 | 3 | 4 | 4 |
| AIRFLOW | m ³ /s | 6.86 | 7.01 | 7.01 | 9.84 | 9.84 | 12.97 | 12.97 |
| NOISE LEVELS | | | | | | | | |
| TOTAL SOUND PRESSURE ⁵ | dB(A) | 45 | 46 | 48 | 48 | 49 | 50 | 50 |
| TOTAL SOUND POWER LEVEL IN COOLING ^{6,7} | dB(A) | 77 | 78 | 80 | 80 | 81 | 82 | 82 |
| SIZE AND WEIGHT ⁸ | | | | | | | | |
| WIDTH (A) | mm | 2085 | 2085 | 2085 | 2600 | 2600 | 3225 | 3225 |
| DEPTH (B) | mm | 1100 | 1100 | 1100 | 1100 | 1100 | 1100 | 1100 |
| HEIGHT (H) | mm | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 | 2400 |
| OPERATION WEIGHT | kg | 630 | 630 | 630 | 830 | 830 | 940 | 940 |

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511
3. Parameter calculated according to [Regulation (EU) N. 2016/2281]
4. Data valid for standard units without any additional options and only indicative. Contact your local representative for support.
5. Average sound pressure level at 1m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
6. Sound power on the basis of measurement taken in compliance with ISO 9614.
7. Sound power level in cooling, outdoors.
8. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

For dimensional drawings of this model please see page 1.13

MECH-iF-G05 R513A High Performance Air Cooled Chiller (414 to 921kW)



Mitsubishi Electric's new **MECH-iF-G05** high performance chiller brings a new class of efficiency with its proprietary Variable Speed Drive (VSD) screw compressor cooling. Available with three configurations for noise performance (Standard, NR Kit and SL version), it features a wide operating envelope and a patented Reduced Exergy Depletion (RED) Cooler, further driving efficiencies and energy saving.

Key Features & Benefits

- Best in class efficiency
- Mitsubishi Electric's proprietary single screw compressor
- 3 noise configurations available
- CU/AL coil treatments available
- Wide operating envelope down to -20°C ambient*

*Additional low temperature options may be required.

R513A

| MODEL | | 0411 | 0802 | 0902 | 0411 | 0802 | 0902 | 0411 | 0802 | 0902 |
|---|-------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| VERSION | | - | - | - | -NR | -NR | -NR | -SL | -SL | -SL |
| PERFORMANCE - COOLING ONLY | | | | | | | | | | |
| GROSS VALUE¹ | | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 414.4 | 814.7 | 921.1 | 411.0 | 807.0 | 913.0 | 407.1 | 799.6 | 903.7 |
| TOTAL POWER INPUT | kW | 133.7 | 249.6 | 289.6 | 134.5 | 251.0 | 291.1 | 135.6 | 252.8 | 293.1 |
| EER | kW/kW | 3.10 | 3.26 | 3.18 | 3.06 | 3.22 | 3.14 | 3.00 | 3.16 | 3.08 |
| EN14511 VALUES^{1,2} | | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 413.9 | 814.1 | 920.4 | 410.6 | 806.3 | 912.4 | 406.6 | 799.0 | 903.1 |
| EER | kW/kW | 3.06 | 3.22 | 3.15 | 3.01 | 3.17 | 3.10 | 2.96 | 3.12 | 3.05 |
| SEASONAL PERFORMANCE³ | | | | | | | | | | |
| P _{RATED,C} | kW | 413.9 | 814.1 | 920.4 | 410.6 | 806.3 | 912.4 | 406.6 | 799.0 | 903.1 |
| SEER | | 5.34 | 5.62 | 5.73 | 5.33 | 5.61 | 5.73 | 5.32 | 5.62 | 5.73 |
| PERFORMANCE η _s | % | 210 | 222 | 226 | 210 | 222 | 226 | 210 | 222 | 226 |
| HEAT EXCHANGER IN COOLING¹ | | | | | | | | | | |
| WATER FLOW | User Side l/s | 19.8 | 39.0 | 44.1 | 19.7 | 38.6 | 43.7 | 19.5 | 38.2 | 43.2 |
| PRESSURE DROP ² | User Side kPa | 54.1 | 50.9 | 40.7 | 53.3 | 50 | 40.1 | 52.5 | 49.3 | 39.4 |
| ELECTRICAL DATA | | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| FLA ⁴ | Total A | 269 | 533 | 554 | 269 | 533 | 554 | 269 | 533 | 554 |
| EXCHANGERS | | | | | | | | | | |
| MINIMUM WATER FLOW | Evaporator l/s | 6.1 | 14.5 | 18.1 | 6.1 | 14.5 | 18.1 | 6.1 | 14.5 | 18.1 |
| MINIMUM WATER CONTENT | Plant l | 2000 | 2800 | 3200 | 2000 | 2800 | 3200 | 2000 | 2800 | 3200 |
| FANS | | | | | | | | | | |
| QUANTITY | No. | 6 | 12 | 14 | 6 | 12 | 14 | 6 | 12 | 14 |
| AIRFLOW | m ³ /s | 32.4 | 64.8 | 75.6 | 29.4 | 58.8 | 68.6 | 27.8 | 55.6 | 64.8 |
| REFRIGERANT CIRCUIT | | | | | | | | | | |
| COMPRESSORS | No. | 1 | 2 | 2 | 1 | 2 | 2 | 1 | 2 | 2 |
| CIRCUITS | No. | 1 | 2 | 2 | 1 | 2 | 2 | 1 | 2 | 2 |
| REFRIGERANT | | R513A | R513A | R513A | R513A | R513A | R513A | R513A | R513A | R513A |
| REFRIGERANT CHARGE ⁵ | kg | 89 | 170 | 199 | 89 | 170 | 199 | 89 | 170 | 199 |
| NOISE LEVELS | | | | | | | | | | |
| TOTAL SOUND PRESSURE ⁶ | dB(A) | 64 | 65 | 70 | 61 | 62 | 68 | 57 | 58 | 64 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁷ | dB(A) | 96 | 98 | 103 | 93 | 95 | 101 | 89 | 91 | 97 |
| SIZE AND WEIGHT⁸ | | | | | | | | | | |
| WIDTH | mm | 4150 | 7900 | 9150 | 4150 | 7900 | 9150 | 4150 | 7900 | 9150 |
| DEPTH | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT | mm | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 |
| OPERATING WEIGHT | kg | 4350 | 8150 | 8610 | 4350 | 8150 | 8610 | 4350 | 8150 | 8610 |

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
5. Theoretical - refer to serial plate for actual charge volumes.
6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
7. Sound power on the basis of measurement taken in compliance with ISO 9614.
8. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

1.51

Commercial Heat
Pumps & Chillers

MECH-iS-G07 R32 Modular Air Cooled Chiller
MECH-iF-G05 R513A High Performance Air Cooled Chiller

MECH-iF-G04 R1234ze High Performance Air Cooled Chiller (346 to 828kW)


Mitsubishi Electric's new **MECH-iF-G04** high performance chiller brings a new class of efficiency with its proprietary Variable Speed Drive (VSD) screw compressor cooling. Available with three configurations for noise performance (Standard, NR Kit and SL version), it features a wide operating envelope and a patented Reduced Exergy Depletion (RED) Cooler, further driving efficiencies and energy saving.

Key Features & Benefits

- Best in class efficiency
- Mitsubishi Electric's proprietary single screw compressor
- 3 noise configurations available
- CU/AL coil treatments available
- Low GWP refrigerant (GWP₁₀₀ = 1)*

*IPCC AR5

R1234ze

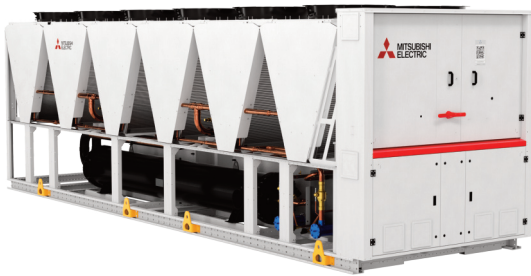

| MODEL | | 0351 | 0702 | 0802 | 0351 | 0702 | 0802 | 0351 | 0702 | 0802 |
|---|-------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| VERSION | | - | - | - | -NR | -NR | -NR | -SL | -SL | -SL |
| PERFORMANCE - COOLING ONLY | | | | | | | | | | |
| GROSS VALUE¹ | | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 346.0 | 701.9 | 828.1 | 342.6 | 696.2 | 819.5 | 339.2 | 690.0 | 811.0 |
| TOTAL POWER INPUT | kW | 105.8 | 213.0 | 269.5 | 106.0 | 213.5 | 270.5 | 106.6 | 214.3 | 271.6 |
| EER | kW/kW | 3.27 | 3.30 | 3.07 | 3.23 | 3.26 | 3.03 | 3.18 | 3.22 | 2.99 |
| EN14511 VALUES^{1,2} | | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 345.5 | 701.3 | 827.4 | 342.2 | 695.6 | 818.8 | 338.8 | 689.3 | 810.4 |
| EER | kW/kW | 3.22 | 3.25 | 3.04 | 3.19 | 3.22 | 3.00 | 3.14 | 3.18 | 2.95 |
| SEASONAL PERFORMANCE³ | | | | | | | | | | |
| P _{RATED,C} | kW | 345.5 | 701.3 | 827.4 | 342.2 | 695.6 | 818.8 | 338.8 | 689.3 | 810.4 |
| SEER | | 5.68 | 5.83 | 5.85 | 5.68 | 5.83 | 5.85 | 5.67 | 5.83 | 5.84 |
| PERFORMANCE η _s | % | 224 | 230 | 231 | 224 | 230 | 231 | 224 | 230 | 231 |
| HEAT EXCHANGER IN COOLING¹ | | | | | | | | | | |
| WATER FLOW | User Side l/s | 16.5 | 33.6 | 39.6 | 16.4 | 33.3 | 39.2 | 16.2 | 33.0 | 38.8 |
| PRESSURE DROP ² | User Side kPa | 48 | 54.1 | 48.4 | 47.2 | 53.4 | 47.6 | 46.5 | 52.6 | 46.7 |
| ELECTRICAL DATA | | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| FLA ⁴ | Total A | 251 | 503 | 509 | 251 | 503 | 509 | 251 | 503 | 509 |
| EXCHANGERS | | | | | | | | | | |
| MINIMUM WATER FLOW | Evaporator l/s | 5.7 | 12.3 | 14.6 | 5.7 | 12.3 | 14.6 | 5.7 | 12.3 | 14.6 |
| MINIMUM WATER CONTENT | Plant l | 1700 | 2400 | 2800 | 1700 | 2400 | 2800 | 1700 | 2400 | 2800 |
| FANS | | | | | | | | | | |
| QUANTITY | No. | 6 | 12 | 14 | 6 | 12 | 14 | 6 | 12 | 14 |
| AIRFLOW | m ³ /s | 32.4 | 64.8 | 75.6 | 29.4 | 58.8 | 68.6 | 27.8 | 55.6 | 64.8 |
| REFRIGERANT CIRCUIT | | | | | | | | | | |
| COMPRESSORS | No. | 1 | 2 | 2 | 1 | 2 | 2 | 1 | 2 | 2 |
| CIRCUITS | No. | 1 | 2 | 2 | 1 | 2 | 2 | 1 | 2 | 2 |
| REFRIGERANT | | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze |
| REFRIGERANT CHARGE ⁵ | kg | 74 | 150 | 177 | 74 | 150 | 177 | 74 | 150 | 177 |
| NOISE LEVELS | | | | | | | | | | |
| TOTAL SOUND PRESSURE ⁶ | dB(A) | 68 | 70 | 72 | 66 | 68 | 70 | 59 | 61 | 63 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁷ | dB(A) | 100 | 103 | 105 | 98 | 101 | 103 | 91 | 94 | 96 |
| SIZE AND WEIGHT⁸ | | | | | | | | | | |
| WIDTH | mm | 4150 | 7900 | 9150 | 4150 | 7900 | 9150 | 4150 | 7900 | 9150 |
| DEPTH | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT | mm | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 | 2500 |
| OPERATING WEIGHT | kg | 4050 | 7650 | 8580 | 4050 | 7650 | 8580 | 4110 | 7730 | 8670 |

Notes:

- Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
- Values in compliance with EN14511.
- Parameter calculated according to [Regulation (EU) N. 2016/2281].
- Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
- Theoretical - refer to serial plate for actual charge volumes.
- Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
- Sound power on the basis of measurement taken in compliance with ISO 9614.
- Sound power level in cooling, outdoors.
- Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

e-series

EACV R32 Modular Air Cooled Chiller

(150 to 1,080kW)

The R32 e-Series **EACV** range allows for up to 6 individual units to be connected together to provide a system capacity from 150kW to 1,080kW. Using this modular approach reduces space requirements and simplifies lifting and installation.

Key Features & Benefits

- Highly efficient inverter scroll compressors
- Modular to maximise space saving
- Y-shaped heat exchangers allow for a greater surface area, maximising efficiency, whilst also keeping the units much narrower than conventional chillers

R32



| MODEL | | EACV-M1500YCL-N | EACV-M1800YCL-N | |
|---|---|--------------------------------------|---|---|
| POWER SOURCE | | 3-phase 4-wire 380-400-415v 50/60Hz | 3-phase 4-wire 380-400-415v 50/60Hz | |
| COOLING CAPACITY ¹ | | 150 | 180 | |
| | Power Input | kW | 44.73 | 57.02 |
| | EER | | 3.35 | 3.16 |
| | IPLV ⁴ | | 6.42 | 6.31 |
| | Water Flow Rate | m ³ /h | 25.8 | 31.0 |
| COOLING CAPACITY (EN14511) ² | | 149.18 | 178.80 | |
| | Power Input | kW | 45.55 | 58.22 |
| | EER | | 3.28 | 3.07 |
| | Eurovent Efficiency Class | | A | B |
| | SEER | | 5.52 | 5.36 |
| | Performance (η _{s,c}) | % | 217.8 | 211.4 |
| | SEPR (HT) ⁵ | | 7.11 | 6.36 |
| | Water Flow Rate | m ³ /h | 25.8 | 31.0 |
| | Cooling Current 380-400-415V ¹ | A | 76 - 72 - 69 | 96 - 91 - 88 |
| | Maximum Current | A | 120 | 120 |
| WATER PRESSURE DROP ¹ | Standard Piping | kPa | 56 | 79 |
| | Inside Header Piping | kPa | 134 | 190 |
| | Cooling | °C | Outlet water 4~30 | Outlet water 4~30 |
| TEMP RANGE | Outdoor | °C | -15~52 | -15~52 |
| | Circulating Water Volume Range | m ³ /h | 12.9~43.0 | 12.9~43.0 |
| SOUND PRESSURE LEVEL (Measured in anechoic room) at 1m ¹ | dB (A) | 65 | 67 | |
| SOUND POWER LEVEL (Measured in anechoic room) ¹ | dB (A) | 83 | 85 | |
| DIAMETER OF WATER PIPE (Standard piping) | Inlet | mm (in) | 65A (2 1/2B) housing type joint | 65A (2 1/2B) housing type joint |
| | Outlet | mm (in) | 65A (2 1/2B) housing type joint | 65A (2 1/2B) housing type joint |
| DIAMETER OF WATER PIPE (Inside header piping) | Inlet | mm (in) | 150A (6B) housing type joint | 150A (6B) housing type joint |
| | Outlet | mm (in) | 150A (6B) housing type joint | 150A (6B) housing type joint |
| EXTERNAL FINISH | | Polyester powder coating steel plate | Polyester powder coating steel plate | |
| EXTERNAL DIMENSION | W x D x H | 3400 x 1080 x 2350 | 3400 x 1080 x 2350 | |
| NET WEIGHT | Standard Piping | mm | 1039 (2291) | 1039 (2291) |
| | Inside Header Piping | kg (lbs) | 1067 (2352) | 1067 (2352) |
| | R32 | kg (lbs) | 4.15 | 4.15 |
| DESIGN PRESSURE | Water | MPa | 1.0 | 1.0 |
| | Water Side | MPa | Stainless steel plate and copper brazing | Stainless steel plate and copper brazing |
| HEAT EXCHANGER | Air Side | | Salt-resistant corrugated fin & aluminium micro channel | Salt-resistant corrugated fin & aluminium micro channel |
| | Type | | Inverter scroll hermetic compressor | Inverter scroll hermetic compressor |
| COMPRESSOR | Starting Method | | Inverter | Inverter |
| | Quantity | | 4 | 4 |
| FAN | Motor Output | kW | 11.5 x 4 | 11.5 x 4 |
| | Air Flow Rate | m ³ /min | 270 x 4 | 270 x 4 |
| | | L/s | 4500 x 4 | 4500 x 4 |
| | | cfm | 9534 x 4 | 9534 x 4 |
| | Type, Quantity | | Propeller fan x 4 | Propeller fan x 4 |
| Starting Method | | Inverter | Inverter | |
| REFRIGERANT | Motor Output | kW | 0.92 x 4 | 0.92 x 4 |
| | External Static Pressure | Pa | 20 | 20 |
| | Type x Charge | | R32 x 4.7 (kg) x 4 ³ | R32 x 4.7 (kg) x 4 ³ |
| Control | | LEV | LEV | |

Notes:

- Under normal cooling conditions at outdoor temp 35°CDB/24°CWB (95°FDB/75.2°FWB) outlet water temp 7°C (44.6°F) inlet water temp 12°C (53.6°F). Pump input is not included in cooling capacity and power input.
 - Under normal cooling conditions at outdoor temp 35°CDB/24°CWB (95°FDB/75.2°FWB) outlet water temp 7°C (44.6°F) inlet water temp 12°C (53.6°F). Pump input is included in cooling capacity and power input based on EN14511.
 - Amount of factory-charged refrigerant is 3 (kg) x 4. Please add the refrigerant at the field.
 - IPLV is calculated in accordance with AHRI 550-590.
 - This value is not certified by Eurovent.
- *Please don't use the steel material for the water piping.
*Please always make water circulate, or pull the circulation water out completely when not in use.
*Please do not use groundwater or well water in direct.
*The water circuit must be closed circuit.
*Due to continuous improvement, the above specifications may be subject to change without notice.
*This model doesn't equip with a pump.

For dimensional drawings of this model please see page 2.9

1.53

Commercial Heat
Pumps & Chillers

MECH-IF-G04 R1234ze High Performance Air Cooled Chiller
e-Series EACV R32 Modular Air Cooled Chiller

NX2-G06

R454B 2 Compressor

Air Cooled Chiller

(40 to 208kW)

The **NX2-G06** units are air cooled chillers with scroll compressors designed for delivering the best efficiencies in comfort applications. The complete range is Eurovent certified and all the sizes are completely ErP2021 compliant. Available from 40kW to 208kW using lower GWP R454B refrigerant, the NX2-G06 is a two scroll compressor, single circuit solution. All the main hydraulic and mechanical components can be integrated within the unit, allowing for the ideal plug & play solution to be configured for HVAC plants within applications including hotels, offices, leisure centres, hospitals and universities.

Key Features & Benefits

- Two Scroll compressors
- ErP2021 compliant
- Low noise
- Energy efficient
- Lower GWP R454B refrigerant

R454B



Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
4. Sound power on the basis of measurements taken in compliance with ISO 9614.
5. Sound power level in cooling, outdoors.
6. Unit in standard configuration, without optional accessories.
7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
8. Seasonal energy efficiency ratio.
9. Seasonal space cooling energy efficiency.

Eurovent Certified Data

| MODEL | | 0042 | 0052 | 0062 | 0072 | 0082 | 0092 | 0102 | 0112 | 0122 | 0142 | 0162 | 0182 | 0202 | 0222 |
|--|---------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| PERFORMANCE | | | | | | | | | | | | | | | |
| COOLING ONLY (GROSS VALUE) | | | | | | | | | | | | | | | |
| COOLING CAPACITY ¹ | kW | 40.53 | 48.50 | 54.16 | 60.98 | 68.18 | 79.82 | 93.31 | 103.8 | 116.5 | 129.6 | 152.0 | 174.2 | 186.9 | 208.7 |
| TOTAL POWER INPUT ¹ | kW | 13.64 | 2.970 | 17.02 | 17.66 | 20.47 | 25.36 | 27.94 | 32.74 | 38.27 | 44.42 | 47.39 | 55.37 | 61.54 | 70.86 |
| EER ¹ | kW/kW | 2.978 | 3.019 | 3.188 | 3.446 | 3.327 | 3.142 | 3.344 | 3.174 | 3.042 | 2.919 | 3.207 | 3.144 | 3.039 | 2.944 |
| COOLING ONLY (EN14511 VALUE) | | | | | | | | | | | | | | | |
| COOLING CAPACITY ^{1,2} | kW | 40.40 | 48.50 | 54.00 | 60.80 | 68.00 | 79.60 | 93.10 | 103.5 | 116.2 | 129.3 | 151.7 | 173.9 | 186.6 | 208.3 |
| EER ^{1,2} | kW/kW | 2.920 | 2.970 | 3.120 | 3.380 | 3.260 | 3.090 | 3.290 | 3.110 | 2.990 | 2.870 | 3.150 | 3.100 | 3.000 | 2.900 |
| ENERGY EFFICIENCY | | | | | | | | | | | | | | | |
| SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281) | | | | | | | | | | | | | | | |
| AMBIENT REFRIGERATION | | | | | | | | | | | | | | | |
| P _{RATED,C} ⁷ | kW | 40.4 | 48.5 | 54.0 | 60.8 | 68.0 | 79.6 | 93.1 | 104 | 116 | 129 | 152 | 174 | 187 | 208 |
| SEER ^{7,8} | | 4.61 | 4.72 | 4.56 | 4.65 | 4.57 | 4.60 | 4.53 | 4.29 | 4.32 | 4.38 | 4.48 | 4.49 | 4.48 | 4.46 |
| PERFORMANCE η _s ^{7,9} | % | 181 | 186 | 179 | 183 | 180 | 181 | 178 | 168 | 170 | 172 | 176 | 177 | 176 | 175 |
| EXCHANGERS | | | | | | | | | | | | | | | |
| HEAT EXCHANGER USER SIDE IN REFRIGERATION | | | | | | | | | | | | | | | |
| WATER FLOW ¹ | l/s | 1.938 | 2.323 | 2.590 | 2.916 | 3.261 | 3.817 | 4.462 | 4.965 | 5.573 | 6.198 | 7.268 | 8.331 | 8.937 | 9.979 |
| PRESSURE DROP AT THE HEAT EXCHANGER | kPa | 44.8 | 33.3 | 41.4 | 45.4 | 46.2 | 45.3 | 36.6 | 45.4 | 45.5 | 42.6 | 47.9 | 44.1 | 38.5 | 48.0 |
| REFRIGERANT CIRCUIT | | | | | | | | | | | | | | | |
| COMPRESSORS NR. | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| REFRIGERANT CHARGE | kg | 7.60 | 7.60 | 8.00 | 9.90 | 10.0 | 11.1 | 13.1 | 14.3 | 15.5 | 15.8 | 21.9 | 22.7 | 22.8 | 22.9 |
| NOISE LEVEL | | | | | | | | | | | | | | | |
| SOUND PRESSURE ³ | dB(A) | 49 | 50 | 49 | 51 | 52 | 52 | 52 | 52 | 52 | 53 | 54 | 55 | 55 | 56 |
| SOUND POWER LEVEL IN COOLING ^{4,5} | dB(A) | 81 | 82 | 81 | 83 | 84 | 84 | 84 | 84 | 84 | 85 | 86 | 87 | 87 | 88 |
| SIZE AND WEIGHT | | | | | | | | | | | | | | | |
| WIDTH ⁶ | mm | 1825 | 1825 | 1825 | 2395 | 2395 | 2395 | 2325 | 2825 | 2825 | 2825 | 3980 | 3980 | 3980 | 3980 |
| DEPTH ⁶ | mm | 1195 | 1195 | 1195 | 1195 | 1195 | 1195 | 1195 | 1195 | 1195 | 1195 | 1195 | 1195 | 1195 | 1195 |
| HEIGHT ⁶ | mm | 1865 | 1865 | 1865 | 1865 | 1865 | 1865 | 1980 | 1980 | 1980 | 1980 | 1980 | 1980 | 1980 | 1980 |
| OPERATING WEIGHT ⁶ | kg | 500 | 510 | 550 | 630 | 630 | 640 | 770 | 770 | 850 | 920 | 1130 | 1170 | 1180 | 1220 |

NX2-G06 R454B 4 Compressor Air Cooled Chiller

(168 to 345kW)

The **NX2-G06** units are air cooled chillers with scroll compressors designed for delivering the best efficiencies in comfort applications. The complete range is Eurovent certified and all the sizes are completely ErP2021 compliant. Available from 168kW to 345kW using lower GWP R454B refrigerant, the NX2-G06 is a four scroll compressor, twin circuit solution. All the main hydraulic and mechanical components can be integrated within the unit, allowing for the ideal plug & play solution to be configured for HVAC plants within applications including hotels, offices, leisure centres, hospitals and universities.

Key Features & Benefits

- Twin circuit tandem scroll compressors
- ErP2021 compliant
- Low noise
- Energy efficient
- Lower GWP R454B refrigerant

R454B



Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
4. Sound power on the basis of measurements taken in compliance with ISO 9614.
5. Sound power level in cooling, outdoors.
6. Unit in standard configuration, without optional accessories.
7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
8. Seasonal energy efficiency ratio.
9. Seasonal space cooling energy efficiency.

■ Eurovent Certified Data

| MODEL | | 0184P | 0214P | 0244P | 0264P | 0294P | 0334P | 0374P |
|---|---------|----------|----------|----------|----------|----------|----------|----------|
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| PERFORMANCE | | | | | | | | |
| COOLING ONLY (GROSS VALUE) | | | | | | | | |
| COOLING CAPACITY ¹ | kW | 168.4 | 197.5 | 226.2 | 250.7 | 280.0 | 313.1 | 345.8 |
| TOTAL POWER INPUT ¹ | kW | 49.44 | 58.24 | 68.66 | 77.32 | 81.59 | 93.64 | 106.6 |
| EER ¹ | kW/kW | 3.409 | 3.393 | 3.293 | 3.243 | 3.431 | 3.345 | 3.244 |
| COOLING ONLY (EN14511 VALUE) | | | | | | | | |
| COOLING CAPACITY ^{1,2} | kW | 168.1 | 197.2 | 225.8 | 250.4 | 279.7 | 312.8 | 345.4 |
| EER ^{1,2} | kW/kW | 3.350 | 3.340 | 3.240 | 3.200 | 3.380 | 3.300 | 3.200 |
| ENERGY EFFICIENCY | | | | | | | | |
| SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281) | | | | | | | | |
| AMBIENT REFRIGERATION | | | | | | | | |
| P _{INTED,C} ⁷ | kW | 168 | 197 | 226 | 250 | 280 | 313 | 345 |
| SEER ^{7,8} | | 4.73 | 4.76 | 4.78 | 4.79 | 4.71 | 4.73 | 4.62 |
| PERFORMANCE η _s ^{7,9} | % | 186 | 188 | 188 | 189 | 185 | 186 | 182 |
| EXCHANGERS | | | | | | | | |
| HEAT EXCHANGER USER SIDE IN REFRIGERATION | | | | | | | | |
| WATER FLOW ¹ | l/s | 8.052 | 9.444 | 10.81 | 11.99 | 13.39 | 14.97 | 16.54 |
| PRESSURE DROP AT THE HEAT EXCHANGER | kPa | 42.7 | 44.3 | 46.7 | 46.6 | 42.8 | 39.8 | 48.5 |
| REFRIGERANT CIRCUIT | | | | | | | | |
| COMPRESSORS NR. | No. | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| REFRIGERANT CHARGE | kg | 30.1 | 31.9 | 37.5 | 37.6 | 47.5 | 51.8 | 51.9 |
| NOISE LEVEL | | | | | | | | |
| SOUND PRESSURE ³ | dB(A) | 54 | 54 | 55 | 55 | 56 | 58 | 59 |
| SOUND POWER LEVEL IN COOLING ^{4,5} | dB(A) | 86 | 86 | 87 | 87 | 88 | 90 | 91 |
| SIZE AND WEIGHT | | | | | | | | |
| WIDTH ⁶ | mm | 3160 | 3160 | 3160 | 3160 | 4335 | 4335 | 4335 |
| DEPTH ⁶ | mm | 2250 | 2250 | 2250 | 2250 | 2250 | 2250 | 2250 |
| HEIGHT ⁶ | mm | 2290 | 2290 | 2290 | 2290 | 2290 | 2290 | 2290 |
| OPERATING WEIGHT ⁶ | kg | 1620 | 1640 | 1850 | 1880 | 2230 | 2260 | 2470 |

1.55

Commercial Heat
Pumps & Chillers

NX2-G06 R454B 2 Compressor Air Cooled Chiller
NX2-G06 R454B 4 Compressor Air Cooled Chiller

NX2-G06 R454B 4-8 Compressor Air Cooled Chiller

(379 to 867kW)

Standard Version (/K)



CLIMAVENETA

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
4. Sound power on the basis of measurements taken in compliance with ISO 9614.
5. Sound power level in cooling, outdoors.
6. Unit in standard configuration, without optional accessories.
7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
8. Seasonal energy efficiency ratio.
9. Seasonal space cooling energy efficiency.

■ Eurovent Certified Data

The **NX2-G06** units are air cooled chillers with scroll compressors designed for delivering the best efficiencies in comfort applications. The complete range is Eurovent certified and all the sizes are completely ErP2021 compliant. All the main hydraulic and mechanical components can be integrated within the unit, allowing for the ideal plug & play solution to be configured for HVAC plants within applications including hotels, offices, leisure centres, hospitals and universities.

Key Features & Benefits

- ErP2021 compliant
- Low noise
- Energy efficient
- Lower GWP R454B refrigerant

R454B

| MODEL | | 0404 | 0424 | 0464 | 0515 | 0576 | 0585 | 0636 | 0676 | 0706 | 0768 | 0808 | 0848 | 0898 | 0928 |
|---|---------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| PERFORMANCE | | | | | | | | | | | | | | | |
| COOLING ONLY (GROSS VALUE) | | | | | | | | | | | | | | | |
| COOLING CAPACITY ¹ | kW | 379.1 | 398.9 | 437.0 | 488.0 | 538.9 | 546.7 | 597.9 | 636.3 | 656.5 | 720.5 | 759.5 | 798.1 | 835.5 | 867.1 |
| TOTAL POWER INPUT ¹ | kW | 115.6 | 122.6 | 136.9 | 152.1 | 167.3 | 168.6 | 183.8 | 198.1 | 200.3 | 218.0 | 231.4 | 245.1 | 259.3 | 273.5 |
| EER ¹ | kW/kW | 3.279 | 3.254 | 3.192 | 3.208 | 3.221 | 3.243 | 3.253 | 3.212 | 3.278 | 3.305 | 3.282 | 3.256 | 3.222 | 3.170 |
| COOLING ONLY (EN14511 VALUE) | | | | | | | | | | | | | | | |
| COOLING CAPACITY ^{1,2} | kW | 378.6 | 398.5 | 436.5 | 487.5 | 538.3 | 546.2 | 597.3 | 635.7 | 655.8 | 719.8 | 758.8 | 797.4 | 834.8 | 866.3 |
| EER ^{1,2} | kW/kW | 3.220 | 3.210 | 3.140 | 3.160 | 3.170 | 3.200 | 3.210 | 3.170 | 3.230 | 3.260 | 3.230 | 3.220 | 3.180 | 3.130 |
| ENERGY EFFICIENCY | | | | | | | | | | | | | | | |
| SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281) | | | | | | | | | | | | | | | |
| AMBIENT REFRIGERATION | | | | | | | | | | | | | | | |
| P _{RATED,C} ⁷ | kW | 379 | 398 | 436 | 488 | 538 | 546 | 597 | 636 | 656 | 720 | 759 | 797 | 835 | 866 |
| SEER ^{7,8} | | 4.67 | 4.68 | 4.65 | 4.70 | 4.70 | 4.76 | 4.75 | 4.73 | 4.77 | 4.75 | 4.74 | 4.75 | 4.75 | 4.74 |
| PERFORMANCE η _s ^{7,9} | % | 184 | 184 | 183 | 185 | 185 | 187 | 187 | 186 | 188 | 187 | 187 | 187 | 187 | 187 |
| EXCHANGERS | | | | | | | | | | | | | | | |
| HEAT EXCHANGER USER SIDE IN REFRIGERATION | | | | | | | | | | | | | | | |
| WATER FLOW ¹ | l/s | 18.13 | 19.08 | 20.90 | 23.34 | 25.77 | 26.14 | 28.59 | 30.43 | 31.39 | 34.45 | 36.32 | 38.17 | 39.96 | 41.46 |
| PRESSURE DROP AT THE HEAT EXCHANGER | kPa | 61.8 | 48.6 | 58.3 | 55.1 | 67.1 | 42.5 | 50.9 | 49.2 | 52.4 | 56.9 | 63.3 | 47.2 | 51.7 | 55.7 |
| REFRIGERANT CIRCUIT | | | | | | | | | | | | | | | |
| COMPRESSORS NR. | No. | 4 | 4 | 4 | 5 | 6 | 5 | 6 | 6 | 6 | 8 | 8 | 8 | 8 | 8 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 3 | 2 | 4 | 4 | 4 | 4 | 4 |
| REFRIGERANT CHARGE | kg | 46.6 | 51.5 | 51.7 | 59.6 | 64.4 | 72.0 | 74.8 | 75.1 | 85.6 | 88.5 | 95.1 | 104 | 106 | 106 |
| NOISE LEVEL | | | | | | | | | | | | | | | |
| SOUND PRESSURE ³ | dB(A) | 62 | 62 | 62 | 62 | 63 | 63 | 62 | 62 | 63 | 63 | 63 | 64 | 64 | 64 |
| SOUND POWER LEVEL IN COOLING ^{4,5} | dB(A) | 94 | 94 | 94 | | 95 | 95 | 95 | 95 | 96 | 96 | 96 | 97 | 97 | 97 |
| SIZE AND WEIGHT | | | | | | | | | | | | | | | |
| WIDTH ⁶ | mm | 3905 | 3905 | 3905 | 5080 | 5080 | 5080 | 6255 | 6255 | 6255 | 7430 | 7430 | 7430 | 7430 | 7430 |
| DEPTH ⁶ | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT ⁶ | mm | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 |
| OPERATING WEIGHT ⁶ | kg | 2590 | 2620 | 2660 | 3190 | 3420 | 3500 | 3940 | 3980 | 4100 | 4970 | 5010 | 5080 | 5120 | 5150 |

NX2-G06 R454B 4-8 Compressor Air Cooled Chiller

(380 to 872kW)

High Efficiency Version (/A)



Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
4. Sound power on the basis of measurements taken in compliance with ISO 9614.
5. Sound power level in cooling, outdoors.
6. Unit in standard configuration, without optional accessories.
7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
8. Seasonal energy efficiency ratio.
9. Seasonal space cooling energy efficiency.

 Eurovent Certified Data

The **NX2-G06** units are air cooled chillers with scroll compressors designed for delivering the best efficiencies in comfort applications. The complete range is Eurovent certified and all the sizes are completely ErP2021 compliant. All the main hydraulic and mechanical components can be integrated within the unit, allowing for the ideal plug & play solution to be configured for HVAC plants within applications including hotels, offices, leisure centres, hospitals and universities.

Key Features & Benefits

- ErP2021 compliant
- Low noise
- Energy efficient
- Lower GWP R454B refrigerant

R454B

| MODEL | | 0404 | 0424 | 0464 | 0515 | 0576 | 0585 | 0636 | 0676 | 0706 | 0768 | 0808 | 0848 | 0898 | 0928 |
|--|---------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| PERFORMANCE | | | | | | | | | | | | | | | |
| COOLING ONLY (GROSS VALUE) | | | | | | | | | | | | | | | |
| COOLING CAPACITY ¹ | kW | 380.1 | 400.0 | 439.8 | 490.2 | 540.8 | 548.6 | 599.7 | 639.0 | 658.6 | 721.1 | 762.2 | 801.1 | 839.7 | 872.3 |
| TOTAL POWER INPUT ¹ | kW | 111.3 | 117.1 | 129.4 | 145.0 | 161.1 | 161.7 | 177.4 | 188.0 | 194.1 | 211.0 | 222.5 | 234.3 | 246.4 | 258.3 |
| EER ¹ | kW/kW | 3.415 | 3.416 | 3.399 | 3.381 | 3.357 | 3.393 | 3.380 | 3.399 | 3.393 | 3.418 | 3.426 | 3.419 | 3.408 | 3.377 |
| COOLING ONLY (EN14511 VALUE) | | | | | | | | | | | | | | | |
| COOLING CAPACITY ^{1,2} | kW | 379.6 | 399.5 | 439.2 | 489.7 | 540.2 | 548.1 | 599.1 | 638.4 | 658.0 | 720.5 | 761.5 | 800.4 | 839.0 | 871.6 |
| EER ^{1,2} | kW/kW | 3.350 | 3.370 | 3.340 | 3.330 | 3.300 | 3.350 | 3.330 | 3.350 | 3.350 | 3.370 | 3.370 | 3.380 | 3.360 | 3.330 |
| ENERGY EFFICIENCY | | | | | | | | | | | | | | | |
| SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281) | | | | | | | | | | | | | | | |
| AMBIENT REFRIGERATION | | | | | | | | | | | | | | | |
| P _{RATED,C} ⁷ | kW | 380 | 400 | 439 | 490 | 540 | 548 | 599 | 638 | 658 | 720 | 762 | 800 | 839 | 872 |
| SEER ^{7,8} | | 4.74 | 4.77 | 4.73 | 4.78 | 4.72 | 4.82 | 4.82 | 4.86 | 4.83 | 4.81 | 4.81 | 4.83 | 4.84 | 4.86 |
| PERFORMANCE η _s ^{7,9} | % | 187 | 188 | 186 | 188 | 186 | 190 | 190 | 191 | 190 | 189 | 189 | 190 | 190 | 191 |
| EXCHANGERS | | | | | | | | | | | | | | | |
| HEAT EXCHANGER USER SIDE IN REFRIGERATION | | | | | | | | | | | | | | | |
| WATER FLOW ¹ | l/s | 18.18 | 19.13 | 21.03 | 23.44 | 25.86 | 26.24 | 28.68 | 30.56 | 31.50 | 34.49 | 36.45 | 38.31 | 40.16 | 41.72 |
| PRESSURE DROP AT THE HEAT EXCHANGER | kPa | 62.1 | 48.8 | 59.0 | 55.6 | 67.6 | 42.8 | 51.2 | 49.6 | 52.7 | 57.0 | 63.7 | 47.6 | 52.2 | 56.4 |
| REFRIGERANT CIRCUIT | | | | | | | | | | | | | | | |
| COMPRESSORS NR. | No. | 4 | 4 | 4 | 5 | 6 | 5 | 6 | 6 | 6 | 8 | 8 | 8 | 8 | 8 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 3 | 2 | 4 | 4 | 4 | 4 | 4 |
| REFRIGERANT CHARGE | kg | 56.1 | 59.9 | 62.7 | 76.5 | 77.9 | 80.8 | 88.8 | 94.1 | 98.8 | 107 | 129 | 129 | 129 | 129 |
| NOISE LEVEL | | | | | | | | | | | | | | | |
| SOUND PRESSURE ³ | dB(A) | 63 | 63 | 63 | 62 | 63 | 63 | 63 | 64 | 64 | 64 | 64 | 65 | 65 | 65 |
| SOUND POWER LEVEL IN COOLING ^{4,5} | dB(A) | 95 | 95 | 95 | 95 | 96 | 96 | 96 | 97 | 97 | 97 | 97 | 98 | 98 | 98 |
| SIZE AND WEIGHT | | | | | | | | | | | | | | | |
| WIDTH ⁶ | mm | 5080 | 5080 | 5080 | 6255 | 6255 | 6255 | 7430 | 7430 | 7430 | 9780 | 9780 | 9780 | 9780 | 9780 |
| DEPTH ⁶ | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT ⁶ | mm | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 |
| OPERATING WEIGHT ⁶ | kg | 2960 | 2960 | 3000 | 3600 | 3830 | 3900 | 4290 | 4430 | 4450 | 5660 | 5720 | 5770 | 5810 | 5850 |

i-FX2-G05 R513A Air Cooled Chiller

(533 to 1,079kW)

Standard Version (-K)



The new generation of customisable screw compressor chillers has arrived with Climaveneta's range of **i-FX2** air cooled chillers. Available with 3 efficiency levels, all of which can be combined with 4 different levels of noise suppression, and the ability to fit integrated hydronic pumps; the **i-FX2** range has a multitude of combinations to match your project requirements.

Key Features & Benefits

- Next generation efficient design
- Wide operating envelope for comfort and process applications
- Variety of low noise versions to match your project requirements
- Exceptionally compact design
- Wide variety of customisations available including factory fitted hydronic pumps

R513A

| MODEL | | 0532 | 0602 | 0622 | 0672 | 0732 | 0802 | 0892 | 0972 | 1032 | 1082 |
|---|-------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| PERFORMANCE - COOLING ONLY | | | | | | | | | | | |
| GROSS VALUE¹ | | | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 533.2 | 597.3 | 623.6 | 674.3 | 725.5 | 800.5 | 889.2 | 966.7 | 1034 | 1079 |
| TOTAL POWER INPUT | kW | 182.5 | 202.8 | 208.4 | 224.5 | 247.3 | 280.9 | 307.4 | 325.4 | 344.5 | 362.8 |
| EER | kW/kW | 2.92 | 2.95 | 2.99 | 3.00 | 2.93 | 2.85 | 2.89 | 2.97 | 3.00 | 2.97 |
| EN14511 VALUES^{1,2} | | | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 532.7 | 596.7 | 623.0 | 673.7 | 724.8 | 799.9 | 888.5 | 966.0 | 1033 | 1078 |
| EER | kW/kW | 2.89 | 2.91 | 2.96 | 2.97 | 2.90 | 2.82 | 2.86 | 2.94 | 2.97 | 2.93 |
| SEASONAL PERFORMANCE³ | | | | | | | | | | | |
| P _{PARTED,C} | kW | 533 | 597 | 623 | 674 | 725 | 800 | 888 | 966 | 1033 | 1078 |
| SEER | | 5.08 | 5.00 | 5.06 | 4.89 | 4.85 | 4.87 | 4.99 | 5.00 | 4.90 | 4.97 |
| PERFORMANCE η_s | % | 200 | 197 | 199 | 193 | 191 | 192 | 197 | 197 | 193 | 196 |
| HEAT EXCHANGER IN COOLING¹ | | | | | | | | | | | |
| WATER FLOW | User Side l/s | 25.5 | 28.6 | 29.8 | 32.2 | 34.7 | 38.3 | 42.5 | 46.2 | 49.4 | 51.6 |
| PRESSURE DROP ² | User Side kPa | 43.3 | 54.4 | 45.8 | 53.5 | 56.3 | 46.3 | 57.1 | 42.5 | 48.6 | 64.5 |
| ELECTRICAL DATA | | | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| FLA ⁴ | Total A | 360 | 398 | 407 | 436 | 481 | 559 | 624 | 626 | 639 | 701 |
| EXCHANGERS | | | | | | | | | | | |
| MINIMUM WATER FLOW | Evaporator l/s | 13.1 | 13.1 | 14.4 | 14.4 | 16.7 | 20.0 | 20.0 | 24.7 | 24.7 | 22.5 |
| MINIMUM WATER CONTENT | Plant l | 1900 | 2100 | 2200 | 2400 | 2500 | 2800 | 3100 | 3400 | 3600 | 3800 |
| FANS | | | | | | | | | | | |
| QUANTITY | No. | 6 | 7 | 7 | 8 | 8 | 9 | 10 | 11 | 12 | 12 |
| AIRFLOW | m ³ /s | 30.9 | 36.1 | 36.1 | 41.2 | 41.2 | 46.4 | 51.5 | 56.7 | 61.8 | 61.8 |
| REFRIGERANT CIRCUIT | | | | | | | | | | | |
| COMPRESSORS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| REFRIGERANT | | R513A | R513A | R513A | R513A | R513A | R513A | R513A | R513A | R513A | R513A |
| REFRIGERANT CHARGE ⁵ | kg | 83 | 92 | 94 | 101 | 112 | 132 | 143 | 155 | 166 | 167 |
| NOISE LEVELS | | | | | | | | | | | |
| TOTAL SOUND PRESSURE ⁶ | dB(A) | 68 | 69 | 69 | 69 | 70 | 69 | 70 | 71 | 71 | 71 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁷ | dB(A) | 100 | 101 | 101 | 101 | 102 | 102 | 103 | 104 | 104 | 104 |
| SIZE AND WEIGHT⁸ | | | | | | | | | | | |
| WIDTH | mm | 4150 | 5400 | 5400 | 5400 | 5400 | 6650 | 6650 | 7900 | 7900 | 7900 |
| DEPTH | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT | mm | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 |
| OPERATING WEIGHT | kg | 4500 | 5000 | 5007 | 5106 | 5388 | 5863 | 5974 | 6464 | 6584 | 7031 |

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
5. Theoretical - refer to serial plate for actual charge volumes.
6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
7. Sound power on the basis of measurement taken in compliance with ISO 9614.
8. Sound power level in cooling, outdoors.

8. Unit in standard configuration, without optional accessories.

■ Eurovent Certified Data

i-FX2-G05 R513A Air Cooled Chiller

(1,123 to 1,859kW)

Standard Version (-K)



- Notes:**
1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
 2. Values in compliance with EN14511.
 3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
 4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
 5. Theoretical - refer to serial plate for actual charge volumes.
 6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
 7. Sound power on the basis of measurement taken in compliance with ISO 9614.
 8. Sound power level in cooling, outdoors.
 8. Unit in standard configuration, without optional accessories.

 Eurovent Certified Data

The new generation of customisable screw compressor chillers has arrived with Climaveneta's range of **i-FX2** air cooled chillers. Available with 3 efficiency levels, all of which can be combined with 4 different levels of noise suppression, and the ability to fit integrated hydronic pumps; the **i-FX2** range has a multitude of combinations to match your project requirements.

Key Features & Benefits

- Next generation efficient design
- Wide operating envelope for comfort and process applications
- Variety of low noise versions to match your project requirements
- Exceptionally compact design
- Wide variety of customisations available including factory fitted hydronic pumps

R513A

| MODEL | | 1122 | 1192 | 1242 | 1382 | 1452 | 1552 | 1633 | 1703 | 1863 |
|---|-------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| PERFORMANCE - COOLING ONLY | | | | | | | | | | |
| GROSS VALUE¹ | | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 1123 | 1185 | 1243 | 1382 | 1450 | 1551 | 1628 | 1702 | 1859 |
| TOTAL POWER INPUT | kW | 384.0 | 389.6 | 413.8 | 454.1 | 495.0 | 501.8 | 550.3 | 579.2 | 621.9 |
| EER | kW/kW | 2.92 | 3.04 | 3.01 | 3.04 | 2.93 | 3.09 | 2.96 | 2.94 | 2.99 |
| EN14511 VALUES^{1,2} | | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 1122 | 1184 | 1242 | 1382 | 1449 | 1550 | 1627 | 1701 | 1858 |
| EER | kW/kW | 2.88 | 3.00 | 2.96 | 3.01 | 2.89 | 3.05 | 2.92 | 2.90 | 2.96 |
| SEASONAL PERFORMANCE³ | | | | | | | | | | |
| P _{PARTED,C} | kW | 1122 | 1184 | 1242 | 1382 | 1449 | 1550 | 1627 | 1701 | 1858 |
| SEER | | 5.01 | 5.04 | 5.05 | 5.12 | 5.03 | 5.16 | 4.99 | 5.04 | 5.13 |
| PERFORMANCE η_s | % | 197 | 199 | 199 | 202 | 198 | 203 | 197 | 198 | 202 |
| HEAT EXCHANGER IN COOLING⁴ | | | | | | | | | | |
| WATER FLOW | User Side l/s | 53.7 | 56.7 | 59.4 | 66.1 | 69.3 | 74.2 | 77.9 | 81.4 | 88.9 |
| PRESSURE DROP ² | User Side kPa | 69.9 | 67.6 | 69.9 | 61.3 | 67.5 | 58.5 | 69.4 | 75.9 | 52.6 |
| ELECTRICAL DATA | | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| FLA ⁴ | Total A | 785 | 825 | 857 | 932 | 984 | 1008 | 1094 | 1178 | 1270 |
| EXCHANGERS | | | | | | | | | | |
| MINIMUM WATER FLOW | Evaporator l/s | 22.5 | 23.6 | 24.2 | 28.3 | 28.3 | 37.2 | 38.9 | 38.9 | 41.7 |
| MINIMUM WATER CONTENT | Plant l | 3900 | 4100 | 4400 | 4800 | 5100 | 5400 | 5700 | 6000 | 6500 |
| FANS | | | | | | | | | | |
| QUANTITY | No. | 12 | 14 | 14 | 16 | 16 | 18 | 18 | 18 | 20 |
| AIRFLOW | m ³ /s | 61.8 | 72.1 | 72.1 | 82.4 | 82.4 | 92.7 | 92.7 | 92.7 | 103 |
| REFRIGERANT CIRCUIT | | | | | | | | | | |
| COMPRESSORS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 3 | 3 | 3 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 3 | 3 | 3 |
| REFRIGERANT | | R513A | R513A | R513A | R513A | R513A | R513A | R513A | R513A | R513A |
| REFRIGERANT CHARGE ⁵ | kg | 167 | 187 | 207 | 243 | 243 | 263 | 263 | 268 | 288 |
| NOISE LEVELS | | | | | | | | | | |
| TOTAL SOUND PRESSURE ⁶ | dB(A) | 72 | 72 | 73 | 73 | 73 | 73 | 73 | 73 | 74 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁷ | dB(A) | 105 | 105 | 106 | 106 | 106 | 106 | 106 | 106 | 107 |
| SIZE AND WEIGHT⁸ | | | | | | | | | | |
| WIDTH | mm | 7900 | 9150 | 9150 | 10400 | 10400 | 11650 | 11650 | 11650 | 12900 |
| DEPTH | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT | mm | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 |
| OPERATING WEIGHT | kg | 7409 | 8243 | 8249 | 9008 | 9008 | 10165 | 11301 | 11679 | 12284 |

i-FX2-G04 R1234ze Air Cooled Chiller

(392 to 861kW)

High Efficiency Version (-E)

The new generation of customisable screw compressor chillers has arrived with Climaveneta's range of **i-FX2** air cooled chillers. Available with 3 efficiency levels, all of which can be combined with 4 different levels of noise suppression, and the ability to fit integrated hydronic pumps; the **i-FX2** range has a multitude of combinations to match your project requirements.

Key Features & Benefits

- Next generation of efficiency with exceptionally low GWP refrigerant ($GWP_{100} = 1$)*
- Wide operating envelope for comfort and process applications
- Variety of low noise versions to match your project requirements
- Exceptionally compact design
- Wide variety of customisations available including factory fitted hydronic pumps

*IPCC AR5

R1234ze



Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
5. Theoretical - refer to serial plate for actual charge volumes.
6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
7. Sound power on the basis of measurement taken in compliance with ISO 9614.
8. Sound power level in cooling, outdoors.
9. Unit in standard configuration, without optional accessories.

 Eurovent Certified Data

| MODEL | | 0392 | 0432 | 0502 | 0552 | 0662 | 0742 | 0872 |
|---|-------------------|----------|----------|----------|----------|----------|----------|----------|
| PERFORMANCE - COOLING ONLY | | | | | | | | |
| GROSS VALUE¹ | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 392.5 | 426.2 | 499.3 | 550.7 | 658.3 | 744.3 | 861.4 |
| TOTAL POWER INPUT | kW | 116.4 | 128.6 | 145.1 | 161.4 | 207.6 | 234.7 | 269.2 |
| EER | kW/kW | 3.37 | 3.31 | 3.44 | 3.41 | 3.17 | 3.17 | 3.20 |
| EN14511 VALUES^{1,2} | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 392.0 | 425.7 | 498.8 | 550.2 | 657.7 | 743.7 | 860.8 |
| EER | kW/kW | 3.33 | 3.27 | 3.41 | 3.37 | 3.13 | 3.14 | 3.17 |
| SEASONAL PERFORMANCE³ | | | | | | | | |
| P _{rated,c} | kW | 392 | 426 | 499 | 550 | 658 | 744 | 861 |
| SEER | | 2.56 | 5.59 | 5.59 | 5.65 | 5.64 | 5.42 | 5.40 |
| PERFORMANCE η_s | % | 219 | 221 | 220 | 223 | 223 | 214 | 213 |
| HEAT EXCHANGER IN COOLING⁴ | | | | | | | | |
| WATER FLOW | User Side l/s | 18.8 | 20.4 | 23.9 | 26.3 | 31.5 | 35.6 | 41.2 |
| PRESSURE DROP ² | User Side kPa | 39.1 | 46.2 | 33.3 | 40.6 | 51.0 | 40.0 | 33.7 |
| ELECTRICAL DATA | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| FLA ⁴ | Total A | 273 | 301 | 334 | 360 | 461 | 532 | 594 |
| EXCHANGERS | | | | | | | | |
| MINIMUM WATER FLOW | Evaporator l/s | 9.2 | 9.2 | 13.9 | 13.9 | 14.4 | 20.0 | 24.7 |
| MINIMUM WATER CONTENT | Plant l | 1400 | 1500 | 1700 | 1900 | 2300 | 2600 | 3000 |
| FANS | | | | | | | | |
| QUANTITY | No. | 6 | 7 | 8 | 8 | 10 | 12 | 12 |
| AIRFLOW | m ³ /s | 30.9 | 36.05 | 41.2 | 41.2 | 51.5 | 61.8 | 61.8 |
| REFRIGERANT CIRCUIT | | | | | | | | |
| COMPRESSORS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| REFRIGERANT | | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze |
| REFRIGERANT CHARGE ⁵ | kg | 72 | 82 | 92 | 94 | 125 | 149 | 154 |
| NOISE LEVELS | | | | | | | | |
| TOTAL SOUND PRESSURE ⁶ | dB(A) | 68 | 69 | 69 | 70 | 69 | 71 | 73 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁷ | dB(A) | 100 | 101 | 101 | 102 | 102 | 104 | 106 |
| SIZE AND WEIGHT⁸ | | | | | | | | |
| WIDTH | mm | 4150 | 5400 | 5400 | 5400 | 6650 | 7900 | 7900 |
| DEPTH | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT | mm | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 |
| OPERATING WEIGHT | kg | 4428 | 4942 | 5105 | 5105 | 5693 | 6579 | 7342 |

i-FX2-G04 R1234ze Air Cooled Chiller

(929 to 1,532kW)

High Efficiency Version (-E)



- Notes:**
1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
 2. Values in compliance with EN14511.
 3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
 4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
 5. Theoretical - refer to serial plate for actual charge volumes.
 6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
 7. Sound power on the basis of measurement taken in compliance with ISO 9614.
 8. Unit in standard configuration, without optional accessories.

Eurovent Certified Data

The new generation of customisable screw compressor chillers has arrived with Climaveneta's range of **i-FX2** air cooled chillers. Available with 3 efficiency levels, all of which can be combined with 4 different levels of noise suppression, and the ability to fit integrated hydronic pumps; the **i-FX2** range has a multitude of combinations to match your project requirements.

Key Features & Benefits

- Next generation of efficiency with exceptionally low GWP refrigerant (GWP₁₀₀ = 1)*
- Wide operating envelope for comfort and process applications
- Variety of low noise versions to match your project requirements
- Exceptionally compact design
- Wide variety of customisations available including factory fitted hydronic pumps

*IPCC AR5

R1234ze

| MODEL | | 0932 | 1022 | 1072 | 1183 | 1323 | 1433 | 1533 |
|---|-------------------|----------|----------|----------|----------|----------|----------|----------|
| PERFORMANCE - COOLING ONLY | | | | | | | | |
| GROSS VALUE¹ | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 929.7 | 1023 | 1072 | 1184 | 1327 | 1425 | 1532 |
| TOTAL POWER INPUT | kW | 285.7 | 303.4 | 325.3 | 360.6 | 408.8 | 433.9 | 473.0 |
| EER | kW/kW | 3.25 | 3.37 | 3.30 | 3.28 | 3.25 | 3.28 | 3.24 |
| EN14511 VALUES^{1,2} | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 929.1 | 1023 | 1072 | 1183 | 1327 | 1424 | 1531 |
| EER | kW/kW | 3.22 | 3.32 | 3.25 | 3.25 | 3.21 | 3.24 | 3.21 |
| SEASONAL PERFORMANCE³ | | | | | | | | |
| P _{rated,c} | kW | 929 | 1023 | 1072 | 1183 | 1327 | 1424 | 1531 |
| SEER | | 5.45 | 5.62 | 5.6 | 5.37 | 5.43 | 5.50 | 5.57 |
| PERFORMANCE η _s | % | 215 | 222 | 221 | 212 | 214 | 217 | 220 |
| HEAT EXCHANGER IN COOLING⁴ | | | | | | | | |
| WATER FLOW | User Side l/s | 44.5 | 48.9 | 51.3 | 56.6 | 63.5 | 68.1 | 73.2 |
| PRESSURE DROP ² | User Side kPa | 39.3 | 58.0 | 55.4 | 45.0 | 46.2 | 53.2 | 35.7 |
| ELECTRICAL DATA | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| FLA ⁴ | Total A | 642 | 687 | 719 | 818 | 892 | 960 | 1017 |
| EXCHANGERS | | | | | | | | |
| MINIMUM WATER FLOW | Evaporator l/s | 24.7 | 22.5 | 23.6 | 28.3 | 38.9 | 38.9 | 41.7 |
| MINIMUM WATER CONTENT | Plant l | 3300 | 3600 | 3800 | 4100 | 4600 | 5000 | 5400 |
| FANS | | | | | | | | |
| QUANTITY | No. | 14 | 16 | 16 | 18 | 18 | 20 | 20 |
| AIRFLOW | m ³ /s | 72.1 | 82.4 | 82.4 | 92.7 | 92.7 | 103 | 103 |
| REFRIGERANT CIRCUIT | | | | | | | | |
| COMPRESSORS | No. | 2 | 2 | 2 | 3 | 3 | 3 | 3 |
| CIRCUITS | No. | 2 | 2 | 2 | 3 | 3 | 3 | 3 |
| REFRIGERANT | | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze |
| REFRIGERANT CHARGE ⁵ | kg | 168 | 182 | 187 | 261 | 276 | 290 | 300 |
| NOISE LEVELS | | | | | | | | |
| TOTAL SOUND PRESSURE ⁶ | dB(A) | 73 | 73 | 73 | 73 | 73 | 74 | 74 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁷ | dB(A) | 106 | 106 | 106 | 106 | 106 | 107 | 107 |
| SIZE AND WEIGHT⁸ | | | | | | | | |
| WIDTH | mm | 9150 | 10400 | 10400 | 11650 | 11650 | 12900 | 12900 |
| DEPTH | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT | mm | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 |
| OPERATING WEIGHT | kg | 8053 | 8634 | 8805 | 11067 | 11655 | 12243 | 12314 |

i-FX2-G04 R1234ze Air Cooled Chiller

(408 to 797kW)

Low noise with EC Fans
Version (-SL-K-EC)



The new generation of customisable screw compressor chillers has arrived with Climaveneta's range of **i-FX2** air cooled chillers. Available with 3 efficiency levels, all of which can be combined with 4 different levels of noise suppression, and the ability to fit integrated hydronic pumps; the **i-FX2** range has a multitude of combinations to match your project requirements.

Key Features & Benefits

- Next generation of efficiency with exceptionally low GWP refrigerant (GWP₁₀₀ = 1)*
- Wide operating envelope for comfort and process applications
- Variety of low noise versions to match your project requirements
- Exceptionally compact design
- Wide variety of customisations available including factory fitted hydronic pumps

*IPCC AR5

R1234ze

| MODEL | | 0422 | 0452 | 0512 | 0572 | 0602 | 0672 | 0712 | 0772 | 0862 |
|---|-------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| PERFORMANCE - COOLING ONLY | | | | | | | | | | |
| GROSS VALUE¹ | | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 408.5 | 439.1 | 482.0 | 544.7 | 575.0 | 636.0 | 688.8 | 741.6 | 797.0 |
| TOTAL POWER INPUT | kW | 128.6 | 144.9 | 159.7 | 169.4 | 183.2 | 219.0 | 225.7 | 249.7 | 262.0 |
| EER | kW/kW | 3.18 | 3.03 | 3.02 | 3.22 | 3.14 | 2.90 | 3.05 | 2.97 | 3.04 |
| EN14511 VALUES^{1,2} | | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 408.1 | 438.6 | 481.6 | 544.2 | 574.5 | 635.4 | 688.1 | 740.9 | 796.5 |
| EER | kW/kW | 3.14 | 2.99 | 2.99 | 3.18 | 3.10 | 2.87 | 3.01 | 2.93 | 3.02 |
| SEASONAL PERFORMANCE³ | | | | | | | | | | |
| P _{PARTED,C} | kW | 408 | 439 | 482 | 544 | 574 | 635 | 688 | 741 | 796 |
| SEER | | 5.45 | 5.35 | 5.28 | 5.39 | 5.34 | 5.24 | 5.40 | 5.16 | 5.11 |
| PERFORMANCE η_s | % | 215 | 211 | 208 | 213 | 211 | 207 | 213 | 203 | 201 |
| HEAT EXCHANGER IN COOLING⁴ | | | | | | | | | | |
| WATER FLOW | User Side l/s | 19.5 | 21.0 | 23.1 | 26.1 | 27.5 | 30.4 | 32.9 | 35.5 | 38.1 |
| PRESSURE DROP ² | User Side kPa | 42.4 | 49.0 | 31.1 | 39.7 | 44.2 | 47.6 | 55.8 | 58.8 | 28.9 |
| ELECTRICAL DATA | | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| FLA ⁴ | Total A | 291 | 316 | 339 | 379 | 398 | 458 | 489 | 525 | 551 |
| EXCHANGERS | | | | | | | | | | |
| MINIMUM WATER FLOW | Evaporator l/s | 9.17 | 9.17 | 13.89 | 13.89 | 13.89 | 14.44 | 14.44 | 16.67 | 24.72 |
| MINIMUM WATER CONTENT | Plant l | 1400 | 1500 | 1700 | 1900 | 2000 | 2200 | 2400 | 2600 | 2800 |
| FANS | | | | | | | | | | |
| QUANTITY | No. | 6 | 6 | 6 | 8 | 8 | 8 | 10 | 10 | 10 |
| AIRFLOW | m ³ /s | 27.78 | 27.78 | 27.78 | 37.04 | 37.04 | 37.04 | 46.30 | 46.30 | 46.30 |
| REFRIGERANT CIRCUIT | | | | | | | | | | |
| COMPRESSORS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| REFRIGERANT | | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze |
| REFRIGERANT CHARGE ⁵ | kg | 72 | 76 | 78 | 92 | 94 | 96 | 125 | 130 | 136 |
| NOISE LEVELS | | | | | | | | | | |
| TOTAL SOUND PRESSURE ⁶ | dB(A) | 59 | 60 | 60 | 61 | 61 | 61 | 62 | 62 | 63 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁷ | dB(A) | 91 | 92 | 92 | 93 | 93 | 93 | 95 | 95 | 96 |
| SIZE AND WEIGHT⁸ | | | | | | | | | | |
| WIDTH | mm | 4150 | 4150 | 4150 | 5400 | 5400 | 5400 | 6650 | 6650 | 6650 |
| DEPTH | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT | mm | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 |
| OPERATING WEIGHT | kg | 4949 | 4961 | 5056 | 5686 | 5686 | 5718 | 6283 | 6643 | 7405 |

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
 2. Values in compliance with EN14511.
 3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
 4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
 5. Theoretical - refer to serial plate for actual charge volumes.
 6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
 7. Sound power on the basis of measurement taken in compliance with ISO 9614.
 8. Sound power level in cooling, outdoors.
8. Unit in standard configuration, without optional accessories.

Eurovent Certified Data

i-FX2-G04 R1234ze Air Cooled Chiller

(926 to 1,619kW)

Low noise with EC Fans
Version (-SL-K-EC)



- Notes:**
1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
 2. Values in compliance with EN14511.
 3. Parameter calculated according to [Regulation (EU) N. 2016/2281].
 4. Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.
 5. Theoretical - refer to serial plate for actual charge volumes.
 6. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
 7. Sound power on the basis of measurement taken in compliance with ISO 9614.
 8. Unit in standard configuration, without optional accessories.

Eurovent Certified Data

The new generation of customisable screw compressor chillers has arrived with Climaveneta's range of **i-FX2** air cooled chillers. Available with 3 efficiency levels, all of which can be combined with 4 different levels of noise suppression, and the ability to fit integrated hydronic pumps; the **i-FX2** range has a multitude of combinations to match your project requirements.

Key Features & Benefits

- Next generation of efficiency with exceptionally low GWP refrigerant (GWP₁₀₀ = 1)*
- Wide operating envelope for comfort and process applications
- Variety of low noise versions to match your project requirements
- Exceptionally compact design
- Wide variety of customisations available including factory fitted hydronic pumps

*IPCC AR5

R1234ze

| MODEL | | 0962 | 1062 | 1152 | 1253 | 1333 | 1463 | 1573 | 1683 |
|---|-------------------|----------|----------|----------|----------|----------|----------|----------|----------|
| PERFORMANCE - COOLING ONLY | | | | | | | | | |
| GROSS VALUE¹ | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 926.4 | 1016 | 1110 | 1186 | 1234 | 1412 | 1511 | 1619 |
| TOTAL POWER INPUT | kW | 305.0 | 322.0 | 363.7 | 383.3 | 404.2 | 461.3 | 499.1 | 529.9 |
| EER | kW/kW | 3.04 | 3.16 | 3.05 | 3.09 | 3.05 | 3.06 | 3.03 | 3.06 |
| EN14511 VALUES^{1,2} | | | | | | | | | |
| TOTAL COOLING CAPACITY | kW | 925.7 | 1015 | 1109 | 1185 | 1233 | 1411 | 1510 | 1619 |
| EER | kW/kW | 3.01 | 3.11 | 3.01 | 3.06 | 3.02 | 3.03 | 2.99 | 3.01 |
| SEASONAL PERFORMANCE³ | | | | | | | | | |
| P _{PARTED,C} | kW | 926 | 1015 | 1109 | 1185 | 1233 | 1411 | 1510 | 1619 |
| SEER | | 5.13 | 5.25 | 5.23 | 5.16 | 5.17 | 5.18 | 5.23 | 5.26 |
| PERFORMANCE η _s | % | 202 | 207 | 206 | 203 | 204 | 204 | 206 | 207 |
| HEAT EXCHANGER IN COOLING⁴ | | | | | | | | | |
| WATER FLOW | User Side l/s | 44.3 | 48.6 | 53.1 | 56.7 | 59.0 | 67.5 | 72.3 | 77.4 |
| PRESSURE DROP ² | User Side kPa | 39.0 | 57.2 | 59.3 | 45.2 | 48.8 | 48.5 | 59.8 | 68.7 |
| ELECTRICAL DATA | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| FLA ⁴ | Total A | 651 | 702 | 764 | 812 | 857 | 987 | 1045 | 1097 |
| EXCHANGERS | | | | | | | | | |
| MINIMUM WATER FLOW | Evaporator l/s | 24.72 | 22.5 | 23.61 | 28.33 | 28.33 | 37.22 | 38.89 | 38.89 |
| MINIMUM WATER CONTENT | Plant l | 3200 | 3600 | 3900 | 4200 | 4300 | 4900 | 5300 | 5700 |
| FANS | | | | | | | | | |
| QUANTITY | No. | 12 | 14 | 14 | 16 | 16 | 18 | 18 | 20 |
| AIRFLOW | m ³ /s | 55.56 | 64.82 | 64.82 | 74.08 | 74.08 | 83.34 | 83.34 | 92.6 |
| REFRIGERANT CIRCUIT | | | | | | | | | |
| COMPRESSORS | No. | 2 | 2 | 2 | 3 | 3 | 3 | 3 | 3 |
| CIRCUITS | No. | 2 | 2 | 2 | 3 | 3 | 3 | 3 | 3 |
| REFRIGERANT | | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze |
| REFRIGERANT CHARGE ⁵ | kg | 158 | 178 | 183 | 227 | 232 | 256 | 276 | 300 |
| NOISE LEVELS | | | | | | | | | |
| TOTAL SOUND PRESSURE ⁶ | dB(A) | 63 | 63 | 63 | 63 | 63 | 64 | 64 | 64 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁷ | dB(A) | 96 | 96 | 96 | 96 | 96 | 97 | 97 | 97 |
| SIZE AND WEIGHT⁸ | | | | | | | | | |
| WIDTH | mm | 7900 | 9150 | 9150 | 10400 | 10400 | 11650 | 11650 | 12900 |
| DEPTH | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT | mm | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 |
| OPERATING WEIGHT | kg | 7935 | 8697 | 8869 | 11375 | 11377 | 12508 | 12598 | 13171 |

FX2-G05 R513A Air Cooled Chiller

(322 to 996kW)

Standard Version (/K)



Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
4. Sound power on the basis of measurements taken in compliance with ISO 9614.
5. Sound power level in cooling, outdoors.
6. Unit in standard configuration, without optional accessories.
7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
8. Seasonal energy efficiency ratio.
9. Seasonal space cooling energy efficiency.

Eurovent Certified Data

The Climaveneta range of **FX2-G05** units are air cooled chillers with screw compressors, designed for delivering high efficiencies in comfort applications. Available with lower GWP R513A refrigerant, the new range features 2 or 3 compressors in multi-circuit configuration.

Key Features & Benefits

- Compact design
- Low noise
- Energy efficient
- Lower GWP R513A refrigerant

| MODEL | | 0322 | 0352 | 0402 | 0472 | 0512 | 0572 | 0652 | 0702 | 0772 | 0852 | 0902 | 1002 |
|--|---------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| PERFORMANCE | | | | | | | | | | | | | |
| COOLING ONLY (GROSS VALUE) | | | | | | | | | | | | | |
| COOLING CAPACITY ¹ | kW | 322.1 | 350.2 | 411.9 | 464.4 | 516.7 | 573.4 | 645.8 | 707.6 | 779.8 | 862.9 | 937.3 | 996.0 |
| TOTAL POWER INPUT ¹ | kW | 102.4 | 119.2 | 133.1 | 146.1 | 172.5 | 188.6 | 207.4 | 239.2 | 254.6 | 272.4 | 295.1 | 315.5 |
| EER ¹ | kW/kW | 3.146 | 2.938 | 3.095 | 3.179 | 2.995 | 3.040 | 3.114 | 2.958 | 3.063 | 3.168 | 3.176 | 3.157 |
| ESEER ¹ | kW/kW | 4.430 | 4.440 | 4.510 | 4.500 | 4.440 | 4.460 | 4.470 | 4.480 | 4.470 | 4.450 | 4.450 | 4.460 |
| COOLING ONLY (EN14511 VALUE) | | | | | | | | | | | | | |
| COOLING CAPACITY ^{1,2} | kW | 321.8 | 349.8 | 411.5 | 463.9 | 516.2 | 572.9 | 645.2 | 707.0 | 779.1 | 862.3 | 936.6 | 995.2 |
| EER ^{1,2} | kW/kW | 3.120 | 2.910 | 3.060 | 3.140 | 2.970 | 3.010 | 3.080 | 2.930 | 3.020 | 3.130 | 3.140 | 3.120 |
| ESEER ^{1,2} | | 4.300 | 4.300 | 4.350 | 4.310 | 4.290 | 4.280 | 4.300 | 4.320 | 4.270 | 4.290 | 4.280 | 4.270 |
| ENERGY EFFICIENCY | | | | | | | | | | | | | |
| SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281) | | | | | | | | | | | | | |
| AMBIENT REFRIGERATION | | | | | | | | | | | | | |
| P _{RATED,C} ⁷ | kW | 322 | 350 | 412 | 464 | 516 | 573 | 645 | 707 | 779 | 862 | 937 | 995 |
| SEER ^{7,8} | | 4.51 | 4.50 | 4.56 | 4.58 | 4.56 | 4.56 | 4.58 | 4.57 | 4.57 | 4.58 | 4.59 | 4.59 |
| PERFORMANCE η _s ^{7,9} | % | 177 | 177 | 179 | 180 | 179 | 179 | 180 | 180 | 180 | 180 | 180 | 181 |
| EXCHANGERS | | | | | | | | | | | | | |
| HEAT EXCHANGER USER SIDE IN REFRIGERATION | | | | | | | | | | | | | |
| WATER FLOW ¹ | l/s | 15.40 | 16.75 | 19.70 | 22.21 | 24.71 | 27.42 | 30.88 | 33.84 | 37.29 | 41.27 | 44.82 | 47.63 |
| PRESSURE DROP AT THE HEAT EXCHANGER | kPa | 27.7 | 32.7 | 38.8 | 49.4 | 37.3 | 46.0 | 46.6 | 44.5 | 54.1 | 47.2 | 49.2 | 55.6 |
| REFRIGERANT CIRCUIT | | | | | | | | | | | | | |
| COMPRESSORS NR. | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| REFRIGERANT CHARGE | kg | 57.0 | 60.0 | 71.0 | 81.0 | 88.0 | 98.0 | 113 | 120 | 133 | 150 | 163 | 173 |
| NOISE LEVEL | | | | | | | | | | | | | |
| SOUND PRESSURE ³ | dB(A) | 67 | 67 | 67 | 68 | 68 | 68 | 68 | 70 | 69 | 69 | 70 | 70 |
| SOUND POWER LEVEL IN COOLING ^{4,5} | dB(A) | 99 | 99 | 99 | 100 | 100 | 100 | 100 | 102 | 102 | 102 | 103 | 103 |
| SIZE AND WEIGHT | | | | | | | | | | | | | |
| WIDTH ⁶ | mm | 2750 | 2750 | 4000 | 4000 | 4000 | 5250 | 5250 | 5250 | 6500 | 6500 | 7750 | 7750 |
| DEPTH ⁶ | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT ⁶ | mm | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 |
| OPERATING WEIGHT ⁶ | kg | 3120 | 2950 | 3600 | 3730 | 4570 | 5060 | 5190 | 5550 | 6400 | 6980 | 7460 | 7620 |

FX2-G05 R513A Air Cooled Chiller

(1,056 to 1,839kW)

Standard Version (/K)







Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
4. Sound power on the basis of measurements taken in compliance with ISO 9614.
5. Sound power level in cooling, outdoors.
6. Unit in standard configuration, without optional accessories.
7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
8. Seasonal energy efficiency ratio.
9. Seasonal space cooling energy efficiency.

 Eurovent Certified Data

The Climaveneta range of **FX2-G05** units are air cooled chillers with screw compressors, designed for delivering high efficiencies in comfort applications. Available with lower GWP R513A refrigerant, the new range features 2 or 3 compressors in multi-circuit configuration.

Key Features & Benefits

-  Compact design
-  Low noise
-  Energy efficient
-  Lower GWP R513A refrigerant

R513A

| MODEL | | 1052 | 1102 | 1152 | 1222 | 1262 | 1322 | 1402 | 1503 | 1593 | 1663 | 1773 | 1883 |
|--|---------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| PERFORMANCE | | | | | | | | | | | | | |
| COOLING ONLY (GROSS VALUE) | | | | | | | | | | | | | |
| COOLING CAPACITY ¹ | kW | 1056 | 1098 | 1139 | 1232 | 1264 | 1332 | 1400 | 1506 | 1592 | 1664 | 1778 | 1839 |
| TOTAL POWER INPUT ¹ | kW | 343.2 | 369.3 | 354.3 | 396.3 | 423.2 | 433.9 | 474.8 | 475.0 | 523.1 | 556.9 | 580.4 | 605.3 |
| EER ¹ | kW/kW | 3.077 | 2.973 | 3.215 | 3.109 | 2.987 | 3.070 | 2.949 | 3.171 | 3.043 | 2.988 | 3.063 | 3.038 |
| ESEER ¹ | kW/kW | 4.460 | 4.470 | 4.460 | 4.490 | 4.470 | 4.460 | 4.490 | 4.430 | 4.450 | 4.440 | 4.440 | 4.470 |
| COOLING ONLY (EN14511 VALUE) | | | | | | | | | | | | | |
| COOLING CAPACITY ^{1,2} | kW | 1055 | 1097 | 1138 | 1231 | 1264 | 1331 | 1399 | 1505 | 1591 | 1663 | 1777 | 1838 |
| EER ^{1,2} | kW/kW | 3.040 | 2.940 | 3.170 | 3.070 | 2.960 | 3.030 | 2.910 | 3.130 | 3.010 | 2.960 | 3.030 | 3.000 |
| ESEER ^{1,2} | | 4.290 | 4.300 | 4.280 | 4.290 | 4.300 | 4.280 | 4.300 | 4.270 | 4.270 | 4.290 | 4.280 | 4.290 |
| ENERGY EFFICIENCY | | | | | | | | | | | | | |
| SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281) | | | | | | | | | | | | | |
| AMBIENT REFRIGERATION | | | | | | | | | | | | | |
| P _{RATED,C} ⁷ | kW | 1055 | 1097 | 1138 | 1231 | 1264 | 1331 | 1399 | 1505 | 1591 | 1663 | 1777 | 1838 |
| SEER ^{7,8} | | 4.56 | 4.56 | 4.58 | 4.60 | 4.56 | 4.57 | 4.58 | 4.59 | 4.59 | 4.58 | 4.60 | 4.63 |
| PERFORMANCE η _s ^{7,9} | % | 180 | 179 | 180 | 181 | 179 | 180 | 180 | 181 | 181 | 180 | 181 | 182 |
| EXCHANGERS | | | | | | | | | | | | | |
| HEAT EXCHANGER USER SIDE IN REFRIGERATION | | | | | | | | | | | | | |
| WATER FLOW ¹ | l/s | 50.51 | 52.49 | 54.45 | 58.92 | 60.46 | 63.71 | 66.96 | 72.03 | 76.12 | 79.55 | 85.04 | 87.92 |
| PRESSURE DROP AT THE HEAT EXCHANGER | kPa | 48.3 | 52.1 | 56.1 | 61.6 | 48.8 | 54.2 | 59.9 | 52.5 | 58.6 | 45.1 | 51.6 | 59.1 |
| REFRIGERANT CIRCUIT | | | | | | | | | | | | | |
| COMPRESSORS NR. | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 3 | 3 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 3 | 3 |
| REFRIGERANT CHARGE | kg | 179 | 104 | 195 | 210 | 214 | 232 | 238 | 263 | 271 | 281 | 303 | 318 |
| NOISE LEVEL | | | | | | | | | | | | | |
| SOUND PRESSURE ³ | dB(A) | 71 | 71 | 71 | 71 | 72 | 73 | 73 | 73 | 73 | 73 | 73 | 73 |
| SOUND POWER LEVEL IN COOLING ^{4,5} | dB(A) | 104 | 104 | 104 | 104 | 105 | 106 | 106 | 106 | 106 | 106 | 106 | 106 |
| SIZE AND WEIGHT | | | | | | | | | | | | | |
| WIDTH ⁶ | mm | 7750 | 7750 | 9000 | 9000 | 9150 | 10400 | 10400 | 11650 | 11650 | 11650 | 12900 | 12900 |
| DEPTH ⁶ | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT ⁶ | mm | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 |
| OPERATING WEIGHT ⁶ | kg | 7870 | 7900 | 8430 | 8500 | 8860 | 9470 | 9610 | 12050 | 12110 | 12120 | 12710 | 12720 |

1.65

Commercial Heat
Pumps & Chillers

FX2-G05 R513A Air Cooled Chiller, Standard Version

FX2-G05 R513A Air Cooled Chiller

(310 to 960kW)

Low Noise Version (/SL-K)



Notes:

- Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
- Values in compliance with EN14511.
- Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
- Sound power on the basis of measurements taken in compliance with ISO 9614.
- Sound power level in cooling, outdoors.
- Unit in standard configuration, without optional accessories.
- Parameter calculated according to [REGULATION (EU) N. 2016/2281].
- Seasonal energy efficiency ratio.
- Seasonal space cooling energy efficiency.

Eurovent Certified Data

The Climaveneta range of **FX2-G05** units are air cooled chillers with screw compressors, designed for delivering high efficiencies in comfort applications. Available with lower GWP R513A refrigerant, the new range features 2 or 3 compressors in multi-circuit configuration.

Key Features & Benefits

- Compact design
- Low noise
- Energy efficient
- Lower GWP R513A refrigerant

| MODEL | | 0322 | 0352 | 0402 | 0472 | 0512 | 0572 | 0652 | 0702 | 0772 | 0852 | 0902 | 1002 |
|--|---------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| PERFORMANCE | | | | | | | | | | | | | |
| COOLING ONLY (GROSS VALUE) | | | | | | | | | | | | | |
| COOLING CAPACITY ¹ | kW | 310.2 | 358.4 | 410.2 | 450.1 | 511.7 | 557.4 | 621.9 | 713.0 | 770.4 | 828.6 | 901.6 | 959.9 |
| TOTAL POWER INPUT ¹ | kW | 103.1 | 115.1 | 128.2 | 148.9 | 164.4 | 177.9 | 211.2 | 226.9 | 251.5 | 276.9 | 300.1 | 321.0 |
| EER ¹ | kW/kW | 3.009 | 3.114 | 3.200 | 3.023 | 3.113 | 3.133 | 2.945 | 3.142 | 3.063 | 2.992 | 3.004 | 2.990 |
| ESEER ¹ | kW/kW | 4.400 | 4.440 | 4.480 | 4.490 | 4.470 | 4.480 | 4.470 | 4.450 | 4.470 | 4.440 | 4.460 | 4.470 |
| COOLING ONLY (EN14511 VALUE) | | | | | | | | | | | | | |
| COOLING CAPACITY ^{1,2} | kW | 309.8 | 358.0 | 409.8 | 449.7 | 511.2 | 556.9 | 621.3 | 712.4 | 769.7 | 828.0 | 901.0 | 959.1 |
| EER ^{1,2} | kW/kW | 2.980 | 3.080 | 3.160 | 2.990 | 3.080 | 3.100 | 2.910 | 3.110 | 3.020 | 2.960 | 2.970 | 2.960 |
| ESEER ^{1,2} | | 4.270 | 4.280 | 4.320 | 4.310 | 4.320 | 4.310 | 4.300 | 4.290 | 4.280 | 4.280 | 4.300 | 4.300 |
| ENERGY EFFICIENCY | | | | | | | | | | | | | |
| SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281) | | | | | | | | | | | | | |
| AMBIENT REFRIGERATION | | | | | | | | | | | | | |
| P _{RATED,C} ⁷ | kW | 310 | 358 | 410 | 450 | 511 | 557 | 621 | 712 | 770 | 828 | 901 | 959 |
| SEER ^{7,8} | | 4.46 | 4.50 | 4.56 | 4.55 | 4.57 | 4.55 | 4.55 | 4.56 | 4.58 | 4.56 | 4.58 | 4.58 |
| PERFORMANCE η _s ^{7,9} | % | 175 | 177 | 179 | 179 | 180 | 179 | 179 | 180 | 180 | 180 | 180 | 180 |
| EXCHANGERS | | | | | | | | | | | | | |
| HEAT EXCHANGER USER SIDE IN REFRIGERATION | | | | | | | | | | | | | |
| WATER FLOW ¹ | l/s | 14.83 | 17.14 | 19.62 | 21.53 | 24.47 | 26.66 | 29.74 | 34.10 | 36.84 | 39.63 | 43.12 | 45.90 |
| PRESSURE DROP AT THE HEAT EXCHANGER | kPa | 25.7 | 34.3 | 38.5 | 46.4 | 36.6 | 43.5 | 43.2 | 45.2 | 52.8 | 43.5 | 45.5 | 51.6 |
| REFRIGERANT CIRCUIT | | | | | | | | | | | | | |
| COMPRESSORS NR. | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| REFRIGERANT CHARGE | kg | 57.0 | 66.0 | 76.0 | 81.0 | 93.0 | 103 | 113 | 131 | 140 | 150 | 163 | 173 |
| NOISE LEVEL | | | | | | | | | | | | | |
| SOUND PRESSURE ³ | dB(A) | 55 | 55 | 56 | 56 | 57 | 57 | 57 | 57 | 58 | 58 | 59 | 59 |
| SOUND POWER LEVEL IN COOLING ^{4,5} | dB(A) | 87 | 87 | 88 | 88 | 89 | 89 | 89 | 90 | 91 | 91 | 92 | 92 |
| SIZE AND WEIGHT | | | | | | | | | | | | | |
| WIDTH ⁶ | mm | 2750 | 4000 | 4000 | 4000 | 5250 | 5250 | 5250 | 6500 | 6500 | 6500 | 7750 | 7750 |
| DEPTH ⁶ | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT ⁶ | mm | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 |
| OPERATING WEIGHT ⁶ | kg | 3380 | 3830 | 3960 | 4000 | 5270 | 5680 | 5720 | 6600 | 7090 | 7590 | 8100 | 8270 |

FX2-G05 R513A Air Cooled Chiller

(1,098 to 1,773kW)

Low Noise Version (/SL-K)



Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
4. Sound power on the basis of measurements taken in compliance with ISO 9614.
5. Sound power level in cooling, outdoors.
6. Unit in standard configuration, without optional accessories.
7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
8. Seasonal energy efficiency ratio.
9. Seasonal space cooling energy efficiency.

■ Eurovent Certified Data

The Climaveneta range of **FX2-G05** units are air cooled chillers with screw compressors, designed for delivering high efficiencies in comfort applications. Available with lower GWP R513A refrigerant, the new range features 2 or 3 compressors in multi-circuit configuration.

Key Features & Benefits

- Compact design
- Low noise
- Energy efficient
- Lower GWP R513A refrigerant

R513A

| MODEL | | 1052 | 1102 | 1152 | 1222 | 1262 | 1322 | 1402 | 1503 | 1593 | 1663 | 1773 | 1883 |
|--|---------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| PERFORMANCE | | | | | | | | | | | | | |
| COOLING ONLY (GROSS VALUE) | | | | | | | | | | | | | |
| COOLING CAPACITY ¹ | kW | 1037 | 1098 | 1131 | 1222 | 1257 | 1284 | 1386 | 1451 | 1573 | 1645 | 1714 | 1773 |
| TOTAL POWER INPUT ¹ | kW | 341.7 | 359.9 | 347.4 | 388.0 | 415.0 | 441.0 | 467.8 | 483.3 | 519.5 | 550.6 | 593.8 | 620.9 |
| EER ¹ | kW/kW | 3.035 | 3.051 | 3.256 | 3.149 | 3.029 | 2.912 | 2.963 | 3.002 | 3.028 | 2.988 | 2.886 | 2.856 |
| ESEER ¹ | kW/kW | 4.450 | 4.480 | 4.480 | 4.480 | 4.450 | 4.470 | 4.480 | 4.450 | 4.470 | 4.440 | 4.440 | 4.450 |
| COOLING ONLY (EN14511 VALUE) | | | | | | | | | | | | | |
| COOLING CAPACITY ^{1,2} | kW | 1037 | 1097 | 1130 | 1222 | 1256 | 1283 | 1385 | 1451 | 1572 | 1644 | 1714 | 1772 |
| EER ^{1,2} | kW/kW | 3.000 | 3.020 | 3.210 | 3.110 | 3.000 | 2.880 | 2.930 | 2.970 | 2.990 | 2.960 | 2.860 | 2.820 |
| ESEER ^{1,2} | | 4.290 | 4.300 | 4.290 | 4.290 | 4.290 | 4.310 | 4.290 | 4.290 | 4.290 | 4.300 | 4.280 | 4.280 |
| ENERGY EFFICIENCY | | | | | | | | | | | | | |
| SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281) | | | | | | | | | | | | | |
| AMBIENT REFRIGERATION | | | | | | | | | | | | | |
| P _{RATED,C} ⁷ | kW | 1037 | 1097 | 1130 | 1222 | 1256 | 1283 | 1385 | 1451 | 1572 | 1644 | 1714 | 1772 |
| SEER ^{7,8} | | 4.56 | 4.59 | 4.62 | 4.62 | 4.58 | 4.55 | 4.58 | 4.59 | 4.61 | 4.59 | 4.57 | 4.57 |
| PERFORMANCE η _s ^{7,9} | % | 179 | 180 | 182 | 182 | 180 | 179 | 180 | 180 | 182 | 180 | 180 | 180 |
| EXCHANGERS | | | | | | | | | | | | | |
| HEAT EXCHANGER USER SIDE IN REFRIGERATION | | | | | | | | | | | | | |
| WATER FLOW ¹ | l/s | 49.60 | 52.51 | 54.06 | 58.46 | 60.10 | 61.40 | 66.26 | 69.40 | 75.22 | 78.65 | 81.99 | 84.78 |
| PRESSURE DROP AT THE HEAT EXCHANGER | kPa | 46.6 | 52.2 | 55.3 | 60.7 | 48.2 | 50.3 | 58.6 | 48.7 | 57.2 | 44.1 | 47.9 | 55.0 |
| REFRIGERANT CIRCUIT | | | | | | | | | | | | | |
| COMPRESSORS NR. | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 3 | 3 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 3 | 3 |
| REFRIGERANT CHARGE | kg | 187 | 199 | 207 | 222 | 228 | 232 | 251 | 263 | 285 | 297 | 308 | 318 |
| NOISE LEVEL | | | | | | | | | | | | | |
| SOUND PRESSURE ³ | dB(A) | 60 | 60 | 61 | 61 | 61 | 61 | 61 | 61 | 61 | 61 | 61 | 62 |
| SOUND POWER LEVEL IN COOLING ^{4,5} | dB(A) | 93 | 93 | 94 | 94 | 94 | 94 | 94 | 94 | 94 | 94 | 94 | 95 |
| SIZE AND WEIGHT | | | | | | | | | | | | | |
| WIDTH ⁶ | mm | 9000 | 9000 | 10250 | 10250 | 10400 | 10400 | 11650 | 11650 | 12900 | 12900 | 12900 | 12900 |
| DEPTH ⁶ | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT ⁶ | mm | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 |
| OPERATING WEIGHT ⁶ | kg | 8920 | 9060 | 9640 | 9710 | 10060 | 10150 | 10720 | 12980 | 13560 | 13560 | 13650 | 13670 |

FX2-G05 R513A Air Cooled Chiller

(340 to 1,372kW)

High Efficiency Version (/E)



The Climaveneta range of **FX2-G05** units are air cooled chillers with screw compressors, designed for delivering high efficiencies in comfort applications. Available with lower GWP R513A refrigerant, the new range features 2 or 3 compressors in multi-circuit configuration.

Key Features & Benefits

- Compact design
- Low noise
- Energy efficient
- Lower GWP R513A refrigerant

R513A

| MODEL | | 0352 | 0402 | 0452 | 0472 | 0572 | 0602 | 0652 | 0702 | 0772 | 0852 | 0902 | 1002 | 1052 | 1152 | 1222 | 1322 | 1402 | |
|---|---------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|--|
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | |
| PERFORMANCE | | | | | | | | | | | | | | | | | | | |
| COOLING ONLY (GROSS VALUE) | | | | | | | | | | | | | | | | | | | |
| COOLING CAPACITY ¹ | kW | 340.3 | 389.8 | 444.9 | 485.0 | 570.3 | 619.0 | 658.9 | 698.5 | 756.1 | 844.7 | 918.1 | 1001 | 1061 | 1133 | 1207 | 1311 | 1372 | |
| TOTAL POWER INPUT ¹ | kW | 98.73 | 113.1 | 128.5 | 142.9 | 163.3 | 178.3 | 189.4 | 200.5 | 222.8 | 246.7 | 267.5 | 289.5 | 310.9 | 331.5 | 352.4 | 390.1 | 409.2 | |
| EER ¹ | kW/kW | 3.448 | 3.447 | 3.462 | 3.394 | 3.492 | 3.472 | 3.479 | 3.484 | 3.394 | 3.424 | 3.432 | 3.458 | 3.413 | 3.418 | 3.425 | 3.361 | 3.353 | |
| ESEER ¹ | kW/kW | 4.610 | 4.630 | 4.520 | 4.620 | 4.610 | 4.610 | 4.620 | 4.640 | 4.620 | 4.610 | 4.630 | 4.680 | 4.630 | 4.650 | 4.650 | 4.580 | 4.610 | |
| COOLING ONLY (EN14511 VALUE) | | | | | | | | | | | | | | | | | | | |
| COOLING CAPACITY ^{1,2} | kW | 339.9 | 389.4 | 444.5 | 484.6 | 569.8 | 618.5 | 658.4 | 697.9 | 755.5 | 844.1 | 917.4 | 1000 | 1060 | 1132 | 1206 | 1310 | 1371 | |
| EER ^{1,2} | kW/kW | 3.410 | 3.410 | 3.430 | 3.360 | 3.450 | 3.440 | 3.440 | 3.440 | 3.360 | 3.390 | 3.390 | 3.410 | 3.370 | 3.370 | 3.380 | 3.330 | 3.320 | |
| ESEER ^{1,2} | | 4.470 | 4.470 | 4.490 | 4.490 | 4.440 | 4.470 | 4.470 | 4.470 | 4.470 | 4.450 | 4.450 | 4.450 | 4.450 | 4.470 | 4.440 | 4.440 | 4.450 | |
| ENERGY EFFICIENCY | | | | | | | | | | | | | | | | | | | |
| SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281) | | | | | | | | | | | | | | | | | | | |
| AMBIENT REFRIGERATION | | | | | | | | | | | | | | | | | | | |
| P _{RATED,C} ⁷ | kW | 340 | 389 | 444 | 485 | 570 | 618 | 658 | 689 | 756 | 844 | 917 | 1000 | 1060 | 1132 | 1206 | 1310 | 1371 | |
| SEER ^{7,8} | | 4.63 | 4.64 | 4.69 | 4.66 | 4.72 | 4.64 | 4.66 | 4.73 | 4.71 | 4.71 | 4.74 | 4.79 | 4.72 | 4.74 | 4.74 | 4.66 | 4.69 | |
| PERFORMANCE η _s ^{7,9} | % | 182 | 182 | 185 | 183 | 186 | 183 | 183 | 186 | 185 | 185 | 187 | 188 | 186 | 187 | 187 | 183 | 185 | |
| EXCHANGERS | | | | | | | | | | | | | | | | | | | |
| HEAT EXCHANGER USER SIDE IN REFRIGERATION | | | | | | | | | | | | | | | | | | | |
| WATER FLOW ¹ | l/s | 16.27 | 18.64 | 21.27 | 23.20 | 27.27 | 29.60 | 31.51 | 33.40 | 36.16 | 40.40 | 43.90 | 47.88 | 50.72 | 54.17 | 57.73 | 62.68 | 65.62 | |
| PRESSURE DROP AT THE HEAT EXCHANGER | kPa | 26.5 | 34.8 | 27.7 | 32.9 | 41.4 | 34.1 | 38.6 | 43.4 | 36.3 | 40.0 | 47.2 | 61.2 | 48.7 | 53.2 | 59.2 | 39.7 | 43.5 | |
| REFRIGERANT CIRCUIT | | | | | | | | | | | | | | | | | | | |
| COMPRESSORS NR. | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | |
| REFRIGERANT CHARGE | kg | 65.0 | 76.0 | 86.0 | 94.0 | 109 | 117 | 126 | 134 | 143 | 160 | 173 | 188 | 200 | 213 | 227 | 244 | 258 | |
| NOISE LEVEL | | | | | | | | | | | | | | | | | | | |
| SOUND PRESSURE ³ | dB(A) | 66 | 67 | 67 | 67 | 67 | 67 | 68 | 68 | 68 | 68 | 69 | 69 | 70 | 70 | 70 | 70 | 71 | |
| SOUND POWER LEVEL IN COOLING ^{4,5} | dB(A) | 98 | 99 | 99 | 99 | 99 | 100 | 101 | 101 | 101 | 101 | 102 | 102 | 103 | 103 | 103 | 103 | 104 | |
| SIZE AND WEIGHT | | | | | | | | | | | | | | | | | | | |
| WIDTH ⁶ | mm | 4000 | 5250 | 5250 | 5250 | 6500 | 6500 | 7750 | 7750 | 7750 | 9000 | 9000 | 10250 | 10250 | 11650 | 11650 | 11650 | 12900 | |
| DEPTH ⁶ | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | |
| HEIGHT ⁶ | mm | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | |
| OPERATING WEIGHT ⁶ | kg | 3660 | 4270 | 4390 | 4440 | 5660 | 5960 | 6420 | 6550 | 6640 | 7530 | 8060 | 8570 | 8920 | 9430 | 9550 | 10490 | 11150 | |

Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
4. Sound power on the basis of measurements taken in compliance with ISO 9614.
5. Sound power level in cooling, outdoors.
6. Unit in standard configuration, without optional accessories.
7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
8. Seasonal energy efficiency ratio.
9. Seasonal space cooling energy efficiency.

Eurovent Certified Data

FX2-G04 R1234ze Air Cooled Chiller

(255 to 1,561kW)

High Efficiency Version (/A)



Notes:

1. Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
2. Values in compliance with EN14511.
3. Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
4. Sound power on the basis of measurements taken in compliance with ISO 9614.
5. Sound power level in cooling, outdoors.
6. Unit in standard configuration, without optional accessories.
7. Parameter calculated according to [REGULATION (EU) N. 2016/2281].
8. Seasonal energy efficiency ratio.
9. Seasonal space cooling energy efficiency.

Eurovent Certified Data

The Climaveneta range of **FX2-G04** units are air cooled chillers with screw compressors, designed for delivering high efficiencies in comfort applications. Available with HFO1234ze refrigerant, the new range features 2 or 3 compressors in multi-circuit configuration.

Key Features & Benefits

- Compact design
- Low noise
- Energy efficient
- Low GWP HFO1234ze refrigerant

R1234ze

| MODEL | | 0252 | 0302 | 0322 | 0352 | 0402 | 0452 | 0512 | 0572 | 0652 | 0772 | 0902 | 0972 | 1052 | 1152 | 1243 | 1373 | 1503 | 1593 | |
|---|---------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| PERFORMANCE | | | | | | | | | | | | | | | | | | | | |
| COOLING ONLY (GROSS VALUE) | | | | | | | | | | | | | | | | | | | | |
| COOLING CAPACITY ¹ | kW | 255.3 | 289.9 | 315.1 | 365.0 | 405.4 | 445.9 | 519.7 | 573.4 | 679.0 | 781.7 | 903.5 | 967.9 | 1058 | 1145 | 1239 | 1362 | 1488 | 1561 | |
| TOTAL POWER INPUT ¹ | kW | 75.98 | 87.26 | 94.43 | 106.7 | 121.7 | 135.2 | 156.8 | 172.2 | 204.8 | 235.6 | 276.0 | 287.2 | 319.7 | 343.6 | 373.1 | 415.8 | 446.3 | 473.4 | |
| EER ¹ | kW/kW | 3.359 | 3.321 | 3.338 | 3.421 | 3.331 | 3.298 | 3.314 | 3.330 | 3.315 | 3.318 | 3.274 | 3.370 | 3.309 | 3.332 | 3.321 | 3.276 | 3.334 | 3.297 | |
| ESEER ¹ | kW/kW | 4.530 | 4.500 | 4.560 | 4.480 | 4.500 | 4.590 | 4.530 | 4.570 | 4.530 | 4.550 | 4.530 | 4.540 | 4.590 | 4.630 | 4.550 | 4.570 | 4.590 | 4.600 | |
| COOLING ONLY (EN14511 VALUE) | | | | | | | | | | | | | | | | | | | | |
| COOLING CAPACITY ^{1,2} | kW | 255.0 | 289.5 | 314.7 | 364.7 | 405.0 | 445.4 | 519.2 | 572.9 | 678.4 | 781.0 | 902.9 | 967.1 | 1057 | 1145 | 1238 | 1361 | 1487 | 1560 | |
| EER ^{1,2} | kW/kW | 3.320 | 3.280 | 3.310 | 3.390 | 3.290 | 3.250 | 3.280 | 3.290 | 3.270 | 3.270 | 3.240 | 3.330 | 3.270 | 3.290 | 3.280 | 3.240 | 3.290 | 3.250 | |
| ENERGY EFFICIENCY | | | | | | | | | | | | | | | | | | | | |
| SEASONAL EFFICIENCY IN COOLING (Reg. EU 2016/2281) | | | | | | | | | | | | | | | | | | | | |
| AMBIENT REFRIGERATION | | | | | | | | | | | | | | | | | | | | |
| P _{RATED,C} ⁷ | kW | 255 | 290 | 315 | 365 | 405 | 445 | 519 | 573 | 678 | 781 | 903 | 967 | 1057 | 1145 | 1238 | 1361 | 1487 | 1560 | |
| SEER ^{7,8} | | 4.55 | 4.52 | 4.61 | 4.54 | 4.56 | 4.61 | 4.56 | 4.61 | 4.60 | 4.63 | 4.61 | 4.64 | 4.65 | 4.69 | 4.63 | 4.58 | 4.67 | 4.69 | |
| PERFORMANCE η _s ^{7,9} | % | 179 | 178 | 181 | 178 | 179 | 181 | 179 | 182 | 181 | 182 | 181 | 183 | 183 | 185 | 182 | 180 | 184 | 185 | |
| EXCHANGERS | | | | | | | | | | | | | | | | | | | | |
| HEAT EXCHANGER USER SIDE IN REFRIGERATION | | | | | | | | | | | | | | | | | | | | |
| WATER FLOW ¹ | l/s | 12.21 | 13.86 | 15.07 | 17.46 | 19.39 | 21.32 | 24.85 | 27.42 | 32.47 | 37.38 | 43.21 | 46.28 | 50.57 | 54.77 | 59.24 | 65.14 | 71.14 | 74.65 | |
| PRESSURE DROP AT THE HEAT EXCHANGER | kPa | 38.1 | 36.3 | 23.9 | 32.1 | 39.7 | 48.0 | 34.3 | 41.8 | 51.5 | 54.3 | 35.3 | 52.5 | 48.4 | 53.3 | 46.9 | 46.2 | 55.1 | 60.7 | |
| REFRIGERANT CIRCUIT | | | | | | | | | | | | | | | | | | | | |
| COMPRESSORS NR. | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 3 | |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 3 | |
| REFRIGERANT CHARGE | kg | 51.0 | 55.0 | 59.0 | 67.0 | 72.0 | 81.0 | 93.0 | 98.0 | 123 | 142 | 152 | 160 | 191 | 195 | 216 | 222 | 232 | 248 | |
| NOISE LEVEL | | | | | | | | | | | | | | | | | | | | |
| SOUND PRESSURE ³ | dB(A) | 66 | 67 | 67 | 68 | 68 | 68 | 68 | 70 | 69 | 70 | 71 | 71 | 73 | 73 | 73 | 73 | 73 | 73 | |
| SOUND POWER LEVEL IN COOLING ^{4,5} | dB(A) | 98 | 99 | 99 | 100 | 100 | 100 | 100 | 102 | 102 | 103 | 104 | 104 | 106 | 106 | 106 | 106 | 106 | 106 | |
| SIZE AND WEIGHT | | | | | | | | | | | | | | | | | | | | |
| WIDTH ⁶ | mm | 4000 | 4000 | 4000 | 4000 | 4000 | 5250 | 5250 | 5250 | 6500 | 7750 | 7750 | 9000 | 10400 | 10400 | 11650 | 11650 | 12900 | 12900 | |
| DEPTH ⁶ | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | |
| HEIGHT ⁶ | mm | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | 2640 | |
| OPERATING WEIGHT ⁹ | kg | 3540 | 3560 | 3660 | 3810 | 4470 | 4990 | 5190 | 5250 | 6710 | 7650 | 7900 | 8340 | 9370 | 9440 | 11380 | 12070 | 12680 | 12930 | |

1.69

Commercial Heat Pumps & Chillers

FX2-G05 R513A Air Cooled Chiller, High Efficiency Version
FX2-G04 HFO1234ze Air Cooled Chiller, High Efficiency Version

Commercial Heat Pumps & Chillers Accessories / Optional Extras

| DESCRIPTION | MODEL REF. |
|--|-------------|
| e-Series | |
| Fin Guard for EACV-M / EAHV-M | EC-130FG |
| Ecodan CAHV | |
| Main Pipework Thermistor | TW-TH16 |
| Differential Pressure Switch for Water Systems | KS10-EP100S |
| Wired Remote Controller | PAR-W31MAA |
| Centralised Controller | AE-C400E |
| Ecodan QAHV | |
| Main Pipework Thermistor | TW-TH16 |
| Centralised Controller | AE-C400E |
| Secondary Side Control Circuit Kit | Q-1SCK |

IT Cooling

Close Control Computer Room
Air Conditioning Systems





Contents

| | |
|---|-------------|
| MSY-TP R32 High SHF Wall Mounted System, Inverter (Cooling Only) | 2.6 |
| s-MEXT DX R32 Close Control System | 2.7 |
| x-MEXT DX R410A Close Control System | 2.8 |
| w-MEXT Chilled Water Close Control System | 2.9 |
| w-NEXT Chilled Water Close Control System | 2.10 |
| MEWall Data Centre Fan Wall | 2.11 |
| m-MRAC / m-MROW R410A Multi Density Close Coupled Control System | 2.12 |
| NR2-FC-G06-Z R454B Free-Cooling Chiller | 2.13 |
| TR2-FC-G04-Z R1234ze Free-Cooling Chiller | 2.14 |
| Accessories / Optional Extras | 2.15 |

Close Control Air Conditioning Systems

Precise Temperature and Humidity Control

More and more businesses are opting to store their data on-site in enterprise data centres, and in the past standard wall mounted split systems may have been an option to cool this type of application.

However, complex IT environments are often characterised by variable cooling loads, which require a high cooling capacity at full load in order to allow the IT equipment to operate correctly when it is most needed.

The perfect match between efficiency and reliability

The need for high sensible cooling and close control of both temperature and humidity in critical IT environments has therefore never been higher, and this is where our new range of specialist IT cooling systems makes it possible to keep temperature and humidity constant, even with very wide load variations, ensuring the correct room conditions all year round.

With our IT cooling systems, both efficiency and reliability are paramount throughout all the stages of research, design and manufacturing. By using this approach, along with over 50 years of manufacturing experience within the IT cooling sector, we are able to offer tailor made IT cooling solutions that have been designed to fulfil this requirement, reducing operational costs in the process through the use of highly efficient technology.



Mitsubishi Electric Perimeter Cooling Units

Mitsubishi Electric's Close Control systems are specifically designed for rooms with a high sensible cooling load that require precise temperature and humidity control. Because of the need for close control 24 hours a day, 365 days a year, an inverter driven compressor has been incorporated into the outdoor units, maximising the energy efficiency of the system. Features include:

- DX or chilled water versions
- Precise temperature and humidity control
- High Sensible cooling
- Easily integrates into existing and new control networks
- Back-up and rotate functions
- Inverter driven capacity control
- New generation EC PUL (Polymeric Ultralight) high efficiency fans
- Free cooling
- Dual fluid circuits available for the highest reliability



Designing the Optimum IT Cooling System

Two factors need to be taken into account when designing the perfect system for IT cooling: density and capacity. Mitsubishi Electric's wide range of products allows you to choose the correct balance of these factors, in order to meet your individual application requirements.

Mitsubishi Electric's range of dedicated IT cooling equipment includes DX systems specifically designed for IT applications, and for those who are familiar with the benefits and installation processes of our existing Mitsubishi Electric HVAC outdoor units. This opens up new opportunities for the application of DX systems in critical IT environments.



MSY-TP

R32 High SHF Wall Mounted System

Inverter (Cooling Only)



The M Series **MSY-TP** R32 High SHF wall mounted system blends energy efficiency with a modern design. This cooling only unit has a high sensible cooling capacity, making it ideal for small computer rooms and areas that require a greater degree of sensible cooling. The MSY-TP also utilises lower GWP R32 refrigerant.

Key Features & Benefits

- Compact and stylish white design
- High sensible cooling ability
- Weekly timer provides greater control of scheduling
- Cooling down to -25°C outdoor air temperature

R32

| MSY-TP - INDOOR UNITS | | MSY-TP35VF | MSY-TP50VF |
|---------------------------------|------------------------|------------------|------------------|
| CAPACITY (kW) | Cooling (nominal) | 3.5 (1.5-4.0) | 5.0 (1.5-5.7) |
| | Cooling (UK) | 3.47 (1.48-3.96) | 4.96 (1.48-5.65) |
| SHF (nominal) | | 0.98 | 0.82 |
| EER (nominal) | | 4.61 | 3.45 |
| SEER (BS EN14825) | | 9.00 | 8.00 |
| ErP ENERGY EFFICIENCY CLASS | Cooling | A+++ | A++ |
| AIRFLOW (l/s) | Cooling - Lo-Mi-Hi-SHi | 168-193-228-273 | 168-193-228-273 |
| PIPE SIZE mm (in) | Gas | 9.52 (3/8") | 9.52 (3/8") |
| | Liquid | 6.35 (1/4") | 6.35 (1/4") |
| SOUND PRESSURE LEVEL (dBA) | Cooling - Lo-Mi-Hi-SHi | 31-36-40-45 | 31-36-40-45 |
| SOUND POWER LEVEL (dBA) | | 60 | 60 |
| DIMENSIONS (mm) | Width x Depth x Height | 923 x 250 x 305 | 923 x 250 x 305 |
| WEIGHT (kg) | | 12.5 | 12.5 |
| ELECTRICAL SUPPLY | | 220-240v, 50Hz | 220-240v, 50Hz |
| FUSE RATING (BS88) - HRC (A) | | 10 | 10 |
| INTERCONNECTING CABLE No. CORES | | 4 | 4 |

| MUY-TP - OUTDOOR UNITS | | MUY-TP35VF | MUY-TP50VF |
|--|------------------------|--------------------|--------------------|
| SOUND PRESSURE LEVEL (dBA) | Cooling | 45 | 47 |
| SOUND POWER LEVEL (dBA) | Cooling | 58 | 61 |
| WEIGHT (kg) | | 34 | 34 |
| DIMENSIONS (mm) | Width x Depth x Height | 800 x 285 x 550 | 800 x 285 x 550 |
| ELECTRICAL SUPPLY | | Fed by Indoor Unit | Fed by Indoor Unit |
| PHASE | | Single | Single |
| SYSTEM POWER INPUT (kW) | Cooling (nominal) | 0.76 | 1.45 |
| | Cooling (UK) | 0.64 | 1.12 |
| STARTING CURRENT (A) | | 3.6 | 6.4 |
| SYSTEM RUNNING CURRENT (A) | Cooling [MAX] | 3.6 [9.2] | 6.4 [9.2] |
| FUSE RATING (BS88) - HRC (A) | | 10 | 10 |
| MAINS CABLE No. CORES | | 3 | 3 |
| MAX PIPE LENGTH (m) | | 20 | 20 |
| MAX HEIGHT DIFFERENCE (m) | | 12 | 12 |
| CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675) | | 0.85 / 0.57 | 0.85 / 0.57 |
| MAX ADDITIONAL REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675) | | 0.13 / 0.09 | 0.13 / 0.09 |

Notes: The SHF figures are based on nominal conditions. Requires an additional MAC-334IF-E interface and PAR-41MAA wired remote controller

s-MEXT DX

R32 Close Control System

Key Features & Benefits

- High efficiency achieved through Mr Slim Power Inverter technology
- EC plug fans fitted as standard
- Pipe runs up to 100m
- Full function - Humidifier & Heater options
- Available in Upflow [over] and Downflow [under] variants



Ideal for smaller IT Cooling environments, the **s-MEXT** system combines a high quality indoor CRAC with Mitsubishi Electric's Mr Slim Power Inverter condensing unit to create an efficient and precision Direct Expansion (DX) Split System for server rooms, UPS rooms and Mechanical and Technical rooms (MERs & TERs).



| CRAC UNITS (Computer Room Air Conditioning) | | | s-MEXT-G00-DX-F1-006-S | s-MEXT-G00-DX-F1-009-S | s-MEXT-G00-DX-F1-009-S | s-MEXT-G00-DX-F1-013-S | s-MEXT-G00-DX-F1-013-S | s-MEXT-G00-DX-F2-022-S | s-MEXT-G00-DX-F3-028-S | s-MEXT-G00-DX-F3-038-D | s-MEXT-G00-DX-F3-044-D |
|---|-----------------------|--------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| PERFORMANCE | | | | | | | | | | | |
| COOLING CAPACITY ¹ | Total | kW | 6.8 | 10.1 | 10.1 | 11.9 | 11.9 | 22.6 | 28.0 | 39.0 | 42.5 |
| | Sensible | kW | 6.2 | 8.9 | 8.9 | 10.2 | 10.2 | 19.3 | 26.2 | 33.6 | 35.3 |
| SHR ² | | | 0.91 | 0.88 | 0.88 | 0.86 | 0.86 | 0.85 | 0.94 | 0.86 | 0.83 |
| SYSTEM EER ³ | Nominal | kW/kW | 4.67 | 4.30 | 4.30 | 3.49 | 3.49 | 3.18 | 2.68 | 3.58 | 2.88 |
| REFRIGERANT | | | | | | | | | | | |
| TYPE | | | R32 | R32 | R32 | R32 | R32 | R32 | R32 | R32 | R32 |
| NUMBER OF CIRCUITS | No. | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 |
| CONNECTIONS | | | | | | | | | | | |
| REFRIGERANT PIPE | Gas | Ø Inch | 5/8" | 5/8" | 5/8" | 5/8" | 5/8" | 1" | 1" | 1" | 1" |
| | Liquid | Ø Inch | 3/8" | 3/8" | 3/8" | 3/8" | 3/8" | 1/2" | 1/2" | 3/8" | 1/2" |
| CONDENSATE ⁴ | | Ø mm | 19 | 19 | 19 | 19 | 19 | 19 | 19 | 19 | 19 |
| POWER SUPPLY CABLE ⁵ | No. x mm ² | | 3G1.5 | 3G1.5 | 3G1.5 | 3G1.5 | 3G1.5 | 3G1.5 | 5G1.5 | 5G1.5 | 5G1.5 |
| ELECTRICAL DATA | | | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | | 230/1/50 | 230/1/50 | 400/3+N/50 | 230/1/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 |
| STARTING CURRENT (SA) | A | | 2 | 2 | 2 | 2.8 | 2.8 | 3.3 | 3.8 | 3.8 | 3.8 |
| MAX ABSORBED CURRENT (FLA) | A | | 27.8 | 27.8 | 27.8 | 27.6 | 27.6 | 35.9 | 28.8 | 28.8 | 28.8 |
| FANS (EC) | | | | | | | | | | | |
| QUANTITY | No. | | 1 | 1 | 1 | 1 | 1 | 2 | 1 | 1 | 1 |
| AIRFLOW | m ³ /h | | 2000 | 2500 | 2500 | 2800 | 2800 | 5000 | 7600 | 8800 | 10000 |
| NOMINAL ESP ⁶ | Pa | | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| POWER INPUT ⁷ | kW | | 0.21 | 0.35 | 0.35 | 0.47 | 0.47 | 0.70 | 0.64 | 1.43 | 1.96 |
| ELECTRICAL HEATERS | | | | | | | | | | | |
| STEPS | No. | | 2 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 3 |
| POWER INPUT | kW | | 2.6 | 2.6 | 2.6 | 2.6 | 2.6 | 3.9 | 9.0 | 9.0 | 9.0 |
| HUMIDIFIER | | | | | | | | | | | |
| CAPACITY | kg/h | | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 8.0 | 8.0 | 8.0 |
| POWER INPUT | kW | | 2.3 | 2.3 | 2.3 | 2.3 | 2.3 | 2.3 | 6.0 | 6.0 | 6.0 |
| SOUND⁸ | | | | | | | | | | | |
| SOUND PRESSURE LEVEL | dB(A) | | 53 | 57 | 57 | 61 | 61 | 60 | 60 | 63 | 67 |
| SOUND POWER LEVEL | dB(A) | | 69 | 73 | 73 | 77 | 77 | 76 | 76 | 79 | 83 |
| FILTERS | | | | | | | | | | | |
| EFFICIENCY CLASS | ISO EN16890 | COARSE | 60% | 60% | 60% | 60% | 60% | 60% | 60% | 60% | 60% |
| SIZE AND WEIGHT | | | | | | | | | | | |
| FRAME SIZE | | | F1 | F1 | F1 | F1 | F1 | F2 | F3 | F3 | F3 |
| WIDTH (A) | mm | | 600 | 600 | 600 | 600 | 600 | 1000 | 1000 | 1000 | 1000 |
| DEPTH (B) | mm | | 500 | 500 | 500 | 500 | 500 | 500 | 890 | 890 | 890 |
| HEIGHT (H) | mm | | 1980 | 1980 | 1980 | 1980 | 1980 | 1980 | 1980 | 1980 | 1980 |
| NET WEIGHT | Upflow (O) | kg | 103 | 106 | 106 | 110 | 110 | 165 | 237 | 237 | 237 |
| | Downflow (U) | kg | 110 | 115 | 115 | 120 | 120 | 175 | 247 | 247 | 247 |

| OUTDOOR UNITS ⁹ | | PUZ-ZM60VHA2 | PUZ-ZM100VDA | PUZ-ZM100YDA | PUZ-ZM125VDA | PUZ-ZM125YDA | PUZ-ZM250YKA2 | PUZ-ZM250YKA2 | PUZ-ZM200YKA2 | PUZ-ZM250YKA2 |
|------------------------------------|-----------------------|--------------|--------------|--------------|--------------|--------------|---------------|---------------|---------------|---------------|
| QUANTITY OF OUTDOOR UNITS | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 |
| INSTALLATION | | | | | | | | | | |
| PIPEWORK SEPARATION ¹⁰ | Standard | 30 | 40 | 40 | 40 | 40 | 30 | 30 | 30 | 30 |
| | Max ¹¹ | 55 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| ELECTRICAL DATA | | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 230/1/50 | 230/1/50 | 400/3+N/50 | 230/1/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 | 400/3+N/50 |
| POWER INPUT | Nominal | kW | 1.25 | 2 | 2 | 2.94 | 2.94 | 6.41 | 9.67 | 6.41 |
| MAX OPERATING CURRENT | A | | 19.0 | 27.2 | 8.7 | 27.2 | 9.7 | 22.5 | 22.5 | 22.5 |
| POWER SUPPLY CABLE | No. x mm ² | | 3G4 | 3G4 | 5G1.5 | 3G4 | 5G1.5 | 5G6 | 5G6 | 5G6 |
| SOUND | | | | | | | | | | |
| SOUND PRESSURE LEVEL ¹² | | 53 | 44 | 44 | 50 | 50 | 62 | 62 | 62 | 62 |
| SOUND POWER LEVEL | | 67 | 63 | 63 | 70 | 70 | 77 | 77 | 77 | 77 |
| SIZE AND WEIGHT | | | | | | | | | | |
| WIDTH (A) | mm | 950 | 1110 | 1110 | 1050 | 1050 | 1050 | 1050 | 1050 | 1050 |
| DEPTH (B) | mm | 355 | 505 | 505 | 370 | 370 | 370 | 370 | 370 | 370 |
| HEIGHT (H) | mm | 943 | 870 | 870 | 1338 | 1338 | 1338 | 1338 | 1338 | 1338 |
| WEIGHT | kg | 70 | 107 | 114 | 116 | 125 | 135 | 135 | 137 | 135 |

Notes:

- Gross value based on return air of 27°C - 47%RH; Ambient Temperature 35°C; ESP=20Pa; Interconnecting pipework length 5m.
- SHR = Sensible Cooling Capacity / Total Cooling Capacity.
- EER = Energy Efficiency Ratio.
- Rubber pipe - referred to internal diameter.
- Minimum section.
- External Static Pressure.
- Corresponding to the nominal ESP=20Pa.
- As per ISO 3744. Sound pressure level on air return at 1m.
- All data refers to a single outdoor unit / circuit.
- In one direction.
- Additional refrigerant required for pipework separation greater than the standard.
- Average sound pressure level, at 1m distance, unit in a free field on a reflective surface according to ISO3744. Non-binding value obtained from the sound power level.

x-MEXT DX

R410A Close Control System



The **x-MEXT DX** is a highly efficient computer room air conditioner (CRAC), incorporating a wide range of options and configurations, and manufactured to the highest Mitsubishi Electric quality and reliability standards. The x-MEXT includes BLDC Mitsubishi Electric compressors, microchannel heat exchanger options, and an EC fan on the indoor unit with an impeller made of recycled plastic, that is specifically design for the x-MEXT range.

Key Features & Benefits

- Perimeter unit with upflow (over) and downflow (under) configurations
- Full inverter technology with BLDC Mitsubishi Electric compressors and a proprietary fan design
- Excellent efficiency with load matching control
- Advanced in-house developed control software
- Intelligent LAN controls for up to 15 units
- Interface cards available with many common BEMS protocols
- Automatic transfer switches and fast restart options
- Optional low ambient temperature kit for extreme conditions
- Full function humidifier and heating options
- Optional dampers, floor stands and discharge plenums

R410A

| CRAC UNITS (Computer Room Air Conditioning) | | x-MEXT-i-G02 -DX-U/O-029 | x-MEXT-i-G02 -DX-U/O-040 | x-MEXT-i-G02 -DX-U/O-051 | x-MEXT-i-G02 -DX-U/O-052 | x-MEXT-i-G02 -DX-U/O-067 | x-MEXT-i-G02 -DX-U/O-076 | x-MEXT-i-G02 -DX-U/O-078 | x-MEXT-i-G02 -DX-U/O-090 | x-MEXT-i-G02 -DX-U/O-108 | x-MEXT-i-G02 -DX-U/O-140 | |
|--|----------------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|----------------|
| PERFORMANCE - WITH CONDENSERS LISTED | | | | | | | | | | | | |
| COOLING CAPACITY*1 | Total | kW | 27.7 | 38.8 | 49.5 | 50.4 | 63.9 | 74.4 | 75.9 | 87.6 | 104.0 | 132.0 |
| SHR | Nominal | | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| EER*2 | Nominal | | 3.45 | 3.32 | 2.93 | 3.55 | 3.15 | 3.14 | 3.63 | 3.38 | 3.12 | 2.61 |
| FANS | | | | | | | | | | | | |
| AIRFLOW | | m ³ /h | 8,000 | 10,500 | 11,000 | 14,750 | 17,000 | 17,000 | 21,500 | 22,500 | 25,500 | 27,000 |
| FAN TYPE | | | Centrifugal EC | Centrifugal EC | Centrifugal EC | Centrifugal EC | Centrifugal EC | Centrifugal EC | Centrifugal EC | Centrifugal EC | Centrifugal EC | Centrifugal EC |
| FANS | No. | | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 2 | 3 | 3 |
| POWER INPUT | | kW | 0.80 | 1.61 | 1.85 | 2.16 | 3.20 | 3.22 | 3.21 | 3.66 | 5.15 | 6.24 |
| MAX EXTERNAL STATIC PRESSURE | | Pa | 364 | 299 | 243 | 237 | 173 | 169 | 300 | 245 | 141 | 84 |
| REFRIGERANT | | | | | | | | | | | | |
| REFRIGERANT | | | R410A | R410A | R410A | R410A | R410A | R410A | R410A | R410A | R410A | R410A |
| REFRIGERANT CIRCUITS | No. | | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 2 | 2 |
| COMPRESSOR(S) TYPE | Operating Mode | | i | i | i | i | 1 + i | 1 + i | 2(i) | 2(i) | 2(1 + i) | 2(1 + i) |
| FILTERS | | | | | | | | | | | | |
| FILTERS | No. | | 2 | 2 | 2 | 3 | 3 | 3 | 4 | 4 | 4 | 4 |
| EFFICIENCY CLASS*3 | Coarse | | 60% | 60% | 60% | 60% | 60% | 60% | 60% | 60% | 60% | 60% |
| SOUND LEVEL | | | | | | | | | | | | |
| PRESSURE LEVEL*4 | Downflow [under] / Upflow [over] | dB(A) | 50 / 69 | 47 / 65 | 47 / 64 | 48 / 66 | 47 / 65 | 47 / 64 | 49 / 68 | 49 / 67 | 50 / 69 | 52 / 69 |
| POWER LEVEL | Downflow [under] / Upflow [over] | dB(A) | 67 / 86 | 64 / 82 | 64 / 81 | 65 / 83 | 64 / 82 | 64 / 81 | 67 / 86 | 67 / 85 | 68 / 87 | 70 / 87 |
| ELECTRICAL | | | | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | | 400 / 3 / 50 | 400 / 3 / 50 | 400 / 3 / 50 | 400 / 3 / 50 | 400 / 3 / 50 | 400 / 3 / 50 | 400 / 3 / 50 | 400 / 3 / 50 | 400 / 3 / 50 | 400 / 3 / 50 |
| MAX RUNNING CURRENT | FLA | A | 30.6 | 41.5 | 41.5 | 47 | 57.4 | 57.4 | 82 | 82 | 108 | 108 |
| DIMENSIONS AND WEIGHT | | | | | | | | | | | | |
| FRAME SIZE | | | M | M | M | L | L | L | XL | XL | XL | XL |
| DIMENSIONS | Width | mm | 1,142 | 1,142 | 1,142 | 1,600 | 1,600 | 1,600 | 2,550 | 2,550 | 2,550 | 2,550 |
| | Depth | mm | 885 | 885 | 885 | 885 | 885 | 885 | 885 | 885 | 885 | 885 |
| | Height | mm | 1,980 | 1,980 | 1,980 | 1,980 | 1,980 | 1,980 | 1,980 | 1,980 | 1,980 | 1,980 |
| NET WEIGHT | Upflow [over] | kg | 363 | 372 | 375 | 459 | 502 | 503 | 799 | 806 | 915 | 916 |
| | Downflow [under] | kg | 372 | 380 | 383 | 477 | 520 | 521 | 839 | 846 | 955 | 957 |
| CONNECTIONS*5 | | | | | | | | | | | | |
| REFRIGERANT PIPE | Gas | Ø mm | 18 | 22 | 22 | 22 | 28 | 28 | 2 x 22 | 2 x 22 | 2 x 28 | 2 x 28 |
| DIAMETER | Liquid | Ø mm | 16 | 18 | 18 | 18 | 18 | 18 | 2 x 18 | 2 x 18 | 2 x 18 | 2 x 18 |
| CONDENSATE DRAIN*6 | | Ø mm | 19 | 19 | 19 | 19 | 19 | 19 | 19 | 19 | 19 | 19 |

| OUTDOOR REMOTE CONDENSER(S)*7 | | MEGR-MC-E 034 | MEGR-MC-E 049 | MEGR-MC-E 067 | MEGR-MC-E 067 | MEGR-MC-E 082 | MEGR-MC-E 110 | 2 x MEGR- MC-E 049 | 2 x MEGR- MC-E 055 | 2 x MEGR- MC-E 067 | 2 x MEGR- MC-E 082 |
|-------------------------------|--|-------------------|------------------|------------------|------------------|------------------|------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| FAN TYPE*8 | | Axial EC | Axial EC | Axial EC | Axial EC | Axial EC | Axial EC | Axial EC | Axial EC | Axial EC | Axial EC |
| FANS | | No. | 1 | 2 | 2 | 2 | 3 | 4 | 2 | 2 | 2 |
| AIRFLOW | | m ³ /h | 9,550 | 15,555 | 19,000 | 19,000 | 25,000 | 36,600 | 15,555 | 18,300 | 19,000 |
| POWER SUPPLY | | V/ph/Hz | 400 / 3 / 50 | 400 / 3 / 50 | 400 / 3 / 50 | 400 / 3 / 50 | 400 / 3 / 50 | 400 / 3 / 50 | 400 / 3 / 50 | 400 / 3 / 50 | 400 / 3 / 50 |
| MAX RUNNING CURRENT | | FLA | 1.92 | 3.84 | 3.84 | 3.84 | 5.76 | 7.68 | 3.84 | 3.84 | 5.76 |
| SOUND LEVEL*4 | | Pressure | 56 | 54 | 58 | 58 | 59 | 59 | 54 | 57 | 58 |
| DIMENSIONS*9 | | Width | mm | 1,140 | 1,140 | 1,140 | 1,140 | 1,140 | 1,140 | 1,140 | 1,140 |
| | | Length | mm | 1,360 | 2,040 | 2,600 | 2,600 | 2,600 | 2,040 | 2,040 | 2,600 |
| | | Height | mm | 1,168 | 1,168 | 1,168 | 1,168 | 1,168 | 1,168 | 1,168 | 1,168 |
| NET WEIGHT | | kg | 50 | 82 | 96 | 96 | 114 | 169 | 82 | 82 | 96 |
| CONNECTION SIZE*5 | | Gas | Ømm | 18 | 22 | 22 | 22 | 28 | 22 | 22 | 28 |
| REFRIGERANT PIPE DIAMETER | | Liquid | Ømm | 16 | 18 | 18 | 18 | 22 | 18 | 18 | 18 |

Notes:

- *1 Gross Total Values shown for Downflow [under] airflow configuration. Operating Conditions:
Return Air Temperature: 30°C / Relative Humidity: 35% / Ambient: 35°C / External Static Pressure: 20Pa
- *2 EER for indoor unit only.
- *3 As per ISO EN 16890. Other filter options are available.
- *4 Average sound level, at 1m distance, unit in a free field on a reflective surface according to ISO3744.
Non-binding value obtained from the sound power level.
- *5 Equipment connection only; consult x-MEXT / MEGR databooks for interconnecting pipework sizing.
- *6 Rubber pipe - refers to internal diameter.
- *7 All data is "per condenser". Typical condenser arrangement shown, other condenser sizing combinations are available.
- *8 Other type of fans are available.
- *9 Based on vertical airflow direction.
- These units contain <HFC R410A [GWP₁₀₀ 2088]> fluorinated greenhouse gas.

w-MEXT

Chilled Water Close Control System



The **w-MEXT** chilled water range incorporates the latest EC Plug fans, advanced controls software and maximises the coil area to bring high efficiency and high SHR performance to smaller data centre and server room environments.

Group controls and smart control strategies are not reserved for larger environments: w-MEXT can operate with intelligent integrated LAN functions for active redundancy and also integrate with the Hydronic Plant Connect (HPC) group control system, bringing harmony between the CRAHs and Chillers.

Additional options for electric heating and humidification further extend control and operational functionality.

Key Features & Benefits

- Compact footprint with Under, Over and Displacement airflows
- Adaptive set-point
- High efficiency EC plug fans
- LAN controls for up to 15 units
- Variety of valve options

| CRAH UNITS (Computer Room Air Handler) | | | w-MEXT U/O 006 F1 | w-MEXT U/O 009 F1 | w-MEXT U/O 011 F1 | w-MEXT U/O 013 F1 | w-MEXT U/O 016 F2 | w-MEXT U/O 022 F2 | w-MEXT U/O 026 F2 |
|--|------------------|---------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| PERFORMANCE | | | | | | | | | |
| COOLING CAPACITY*1 | Total | kW | 4.6 | 7.9 | 9.7 | 12.5 | 15.4 | 20.4 | 25.6 |
| | Nominal | | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| SHR | Nominal | | 65.3 | 37.6 | 30.2 | 27.8 | 38.5 | 30.0 | 26.9 |
| EER*2 | Nominal | | | | | | | | |
| FANS | | | | | | | | | |
| AIRFLOW | | m³/h | 1,500 | 2,200 | 2,500 | 2,700 | 4,300 | 5,000 | 5,400 |
| FAN TYPE | | | Centrifugal EC | Centrifugal EC | Centrifugal EC | Centrifugal EC | Centrifugal EC | Centrifugal EC | Centrifugal EC |
| FANS | No. | | 1 | 1 | 1 | 1 | 2 | 2 | 2 |
| POWER INPUT | | kW | 0.07 | 0.21 | 0.32 | 0.45 | 0.40 | 0.68 | 0.95 |
| MAX EXTERNAL STATIC PRESSURE | | Pa | 201 | 471 | 384 | 276 | 277 | 370 | 254 |
| WATER CIRCUIT | | | | | | | | | |
| FLOW RATE | | l/s | 0.22 | 0.38 | 0.46 | 0.60 | 0.74 | 0.97 | 1.22 |
| PRESSURE DROP*3 | | kPa | 23.5 | 61.1 | 32.2 | 55.7 | 46.5 | 80.2 | 108 |
| FILTERS | | | | | | | | | |
| FILTERS | No. | | 1 | 1 | 1 | 1 | 2 | 2 | 2 |
| EFFICIENCY CLASS*4 | Coarse | | 60% | 60% | 60% | 60% | 60% | 60% | 60% |
| SOUND LEVEL | | | | | | | | | |
| PRESSURE LEVEL*5 | | dB(A) | 43 | 56 | 58 | 60 | 53 | 60 | 62 |
| POWER LEVEL*5 | | dB(A) | 59 | 72 | 74 | 76 | 69 | 76 | 78 |
| ELECTRICAL | | | | | | | | | |
| POWER SUPPLY | | V/ph/Hz | 230 / 1 / 50 | 230 / 1 / 50 | 230 / 1 / 50 | 230 / 1 / 50 | 230 / 1 / 50 | 230 / 1 / 50 | 230 / 1 / 50 |
| MAX RUNNING CURRENT*6 | FLA | A | 3.6 | 4.0 | 4.0 | 4.0 | 7.2 | 8.0 | 8.0 |
| ELECTRIC HEATER (optional) | | | | | | | | | |
| STEPS | No. | | 2 | 2 | 2 | 2 | 3 | 3 | 3 |
| CAPACITY | | kW | 2.6 | 2.6 | 2.6 | 2.6 | 3.9 | 3.9 | 3.9 |
| MAX RUNNING CURRENT*7 | FLA | A | 11.3 | 11.3 | 11.3 | 11.3 | 16.9 | 16.9 | 16.9 |
| HUMIDIFIER (optional) | | | | | | | | | |
| QUANTITY | No. | | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| CAPACITY | | kg/h | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 |
| MAX RUNNING CURRENT*8 | FLA | A | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 | 14.1 |
| DIMENSIONS AND WEIGHT | | | | | | | | | |
| FRAME SIZE | | | F1 | F1 | F1 | F1 | F2 | F2 | F2 |
| DIMENSIONS | Width | mm | 600 | 600 | 600 | 600 | 1,000 | 1,000 | 1,000 |
| | Depth | mm | 500 | 500 | 500 | 500 | 500 | 500 | 500 |
| | Height | mm | 1,980 | 1,980 | 1,980 | 1,980 | 1,980 | 1,980 | 1,980 |
| | NET WEIGHT | | | | | | | | |
| | Upflow [over] | kg | 103 | 109 | 116 | 120 | 163 | 173 | 181 |
| | Downflow [under] | kg | 110 | 118 | 126 | 130 | 173 | 183 | 191 |
| CONNECTIONS | | | | | | | | | |
| WATER*9 | Inlet | Ø inch | 3/4" | 3/4" | 3/4" | 1" | 1 1/4" | 1 1/4" | 1 1/4" |
| | Outlet | Ø inch | 3/4" | 3/4" | 3/4" | 1" | 1 1/4" | 1 1/4" | 1 1/4" |
| CONDENSATE DRAIN*10 | | Ø mm | 19 | 19 | 19 | 19 | 19 | 19 | 19 |

Notes:

- *1: Gross total values shown. Operating conditions: Return Air Temperature: 26°C / Relative Humidity: 40% / Water Inlet: 10°C / Water ΔT: 5K / Glycol: 0% / External Static Pressure: 20Pa.
- *2: EER for indoor unit only.
- *3: For heat exchanger coil and 2-port valve only.
- *4: As per ISO EN 16890. Other filter options are available.
- *5: Average sound level, at 1m distance, unit in a free field on a reflective surface according to ISO 3744. Values for downflow [under] and upflow [over] only.
- *6: Cooling only version. Humidifier / electrical heating options will change value. Refer to databook.
- *7: For electric heater only.
- *8: For humidifier only.
- *9: As per ISO 228/1-G.
- *10: Rubber pipe - refers to internal diameter.

w-NEXT

Chilled Water Close Control System



High precision air conditioners are ideal for applications where high sensible cooling and close control of temperature and humidity are required. The **w-NEXT** chilled water range incorporates the latest EC plug fan(s), advanced controls software and an increased coil area resulting in the highest efficiency.

Key Features & Benefits

- High Efficiency - EC plug fans
- Small footprint
- Adaptive Set Point
- Active Redundancy
- Available in Upflow [over] and Downflow [under] variants

| CRAH UNITS (Computer Room Air Handler) | | w-NEXT S 045 E3P | w-NEXT S 053 E4 | w-NEXT S 072 E5 | w-NEXT S 081 E6 |
|---|---------------------------------------|------------------|-----------------|-----------------|-----------------|
| CAPACITY (kW) ^{*2} | Total | 41.0 | 48.1 | 66.1 | 73.5 |
| | Sensible | 41.0 | 48.1 | 66.1 | 73.5 |
| SHR ^{*3} | | 1.00 | 1.00 | 1.00 | 1.00 |
| EER | | 18.6 | 22.4 | 22.8 | 21.2 |
| EC SUPPLY FAN(S) | No. | 1 | 1 | 2 | 2 |
| AIRFLOW (m³/h) | | 10,800 | 13,100 | 16,350 | 20,000 |
| EXTERNAL STATIC PRESSURE (Pa) | | 20 | 20 | 20 | 20 |
| MAX EXTERNAL STATIC PRESSURE (Pa) | | 297 | 194 | 532 | 458 |
| POWER INPUT (kW) ^{*4} | | 2.20 | 2.15 | 2.90 | 3.47 |
| AIR FILTERS | No. | 2 | 3 | 3 | 4 |
| | Extended filtering surface (m²) | 1.71 | 2.07 | 2.59 | 3.16 |
| | Efficiency [ISO EN 16890] (COARSE) | 60% | 60% | 60% | 60% |
| CHILLED WATER FLOW RATE (l/s) | | 1.96 | 2.30 | 3.16 | 3.51 |
| WATERSIDE PRESSURE DROP (kPa) | Coil + 2-Port Valve | 34.1 | 37.3 | 42.9 | 35.6 |
| SOUND LEVEL dB(A) (ISO3774) ^{*5} | Downflow - Power / Pressure | 73 / 57 | 74 / 57 | 73 / 56 | 75 / 58 |
| | Upflow - Power / Pressure | 77 / 61 | 78 / 61 | 77 / 60 | 79 / 62 |
| POWER SUPPLY (V/Ph/Hz) | | 400 / 3+N / 50 | 400 / 3+N / 50 | 400 / 3+N / 50 | 400 / 3+N / 50 |
| MAX POWER ABSORBED (kW) | | 2.90 | 2.70 | 5.40 | 5.80 |
| MAX RUNNING CURRENT (A) | | 4.4 | 4.2 | 8.4 | 8.9 |
| DIMENSIONS (mm) | Width | 1085 | 1305 | 1630 | 1875 |
| | Depth | 930 | 930 | 930 | 930 |
| | Height | 1925 | 1980 | 1980 | 1980 |
| | Downflow | 321 | 345 | 470 | 531 |
| NET WEIGHT (kg) | Upflow | 329 | 379 | 428 | 483 |
| | Water Inlet / Outlet ISO 7/1 (Ø inch) | 1 1/4" | 1 1/2" | 2" | 2" |
| CONNECTIONS | Condensate (Ømm) ^{*6} | 19 | 19 | 19 | 19 |

| CRAH UNITS (Computer Room Air Handler) | | w-NEXT S 100 E7 | w-NEXT S 120 E8 | w-NEXT S 138 E9 | w-NEXT S 160 E10 ^{*1} | w-NEXT S 215 E10 ^{*1} |
|---|---------------------------------------|-----------------|-----------------|-----------------|--------------------------------|--------------------------------|
| CAPACITY (kW) ^{*2} | Total | 91.6 | 111.0 | 126.0 | 147.0 | 204.0 |
| | Sensible | 91.6 | 111.0 | 126.0 | 147.0 | 177.0 |
| SHR ^{*3} | | 1.00 | 1.00 | 1.00 | 1.00 | 0.87 |
| EER | | 23.0 | 17.8 | 19.6 | 22.8 | 31.7 |
| EC SUPPLY FAN(S) | No. | 2 | 3 | 3 | 3 | 3 |
| AIRFLOW (m³/h) | | 24,200 | 28,300 | 33,100 | 37,150 | 37,150 |
| EXTERNAL STATIC PRESSURE (Pa) | | 20 | 20 | 20 | 20 | 20 |
| MAX EXTERNAL STATIC PRESSURE (Pa) | | 247 | 237 | 309 | 207 | 207 |
| POWER INPUT (kW) ^{*4} | | 3.98 | 6.22 | 6.42 | 6.44 | 6.44 |
| AIR FILTERS | No. | 4 | 5 | 6 | 6 | 6 |
| | Extended filtering surface (m²) | 3.83 | 4.47 | 5.24 | 6.54 | 6.54 |
| | Efficiency [ISO EN 16890] (COARSE) | 60% | 60% | 60% | 60% | 60% |
| CHILLED WATER FLOW RATE (l/s) | | 4.38 | 5.33 | 6.04 | 7.03 | 9.74 |
| WATERSIDE PRESSURE DROP (kPa) | Coil + 2-Port Valve | 31.7 | 48.6 | 47 | 66.7 | 62.2 |
| SOUND LEVEL dB(A) (ISO3774) ^{*5} | Downflow - Power / Pressure | 76 / 59 | 79 / 61 | 80 / 62 | 79 / 61 | 79 / 61 |
| | Upflow - Power / Pressure | 80 / 63 | 83 / 65 | 81 / 63 | N/A | N/A |
| POWER SUPPLY (V/Ph/Hz) | | 400 / 3+N / 50 | 400 / 3+N / 50 | 400 / 3+N / 50 | 400 / 3+N / 50 | 400 / 3+N / 50 |
| MAX POWER ABSORBED (kW) | | 5.40 | 8.10 | 8.70 | 8.10 | 8.10 |
| MAX RUNNING CURRENT (A) | | 8.3 | 12.6 | 13.3 | 12.5 | 12.5 |
| DIMENSIONS (mm) | Width | 2175 | 2499 | 2699 | 3510 | 3510 |
| | Depth | 930 | 930 | 930 | 930 | 930 |
| | Height | 1980 | 1980 | 1980 | 1980 | 1980 |
| | Downflow | 589 | 660 | 753 | 900 | 970 |
| NET WEIGHT (kg) | Upflow | 535 | 598 | 679 | N/A | N/A |
| | Water Inlet / Outlet ISO 7/1 (Ø inch) | 2 1/2" | 2 1/2" | 3" | 3" | 3" |
| CONNECTIONS | Condensate (Ømm) ^{*6} | 19 | 19 | 19 | 19 | 19 |

THE COOLING CAPACITY DOES NOT CONSIDER THE SUPPLY FAN MOTOR THERMAL LOAD

^{*1} Downflow version only.

^{*2} Gross value based on return air at 24°C - 45%RH; Chiller water 7°C / 12°C.

^{*3} SHR = Sensible cooling capacity / Total cooling capacity.

^{*4} Fan(s) input power (ESP=20Pa).

^{*5} Average level at 1m from unit in free field conditions.

^{*6} Rubber pipe - refers to internal diameter.

MEWALL

Data Centre Fan Wall



Mitsubishi Electric's new and improved **MEWALL** brings performance and reliability at scale. It is ideal for hyperscale datacentres and large co-location customers, so that they can fully utilise their large building structures to deliver improved efficiencies and make every kW count.

By changing the airflow convention, the unit is designed for horizontal airflow at scale. This allows for taller heat exchangers, with elevated water temperatures, improving performance over conventional designs. It also allows for the separation of the white space from the technical corridor, simplifying security arrangements. Most importantly, this design eliminates the need for raised floors: simplifying building design, installation and reducing costs. Available in 2 sizes for 350kW to 400kW applications, it is available with a variety of options including an option to replace the side panels with filters to lower the airflow pressure drop and further improve on efficiency.

Key Features & Benefits

- State of the art EC fans with high efficiency air intake grilles
- High quality, low pressure drop filters easily accessible from the front
- Improved performance with side filter version
- Eliminates the need for raised floors in your white space
- Highly efficient EC fan combined with efficient heat exchanger
- Operates at modern hyperscale conditions
- Easy to service - fully accessible from the front
- Advanced control and networking options
- Available with variety of options including a variety of hydronic control valves, harmonic filters, fast restarts, touchscreen display and more

| MEWALL | | | 0402 | | 0462 | |
|------------------------------------|----------------|-------------------|----------------|----------------|----------------|----------------|
| VERSION | | | - | -SF | - | -SF |
| PERFORMANCE - Nominal | | | | | | |
| COOLING CAPACITY ¹ | Total | kW | 340.6 | 338.9 | 382.9 | 380.9 |
| SHR | | | 1.00 | 1.00 | 1.00 | 1.00 |
| EER ² | | | 36.9 | 40.7 | 36.5 | 39.1 |
| AIRFLOW ³ | Volume | m ³ /h | 90,000 | 90,000 | 100,000 | 100,000 |
| PERFORMANCE - Max Condition | | | | | | |
| COOLING CAPACITY ¹ | Total | kW | 459.5 | 465.9 | 491.1 | 494.9 |
| SHR | | | 1.00 | 1.00 | 1.00 | 1.00 |
| EER ² | | | 17.1 | 18.2 | 19.5 | 20.4 |
| AIRFLOW ³ | Volume | m ³ /h | 134,000 | 137,600 | 138,700 | 141,100 |
| FANS | | | | | | |
| AIRFLOW | Direction | | Horizontal | Horizontal | Horizontal | Horizontal |
| FAN TYPE | | | EC | EC | EC | EC |
| FANS | No. | | 8 | 8 | 8 | 8 |
| WATER CIRCUIT | | | | | | |
| FLOW RATE | l/s | | 6.94 | 6.94 | 6.94 | 6.94 |
| FILTERS | | | | | | |
| FILTERS | No. | | 12 | 12 | 12 | 12 |
| EFFICIENCY CLASS ⁴ | ePM10 | | 50% | 50% | 50% | 50% |
| ELECTRICAL | | | | | | |
| POWER SUPPLY | V/ph/Hz | | 400 / 3+N / 50 | 400 / 3+N / 50 | 400 / 3+N / 50 | 400 / 3+N / 50 |
| DIMENSIONS AND WEIGHT | | | | | | |
| DIMENSIONS | Width | mm | 3,600 | 3,600 | 3,600 | 3,600 |
| | Depth | mm | 1,600 | 1,600 | 1,600 | 1,600 |
| | Height | mm | 3,500 | 3,500 | 4,000 | 4,000 |
| NET WEIGHT | kg | | 2,460 | 2,460 | 2,545 | 2,545 |
| CONNECTIONS | | | | | | |
| WATER ⁵ | Inlet / Outlet | DN | 50 | 50 | 50 | 50 |
| | Inlet / Outlet | Ø inches | 2 | 2 | 2 | 2 |
| CONDENSATE DRAIN ⁶ | | Ø mm | 22 | 22 | 22 | 22 |

Notes:

-SF represents the side filter option included.

¹ Gross Total Values shown. Operating Conditions: Return Air Temperature: 37°C / Relative Humidity: 25% / Water Inlet: 20°C / Water DeltaT: 10K / Glycol: 0%.

² EER for indoor unit only.

³ Corresponding to nominal external static pressure (50Pa).

⁴ As per ISO EN 16890.

⁵ As per UNI EN 10255. The connections refer to the supply manifold for stacked modules.

Grooved connection - the grooved flexible joint is not supplied.

⁶ Rubber pipe - refers to internal diameter.

m-MRAC / m-MROW

R410A Multi Density Close Coupled Control System



Mitsubishi Electric's **Multi Density** systems combine the efficiency, quality and simplicity of VRF with high performance close coupled air conditioning units. Multi Density is ideal for applications where high sensible cooling and close control of temperature in high density applications is required. This system consists of multiple indoor 'coolside' close coupled air conditioners connected to a City Multi VRF outdoor unit. The result is a full inverter multi-split system, designed according to the best quality standards and dedicated to the most reliable IT environments. The range is particularly suitable for high density racks and blade server cooling in data centres, as it is able to cope with the high density of the thermal load, putting the air conditioning unit directly within the rows of racks to cool the localised heat sources (hot spots).

Key Features & Benefits

- High Efficiency - full Mitsubishi Electric inverter technology
- Small footprint
- Pipe runs up to 165m
- Trusted VRF technology

R410A

| CRAC UNITS (COMPUTER ROOM AIR CONDITIONING) | | m-MRAC G02 009 / M-MROW G02 009 | m-MRAC G02 015 / M-MROW G02 015 | m-MRAC G02 025 / M-MROW G02 025 |
|---|---|---------------------------------|---------------------------------|---------------------------------|
| COOLING CAPACITY (kW) ¹ | Total | 10.6 | 16.6 | 28.6 |
| | Sensible | 9.6 | 15.7 | 27.4 |
| SHR ² | | 0.91 | 0.94 | 0.96 |
| EC SUPPLY FAN (no.) | | 2 | 4 | 5 |
| AIRFLOW (m ³ /h) | | 1,500 | 2,700 | 4,200 |
| NOMINAL EXTERNAL STATIC PRESSURE (Pa) | | 20 | 20 | 20 |
| MAX EXTERNAL STATIC PRESSURE (Pa) | | 60 | 60 | 60 |
| POWER INPUT (kW) ³ | | 0.18 | 0.34 | 0.85 |
| REFRIGERANT | | R410A | R410A | R410A |
| REFRIGERANT CIRCUITS (n ⁴) | | 1 | 1 | 1 |
| AIR FILTERS | NO. | 2 | 2 | 2 |
| | Extended filtering surface (m ²) | 0.35 | 0.35 | 0.35 |
| | Efficiency [ISO EN 16890] (COARSE) | 40% | 40% | 40% |
| SOUND LEVEL [ISO 3744] (dB(A)) ⁴ | Pressure Level | 63.5 | 64.5 | 70.5 |
| | Power Level | 79 | 80 | 86 |
| POWER SUPPLY (V / Ph / Hz) | | 230 / 1 / 50 | 230 / 1 / 50 | 230 / 1 / 50 |
| ABSORBED CURRENT (A) ⁵ | | 0.8 | 1.5 | 4 |
| STARTING CURRENT (A) | | 2.9 | 5.8 | 7.3 |
| DIMENSIONS (mm) | Width | 300 | 300 | 300 |
| | Depth (MROW / MRAC) | 1000 / 1200 | 1000 / 1200 | 1000 / 1200 |
| | Height | 2,085 | 2,085 | 2,085 |
| NET WEIGHT (kg) | In-Row | 175 | 190 | 193 |
| | Enclosure | 185 | 200 | 203 |
| CONNECTIONS | Refrigerant pipes diameter - Gas (Ø Inch) | 3/4" | 7/8" | 1" |
| | Refrigerant pipes diameter - Liquid (Ø Inch) | 1/2" | 5/8" | 3/4" |
| | Condensate (Ømm) ⁵ | 16 | 16 | 16 |
| | Power supply wiring cable (no. x mm ²) ⁶ | 3G1.5 | 3G1.5 | 3G1.5 |

| OUTDOOR UNITS | | m-MOCU G02 050 | 2 X m-MOCU G02 050 |
|--|------------------------|-----------------------|------------------------|
| RATED COOLING CAPACITY | kW | 50 | 50 x 2 |
| SYSTEM EER ⁷ | kW/kW | 2.96 | 3.24 |
| SOUND PRESSURE LEVEL (dB(A)) | Cooling | 65 | 68 |
| WEIGHT (kg) | | 304 | 304 x 2 |
| DIMENSIONS (mm) | Width x Depth x Height | 1650 x 740 x 1750 | 1650 x 740 x 1750 [x2] |
| POWER SUPPLY (V / Hz) | | 380-415v, 50Hz | 380-415v, 50Hz |
| PHASE | | 3 | 3 |
| OUTDOOR POWER INPUT (kW) | Cooling (nominal) | 15.2 | 13.7 |
| STARTING CURRENT (A) | | 27.8 | 27.8 x 2 |
| MAX RUNNING CURRENT (A) | Cooling | 37.6 | 37.6 x 2 |
| FUSE RATING (BS88) - HRC (A) | | 40 | 40 x 2 |
| MAINS CABLE | No. Cores | 5G6 | 5G6 |
| MAX PIPE LENGTH (m) | | 165 | 165 |
| MAX HEIGHT DIFFERENCE (m) | | 50 (40 ⁷) | 50 (40 ⁷) |
| CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (T) | R410A (GWP 2088) | 11.8 / 24.6 | 11.8 / 24.6 x 2 |
| GUARANTEED OPERATING RANGE (°C) | Max Temp | 45 | 45 |
| | Min Temp | -15 | -15 |

Notes:

THE COOLING CAPACITY DOES NOT CONSIDER THE SUPPLY FAN MOTOR THERMAL LOAD.

¹ All data refers to the Rating Configuration with 2x m-MROW-Z G02 F/S 025 @35°C

Outdoor Temperature and 35°C/27%rh Indoor Temperature.

² SHR = Sensible cooling capacity / Total cooling capacity.

³ Corresponding to the nominal ESP=20Pa.

⁴ Sound pressure level on air return at 1m.

⁵ Rubber pipe - refers to internal diameter.

⁶ Minimum section. It's possible to connect indoor units with a sum of sizing from 25 to 75.

⁷ When outdoor unit is below indoor unit.

These units contain <HFC R410A (GWP₁₀₀ 2088)> fluorinated greenhouse gas.

NR2-FC-G06-Z

R454B Free-Cooling Chiller (359 to 895kW)



The NR2-FC-G06-Z is our outdoor chiller with integrated free-cooling utilising hermetic rotary Scroll compressors with R454B refrigerant, axial-flow fans, shell and tubes exchanger and an electronic expansion valve.

The range is composed of units equipped with four, five and six compressors in multi-circuit configuration. Available in 14 sizes from 359kW to 895kW cooling capacity and operating on R454B low GWP refrigerant, makes the NR2-FC-G06-Z best in class. The NR2-FC-G06-Z is available as four different configurations for noise and efficiency performance (K, SL-K, A, SL-A), with a wide operating range from 5°C to +24°C evaporator leaving water temperatures (ELWT) and ambient temperatures from 48°C to -30°C. The NR2-FC-G06-Z can also be fitted with a range of options including Soft Start, energy meters, BEMS interface cards and on-board hydronic kits.

Key Features & Benefits

- Best-in-class seasonal efficiency in a compact footprint
- Available in 'No Glycol' versions
- High efficiency scroll compressors providing a multi refrigeration circuit
- EC Fans available as an option for improved efficiency (standard on A version)
- Four different configurations for noise and efficiency performance available (K, SL-K, A, SL-A)
- Lower GWP refrigerant R454B
- Available options include; inbuilt hydronic pumps, energy meters, Refrigerant leak detection, dual power supply and many more
- Microchannel MCHX for condenser coil and Cu/Al for free cooling coil
- Fast Restart fitted as standard

R454B

| NR2-FC-G06-Z / A | | 0384 | 0414 | 0434 | 0462 | 0494 | 0524 | 0554 | 0594 | 0624 | 0685 | 0746 | 0836 | 0866 | 0926 |
|--|----------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| MECHANICAL COOLING (30°C / 20°C) ¹ | | | | | | | | | | | | | | | |
| COOLING CAPACITY | kW | 359.8 | 388.7 | 416.7 | 444.1 | 471.0 | 501.6 | 531.8 | 569.6 | 607.7 | 660.6 | 699.5 | 805.6 | 835.8 | 895.0 |
| COMPRESSOR POWER INPUT | kW | 76.53 | 79.48 | 82.67 | 86.03 | 89.52 | 96.89 | 104.5 | 108.7 | 113.1 | 122.3 | 137.2 | 153.4 | 160.9 | 176.3 |
| TOTAL POWER INPUT | kW | 86.70 | 91.40 | 96.30 | 101.3 | 106.5 | 113.9 | 121.5 | 127.4 | 133.5 | 146.1 | 161.0 | 180.6 | 188.1 | 203.5 |
| EER | kW/kW | 4.15 | 4.25 | 4.33 | 4.38 | 4.42 | 4.40 | 4.38 | 4.47 | 4.55 | 4.52 | 4.35 | 4.46 | 4.44 | 4.40 |
| TOTAL FREE-COOLING (30°C / 20°C) ² | | | | | | | | | | | | | | | |
| TOTAL FREE-COOLING OCCURS AT | °C | 10.7 | 11.3 | 11.8 | 12.0 | 12.3 | 12.0 | 11.6 | 11.7 | 11.9 | 12.3 | 11.9 | 11.9 | 11.7 | 11.1 |
| COOLING CAPACITY | kW | 359.8 | 388.7 | 416.7 | 444.1 | 471.0 | 501.6 | 531.8 | 569.6 | 607.7 | 660.6 | 699.5 | 805.6 | 835.8 | 895.0 |
| TOTAL POWER INPUT | kW | 10.20 | 11.90 | 13.60 | 15.30 | 17.00 | 17.00 | 17.00 | 18.70 | 20.40 | 23.80 | 23.80 | 27.20 | 27.20 | 27.20 |
| EER | kW/kW | 35.27 | 32.66 | 30.64 | 29.03 | 27.71 | 29.51 | 31.28 | 30.46 | 29.79 | 27.76 | 29.39 | 29.62 | 30.73 | 32.90 |
| MECHANICAL COOLING (16°C / 10°C) ³ | | | | | | | | | | | | | | | |
| COOLING CAPACITY | kW | 279.4 | 301.2 | 322.3 | 343.0 | 363.3 | 387.2 | 410.7 | 439.3 | 468.1 | 508.8 | 540.4 | 621.3 | 644.9 | 691.2 |
| COMPRESSOR POWER INPUT | kW | 73.56 | 76.84 | 80.32 | 83.94 | 87.66 | 94.65 | 101.8 | 106.5 | 111.3 | 120.4 | 133.7 | 150.3 | 157.3 | 171.7 |
| TOTAL POWER INPUT | kW | 83.80 | 88.70 | 93.90 | 99.20 | 104.7 | 111.6 | 118.8 | 125.2 | 131.7 | 144.2 | 157.5 | 177.5 | 184.5 | 198.9 |
| EER | kW/kW | 3.33 | 3.39 | 3.43 | 3.45 | 3.47 | 3.47 | 3.45 | 3.50 | 3.55 | 3.52 | 3.43 | 3.50 | 3.49 | 3.47 |
| TOTAL FREE-COOLING (16°C / 10°C) ⁴ | | | | | | | | | | | | | | | |
| TOTAL FREE-COOLING OCCURS AT | °C | 2.9 | 3.5 | 3.9 | 4.1 | 4.3 | 4.0 | 3.7 | 3.8 | 4.0 | 4.3 | 4.0 | 4.0 | 3.8 | 3.3 |
| COOLING CAPACITY | kW | 279.4 | 301.2 | 322.3 | 343.0 | 363.3 | 387.2 | 410.7 | 439.3 | 468.1 | 508.8 | 540.4 | 621.3 | 644.9 | 691.2 |
| TOTAL POWER INPUT | kW | 10.20 | 11.90 | 13.60 | 15.30 | 17.00 | 17.00 | 17.00 | 18.70 | 20.40 | 23.80 | 23.80 | 27.20 | 27.20 | 27.20 |
| EER | kW/kW | 27.39 | 25.31 | 23.70 | 22.42 | 21.37 | 22.78 | 24.16 | 23.49 | 22.95 | 21.38 | 22.71 | 22.84 | 23.71 | 25.41 |
| SEASONAL EFFICIENCY IN COOLING (REG. EU 2016/2281) ⁵ | | | | | | | | | | | | | | | |
| PRATED,C | kW | 262.2 | 282.4 | 301.9 | 321.3 | 340.2 | 362.7 | 384.8 | 411.5 | 438.3 | 476.3 | 506.2 | 581.9 | 604.1 | 647.8 |
| SEPR HT | | 7.20 | 7.24 | 7.18 | 7.16 | 7.10 | 7.12 | 7.24 | 7.26 | 7.31 | 7.33 | 7.39 | 7.48 | 7.40 | 7.59 |
| ELECTRICAL DATA | | | | | | | | | | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/51 | 400/3/52 | 400/3/53 | 400/3/54 | 400/3/55 |
| MAX FLA ⁷ | Total A | 201 | 217 | 233 | 249 | 265 | 280 | 295 | 312 | 329 | 365 | 395 | 445 | 459 | 488 |
| EXCHANGERS | | | | | | | | | | | | | | | |
| MINIMUM WATER FLOW IN COOLING | Evaporator l/s | 6.66 | 6.66 | 6.66 | 8.33 | 8.33 | 8.61 | 8.61 | 9.44 | 9.44 | 9.44 | 13.69 | 13.69 | 13.69 | 13.69 |
| MINIMUM SYSTEM VOLUME | l | 940 | 1020 | 1100 | 1180 | 1250 | 1320 | 1400 | 1500 | 1600 | 1750 | 1850 | 2120 | 2200 | 2350 |
| REFRIGERANT CIRCUIT | | | | | | | | | | | | | | | |
| COMPRESSORS | No. | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 5 | 6 | 6 | 6 | 6 |
| CIRCUITS | No. | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 3 | 2 |
| THEORETICAL REFRIGERANT CHARGE | kg | 36.0 | 40.5 | 46.8 | 58.5 | 60.3 | 60.3 | 63.0 | 69.3 | 72.9 | 75.6 | 77.4 | 80.1 | 80.1 | 80.1 |
| NOISE LEVELS | | | | | | | | | | | | | | | |
| TOTAL SOUND PRESSURE ⁸ | dB(A) | 63 | 63 | 64 | 63 | 64 | 64 | 64 | 64 | 65 | 65 | 65 | 65 | 66 | 66 |
| TOTAL SOUND POWER LEVEL IN COOLING ⁸ | dB(A) | 95 | 95 | 96 | 96 | 97 | 97 | 97 | 97 | 98 | 98 | 98 | 98 | 99 | 99 |
| SIZE AND WEIGHT ⁷ | | | | | | | | | | | | | | | |
| WIDTH (A) | mm | 3905 | 5080 | 5080 | 6255 | 6255 | 6255 | 6255 | 7430 | 7430 | 8605 | 8605 | 9780 | 9780 | 9780 |
| DEPTH (B) | mm | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT (H) | mm | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 | 2560 |
| OPERATION WEIGHT | kg | 3160 | 3580 | 3770 | 4600 | 4790 | 4820 | 4840 | 5220 | 5400 | 6140 | 6610 | 7170 | 7180 | 7210 |

Notes:

- *1 Gross Value. Plant (side) cooling exchanger water (in/out) 30.00°C/20.00°C; Source (side) heat exchanger air (in) 35.0°C; Ethylene glycol 30%.
 - *2 Gross Value. Plant (side) cooling exchanger water (in/out) 30.00°C/20.00°C; Ethylene glycol 30%.
 - *3 Gross Values. Plant (side) cooling exchanger water (in/out) 16.00°C/10.00°C; Source (side) heat exchanger air (in) 35.0°C; Ethylene glycol 30%.
 - *4 Gross Values. Plant (side) cooling exchanger water (in/out) 16.00°C/10.00°C; Ethylene glycol 30%.
 - *5 Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.
 - *6 Sound power on the basis of measurements taken in compliance with ISO 9614.
 - *7 Unit in standard configuration, without optional accessories.
 - *8 Seasonal energy efficiency of high temperature process cooling; REGULATION (EU) N. 2016/2281.
- General - Other models are available to suit noise or efficiency (K, SL-K, SL-A) including No Glycol (NG) hydraulic version. Models shown here are high efficiency "A" versions

TR2-FC-G04-Z

R1234ze Free-Cooling Chiller (1,216 to 1,819kW)

The **TR2-FC-G04-Z** is a high efficiency free-cooling chiller designed for hyperscale and colocation data centres. Available in both standard and No Glycol (-NG) versions, it features oil-free centrifugal compressors optimised for low GWP R1234ze refrigerant, operating in 3 modes: total free-cooling, hybrid free-cooling and mechanical cooling. The innovative new free-cooling control logic enhances the system's EER throughout the year, providing up to 20% annual energy savings compared to previous control logics.

Key Features & Benefits

- Best-in-class Energy Efficiency Ratio (EER)
- Low GWP R1234ze refrigerant (IPCC AR5)
- Highly efficient components throughout: magnetic levitation centrifugal compressors, large diameter EC fans and advanced control and optimisation algorithms
- Designed for chilled water with higher temperatures up to 26°C and high ΔT of up to 20K, ideal for the modern hyperscale data centre
- V-block design improves maintenance and increases the cooling density with the patented Reduced Exergy Depletion (R.E.D) Cooler
- Wide set of new options: fan diffusers, discharge air plenum, fast restart with ultracap, and energy monitoring amongst many others

R1234ze



| FREE-COOLING CHILLER | 1232 | 1653 | 1803 | 1232 | 1653 | 1803 |
|--|------------|----------|----------|----------|----------|----------|
| VERSION | - | - | - | -NG | -NG | -NG |
| PERFORMANCE | | | | | | |
| MECHANICAL COOLING - GROSS VALUE*1 | | | | | | |
| COOLING CAPACITY | kW | 1216 | 1619 | 1771 | 1249 | 1662 |
| TOTAL POWER INPUT | kW | 252.1 | 338.4 | 381.9 | 253.0 | 339.6 |
| EER | kW/kW | 4.82 | 4.78 | 4.64 | 4.94 | 4.89 |
| FREE-COOLING @ 10°C AMBIENT - GROSS VALUE*2 | | | | | | |
| COOLING CAPACITY | kW | 1178 | 1507 | 1654 | 1042 | 1341 |
| FREE-COOLING KW / NOMINAL KW | % | 97 | 93 | 93 | 83 | 81 |
| TOTAL FREE-COOLING (GROSS VALUE)*2 | | | | | | |
| TOTAL FREE-COOLING AMBIENT*3 | °C | 9.3 | 8.4 | 8.4 | 5.6 | 4.7 |
| TOTAL POWER INPUT | kW | 22.4 | 28.0 | 30.8 | 27.9 | 33.5 |
| EER | kW/kW | 54.29 | 57.82 | 57.50 | 44.77 | 49.61 |
| HEAT EXCHANGER IN COOLING*1 | | | | | | |
| GLYCOL | % | 30 | 30 | 30 | 0 | 0 |
| WATER FLOW | User Side | 26.7 | 35.6 | 38.9 | 25.0 | 33.3 |
| PRESSURE DROP | User Side | 74.8 | 97.5 | 100 | 71.2 | 88.9 |
| ELECTRICAL DATA | | | | | | |
| POWER SUPPLY | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| F.L.A.**4 | Total | 537 | 787 | 796 | 537 | 787 |
| EXCHANGERS | | | | | | |
| MINIMUM WATER FLOW | Evaporator | 16.7 | 20.8 | 22.2 | 16.7 | 20.8 |
| MINIMUM WATER CONTENT | Plant | 5000 | 5000 | 5000 | 5000 | 5000 |
| FANS | | | | | | |
| QUANTITY | No. | 16 | 20 | 22 | 16 | 20 |
| AIRFLOW | m³/s | 78.4 | 104.2 | 113.1 | 78.4 | 104.2 |
| REFRIGERANT CIRCUIT | | | | | | |
| COMPRESSORS | No. | 2 | 3 | 3 | 2 | 3 |
| CIRCUITS | No. | 1 | 1 | 1 | 1 | 1 |
| REFRIGERANT | | R1234ze | R1234ze | R1234ze | R1234ze | R1234ze |
| REFRIGERANT CHARGE*5 | kg | 680 | 840 | 860 | 680 | 840 |
| SOUND LEVELS | | | | | | |
| TOTAL SOUND PRESSURE*6 | dB(A) | 68 | 69 | 70 | 68 | 69 |
| TOTAL SOUND POWER LEVEL IN COOLING*7 | dB(A) | 101 | 102 | 103 | 101 | 102 |
| DIMENSIONS & WEIGHT*8 | | | | | | |
| WIDTH | mm | 9500 | 11700 | 12800 | 9500 | 11700 |
| DEPTH | mm | 2260 | 2260 | 2260 | 2260 | 2260 |
| HEIGHT | mm | 2500 | 2500 | 2500 | 2500 | 2500 |
| OPERATION WEIGHT | kg | 10700 | 12700 | 14000 | 11800 | 14100 |

Notes:

*1 Plant (side) cooling exchanger water (in/out) 32°C/20°C; Source (side) heat exchanger air (in) 35°C.

*2 Plant (side) cooling exchanger water (in/out) 32°C/20°C.

*3 Maximum ambient temperature where free-cooling capacity >= nominal cooling capacity, as stated above.

*4 Data valid for standard units without any additional options and only indicative. Safety values to be considered when cabling the unit for power supply and line-protection. Refer to Databook.

*5 Theoretical - refer to serial plate for actual charge volumes.

*6 Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.

*7 Sound power on the basis of measurement taken in compliance with ISO 9614.

Sound power level in cooling, outdoors.

*8 Unit in standard configuration, without optional accessories.

IT Cooling Accessories / Optional Extras

| DESCRIPTION | MODEL REF. |
|--|-------------|
| MSY-TP / MUY-TP | |
| Air outlet guide for MUY-TP35/50VF | MAC-881SG |
| Standard wired remote controller | PAR-41MAA |
| Interface for M-NET, MA remote controller (PAR-41MAA), on/off input and run/fault output | MAC-334IF-E |
| Interface for connection to Wi-Fi MELCloud service | MAC-587IF-E |
| s-MEXT DX | |
| s-MEXT-G00 F01 Support Frame H510 P043 | |
| s-MEXT-G00 F02 Support Frame H510 P043 | |
| s-MEXT-G00 F03 Support Frame H510 P043 | |
| s-MEXT-G00 F01 Plenum c/w 3 Grilles P013 | |
| s-MEXT-G00 F02 Plenum c/w 3 Grilles P013 | |
| s-MEXT-G00 F03 Plenum c/w 3 Grilles P013 | |
| s-MEXT-G00 Modbus serial card (RS485) | |
| s-MEXT-G00 BACnet TCP/IP card (RJ45) | |
| x-MEXT DX | |
| Modbus Serial card (RS485) | |
| BACNet TCP/IP Ethernet card (RJ45) | |
| Floor stand with rubber holders (350-500mm) | |
| Floor stand with rubber holders (500-750mm) | |
| Floor stand with rubber holders (750-1000mm) | |
| Electric heater | |
| Steam humidifier | |
| Air discharge plenum with 3 grilles | |
| Inlet damper with actuator | |
| Epoxy coated condenser coil(s) | |
| w-MEXT / w-NEXT | |
| Modbus Serial card (RS485) | |
| BACNet TCP/IP Ethernet card (RJ45) | |
| Floor stand with rubber holders (255-350mm) | |
| Floor stand with rubber holders (355-450mm) | |
| Floor stand with rubber holders (400-510mm) | |
| Electric heater | |
| Steam humidifier | |
| Air discharge plenum with 3 grilles | |
| Inlet damper with actuator | |
| m-MRAC / m-MROW | |
| Multi Density Tee & Adaptor | |



Residential Heating

Ecodan Residential Renewable Heating Systems



ecodan[®]
Renewable Heating Technology



Contents

| | |
|---|-------------|
| Ecodan Heat Pumps - Renewable Heating Systems | 3.4 |
| PUZ-WZ50-120VAA/YAA R290 Monobloc Air Source Heat Pumps | 3.6 |
| PUZ-WM50VHA R32 Monobloc Air Source Heat Pump | 3.8 |
| PUZ-WM60-112VAA/YAA R32 Monobloc Air Source Heat Pumps | 3.10 |
| PUZ-HWM140VHA/YHA R32 Monobloc Air Source Heat Pumps | 3.12 |
| EHPT20X-MEHEW FTC7 Packaged Cylinder for Ecodan Monobloc Units | 3.14 |
| EHPT15-17X-UKHLEWS FTC7 Pre-Plumbed Slimline Cylinders for Ecodan Monobloc Units | 3.16 |
| EHPT15-30X-UKHEWS/L FTC7 Pre-Plumbed Standard Cylinders for Ecodan Monobloc Units | 3.18 |
| FTC7 / FTC2BR Flow Temperature Controllers for use with Ecodan Monobloc Units and Third Party BEMS | 3.20 |
| Energy Monitoring Packs | 3.21 |
| MELCloud Wi-Fi Connectivity | 3.22 |
| i-LIFE2 SLIM Fan Assisted Radiator | 3.24 |
| Accessories / Optional Extras | 3.26 |

Ecodan Heat Pumps - Renewable Heating Systems

There is now no doubt that the world is in a climate crisis and that we need to act immediately to avoid catastrophic climate change. The UK Government have reacted by being the first major economy to pass net zero (Greenhouse Gas) emission laws. Renewable technologies, such as heat pumps, have become an integral part of the solution to the problem of reducing carbon emissions generated through heating.

As a market leader in both commercial and domestic heat pumps, Mitsubishi Electric is a pioneer in the development of this renewable technology. Around the world, heat pumps have been utilised for decades and Mitsubishi Electric has refined this technology to produce Ecodan - one of the most advanced, efficient heating systems available on the market today.

The award winning Ecodan heat pumps are available from 5kW up to 640kW, making them suitable for virtually any property, from small flats to large detached houses, from an office block to a school. They are the renewable, low carbon alternative to traditional high carbon heating systems.

- Renewable heating solution capable of reducing emissions and achieving climate targets
- Highly efficient, proven and refined technology that can lower energy bills
- Range of easy to design, install and maintain systems suitable for a variety of property and application types

Ecodan heat pumps are a renewable heating technology that efficiently and reliably generates sustainable space heating and hot water all year round, delivering a level of comfort that sets the technology apart from other forms of heating.



TV presenter, architect, lecturer and writer, George Clarke is a passionate advocate of design excellence and high levels of quality in the construction industry.

“ The way we design, build, heat, power and recycle our homes needs to change, and change quickly, and renewable heating is an important part of our future.










I'm therefore delighted to associate myself with Ecodan, the market-leading brand of heat pumps built here in the UK and which can help reduce energy bills and lower emissions for almost any home. ”

George Clarke

Ecodan Brand Ambassador

Range Overview



| System Type | Litres | 5kW | 5kW | 6kW | 6kW | 8.5kW | 8.5kW | 10kW | 11.2kW | 12kW | 14kW | 40kW | 40kW | 40kW |
|---|--------------------------------------|-----|-----|-----|-----|-------|-------|------|--------|------|------|------|------|------|
| FTC7 Standalone  PAC-IF082B-E | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | | |
| FTC7 Packaged Cylinder  EHPT20X-MEHEW | 200 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | | |
| FTC7 Pre-Plumbed Slimline Cylinder  | EHPT15X-UKHLEWS | 150 | ● | ● | ● | ● | ● | | | | | | | |
| | EHPT17X-UKHLEWS | 170 | ● | ● | ● | ● | ● | | | | | | | |
| FTC7 Pre-Plumbed Standard Cylinder  | EHPT15X-UKHEWS | 150 | ● | ● | ● | ● | ● | | | | | | | |
| | EHPT17X-UKHEWS | 170 | ● | ● | ● | ● | ● | | | | | | | |
| | EHPT21X-UKHEWS | 210 | ● | ● | ● | ● | ● | | | | | | | |
| | EHPT21X-UKHEWL | 210 | | | ● | ● | ● | ● | ● | ● | ● | | | |
| | EHPT25X-UKHEWL | 250 | | | ● | ● | ● | ● | ● | ● | ● | | | |
| EHPT30X-UKHEWL | 300 | | | | ● | ● | ● | ● | ● | ● | | | | |
| Approvals      | Manufactured in the United Kingdom | | ● | ● | ● | ● | ● | ● | ● | ● | ● | | | |
| | Red Dot Award | | ● | | ● | ● | ● | ● | ● | ● | ● | | | |
| | Quiet Mark Certification | | | | | ● | | ● | | ● | | | | |
| | Microgeneration Certification Scheme | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | Keymark | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Boiler Upgrade Scheme Product Eligibility List | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | | |

Notes: For further information on the Ecodan QAHV and CAHV models, please refer to the 'Commercial Heat Pumps & Chillers' section of this catalogue. Product Eligibility List from <https://www.ofgem.gov.uk/publications/boiler-upgrade-scheme-product-eligibility>.



PUZ-WZ50-120VAA/YAA

R290 Monobloc Air Source Heat Pumps



The new R290 Ecodan monobloc air source heat pumps are designed specifically to suit the demands of the UK market and include 5, 6, 8.5, 10 and 12kW sizes.

The innovative, stylish and compact single fan outdoor unit utilises advanced technologies to deliver improved efficiencies. Designed for a wide range of applications, the market leading low noise levels virtually eliminate the need for planning permission, maximises installation options and is a viable solution for all types of domestic requirements that the UK housing market demands.

Key Features & Benefits

- A+++ heating efficiency
- Ultra quiet noise levels
- MELCloud enabled
- High water temperature of up to 75°C
- Fully electric source of heating and hot water
- Minimised energy consumption
- Flexible product placement
- Remote control, monitoring, maintenance and technical support
- Ideal for energy storage
- Zero carbon ready



Manufactured in the UK

R290

| OUTDOOR UNIT | | PUZ-WZ50VAA(-BS) | PUZ-WZ60VAA(-BS) | PUZ-WZ85VAA(-BS) | PUZ-WZ85YAA(-BS) | PUZ-WZ100VAA(-BS) | PUZ-WZ100YAA(-BS) | PUZ-WZ120VAA(-BS) | PUZ-WZ120YAA(-BS) |
|---|--|------------------|------------------|------------------|------------------|-------------------|-------------------|-------------------|-------------------|
| HEAT PUMP SPACE HEATER - 55°C | ErP Rating (Range A+++ to D) | A++ | A++ | A++ | A++ | A++ | A++ | A++ | A++ |
| | $\eta_{h,s}$ | 138% | 139% | 143% | 143% | 141% | 141% | 142% | 142% |
| | SCOP (MCS) | 3.38 | 3.43 | - | - | - | - | - | - |
| HEAT PUMP SPACE HEATER - 35°C | ErP Rating (Range A+++ to D) | A+++ | A+++ | A+++ | A+++ | A+++ | A+++ | A+++ | A+++ |
| | $\eta_{h,s}$ | 182% | 179% | 183% | 183% | 189% | 189% | 192% | 192% |
| | SCOP (MCS) | 4.42 | 4.39 | - | - | - | - | - | - |
| HEAT PUMP COMBINATION HEATER - Large Profile ¹ | ErP Rating (Range A+ to F) | A+ | A+ | A+ | A+ | A+ | A+ | A+ | A+ |
| | $\eta_{h,s}$ | 143% | 143% | 137% | 137% | 129% | 129% | 129% | 129% |
| HEATING ² (A-7/W35) | Capacity (kW) | 5.2 | 6.2 | 9.5 | 9.5 | 11.3 | 11.3 | 13.4 | 13.4 |
| | Power Input (kW) | 1.94 | 2.51 | 2.5 | 2.5 | 4 | 4 | 4 | 4 |
| | COP | 2.68 | 2.47 | 2.60 | 2.60 | 2.70 | 2.70 | 2.45 | 2.45 |
| | OPERATING AMBIENT TEMPERATURE (°C DB) | -25 ~ +46 | -25 ~ +46 | -25 ~ +46 | -25 ~ +46 | -25 ~ +46 | -25 ~ +46 | -25 ~ +46 | -25 ~ +46 |
| MAXIMUM WATER OUTLET TEMPERATURE (°C) | | 75 | 75 | 75 | 75 | 75 | 75 | 75 | 75 |
| SOUND DATA ³ | Pressure Level at 1m (dBA) | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 |
| | Power Level (dBA) ⁴ | 56 | 56 | 54 | 54 | 55 | 55 | 55 | 55 |
| WATER DATA | Pipework Size (mm) | 22 | 22 | 28 | 28 | 28 | 28 | 28 | 28 |
| | Flow Rate (l/min) | 14 | 17 | 23 | 23 | 23 | 23 | 23 | 23 |
| | Water Pressure Drop (kPa) | 18.16 | 26 | 32.33 | 32.33 | 32.33 | 32.33 | 32.33 | 32.33 |
| | DIMENSIONS (mm) | | | | | | | | |
| DIMENSIONS (mm) | Width | 1050 | 1050 | 1050 | 1050 | 1050 | 1050 | 1050 | 1050 |
| | Depth | 480 | 480 | 480 | 480 | 480 | 480 | 480 | 480 |
| | Height | 1020 | 1020 | 1040 | 1040 | 1040 | 1040 | 1040 | 1040 |
| WEIGHT (kg) | | | | | | | | | |
| ELECTRICAL DATA | Weight | 89 | 89 | 103 | 117 | 120 | 131 | 120 | 131 |
| | Electrical Supply | 220-240v, 50Hz | 220-240v, 50Hz | 220-240v, 50Hz | 380-415v, 50Hz | 220-240v, 50Hz | 380-415v, 50Hz | 220-240v, 50Hz | 380-415v, 50Hz |
| | Phase | Single | Single | Single | 3 | Single | 3 | Single | 3 |
| | Nominal Running Current [MAX] (A) ⁵ | 13 | 13 | 21 | 12 | 28 | 12 | 35 | 12 |
| REFRIGERANT CHARGE (kg) / CO ₂ EQUIVALENT (t) | Fuse Rating - MCB Sizes (A) ⁶ | 16 | 16 | 25 | 16 | 32 | 16 | 40 | 16 |
| | R290 (GWP 0.02) | 0.60 / 0.000012 | 0.60 / 0.000012 | 0.60 / 0.000012 | 0.60 / 0.000012 | 0.82 / 0.0000164 | 0.82 / 0.0000164 | 0.82 / 0.0000164 | 0.82 / 0.0000164 |

¹ Combination with EHPT20X-MEHEW Cylinder

² Under normal heating conditions at outdoor temp: -7°CDB / -8°CWB, outlet water temp 35°C, inlet water temp 30°C.

³ Under normal heating conditions at outdoor temp: 7°CDB / 6°CWB, outlet water temp 55°C, inlet water temp 47°C as tested to BS EN14511.

⁴ Sound power level tested to BS EN12102.

⁵ Under nominal heating conditions at outdoor temp: 7°C, outlet water temp: 35°C.

⁶ MCB Sizes BS EN60898-2 & BS EN60947-2.

⁷ Quiet Mark certification is for PUZ-WZ85VAA/YAA(-BS), PUZ-WZ100VAA/YAA(-BS) and PUZ-WZ120VAA/YAA(-BS) models only.

$\eta_{h,s}$ is the seasonal space heating energy efficiency (SSHEE) $\eta_{h,w}$ is the water heating energy efficiency



Certificate Number: 037-0033-20-01 / 037-0159-25 / 037-0161-25
Product Type: Heat Pumps
Product Reference: PUZ-WZ50/60/85/100/120VAA/YAA(-BS)



CERTIFIED


Certification Numbers: 037-0135-23-1/2/3/4
Product Reference: PUZ-WZ50/60VAA(-BS)

Product Dimensions


PUZ-WZ50-60VAA(-BS)

All measurements in mm


Front View

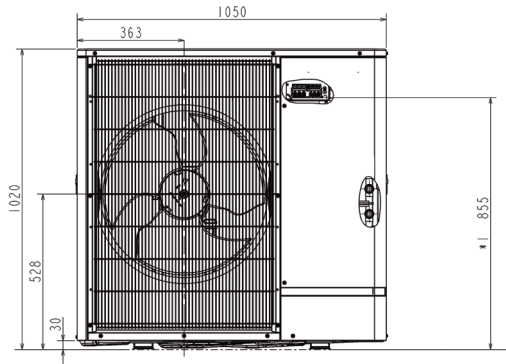


Upper View

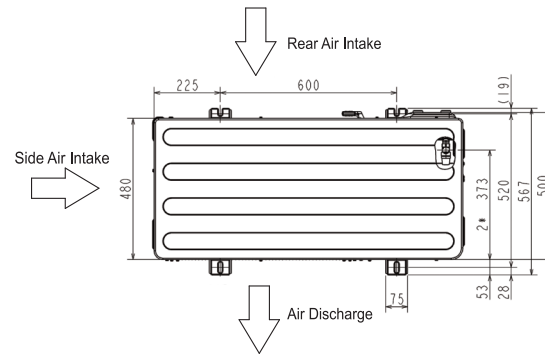

Side View



Flow Temperature

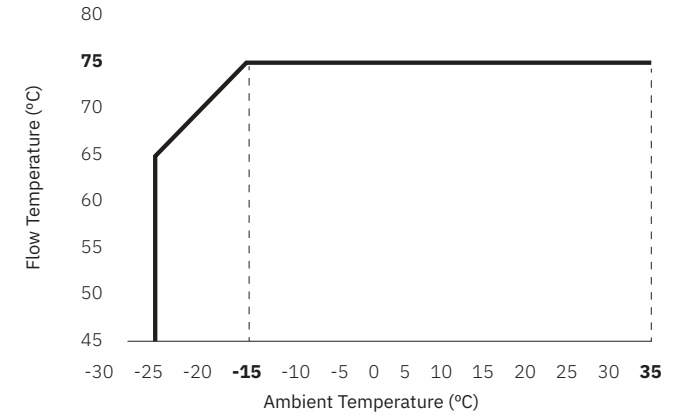


Product Dimensions


PUZ-WZ85-120VAA/YAA(-BS)

All measurements in mm


Front View

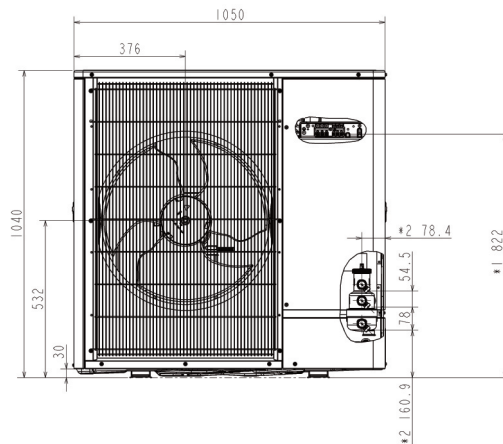

Upper View

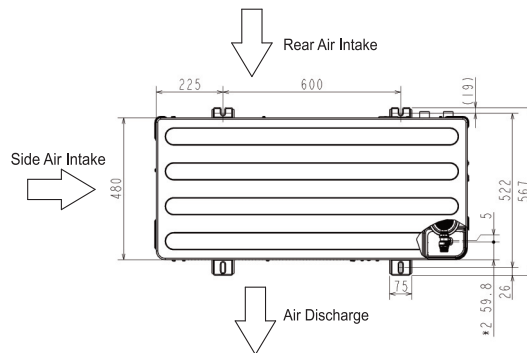

Side View





Protected Zones

No building openings, entrances to the basement, grooves or entrance into the waste-water system.

Must not extend to adjacent buildings or public traffic areas.

Ignition sources must not be present, either permanently or for a short period of time.

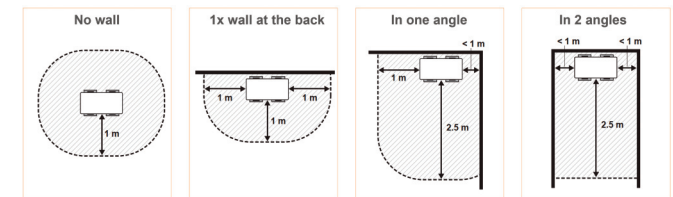



PUZ-WM50VHA

R32 Monobloc Air Source Heat Pump



Our range of Ecodan monobloc air source heat pumps includes a 5kW size.

With enhanced performance and efficiencies of the new chassis, combined with the ability to cascade up to six units of the same output, this Ecodan monobloc system can provide a capacity range from 5 through to 30kW. Designed to suit a wide number of applications, this model offers a viable solution for all types of domestic requirements that the UK housing market demands.

Key Features & Benefits

- Self-contained unit, only requiring water and electric connections
- No need for gas supply, flues or ventilation
- Low maintenance and quiet operation
- Operates with outside temperatures as low as -20°C
- Optimised low ambient defrost control and operation down to -7°C
- Hybrid function, for use with conventional boilers
- Energy monitoring as standard
- Multiple unit cascade function



Manufactured in the UK



| OUTDOOR UNIT | | PUZ-WM50VHA(-BS) |
|---|--|---------------------|
| HEAT PUMP SPACE HEATER - 55°C | ErP Rating (Range A+++ to D) | A++ |
| | η_s | 129% |
| | SCOP | 3.24 |
| HEAT PUMP SPACE HEATER - 35°C | ErP Rating (Range A+++ to D) | A+++ |
| | η_s | 183% |
| | SCOP | 4.62 |
| HEAT PUMP COMBINATION HEATER - Large Profile ¹ | ErP Rating (Range A+ to F) | A+ |
| | η_{wh} | 135% |
| HEATING ² (A-7/W35) | Capacity (kW) | 5.0 |
| | Power Input (kW) | 1.67 |
| | COP | 3.00 |
| OPERATING AMBIENT TEMPERATURE (°C DB) | | -20 ~ +35 |
| SOUND DATA ³ | Pressure Level at 1m (dBA) | 47 |
| | Power Level (dBA) ⁴ | 61 |
| WATER DATA | Pipework Size (mm) | 22 |
| | Flow Rate (l/min) | 14 |
| | Water Pressure Drop (kPa) | 12.0 |
| | | |
| DIMENSIONS (mm) | Width | 950 |
| | Depth | 330+30 ⁷ |
| | Height | 923 |
| WEIGHT (kg) | | 71 |
| ELECTRICAL DATA | Electrical Supply | 220-240v, 50Hz |
| | Phase | Single |
| | Nominal Running Current [MAX] (A) ⁵ | 4.64 [13] |
| | Fuse Rating - MCB Sizes (A) ⁶ | 16 |
| REFRIGERANT CHARGE (kg) / CO ₂ EQUIVALENT (t) | R32 (GWP 675) | 2.0 / 1.35 |

¹ Combination with E⁺PT20X Cylinder

² Under normal heating conditions at outdoor temp: -7°CDB / -8°CWB, outlet water temp 35°C, inlet water temp 30°C.

³ Under normal heating conditions at outdoor temp: 7°CDB / 6°CWB, outlet water temp 55°C, inlet water temp 47°C as tested to BS EN14511.

⁴ Sound power level tested to BS EN12102.

⁵ Under nominal heating conditions at outdoor temp: 7°C, outlet water temp: 35°C.

⁶ MCB Sizes BS EN60898-2 & BS EN60947-2.

⁷ Grille.

η_s is the seasonal space heating energy efficiency (SSHEE) η_{wh} is the water heating energy efficiency



Certificate Number: 037-0032-20
Product Type: Heat Pumps
Product Reference: PUZ-WM50VHA(-BS)




Certification Numbers:
037-0032-20-01/02

Product Dimensions

PUZ-WM50VHA(-BS)


All measurements in mm

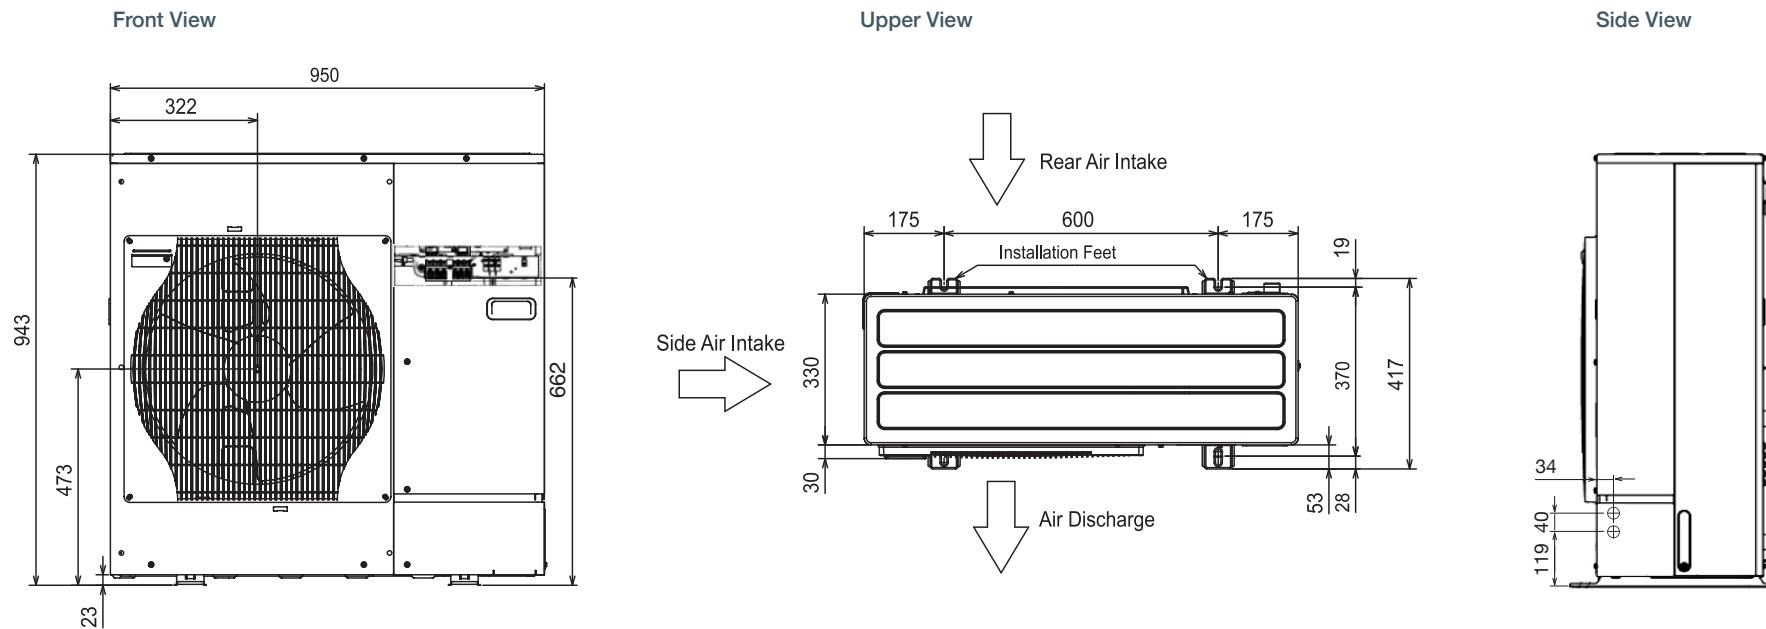

Installation Location

PUZ-WM50VHA(-BS)

All measurements in mm

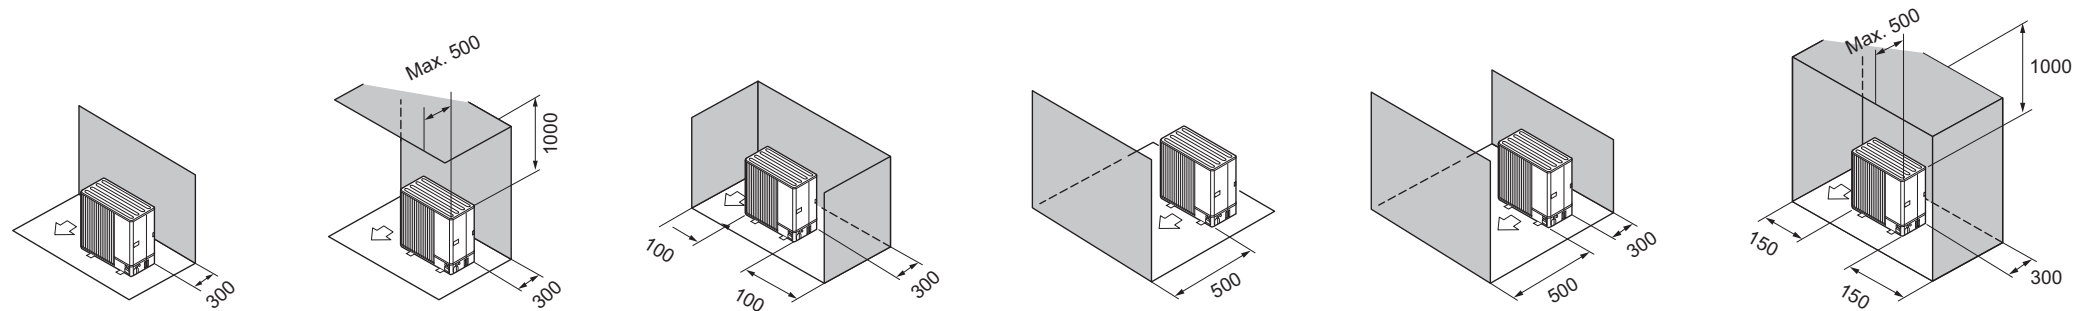

Please refer to Databook and Installation Manual for further details.



PUZ-WM60-112VAA/YAA

R32 Monobloc Air Source Heat Pumps



The multiple award winning range of AA chassis Ecodan monobloc air source heat pumps are designed specifically to suit the demands of the UK market and includes 6, 8.5 and 11.2kW sizes.

The innovative, stylish and compact single fan outdoor unit utilises advanced technologies to deliver improved efficiencies. Designed for a wide range of applications, the market leading low noise levels virtually eliminate the need for planning permission, maximises installation options and is a viable solution for all types of domestic requirements that the UK housing market demands.

Key Features & Benefits

- Self-contained unit, only requiring water and electric connections
- No need for gas supply, flues or ventilation
- Low maintenance and ultra quiet operation
- Operates with outside temperatures as low as -25°C
- Optimised low ambient defrost control and operation down to -7°C
- Hybrid function, for use with conventional boilers
- Energy monitoring as standard
- Multiple unit cascade function



Manufactured in the UK



| OUTDOOR UNIT | | PUZ-WM60VAA(-BS) | PUZ-WM85VAA(-BS) | PUZ-WM85YAA(-BS) | PUZ-WM112VAA(-BS) | PUZ-WM112YAA(-BS) |
|---|--|------------------|------------------|------------------|-------------------|-------------------|
| HEAT PUMP SPACE HEATER - 55°C | ErP Rating (Range A+++ to D) | A++ | A++ | A++ | A++ | A++ |
| | η_{s} | 142% | 139% | 139% | 134% | 134% |
| | SCOP | 3.57 | 3.48 | 3.46 | 3.34 | 3.31 |
| HEAT PUMP SPACE HEATER - 35°C | ErP Rating (Range A+++ to D) | A+++ | A+++ | A+++ | A+++ | A+++ |
| | η_{s} | 190% | 193% | 193% | 191% | 191% |
| | SCOP | 4.81 | 4.84 | 4.81 | 4.74 | 4.70 |
| HEAT PUMP COMBINATION HEATER - Large Profile ¹ | ErP Rating (Range A+ to F) | A+ | A+ | A+ | A+ | A+ |
| | η_{wh} | 145% | 145% | 145% | 148% | 148% |
| HEATING ² (A-7/W35) | Capacity (kW) | 6.0 | 8.5 | 8.5 | 11.2 | 11.2 |
| | Power Input (kW) | 1.88 | 3.27 | 3.27 | 3.73 | 3.73 |
| | COP | 3.20 | 2.60 | 2.60 | 3.00 | 3.00 |
| OPERATING AMBIENT TEMPERATURE (°C DB) | | -20 ~ +35 | -20 ~ +35 | -25 ~ +35 | -25 ~ +35 | -25 ~ +35 |
| SOUND DATA ³ | Pressure Level at 1m (dBA) | 45 | 45 | 45 | 45 | 45 |
| | Power Level (dBA) ⁴ | 58 | 58 | 58 | 60 | 60 |
| WATER DATA | Pipework Size (mm) | 22 | 28 | 28 | 28 | 28 |
| | Flow Rate (l/min) | 17 | 24 | 24 | 32 | 32 |
| | Water Pressure Drop (kPa) | 8.0 | 15.0 | 15.0 | 24.0 | 24.0 |
| DIMENSIONS (mm) | Width | 1050 | 1050 | 1050 | 1050 | 1050 |
| | Depth | 480 | 480 | 480 | 480 | 480 |
| | Height | 1020 | 1020 | 1020 | 1020 | 1020 |
| WEIGHT (kg) | | 98 | 98 | 111 | 119 | 119 |
| ELECTRICAL DATA | Electrical Supply | 220-240v, 50Hz | 220-240v, 50Hz | 400v, 50Hz | 220-240v, 50Hz | 400v, 50Hz |
| | Phase | Single | Single | Three | Single | Three |
| | Nominal Running Current [MAX] (A) ⁵ | 5.68 [13] | 9.1 [22] | 2.9 [11.5] | 10.9 [28] | 3.6 [13] |
| | Fuse Rating - MCB Sizes (A) ⁶ | 16 | 25 | 16 | 32 | 16 |
| REFRIGERANT CHARGE (kg) / CO ₂ EQUIVALENT (t) | R32 (GWP 675) | 2.2 / 1.49 | 2.2 / 1.49 | 2.2 / 1.49 | 3.0 / 2.03 | 3.0 / 2.03 |

¹ Combination with E*PT20X Cylinder

² Under normal heating conditions at outdoor temp: -7°CDB / -8°CWB, outlet water temp 35°C, inlet water temp 30°C.

³ Under normal heating conditions at outdoor temp: 7°CDB / 6°CWB, outlet water temp 55°C, inlet water temp 47°C as tested to BS EN14511.

⁴ Sound power level tested to BS EN12102.

⁵ Under normal heating conditions at outdoor temp: 7°C, outlet water temp: 35°C.

⁶ MCB Sizes BS EN60898-2 & BS EN60947-2.

η_{s} is the seasonal space heating energy efficiency (SSHEE) η_{wh} is the water heating energy efficiency



Certificate Number: 037-0033-20 / 037-0034-20
Product Type: Heat Pumps
Product Reference: PUZ-WM60/85VAA(-BS) / PUZ-WM112VAA(-BS)




Certification Numbers:
037-0033-20-01/02/03/04/05/06
037-0034-20-01/02/03/04

Product Dimensions


PUZ-WM60-112VAA/YAA(-BS)

All measurements in mm


Front View

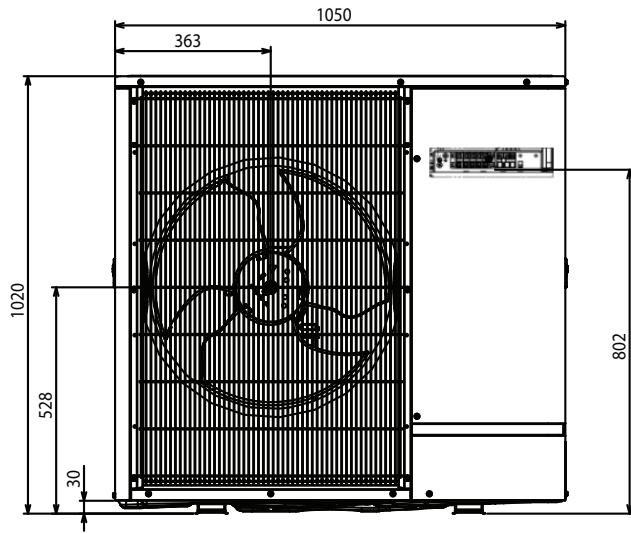

Upper View

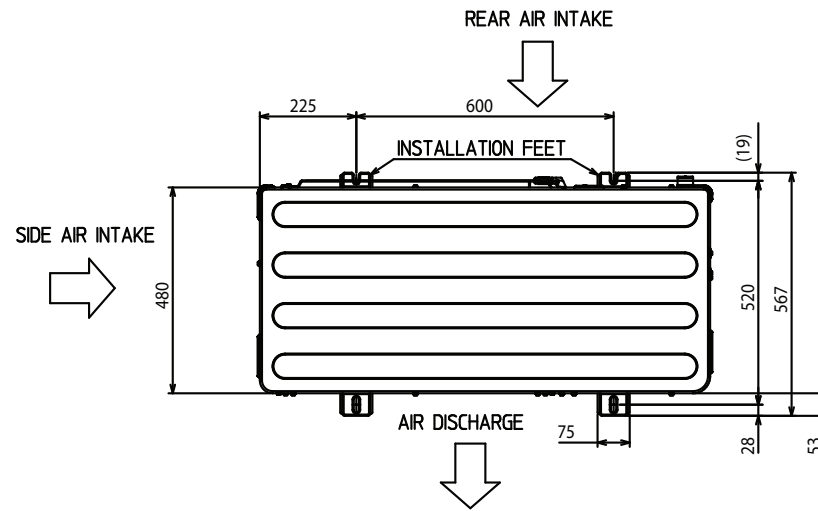


Side View

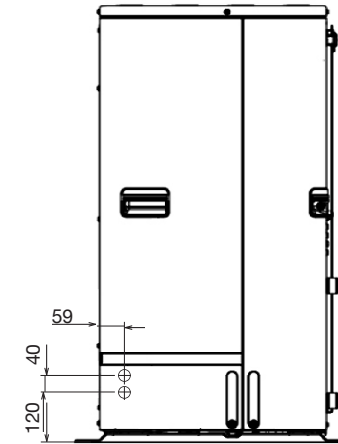

Installation Location

PUZ-WM60-112VAA/YAA(-BS)

All measurements in mm

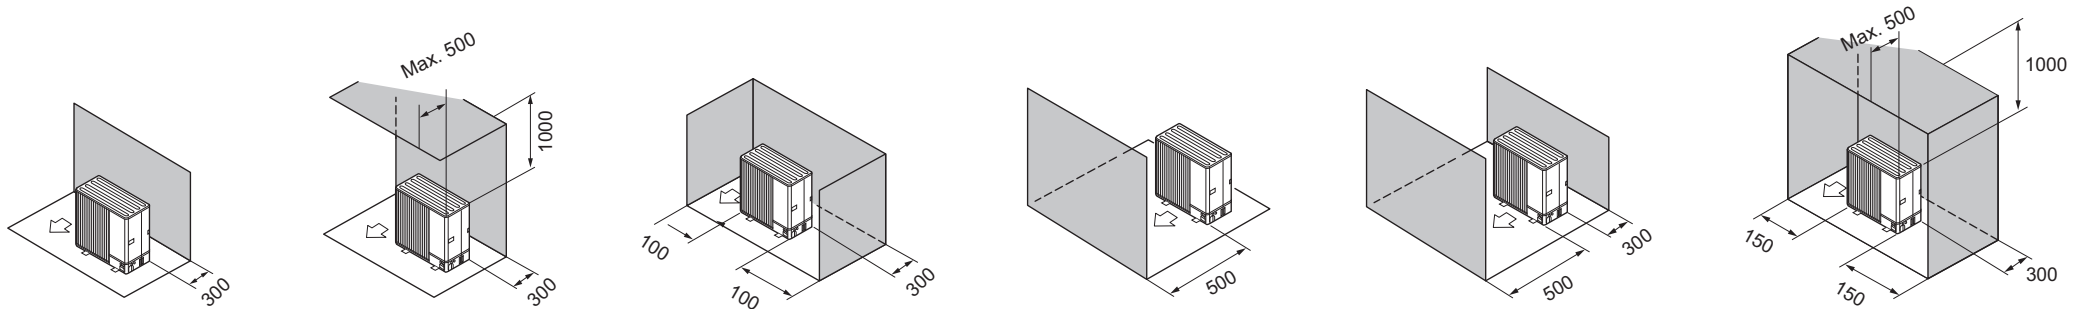


Please refer to Databook and Installation Manual for further details.



PUZ-HWM140VHA/YHA

R32 Monobloc Air Source Heat Pumps

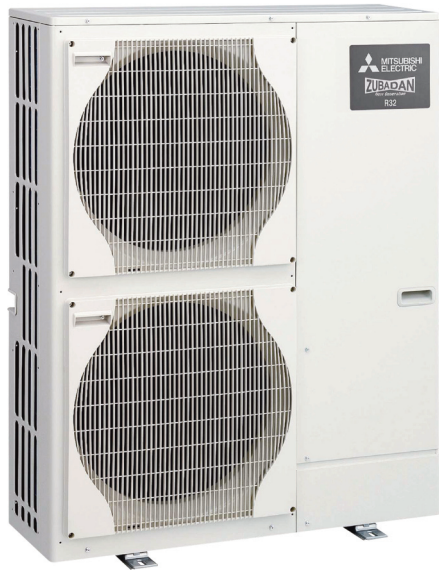

Our range of Zubadan chassis Ecodan monobloc air source heat pumps are suitable for properties with large space heating requirements and are available in single or three phase 14kW sizes.

With its advanced flash injection technology, this product provides a solution to low ambient capacity issues common to standard systems and is a viable solution for all types of domestic requirements that the UK housing market demands.

Key Features & Benefits

- Self-contained unit, only requiring water and electric connections
- No need for gas supply, flues or ventilation
- Low maintenance and quiet operation
- Operates with outside temperatures as low as -28°C
- Optimised low ambient defrost control and operation down to -15°C
- Hybrid function, for use with conventional boilers
- Energy monitoring as standard
- Multiple unit cascade function



| OUTDOOR UNIT | | PUZ-HWM140VHA(-BS) | PUZ-HWM140YHA(-BS) |
|---|--|---------------------|---------------------|
| HEAT PUMP SPACE HEATER - 55°C | ErP Rating (Range A+++ to D) | A++ | A++ |
| | η_s | 3.35 | 131 |
| | SCOP | 3.34 | 3.35 |
| HEAT PUMP SPACE HEATER - 35°C | ErP Rating (Range A+++ to D) | A+++ | A+++ |
| | η_s | 176 | 176 |
| | SCOP | 4.48 | 4.45 |
| HEAT PUMP COMBINATION HEATER - Large Profile ¹ | ErP Rating (Range A+ to F) | A+ | A+ |
| | η_{wh} | 130 | 130 |
| HEATING ² (A-7/W35) | Capacity (kW) | 14.0 | 14.0 |
| | Power Input (kW) | 5.72 | 5.72 |
| | COP | 2.45 | 2.45 |
| OPERATING AMBIENT TEMPERATURE (°C DB) | | -28 ~ +35 | -28 ~ +35 |
| SOUND DATA ³ | Pressure Level at 1m (dBA) | 53 | 53 |
| | Power Level (dBA) ⁴ | 67 | 67 |
| WATER DATA | Pipework Size (mm) | 28 | 28 |
| | Flow Rate (l/min) | 40 | 40 |
| | Water Pressure Drop (kPa) | 20 | 20 |
| DIMENSIONS (mm) | Width | 1020 | 1020 |
| | Depth | 330+30 ⁷ | 330+30 ⁷ |
| | Height | 1350 | 1350 |
| WEIGHT (kg) | | 132 | 143 |
| ELECTRICAL DATA | Electrical Supply | 220-240v, 50Hz | 380-415v, 50Hz |
| | Phase | Single | 3 |
| | Nominal Running Current [MAX] (A) ⁵ | xx [35] | xx [13] |
| | Fuse Rating - MCB Sizes (A) ⁶ | 40 | 16 |
| REFRIGERANT CHARGE (kg) / CO ₂ EQUIVALENT (t) | R32 (GWP 675) | 3.3 / 2.23 | 3.3 / 2.23 |

For information marked with a "-" please consult the databook or speak to your local sales office.

¹ Combination with E-PT20X Cylinder ² Under normal heating conditions at outdoor temp: -7°CDB / -8°CWB, outlet water temp 35°C, inlet water temp 30°C.

³ Under normal heating conditions at outdoor temp: 7°CDB / 6°CWB, outlet water temp 55°C, inlet water temp 47°C as tested to BS EN14511.

⁴ Sound power level tested to BS EN12102. ⁵ Under nominal heating conditions at outdoor temp: 7°C, outlet water temp: 35°C.

⁶ MCB Sizes BS EN60898-2 & BS EN60947-2. ⁷ Grille.

η_s is the seasonal space heating energy efficiency (SSHEE) η_{wh} is the water heating energy efficiency



Certificate Number: 037-0035-20
Product Type: Heat Pumps
Product Reference: PUZ-HWM140VHA/YHA(-BS)



CERTIFIED


Certification Numbers:
037-0035-20-01/02/03/04

Product Dimensions


PUZ-HWM140VHA/YHA(-BS)

All measurements in mm

Front View

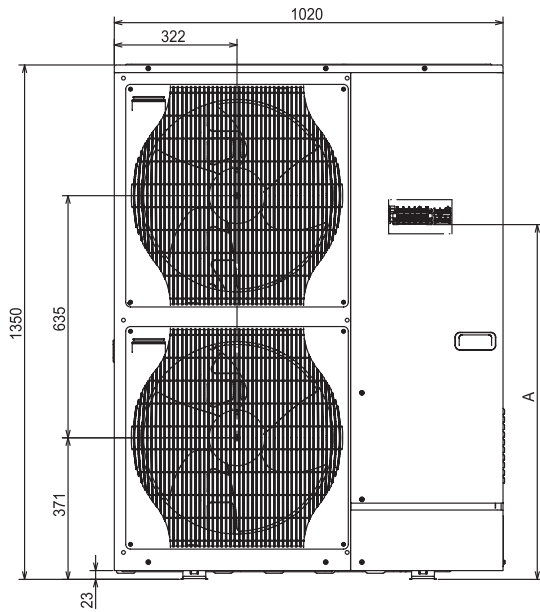


Upper View

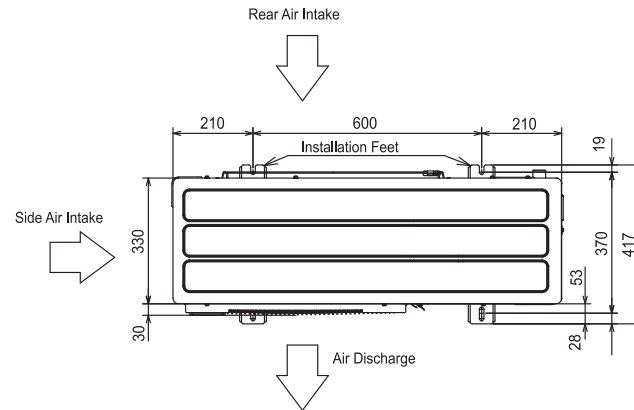

| | A |
|-----|------|
| VHA | 1079 |
| YHA | 931 |


Side View

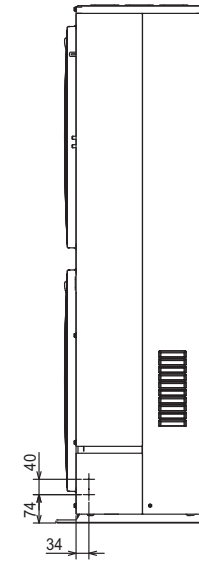

Installation Location

PUZ-HWM140VHA/YHA(-BS)

All measurements in mm

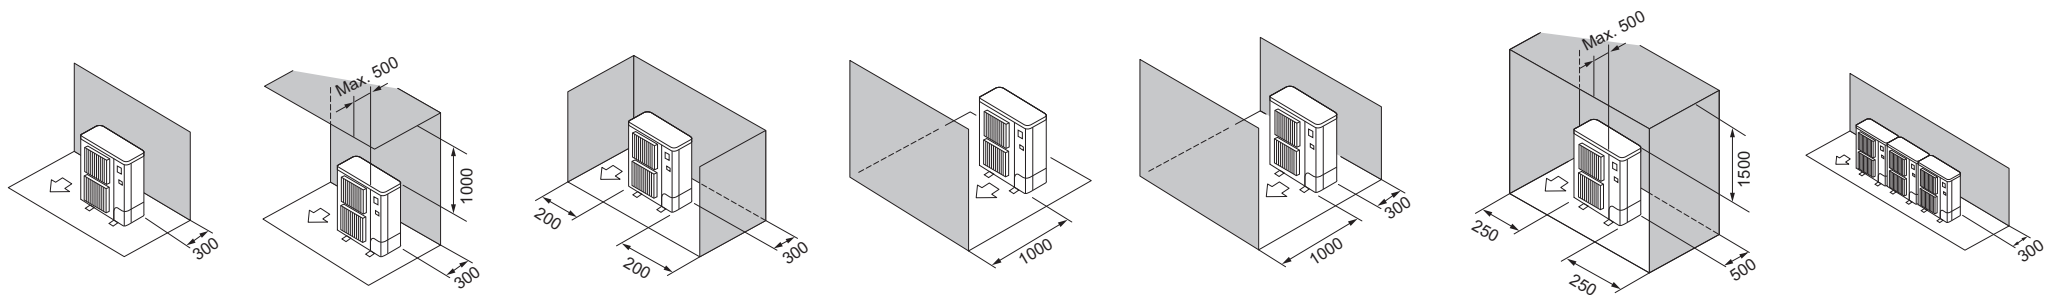

Please refer to Databook and Installation Manual for further details.



EHPT20X-MEHEW

FTC7 Packaged Cylinder for Ecodan Monobloc Units



The Packaged Cylinder provides a highly adaptable heating solution for all property types.

Designed to optimise performance within a compact white goods footprint, the plug and play packaged cylinder fully integrates with the Ecodan monobloc air source heat pump range. Advanced plate heat exchanger technology delivers superior heat up times and our rapid SD card commissioning, MELCloud Wi-Fi connectivity and energy monitoring functions are also included as standard.

Key Features & Benefits

- A+ hot water efficiency
- Stylish and modern aesthetics
- Packaged hot water, heating and controls
- Colour touch screen control
- MELCloud enabled
- Minimised energy consumption
- Flexible product placement
- Plug and play simple installation
- Intuitive user friendly operation
- Remote control, monitoring, maintenance and technical support

FTC7 Controller

Mitsubishi Electric's seventh generation controller (FTC7) includes intelligent room temperature control as standard. This together with advanced weather compensation ensures the system delivers efficient, comfortable heating regardless of the season. FTC7 also includes energy monitoring showing consumed and produced energy.




R290 R32

| CYLINDER | | EHPT20X-MEHEW | |
|--|--|---|--|
| NOMINAL HOT WATER VOLUME (LITRES) | | 200 | |
| HEAT PUMP COMBINATION HEATER - Large Profile (Average Climate) | | ErP Rating (Range A+ to F) A+ | |
| OPERATING AMBIENT TEMPERATURE (°C DB) | | 0 ~ +35°C (RH<80%) | |
| SOUND PRESSURE LEVEL AT 1M (dBA) | | 28 | |
| WATER DATA | | Flow Rate (l/min) - with R32 Heat Pump 5 / 6 / 8.5 / 11.2 / 14kW - with R290 Heat Pump 5 / 6 / 8.5 / 10 / 12kW | |
| | | 14 / 17 / 24 / 32 / 40 | |
| | | 14 / 17 / 27.2 / 34.4 / 34.4 | |
| | | Primary Circuit Pump Grundfos UPM3 15-75 130 | |
| | | Sanitary Hot Water Pump Grundfos UPSO 15-60 130 | |
| | | Connection Size (mm) Heating / DHW G1 / G3/4 | |
| WATER SAFETY DEVICES | | Control Thermistor (°C) 80 | |
| | | Flow Sensor (minimum flow 5L/min) Supplied | |
| | | DHW Cylinder Control Thermistor (°C) 75 | |
| | | Temp and Pressure Relief Valve (°C)/ (MPa (Bar)) 90 / 0.7 (7) | |
| DIMENSIONS (mm) | | Width 595 | |
| | | Depth 680 | |
| | | Height 1600 | |
| WEIGHT EMPTY / FULL (kg) | | 81 / 287 | |
| ELECTRICAL DATA | | Control Board - optionally powered by outdoor unit | |
| | | Electrical Supply 220-240v, 50Hz | |
| | | Phase Single | |
| | | Fuse Rating - MCB Sizes (A) ¹ 10 | |
| | | Immersion Heater | |
| | | Electrical Supply 220-240v, 50Hz | |
| | | Phase Single | |
| | | Capacity (kW) 3 | |
| | | Max Running Current (A) 13 | |
| | | Fuse Rating - MCB Sizes (A) ¹ 16 | |
| MECHANICAL ZONES | | DHW and 1 Heating Zone ² | |
| OPTIONAL SIMPLIFIED WIRELESS ROOM THERMOSTAT AND WIRELESS RECEIVER | | PAR-WT60R-E and PAR-WR61R-E Receiver | |


¹ MCB Sizes BS EN60898-2 & BS EN60947-2. ² Optional 2 zone accessory pack available.

Notes: Notes: Cylinder includes: Flow Temperature Controller (FTC7) with Main Controller and Temperature Sensors, Pumps & Valves for Zone 1 and DHW use, Flow Sensor, Plate Heat Exchanger, Scale Trap and 3kW Immersion Heater.


Left View

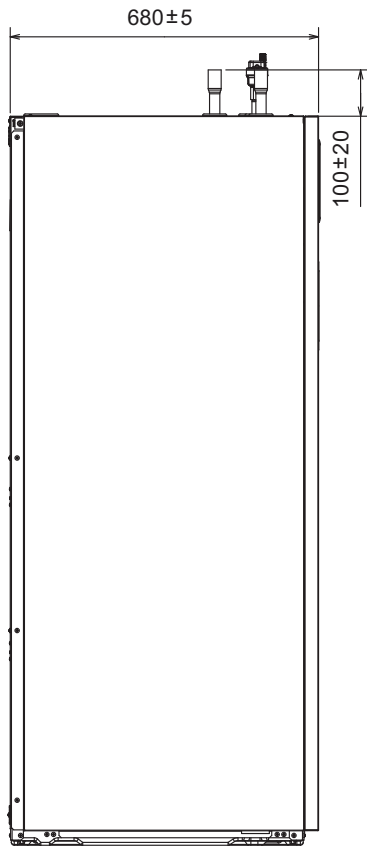


Front View

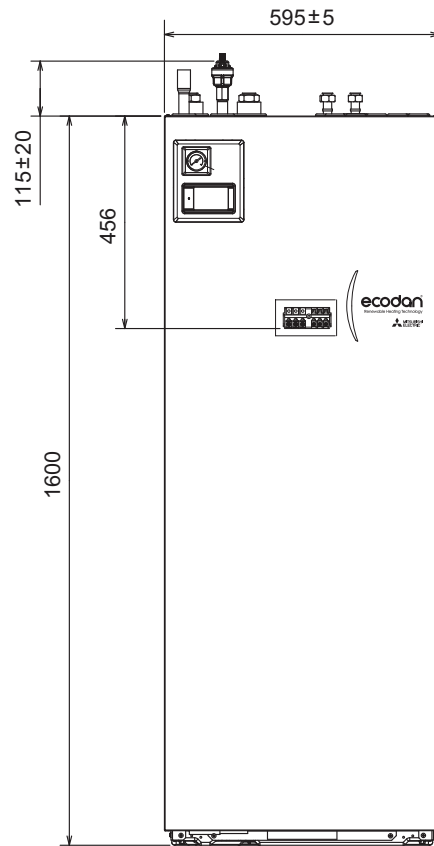

Right View

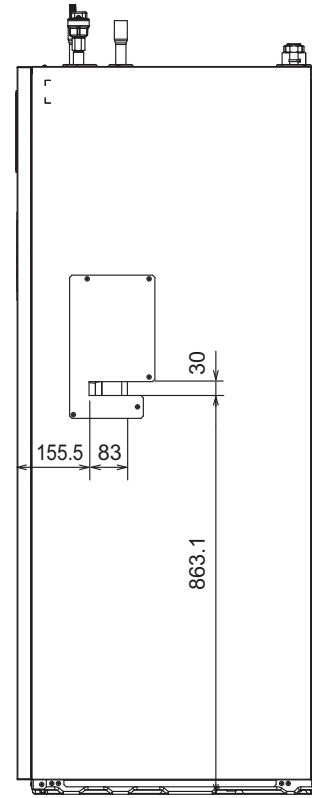

Upper View

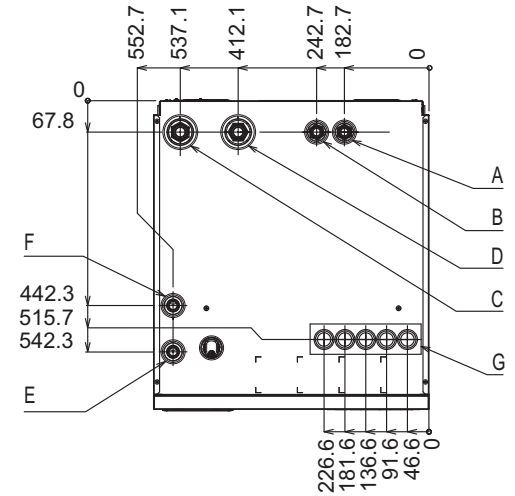

| Letter | Pipe Description | Connection size/type |
|--------|---------------------------------|----------------------|
| A | DHW outlet connection | G3/4"/Compression |
| B | Cold water inlet connection | G3/4"/Compression |
| C | Space heating return connection | G1"/Compression |
| D | Space heating flow connection | G1"/Compression |
| E | Flow from heat pump connection | G1"/Compression |
| F | Return to heat pump connection | G1"/Compression |
| G | Electrical cable inlets | |

EHPT15-17X-UKHLEWS

FTC7 Pre-Plumbed Slimline Cylinders for Ecodan Monobloc Units



The Pre-Plumbed Slimline Cylinder comes complete with integrated hydraulic components & advanced controls.


Designed to optimise performance and flexibility within a minimal footprint, the slimline cylinder fully integrates with the Ecodan monobloc air source heat pump range. Advanced plate heat exchanger technology delivers superior heat up times and our rapid SD card commissioning, MELCloud Wi-Fi connectivity and energy monitoring functions are also included as standard.

Key Features & Benefits

- Pre-Plumbed and Pre-Wired
- DHW Plate Heat Exchanger combined with scale trap
- Low Loss Header
- Colour touch screen control
- MELCloud enabled
- Plug and play simple installation
- Excellent hot water recovery times
- Automatic heat pump flow rate regulation
- Intuitive user friendly operation
- Remote control, monitoring, maintenance and technical support

FTC7 Controller

Mitsubishi Electric's seventh generation controller (FTC7) includes intelligent room temperature control as standard. This together with advanced weather compensation ensures the system delivers efficient, comfortable heating regardless of the season. FTC7 also includes energy monitoring showing consumed and produced energy.

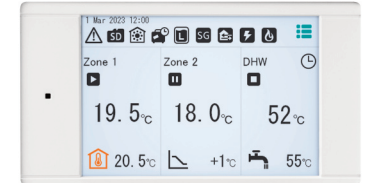

Manufactured in the UK


R290 R32

| CYLINDER | | EHPT15X-UKHLEWS | EHPT17X-UKHLEWS | |
|--|--|---|---|----------------|
| NOMINAL HOT WATER VOLUME (LITRES) | | 150 | 170 | |
| ErP Rating (Range A+ to F) | | C | C | |
| HEAT LOSS (kWh/24hrs) | | 1.40 | 1.59 | |
| HEAT LOSS (W) | | 58 | 66 | |
| WATER | Flow rate (l/min) - with R32 Heat Pump 5 / 6 / 8.5kW | 14 / 17 / 24 | 14 / 17 / 24 | |
| | - with R290 Heat Pump 5 / 6 / 8.5kW | 14 / 17 / 27.2 | 14 / 17 / 27.2 | |
| Primary Circuit Pump | Heating Circuit Pump | Grundfos UPM3L 25-75 130AZA | | |
| | Sanitary Hot Water Pump | Grundfos UPM3 AUTO 25-70 130 | | |
| | Connection Size (mm) Heating / DHW | 22 / 22 | 22 / 22 | |
| | Charge Pressure (MPa (Bar)) | 0.35 (3.5) | 0.35 (3.5) | |
| WATER SAFETY | Water Circuit DHW Cylinder | Control Thermistor (°C) | 80 | |
| | | DHW Expansion Vessel (Litres) | 12 | |
| | | Control Thermistor | 75 | |
| | | Over Temperature Cut-Out (°C) | 80 ± 5 | |
| | | Temp and Pressure Relief Valve (°C) / (MPa (Bar)) | 90 / 1.0 (10) | |
| DIMENSIONS (mm) | | Expansion Relief Valve (Cold) (MPa (Bar)) | 0.8 (8) | |
| | | Width | 676 | |
| | | Depth | 654 | |
| | | Height | 1690 | |
| WEIGHT EMPTY / FULL (kg) | | 59 / 209 | 63 / 233 | |
| CYLINDER MATERIAL | Cylinder Insulation | Cylinder Material | Duplex stainless steel | |
| | | Insulation Type | CFC / HCFC-free flame-retardant expanded Polyurethane | |
| | | Insulation Thickness (mm) | 50 | 50 |
| | | GWP of Insulation | 3.1 | 3.1 |
| | | ODP of Insulation | 0 | 0 |
| ELECTRICAL DATA | Control Board <i>optionally powered by outdoor unit</i> | Electrical Supply | 220-240v, 50Hz | 220-240v, 50Hz |
| | | Phase | Single | Single |
| | | Fuse Rating - MCB Sizes (A) ¹ | 16 | 16 |
| | | Electrical Supply | 220-240v, 50Hz | 220-240v, 50Hz |
| | Immersion Heater | Phase | Single | Single |
| | | Capacity (kW) | 3 | 3 |
| | | Max Running Current (A) | 13 | 13 |
| | | Fuse Rating - MCB Sizes (A) ¹ | 16 | 16 |
| MECHANICAL ZONES | | DHW and 1 Heating Zone ² | | |
| OPTIONAL SIMPLIFIED WIRELESS ROOM THERMOSTAT AND WIRELESS RECEIVER | | PAR-WT60R-E Controller and PAR-WR61R-E Receiver | | |


¹ MCB Sizes BS EN60898-2 & BS EN60947-2. ² Optional 2 zone accessory pack available.

Notes: Cylinder includes: Flow Temperature Controller (FTC7) with Main Controller and Temperature Sensors, Heat Pump Filter, Pumps & Valves for Primary Circuit and Zone 1 and DHW use, Flow Sensor, Plate Heat Exchanger, Scale Trap, 3kW Immersion Heater, Expansion Vessel, Diverter Valve and Low Loss Header.

Front View

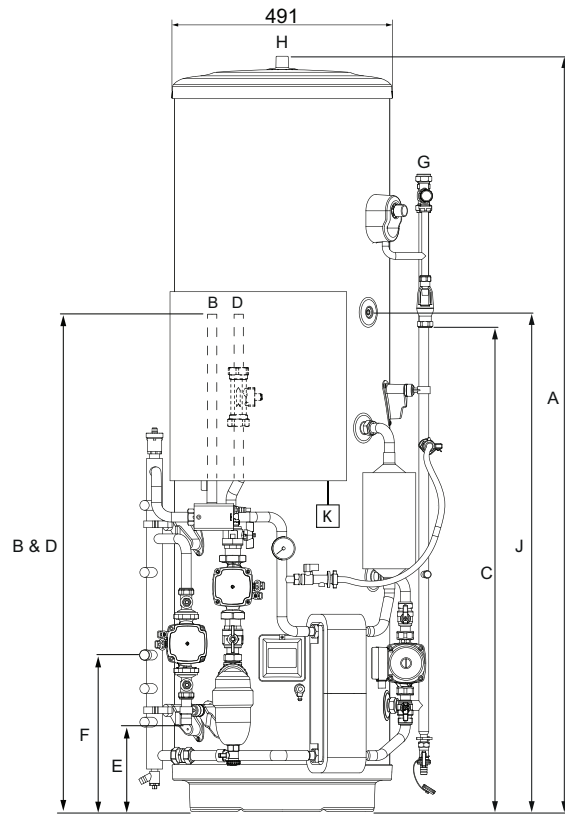

Upper View

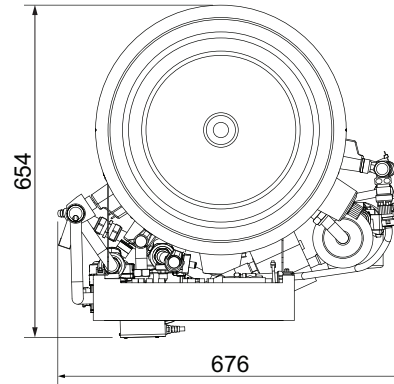

| Letter | Pipe Description | Connection size/type |
|--------|---|-------------------------------|
| A | Overall height | |
| B | Heat pump flow connection | 22mm O/D Copper |
| C | Tundish outlet connection | 22mm Compression |
| D | Heat pump return connection | 22mm O/D Copper |
| E | Heating zone 1 circuit flow connection | 22mm O/D Copper |
| F | Heating zone 1 circuit return connection | 22mm O/D Copper |
| G | Cold water inlet connection | 22mm Compression |
| H | Hot water outlet connection | 22mm Compression / 3/4" BSP M |
| J | THW5A sensor pocket | |
| K | Wi-Fi adaptor (included, installer to locate and mount) | |

| Capacity | 150 | 170 |
|----------|-------------------------------|------|
| A | 1516 | 1690 |
| B | 1127 | 1127 |
| C | 909 | 1083 |
| D | 1127 | 1127 |
| E | 194 | 194 |
| F | 350 | 350 |
| J | 943 | 1117 |
| K | Installer to locate and mount | |



EHPT15-30X-UKHEWS/L

FTC7 Pre-Plumbed Standard Cylinders for Ecodan Monobloc Units



The Pre-Plumbed Standard Cylinder comes complete with integrated hydraulic components & advanced controls.

Designed to optimise performance and flexibility within an average footprint, the standard cylinder fully integrates with the Ecodan monobloc air source heat pump range. Advanced plate heat exchanger technology delivers superior heat up times and our rapid SD card commissioning, MELCloud Wi-Fi connectivity and energy monitoring functions are also included as standard.

Key Features & Benefits

- Pre-Plumbed and Pre-Wired
- DHW Plate Heat Exchanger combined with scale trap
- Low Loss Header
- Colour touch screen control
- MELCloud enabled
- Plug and play simple installation
- Excellent hot water recovery times
- Automatic heat pump flow rate regulation
- Intuitive user friendly operation
- Remote control, monitoring, maintenance and technical support

FTC7 Controller

Mitsubishi Electric's seventh generation controller (FTC7) includes intelligent room temperature control as standard. This together with advanced weather compensation ensures the system delivers efficient, comfortable heating regardless of the season. FTC7 also includes energy monitoring showing consumed and produced energy.




Manufactured in the UK




| CYLINDER | | EHPT15X-UKHEWS | EHPT17X-UKHEWS | EHPT21X-UKHEWS | EHPT21X-UKHEWL | EHPT25X-UKHEWL | EHPT30X-UKHEWL |
|-----------------------------------|--|--|------------------------|------------------------|-----------------------------|-----------------------------|----------------------------|
| NOMINAL HOT WATER VOLUME (LITRES) | | 150 | 170 | 210 | 210 | 250 | 300 |
| ErP Rating (Range A+ to F) | | B | B | C | C | C | C |
| HEAT LOSS (kWh/24hrs) | | 1.15 | 1.23 | 1.53 | 1.53 | 1.80 | 2.09 |
| HEAT LOSS (W) | | 48 | 51 | 64 | 65 | 75 | 86 |
| WATER | | Flow rate (l/min) - with R32 Heat Pump 5 / 6 / 8.5 / 11.2 / 14kW | | | | | |
| | | 14 / 17 / 24 / - / - | 14 / 17 / 24 / - / - | 14 / 17 / 24 / - / - | - / 17 / 24 / 32 / 40 | - / 17 / 24 / 32 / 40 | - / - / 24 / 32 / 40 |
| | | - with R290 Heat Pump 5 / 6 / 8.5 / 10 / 12kW | | | | | |
| | | 14 / 17 / 27.2 / - / - | 14 / 17 / 27.2 / - / - | 14 / 17 / 27.2 / - / - | - / 17 / 27.2 / 34.4 / 34.4 | - / 17 / 27.2 / 34.4 / 34.4 | - / - / 27.2 / 34.4 / 34.4 |
| | | Grundfos UPM4L 25-75 130AZA | | | | | |
| | | Primary Circuit Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |
| | | Sanitary Hot Water Pump | | | | | |
| | | Grundfos UPM3 AUTO 25-70 130 | | | | | |
| | | Heating Circuit Pump | | | | | |
| | | Grundfos UPSO 15-60 CIL2 | | | | | |


Front View

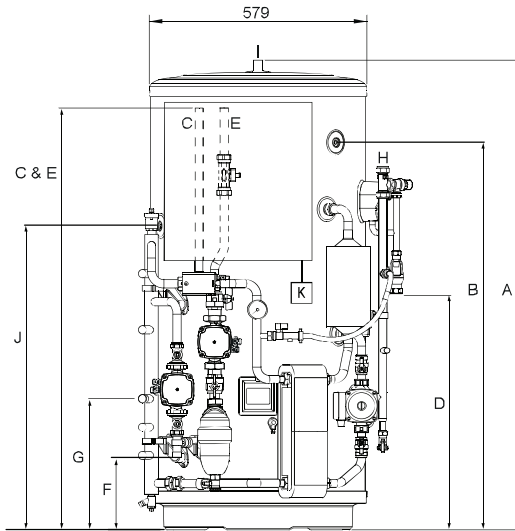


Upper View



Front View

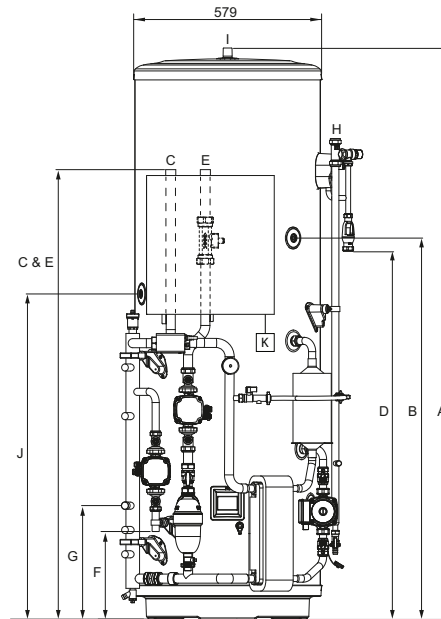

Upper View




| Letter | Pipe Description | Connection size/type |
|--------|---|-------------------------------|
| A | Overall height | |
| B | Secondary return tapping (Not fitted to 150L and 170L) | |
| C | Heat pump flow connection - 150/170/210(S) | 22mm O/D Copper |
| | Heat pump flow connection - 210(L)/250/300 | 28mm O/D Copper |
| D | Tundish outlet connection | 22mm Compression |
| E | Heat pump return connection - 150/170/210(S) | 22mm O/D Copper |
| | Heat pump return connection - 210(L)/250/300 | 28mm O/D Copper |
| F | Heating zone 1 circuit flow connection | 22mm O/D Copper |
| G | Heating zone 1 circuit return connection | 22mm O/D Copper |
| H | Cold water inlet connection | 22mm Compression |
| I | Hot water outlet connection | 22mm Compression / 3/4" BSP M |
| J | THW5A sensor pocket | |
| K | Wi-Fi adaptor (included, installer to locate and mount) | |

| Capacity | 150 | 170 | 210 (S) | 210 (L) | 250 | 300 |
|----------|-------------------------------|------------|---------|---------|------|------|
| A | 1131 | 1257 | 1509 | 1509 | 1761 | 2075 |
| B | Not Fitted | Not Fitted | 1050 | 1050 | 1175 | 1385 |
| C | 1122 | 1122 | 1122 | 1370 | 1370 | 1370 |
| D | 505 | 630 | 880 | 880 | 1136 | 1450 |
| E | 1122 | 1122 | 1122 | 1370 | 1370 | 1370 |
| F | 194 | 194 | 194 | 270 | 270 | 270 |
| G | 350 | 350 | 350 | 350 | 350 | 350 |
| J | 675 | 815 | 925 | 925 | 1005 | 1193 |
| K | Installer to locate and mount | | | | | |



FTC7 / FTC2BR Flow Temperature Controllers

For use with Ecodan
Monobloc Units and
Third Party BEMS

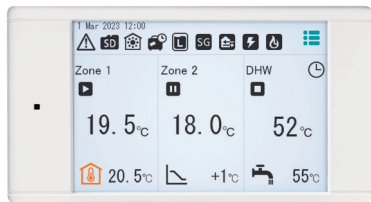

The FTC7 Flow Temperature Controller is designed specifically by Mitsubishi Electric to integrate with the Ecodan PUZ monobloc air source heat pump range and a third party cylinder.

The FTC2BR has been developed to allow the Ecodan PUZ-(H)WM range to interface with third party or BEMS (Building Energy Management System) controls. A combination of volt free and voltage inputs allow the Ecodan PUZ-(H)WM monobloc range to be used in applications where only simple on/off and temperature control is required.

Functions that can be controlled and monitored by third party controls:

Controlled

- On/Off heating mode
- On/Off heating ECO mode
- On/Off hot water mode
- On/Off holiday mode
- On/Off legionella mode
- Change water flow temperature

Monitored

- Unit running
- Error
- Defrost

The ability to interface with third party controls opens up a huge number of application opportunities. Many processes simply require a heat source that provides hot water, without polished end user controls. The FTC2BR controller allows the Ecodan PUZ to be used in these applications. FTC2BR inputs and outputs can be used in conjunction with local BEMS.

R290 R32

| FLOW TEMPERATURE CONTROLLERS | | FTC7 (PAC-IF082B-E) | FTC2BR (PAC-IF033B-E) |
|---|-------------------------|---|---|
| COMPATIBILITY | PUZ-WZ50VAA(-BS) | ✓ | |
| | PUZ-WZ60VAA(-BS) | ✓ | |
| | PUZ-WZ85VAA/YAA(-BS) | ✓ | |
| | PUZ-WZ100VAA/YAA(-BS) | ✓ | |
| | PUZ-WZ120VAA/YAA(-BS) | ✓ | |
| | PUZ-WM50VHA(-BS) | ✓ | ✓ |
| | PUZ-WM60VAA(-BS) | ✓ | ✓ |
| | PUZ-WM85VAA/YAA(-BS) | ✓ | ✓ |
| | PUZ-WM112VAA/YAA(-BS) | ✓ | ✓ |
| | PUZ-HWM140VHA/YHA(-BS) | ✓ | ✓ |
| BUILT-IN FEATURES | Initial Setting Wizard | ✓ | |
| | Commissioning Aide | ✓ | |
| | Smart Grid Ready | ✓ | |
| | PV Connection | ✓ | |
| | Energy Monitoring | ✓ | |
| | Dual Set-Point DHW | ✓ | |
| | Flow Rate Control Logic | ✓ | |
| | Quiet Mode | ✓ | |
| | Cascade ^{*1} | ✓ | |
| Hybrid | ✓ | | |
| MELCloud ENABLED ^{*2} | ✓ | | |
| BEMS INTERFACE | | | ✓ |
| DIMENSIONS (MM) | Width | 393 | 336 |
| | Depth | 86.7 | 69 |
| | Height | 422 | 278 |
| WEIGHT (kg) | | 4.2 | 3.2 |
| OPERATING AMBIENT TEMPERATURE (°C) / HUMIDITY | | 0~ +35°C (RH<80%) | 0~ +35°C (RH<80%) |
| ELECTRICAL DATA | Electrical Supply | Via Outdoor Unit or Independent Source (230v) | Via Outdoor Unit or Independent Source (230v) |
| | Phase | Single | Single |

^{*1} Requires additional optional part PAC-IF082B-E. Please contact your regional sales office technical team. ^{*2} Requires Wi-Fi interface MAC-587F-EH.



Energy Monitoring Packs

All Ecodan Flow Temperature Control systems come with free energy monitoring as standard. System users are able to measure both consumed electrical energy and produced heat energy to the nearest kWh.

In addition to the basic system functionality features, i.e. hot water and heating status, the system's energy performance can also now be viewed. Historic energy consumption, heat production and run cost reports are available via the main controller, SD card or MELCloud.



| PACK | 5kW | 5kW | 6kW | 6kW | 8.5kW | 8.5kW | 10kW | 11.2kW | 12kW | 14kW | DESCRIPTION | ELECTRIC METER | HEAT METER | DATA STORAGE |
|------------|-----|-----|-----|-----|-------|-------|------|--------|------|------|---|--|--|-------------------------|
| EMP1 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | Energy input & output estimation included as standard | | | |
| EMP2 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | Electrical energy measurement consumption pack | 2 x ACC-EM-EML-1PH2 System Electricity Meter | | |
| EMPH-M-1PH | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | Electrical energy consumption and heat generation pack for hybrid systems | 2 x ACC-EM-EML-1PH2 System Electricity Meter | 1 x ACC-HM-749-G25 Glycol Mono Hybrid System | ACC-RES-DSV-1Y One Year |



MELCloud Wi-Fi Connectivity



Featuring the award-winning



MELCloud is a cloud based solution for controlling your Mitsubishi Electric Ecodan heating system either locally or remotely by PC, Mac, Tablet or Smartphone via the internet.

The set up and remote operation of your Ecodan heating system via MELCloud is simple and straight forward. All you need is a wireless connection where the Ecodan is located and an internet connection on your mobile or fixed device. To set up the system, the router and the Ecodan Wi-Fi interface need pairing and this is done simply and quickly via the WPS button found on all mainstream routers, or using access point pairing via a mobile phone.

Key Features & Benefits

- Access to remote maintenance and technical support
- View and control your heating and hot water from anywhere in the world
- Reports on energy use, temperature history and more
- Live weather feed at location of Ecodan
- Share / restrict access and control of the Ecodan system
- Compatible with Amazon Alexa or Google Assistant-enabled devices



MELConsole





Once connected, you can also enjoy the benefits of **MELConsole** which provides **remote maintenance & technical support** reducing the need of a visit from an engineer.

To find out more, scan the QR Code or call the Ecodan Helpdesk:
0161 866 6064



24/7 Technical Support

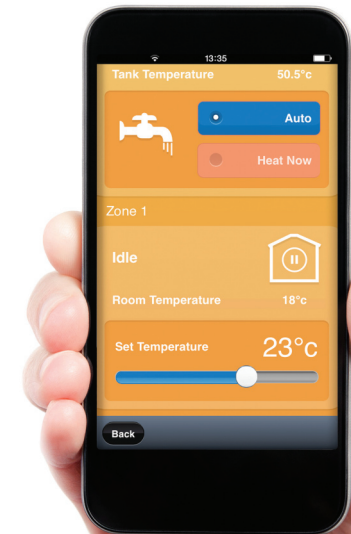

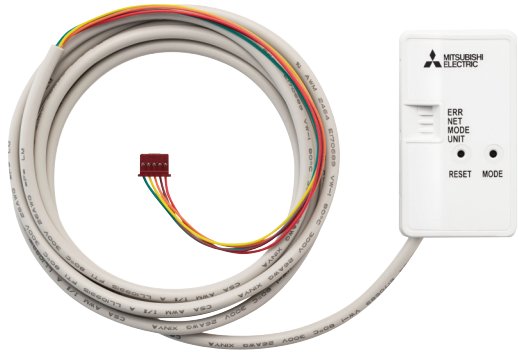

For a demonstration of Mitsubishi Electric's MELCloud, scan the QR Code or visit our website melcloud.com



Available for PC, Mac, Tablet or Smartphone

Supported Ecodan Models

All **Ecodan FTC7** systems have energy monitoring functionality as standard and the ability to connect to MELCloud. A MAC-587IF-EH Wi-Fi Interface is required to use MELCloud.

| Wi-Fi Interface | | MAC-587IF-EH |
|-----------------------|----------------------------|--------------------|
| DESCRIPTION | | Wi-Fi Interface |
| CONNECT TO | | Indoor Unit |
| MAX NUMBER OF UNITS | | 1 |
| COMPATIBILITY | | Ecodan FTC7 |
| POWER SUPPLY | | From indoor unit |
| DIMENSIONS (WxDxH) mm | | 73.5 x 18.5 x 41.5 |
| CONTROL | On/Off | ✓ |
| | Mode | ✓ |
| | Heating Setpoint | ✓ |
| | Hot Water Boost | ✓ |
| | 2-Zone Control | ✓ |
| | Holiday Mode | ✓ |
| | Timer | ✓ |
| | Frost Protection | ✓ |
| MONITOR | On/Off | ✓ |
| | Mode | ✓ |
| | Heating Setpoint | ✓ |
| | Tank Temperature | ✓ |
| | Tank Target Temperature | ✓ |
| | Outside Temperature | ✓ |
| | Fault Codes | ✓ |
| | Consumed Electrical Energy | ✓ |
| | Produced Heat Energy | ✓ |

Supported Hardware / Software

Tablets (Apps or Web Client)

Apple iPad / iPad mini
 Samsung Galaxy Tab / Note
 Google Nexus
 Dell Latitude 10
 Microsoft Surface
 BlackBerry PlayBook

Smartphones (Apps or Web Client)

Apple iPhone
 Samsung Galaxy S
 Google Nexus
 Nokia Lumia
 BlackBerry Z10

Operating Systems

Android™
 Apple iOS / OS
 Microsoft Windows
 BlackBerry

Internet Browsers (Web Client only)

Microsoft Internet Explorer
 Google Chrome
 Apple Safari
 Mozilla Firefox
 Opera

Please Note:

This is not definitive list of all compatible devices, other similar devices which use supported Operating Systems or Internet Browsers should also work either via dedicated Apps or via Web Browser / Web Client options. Please note that user experience may vary slightly depending on hardware and software combination. Google, Android, Google Play, Google Chrome and other marks are trademarks of Google LLC.

i-LIFE2 Slim

Fan Assisted Radiator


The i-Life2 Slim Fan Assisted Radiator is designed to work seamlessly with existing heating or renewable technologies.

Key Features & Benefits

- **Stylish** - At only 13cm deep, the sleek and elegant satin-white, wall mounted cabinet is designed to blend seamlessly into any setting
- **Flexible** - Packed with advanced controls and functions, the i-Life2 Slim will work with traditional heating or renewable systems such as heat pumps
- **Easy to Use** - Airflow is managed by deflectors at the top of the unit, which open and close automatically, ensuring fast and even heat distribution



| MODEL | | I-LIFE2 SLIM DLMV 080 ATS2 | I-LIFE2 SLIM DLMV 170 ATS2 |
|-------------------------------|---|----------------------------|----------------------------|
| CAPACITY (W) ^{2 * 8} | | 500 / 780 / 880 | 1060 / 1660 / 2130 |
| ELECTRICAL DATA | Electrical Supply | 230v, 50Hz | 230v, 50Hz |
| | Phase | Single | Single |
| | Fan Power Input (W) - (Lo-Mi-Hi) ^{1 * 8} | 0.7 / 4.6 / 10.7 | 1.62 / 10.1 / 19.0 |
| WATER DATA | Water Flow Rate (l/min) - (Lo-Mi-Hi) ² | 1.2 / 2.4 / 2.4 | 3 / 4.8 / 6 |
| | Water Pressure Drop (kPa) - (Lo-Mi-Hi) ^{2 * 8} | 3 / 6 / 8 | 2 / 5 / 8 |
| AIR DATA | Air Flow Rate (m3/h) - (Lo-Mi-Hi) ¹ | 51 / 93 / 125 | 122 / 221 / 277 |
| SOUND DATA | Sound Pressure (dB(A)) - (Lo-Mi-Hi) ³ | 24 / 35 / 41 | 26 / 36 / 42 |
| | Sound Power (dB(A)) - (Lo-Mi-Hi) ^{4 * 7 * 8} | 33 / 44 / 50 | 35 / 45 / 51 |
| DIMENSIONS (mm) ⁵ | Width | 737 | 937 |
| | Depth | 131 | 131 |
| | Height | 579 | 579 |
| WEIGHT (kg) ⁵ | | 17 | 20 |


 i-Life2 Slim units are managed by a variable speed fan motor that continuously modulates the fan speed

1. Room temperature 27°C d.b./19°C w.b.; Chilled water (in/out) 7/12°C.
2. Room temperature 20°C d.b.; Hot water (in/out) 45/40 °C.
3. Sound pressure level in free field on a reflective surface, 1m from fan front and 1m from the ground. Non-binding value obtained from sound power level.
4. Sound power on the basis of measurements made in compliance with ISO 374 and Eurovent 8/2.
5. Unit in standard configuration/execution, without optional accessories.
6. Values in compliance with EN14511-3:2013.
7. Values in compliance with [REGULATION (UE) N.2016/2281].
8. Certified data in EUROVENT.

Product Dimensions

i-LIFE2 SLIM DLMV 080 ATS2 & i-LIFE2 SLIM DLMV 170 ATS2


All measurements in mm

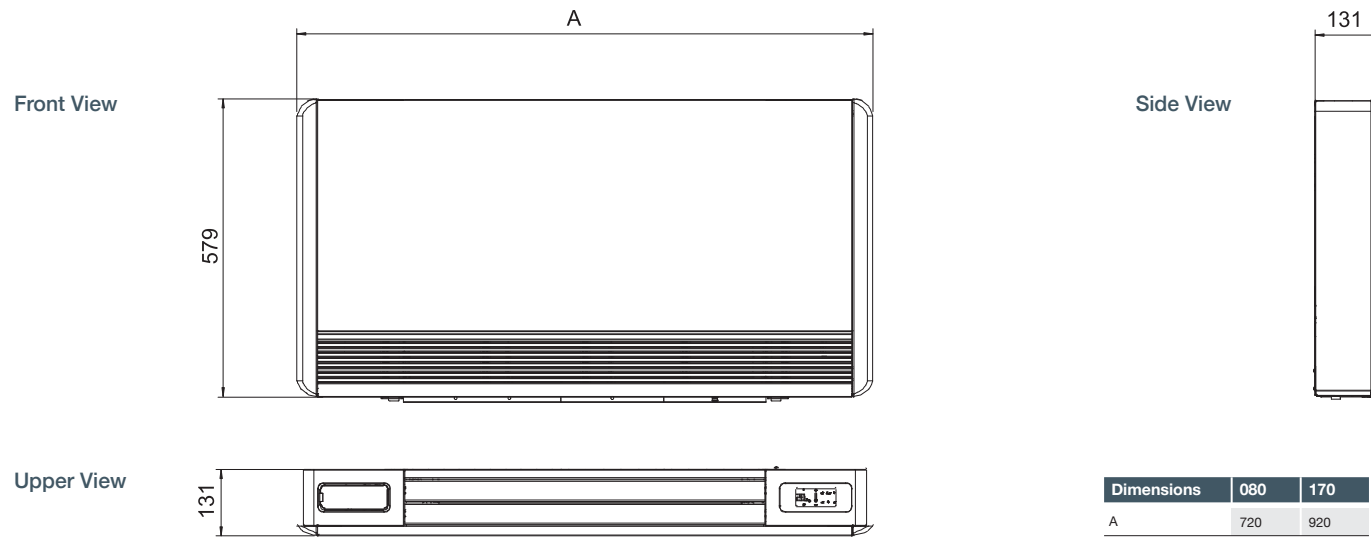

Installation Location

i-LIFE2 SLIM DLMV 080 ATS2 & i-LIFE2 SLIM DLMV 170 ATS2

All measurements in mm

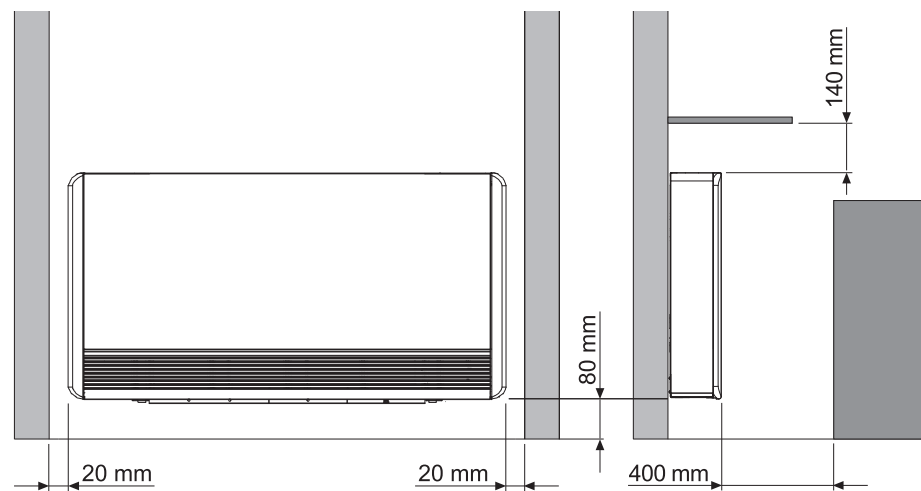



Accessories / Optional Extras



PAR-WT60R-E
FTC Wireless Controller Transmitter

| DESCRIPTION | MODEL REF. |
|--|-----------------|
| PUZ | |
| FTC Wireless Controller Transmitter | PAR-WT60R-E |
| FTC Wireless Controller Receiver 2m Cable | PAR-WR61R-E |
| Modbus CN105 Interface | ACC-BEMS-A1MR5 |
| Isolator 20A IP65 | ACC-ISO-020 |
| Isolator 32A IP65 | ACC-ISO-032 |
| Isolator 40A IP65 | ACC-ISO-040 |
| FTC High Temperature Sensor 5m Cable | PAC-TH012HT-E |
| FTC High Temperature Sensor 30m Cable | PAC-TH012HTL-E |
| FTC Flow and Return Temperature Sensors 5m Cable | PAC-TH011-E |
| FTC Cylinder DHW Temp Sensor 5m Cable | PAC-TH011TK2-E |
| FTC Cylinder DHW Temp Sensor 30m Cable | PAC-TH011TKL2-E |
| FTC Service Diagnostic Tool | PAC-SK52ST |
| Ecodan Anti-Vibration Fix-It-Foot 600mm Kit | ACC-AVM-001 |
| Ecodan Reinforced Lightweight Slab +Anti-Vibration Fix-It-Foot Kit | ACC-AVS-001 |
| Compatible Drain Socket Kit | PAC-SH71DS-E |
| 10L Anti Freeze | ACC-AFZ-010A |
| 20L Anti Freeze | ACC-AFZ-020A |
| Insulated Through Wall Sleeve Kit (85mm) | ACC-FCP-TW1 |
| External Pipework Trunking Length (1m x 140mm Black x2) | ACC-TRU-LE1 |
| External Pipework Trunking Length (2m x 140mm Black x1) | ACC-TRU-LE2 |
| External Pipework Trunking Length Connector (140mm Black) | ACC-TRU-JO1 |
| External Pipework Trunking Wall Cover (140mm Black) | ACC-TRU-CO1 |
| External Pipework Trunking Elbow (140mm Black) | ACC-TRU-EL1 |
| External Pipework Trunking External Corner (140mm Black) | ACC-TRU-EC1 |
| External Pipework Trunking Internal Corner (140mm Black) | ACC-TRU-IC1 |
| Pack for 2 Zone Systems with Equal Temperatures | ACC-2ZP-K01 |
| Pack for 2 Zone Systems with Different Temperatures | ACC-2ZP-K02 |
| Insulated Flexible Connection Pipes (22mm x 500mm) Standard Pair | ACC-FCP-S22 |
| Insulated Flexible Connection Pipes (28mm x 500mm) Standard Pair | ACC-FCP-S28 |
| Insulated Flexible Connection Pipes (28mm x 300mm) Elbow Pair | ACC-FCP-E28 |
| MELCloud Wi-Fi Interface | MAC-587IF-EH |

Ventilation

Fresh Air Ventilation Range





Contents

| | |
|--|------|
| LGH-RVX3-E Commercial Lossnay | 4.6 |
| LGH-RVXT3-E Commercial Lossnay | 4.8 |
| LGH-RVS-E Commercial Lossnay | 4.10 |
| GUF-RD4 Lossnay Outdoor Air Processing Unit | 4.12 |
| VL-CZPVU-L/R-E Residential Lossnay | 4.14 |
| CP-500CM-L/R Cooling Module | 4.16 |
| s-AIRME-G07 HR-P C Air Handling Unit | 4.18 |
| Accessories / Optional Extras | 4.20 |

Fresh Air Ventilation Range

Why Do We Need **Fresh Air Ventilation**?

The build-up of health damaging pollutants, mould and rot are all attributed to poor indoor air quality and the lack of effective ventilation.

With highly airtight buildings on the rise, alongside increasingly strict legislation on air quality, the need is growing for an effective solution such as mechanical ventilation, which is also energy efficient. Mitsubishi Electric systems are perfectly placed to address this need and are the ideal solution to provide fresh air.

Our range includes single and multi-room Mechanical Ventilation with Heat Recovery (MVHR) units and medium to large scale ventilation solutions including Air Handling Units (AHUs). All systems have been designed to provide the best ventilation solution for the chosen application, by delivering the required amount of fresh air, whilst extracting the right amount of stale air, in the most energy efficient way possible.



Fresh air benefits include:

- A healthy and better maintained building
- Improved air quality for occupants
- Improved comfort via the recovery of heat to incoming fresh air



Fresh Air Ventilation Range


Excellent Air Quality and Heat Exchange Efficiency

How Lossnay Works

Our Lossnay systems have perfected the recovery of energy that would have otherwise been wasted. They do this by either warming or cooling incoming air, a feature which makes Mitsubishi Electric MVHR units extremely energy efficient.

Heat Recovery is made possible via the unique Lossnay ultra-thin paper core technology, which is constructed in a corrugated form and layered in alternative directions.

This design allows a cross airflow to maximise heat recovery without the supply and exhaust air mixing, ensuring only fresh air is introduced to the building.

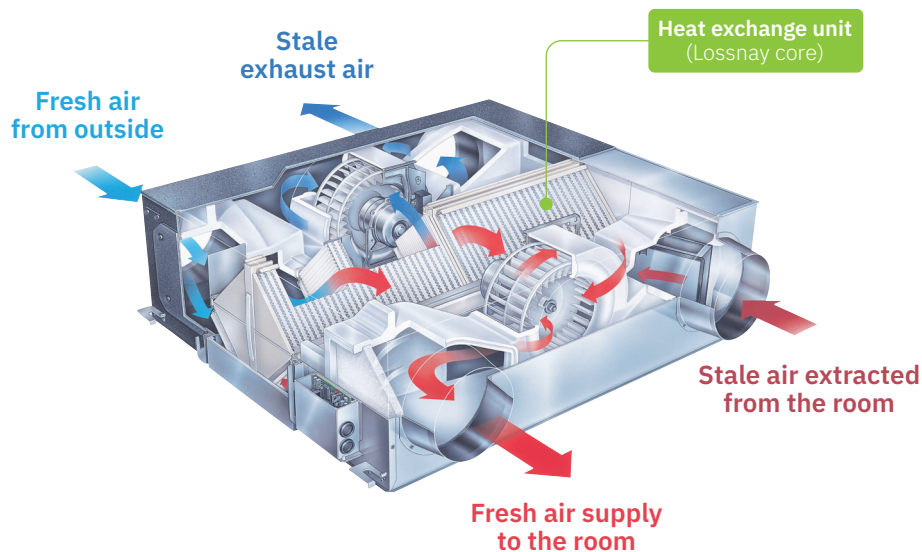

How Air Handling Units work

Packaged Air Handling Units (AHUs) are designed to provide a tempered fresh air supply into commercial buildings. They work in conjunction with the building's air conditioning system to provide occupants with a fresh and comfortable environment.



The Mitsubishi Electric AIRME Compact Air Handling Units incorporate a frameless structure to achieve a line-up of units that are as compact as possible, maximising air tightness and improving thermal properties.

The s-AIRME-G07 HR-P range of AHU's utilises a combination of Mr Slim R32 Power Inverter heat pump technology, energy efficient plate heat exchanger heat recovery technology, and an integrated control system.



LGH-RVX3-E

Commercial Lossnay

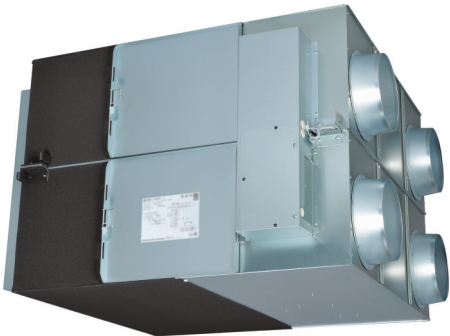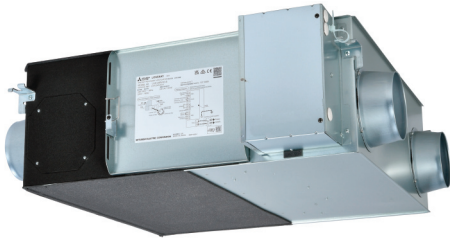

CO₂ LEVELS
LOW MID HIGH



Compatible with Mitsubishi Electric
plug-and-play CO₂ sensor
(powered by the Lossnay unit)

The new Lossnay **LGH-RVX3-E** Mechanical Ventilation Heat Recovery (MVHR) systems are designed to supply clean, fresh air into any commercial building, whilst simultaneously extracting stale air, ensuring good indoor air quality for occupant wellbeing. These units are also able to recover valuable heat energy from inside the building, maximising energy efficiency and reducing running costs.

Key Features & Benefits

- Mitsubishi Electric pioneered heat exchanger enables maximised latent heat exchange, resulting in cost and carbon savings
- Four commissionable fan speeds, settable between 25-100%, with independent supply and return fan control offering low running costs and easier compliance to Part L
- Optional Mitsubishi Electric energy saving CO₂ sensor allows automatic incremental fan control for a healthy indoor environment
- Full airflow in bypass mode, promoting good indoor air quality during free cooling
- Dual-Barrier coating on the fan prevents dust and grease accumulation, ensuring long-term efficient operation
- Lightweight structure ideal for easy ceiling installation
- Vertical installation available for flexibility of application
- Easy control interlock with Mr Slim and City Multi air conditioning systems, including M-NET connection for centralised control


| MODEL | | LGH-15RVX3-E | LGH-25RVX3-E | LGH-35RVX3-E | LGH-50RVX3-E | LGH-65RVX3-E | LGH-80RVX3-E | LGH-100RVX3-E | LGH-160RVX3-E | LGH-200RVX3-E | |
|------------------------------|---------------------------------|-------------------|-----------------|-----------------|-----------------|---|-----------------|-------------------|-----------------------------|-----------------------------|-----------------------------|
| 25% (Default speed 1) | Air Volume | m ³ /h | 38 | 63 | 88 | 125 | 163 | 200 | 250 | 400 | 500 |
| | | l/s | 10 | 17 | 24 | 35 | 45 | 56 | 69 | 111 | 139 |
| | External Static Pressure | Pa | 8 | 8 | 10 | 10 | 10 | 11 | 12 | 11 | 11 |
| | Temperature Exchange Efficiency | Heating % | 81.5 | 88.0 | 82.0 | 75.0 | 82.0 | 80.0 | 83.5 | 80.0 | 83.5 |
| | | Cooling % | 78.0 | 85.0 | 79.0 | 73.0 | 80.0 | 78.0 | 82.5 | 78.0 | 82.5 |
| | Enthalpy Exchange Efficiency | Heating % | 80.5 | 84.0 | 80.0 | 73.0 | 80.0 | 73.5 | 75.5 | 73.5 | 76.0 |
| | | Cooling % | 73.0 | 75.0 | 74.5 | 68.0 | 74.0 | 70.5 | 73.5 | 70.5 | 71.0 |
| | Specific Fan Power | W/(l/s) | 0.96 | 0.63 | 0.62 | 0.43 | 0.44 | 0.41 | 0.39 | 0.41 | 0.41 |
| | Input Power | W | 10 | 11 | 15 | 15 | 20 | 23 | 27 | 45 | 57 |
| | Sound Pressure Level | dB(A) | 17.0 | 17.0 | 17.0 | 17.0 | 17.5 | 18.0 | 18.5 | 18.0 | 18.0 |
| 50% (Default speed 2) | Air Volume | m ³ /h | 75 | 125 | 175 | 250 | 325 | 400 | 500 | 800 | 1000 |
| | | l/s | 21 | 35 | 49 | 69 | 90 | 111 | 139 | 222 | 278 |
| | External Static Pressure | Pa | 30 | 30 | 40 | 38 | 38 | 43 | 48 | 43 | 43 |
| | Temperature Exchange Efficiency | Heating % | 78.0 | 81.0 | 79.0 | 73.5 | 78.5 | 78.0 | 79.5 | 78.0 | 79.5 |
| | | Cooling % | 73.5 | 79.0 | 74.0 | 71.0 | 74.5 | 75.5 | 77.0 | 75.5 | 76.0 |
| | Enthalpy Exchange Efficiency | Heating % | 76.5 | 75.5 | 77.5 | 72.0 | 76.5 | 70.5 | 68.5 | 70.5 | 67.5 |
| | | Cooling % | 66.0 | 68.0 | 68.5 | 63.0 | 66.5 | 65.0 | 66.0 | 65.0 | 65.0 |
| | Specific Fan Power | W/(l/s) | 0.72 | 0.60 | 0.60 | 0.49 | 0.56 | 0.58 | 0.60 | 0.58 | 0.59 |
| | Input Power | W | 15 | 21 | 29 | 34 | 51 | 64 | 83 | 128 | 163 |
| | Sound Pressure Level | dB(A) | 18.0 | 19.5 | 19.0 | 21.0 | 24.0 | 25.0 | 27.0 | 26.0 | 27.5 |
| 75% (Default speed 3) | Air Volume | m ³ /h | 113 | 188 | 263 | 375 | 488 | 600 | 750 | 1200 | 1500 |
| | | l/s | 31 | 52 | 73 | 104 | 135 | 167 | 208 | 333 | 417 |
| | External Static Pressure | Pa | 68 | 68 | 90 | 85 | 85 | 96 | 107 | 96 | 96 |
| | Temperature Exchange Efficiency | Heating % | 75.5 | 78.5 | 77.0 | 71.5 | 75.0 | 76.5 | 77.0 | 76.5 | 77.5 |
| | | Cooling % | 70.5 | 76.5 | 71.0 | 67.0 | 70.0 | 70.0 | 72.0 | 70.0 | 71.5 |
| | Enthalpy Exchange Efficiency | Heating % | 73.5 | 72.0 | 74.5 | 69.5 | 72.0 | 65.0 | 63.0 | 65.0 | 64.0 |
| | | Cooling % | 62.0 | 63.5 | 64.5 | 58.0 | 60.0 | 58.5 | 61.0 | 58.5 | 60.0 |
| | Specific Fan Power | W/(l/s) | 0.96 | 0.81 | 0.84 | 0.78 | 0.89 | 0.96 | 1.01 | 0.97 | 1.00 |
| | Input Power | W | 30 | 42 | 61 | 81 | 120 | 160 | 210 | 324 | 416 |
| | Sound Pressure Level | dB(A) | 22.0 | 25.0 | 24.5 | 27.0 | 31.5 | 33.5 | 35.0 | 35.0 | 36.0 |
| 100% (Default speed 4) | Air Volume | m ³ /h | 150 | 250 | 350 | 500 | 650 | 800 | 1000 | 1600 | 2000 |
| | | l/s | 42 | 69 | 97 | 139 | 181 | 222 | 278 | 444 | 556 |
| | External Static Pressure | Pa | 120 | 120 | 160 | 150 | 150 | 170 | 190 | 170 | 170 |
| | Temperature Exchange Efficiency | Heating % | 73.5 | 75.5 | 75.0 | 70.5 | 72.5 | 75.0 | 75.5 | 75.0 | 76.5 |
| | | Cooling % | 65.5 | 70.5 | 66.5 | 63.5 | 65.0 | 65.0 | 67.5 | 65.0 | 66.5 |
| | Enthalpy Exchange Efficiency | Heating % | 70.5 | 69.0 | 72.0 | 68.5 | 69.5 | 62.0 | 60.5 | 62.0 | 60.5 |
| | | Cooling % | 58.0 | 59.0 | 60.0 | 53.5 | 55.5 | 54.5 | 55.5 | 54.5 | 57.0 |
| | Specific Fan Power | W/(l/s) | 1.32 | 1.08 | 1.23 | 1.33 | 1.36 | 1.54 | 1.58 | 1.55 | 1.54 |
| | Input Power | W | 55 | 75 | 120 | 185 | 245 | 343 | 438 | 687 | 855 |
| | Sound Pressure Level | dB(A) | 27.0 | 30.5 | 30.5 | 35.0 | 37.5 | 39.0 | 40.0 | 41.0 | 41.5 |
| DUCT SIZE | mm | 100 | 150 | 150 | 200 | 200 | 250 | 250 | (SA,PA)250 (OA,EA)270 x 700 | (SA,PA)250 (OA,EA)270 x 700 | (SA,PA)250 (OA,EA)270 x 700 |
| WEIGHT | kg | 20 | 22 | 30 | 33 | 41 | 47 | 53 | 96 | 108 | |
| DIMENSIONS | Width x Depth x Height | mm | 780 x 610 x 289 | 780 x 735 x 289 | 888 x 874 x 331 | 888 x 1016 x 331 | 908 x 954 x 404 | 1144 x 1004 x 404 | 1144 x 1231 x 404 | 1144 x 1004 x 808 | 1144 x 1231 x 808 |
| ELECTRICAL POWER SUPPLY | | | | | | 220-240V, 50Hz | | | | | |
| MAXIMUM CURRENT | A | 0.57 | 0.88 | 1.37 | 1.86 | 2.37 | 3.23 | 3.77 | 4.74 | 5.40 | |
| FUSE RATING (BS88) – HRC (A) | A | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 10 | 10 | |
| HEAT EXCHANGER | | | | | | Paper with specially treated Cellulose Membrane | | | | | |
| STANDARD FILTER | | | | | | ISO 16890 Coarse 60% ¹⁾ | | | | | |

Notes: Running current, power consumption, recovery efficiency, and sound levels are based on the above default airflow rates at 25%, 50%, 75%, and 100%. Specific duty point data is available upon request. Supply and exhaust fan speeds can be individually commissioned between 25% and 100% in 5% increments. Sound Pressure Level measured at 1.5m under the centre of the bottom panel. Air flow rates, external static pressure and specific fan powers tested to BS EN13053: 2019. Energy recovery efficiencies tested to BS EN308: 2022.

¹⁾ EN 779 G4 equivalent according to 'REHVA Filter Class Conversion between EN 779 and EN ISO 16890-1'.

LGH-RVXT3-E

Commercial Lossnay

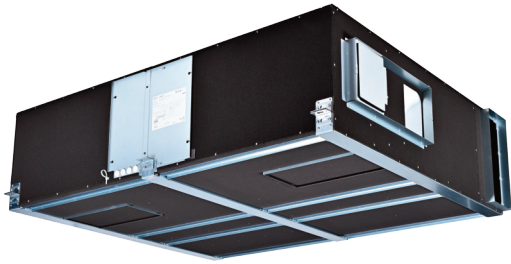

CO₂ LEVELS
LOW MID HIGH



Compatible with Mitsubishi Electric
plug-and-play CO₂ sensor
(powered by the Lossnay unit)

Lossnay **LGH-RVXT3-E** Mechanical Ventilation Heat Recovery (MVHR) systems are designed to supply clean, fresh air into any commercial building, whilst simultaneously extracting stale air, ensuring good indoor air quality for occupant wellbeing. Offering a significantly reduced height, whilst maintaining a large airflow, these units are designed for installation in ceiling voids within commercial properties.

Key Features & Benefits

- Mitsubishi Electric pioneered heat exchanger enables maximised latent heat exchange, resulting in cost and carbon savings
- Low unit height (500mm) and lightweight structure, ideal for ceiling installation
- Four commissionable fan speeds, settable between 25-100%, with independent supply and return fan control offering low running costs and easier compliance to Part L
- Optional Mitsubishi Electric energy saving CO₂ sensors allow automatic incremental fan control for a healthy indoor environment; sensors powered by Lossnay unit
- Easy control interlock with Mr Slim and City Multi air conditioning systems, including M-NET connection for centralised control
- Dual-Barrier coating on the fan prevents dust and grease accumulation, ensuring long-term efficient operation

| MODEL | | | LGH-160RVXT3-E | LGH-200RVXT3-E | LGH-250RVXT3-E |
|---------------------------|---------------------------------|--|----------------|----------------|----------------|
| 25% (DEFAULT SPEED 1) | Air Volume | m ³ /h | 400 | 500 | 625 |
| | | l/s | 111 | 139 | 174 |
| | External Static Pressure | Pa | 12 | 12 | 12 |
| | Temperature Exchange Efficiency | Heating % | 88.0 | 86.0 | 84.0 |
| | | Cooling % | 83.0 | 82.0 | 81.0 |
| | Enthalpy Exchange Efficiency | Heating % | 85.5 | 84.5 | 81.5 |
| | | Cooling % | 78.0 | 75.0 | 73.0 |
| | Specific Fan Power | W/(l/s) | 0.41 | 0.40 | 0.50 |
| | Input Power | W | 46 | 56 | 86 |
| | Sound Pressure Level | dB(A) | 19.5 | 21.0 | 23.0 |
| 50% (DEFAULT SPEED 2) | Air Volume | m ³ /h | 800 | 1000 | 1250 |
| | | l/s | 222 | 278 | 347 |
| | External Static Pressure | Pa | 48 | 48 | 48 |
| | Temperature Exchange Efficiency | Heating % | 85.5 | 83.0 | 80.0 |
| | | Cooling % | 79.0 | 78.0 | 76.5 |
| | Enthalpy Exchange Efficiency | Heating % | 83.0 | 81.5 | 78.0 |
| | | Cooling % | 73.0 | 67.5 | 66.0 |
| | Specific Fan Power | W/(l/s) | 0.65 | 0.69 | 0.82 |
| | Input Power | W | 144 | 192 | 284 |
| | Sound Pressure Level | dB(A) | 26.0 | 28.0 | 31.5 |
| 75% (DEFAULT SPEED 3) | Air Volume | m ³ /h | 1200 | 1500 | 1875 |
| | | l/s | 333 | 417 | 521 |
| | External Static Pressure | Pa | 107 | 107 | 107 |
| | Temperature Exchange Efficiency | Heating % | 83.0 | 81.0 | 78.0 |
| | | Cooling % | 75.0 | 73.0 | 70.5 |
| | Enthalpy Exchange Efficiency | Heating % | 81.0 | 79.5 | 76.0 |
| | | Cooling % | 65.5 | 61.0 | 59.0 |
| | Specific Fan Power | W/(l/s) | 1.10 | 1.20 | 1.34 |
| | Input Power | W | 368 | 498 | 696 |
| | Sound Pressure Level | dB(A) | 33.0 | 35.0 | 38.0 |
| 100% (DEFAULT SPEED 4) | Air Volume | m ³ /h | 1600 | 2000 | 2500 |
| | | l/s | 444 | 556 | 694 |
| | External Static Pressure | Pa | 190 | 190 | 190 |
| | Temperature Exchange Efficiency | Heating % | 82.0 | 80.0 | 77.0 |
| | | Cooling % | 70.0 | 67.5 | 65.0 |
| | Enthalpy Exchange Efficiency | Heating % | 80.0 | 78.5 | 75.0 |
| | | Cooling % | 61.5 | 56.5 | 54.0 |
| | Specific Fan Power | W/(l/s) | 1.59 | 1.88 | 2.09 |
| | Input Power | W | 708 | 1044 | 1448 |
| | Sound Pressure Level | dB(A) | 38.0 | 40.0 | 44.0 |
| DUCT SIZE | mm | Outlets (SA/EA): 250 x 650 / Inlets (RA/OA): 465 x 220 | | | |
| WEIGHT | kg | 172 | | 172 | |
| DIMENSIONS | Width x Depth x Height | 2100 x 1600 x 500 | | | |
| ELECTRICAL POWER SUPPLY | | 3-phase, 380-415V, 50Hz ² | | | |
| MAXIMUM CURRENT | A | 3.0 | 3.9 | 5.0 | |
| HEAT EXCHANGER | | Paper with Specially Treated Cellulose Membrane | | | |
| STANDARD FILTER | | ISO 16890 Coarse 60% ¹ | | | |

Notes: Running current, power consumption, recovery efficiency, and sound levels are based on the above default airflow rates at 25%, 50%, 75%, and 100%. Specific duty point data is available upon request. Supply and exhaust fan speeds can be individually commissioned between 25% and 100% in 5% increments. Sound Pressure Level measured at 1.5m under the centre of the bottom panel. Air flow rates, external static pressure and specific fan powers tested to BS EN13053: 2019. Energy recovery efficiencies tested to BS EN308: 2022.

¹: EN 779 G4 equivalent according to 'REHVA Filter Class Conversion between EN 779 and EN ISO 16890-1'.

²: 3 phase 4 wire power must be connected. The unit only uses loads L2 and L3, meaning L1 does not draw load.

Accessories

Remote Controllers

PZ-62DR-EB

Lossnay remote controller for LGH-RVXT3-E

PZ-4GS-E

External signal relay for LGH-RVXT3-E

Filters

PZ-250TRF-E

Standard replacement filter (Coarse 60%) for LGH-RVXT3-E

PZ-250TPF-E

ISO 16890 ePM₁ 75%, ePM_{2.5} 80%, ePM₁₀ 95% filter for LGH-RVXT3-E

CO₂ Sensors

PZ-70CSW-E


Wall mounted plug and play CO₂ sensor with traffic light signals for LGH-RVXT3-E

PZ-70CSD-E

Duct mounted plug and play CO₂ sensor for LGH-RVXT3-E


Product Dimensions

LGH-160/200/250RVXT3-E

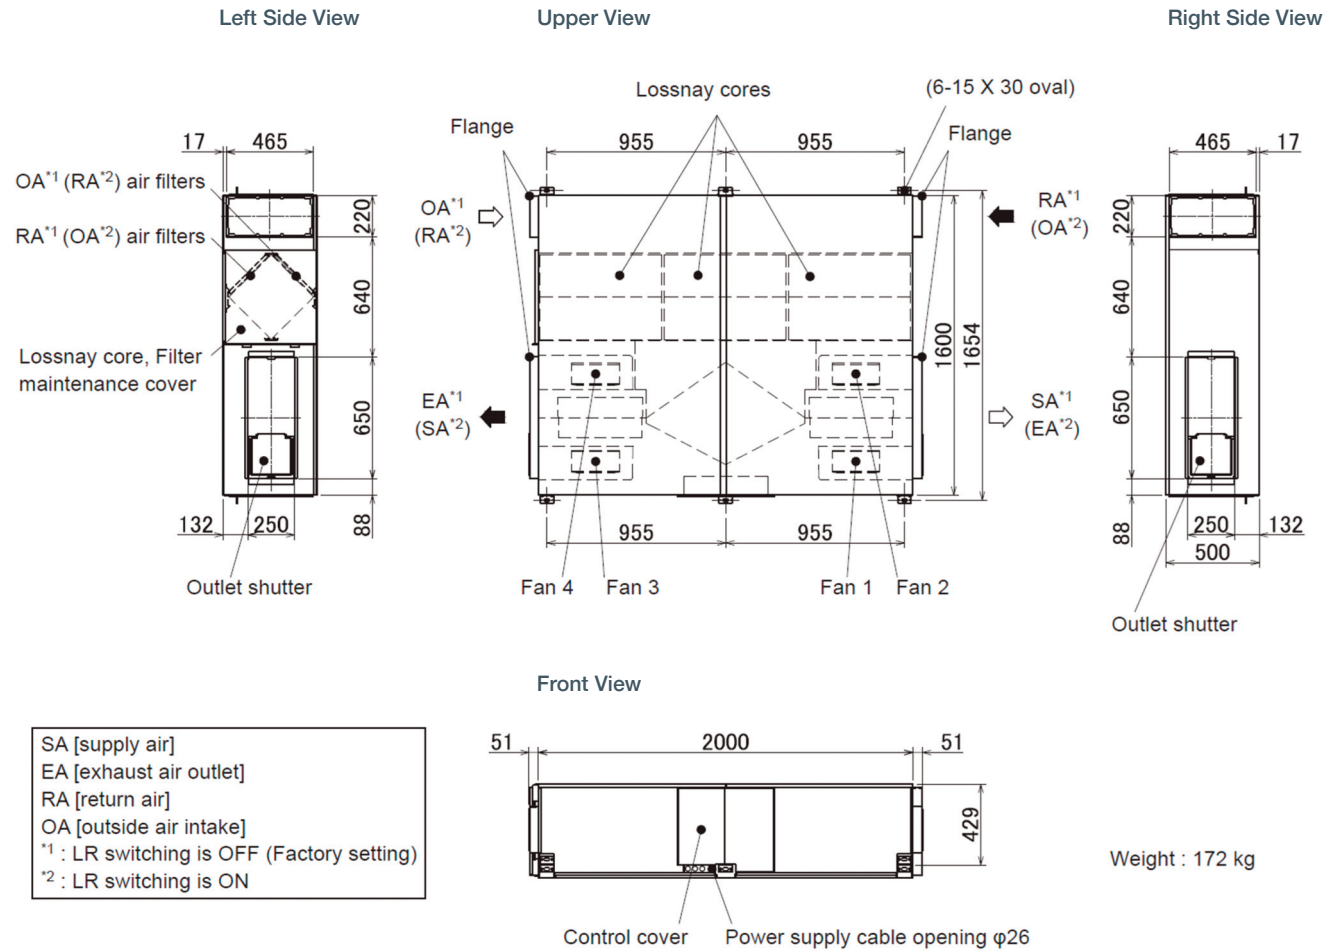

LGH-RVS-E

Commercial Lossnay

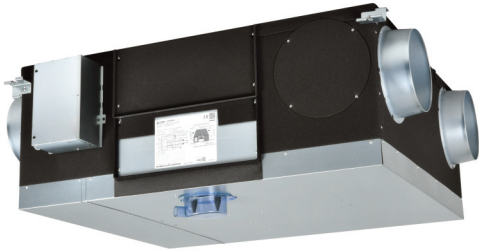

Compatible with Mitsubishi Electric
plug-and-play CO₂ sensor
(powered by the Lossnay unit)

The **LGH-RVS-E** is designed to simultaneously extract stale air from a commercial building and supply fresh filtered air. Whilst doing this the Lossnay units also recover valuable heat energy for maximum efficiency.

Key Features & Benefits

- Fresh air ventilation with energy efficient heat recovery
- Plastic heat exchanger - perfect for higher humidity environments
- Optional Mitsubishi Electric energy saving CO₂ sensors allow automatic incremental fan control for a healthy indoor environment; sensors powered by Lossnay unit
- Four commissionable fan speeds, settable between 25-100%, with independent supply and return fan control offering low running costs and easier compliance to Part L
- Easy control interlock with Mr Slim and City Multi air conditioning systems, including M-NET connection for centralised control
- Integrated bypass damper for free cooling
- In-built condensate drainage traps

| MODEL | | | LGH-50RVS-E | LGH-80RVS-E | LGH-100RVS-E |
|------------------------------|---------------------------------|--------------------|-----------------------------|--|----------------------------|
| 25% | Air Volume | l/s | 35 | 56 | 69 |
| | | m ³ /hr | 125 | 200 | 250 |
| | External Static Pressure | Pa | 9 | 11 | 12 |
| | Temperature Exchange Efficiency | % | 93 | 90 | 90 |
| | Specific Fan Power | W/(l/s) | 0.72 | 0.58 | 0.5 |
| | Input Power | W | 25 | 32 | 35 |
| | Sound Pressure Level | dB(a) | 18 | 18 | 18 |
| 50% | Air Volume | l/s | 69 | 111 | 139 |
| | | m ³ /hr | 250 | 400 | 500 |
| | External Static Pressure | Pa | 38 | 43 | 48 |
| | Temperature Exchange Efficiency | % | 91 | 86 | 86 |
| | Specific Fan Power | W/(l/s) | 0.86 | 0.77 | 0.72 |
| | Input Power | W | 60 | 85 | 100 |
| | Sound Pressure Level | dB(a) | 22 | 25 | 24 |
| 75% | Air Volume | l/s | 104 | 167 | 208 |
| | | m ³ /hr | 375 | 600 | 750 |
| | External Static Pressure | Pa | 84 | 96 | 107 |
| | Temperature Exchange Efficiency | % | 89 | 84 | 84 |
| | Specific Fan Power | W/(l/s) | 1.06 | 1.05 | 1.08 |
| | Input Power | W | 110 | 175 | 225 |
| | Sound Pressure Level | dB(a) | 27 | 30 | 32 |
| 100% | Air Volume | l/s | 139 | 222 | 278 |
| | | m ³ /hr | 500 | 800 | 1000 |
| | External Static Pressure | Pa | 150 | 170 | 190 |
| | Temperature Exchange Efficiency | % | 87 | 82 | 82 |
| | Specific Fan Power | W/(l/s) | 1.37 | 1.46 | 1.6 |
| | Input Power | W | 190 | 325 | 445 |
| | Sound Pressure Level | dB(a) | 33 | 36 | 37 |
| DUCT SIZE | | mm | 200 | 250 | 250 |
| WEIGHT | (with full condensate drain) | kg | 55 (67) | 63 (77) | 73 (89) |
| DIMENSIONS | Width x Depth x Height | mm | 974 x 946 x 465 | 1185 x 997 x 465 | 1185 x 1224 x 465 |
| ELECTRICAL POWER SUPPLY | | | 220-240V, 50Hz | 220-240V, 50Hz | 220-240V, 50Hz |
| MAXIMUM RUNNING CURRENT | | A | 2.2 | 3.7 | 4.2 |
| FUSE RATING (BS88) - HRC (A) | | A | 6 | 6 | 6 |
| HEAT EXCHANGER | | | | Plastic Counter Flow | |
| CONDENSATE CONNECTION | | mm | 32 | 32 | 32 |
| STANDARD FILTER | | | ISO 16890:2016 / EN779:2012 | Coarse 35% / G3 | |
| OPTIONAL FILTER(S) | | | ISO 16890:2016 / EN779:2012 | ePM ₁ 65%, ePM _{2.5} 75%, ePM ₁₀ 90% / F8 | ePM ₁₀ 80% / M6 |

Notes: Airflow rate, static pressure, power input, running current, and heat exchange efficiency tested to ISO 16494 (winter condition), 230v 50Hz. A-Weighted Sound Pressure Level measured at 1.5m under the centre of the unit in an anechoic chamber.

Accessories

Controls

PZ-62DR-EB

Lossnay remote controller for LGH-RVS-E

PZ-4GS-E

External signal relay for LGH-RVS-E

Filters

PZ-S50RF-E

Replacement Coarse 35% / G3 filter for LGH-50RVS-E

PZ-S80RF-E

Replacement Coarse 35% / G3 filter for LGH-80RVS-E

PZ-S100RF-E

Replacement Coarse 35% / G3 filter for LGH-100RVS-E

PZ-S50RFM-E

ePM₁₀ 80% / M6 filter for LGH-50RVS-E

PZ-S80RFM-E

ePM₁₀ 80% / M6 filter for LGH-80RVS-E

PZ-S100RFM-E

ePM₁₀ 80% / M6 filter for LGH-100RVS-E

PZ-S50RFH-E

ePM₁ 65% / F8 filter for LGH-50RVS-E

PZ-S80RFH-E

ePM₁ 65% / F8 filter for LGH-80RVS-E

PZ-S100RFH-E

ePM₁ 65% / F8 filter for LGH-100RVS-E

CO₂ Sensors

PZ-70CSW-E


Wall mounted plug and play CO₂ sensor with traffic light signals for LGH-RVS-E

PZ-70CSD-E

Duct mounted plug and play CO₂ sensor for LGH-RVS-E

Product Dimensions

LGH-50/80/100RVS-E

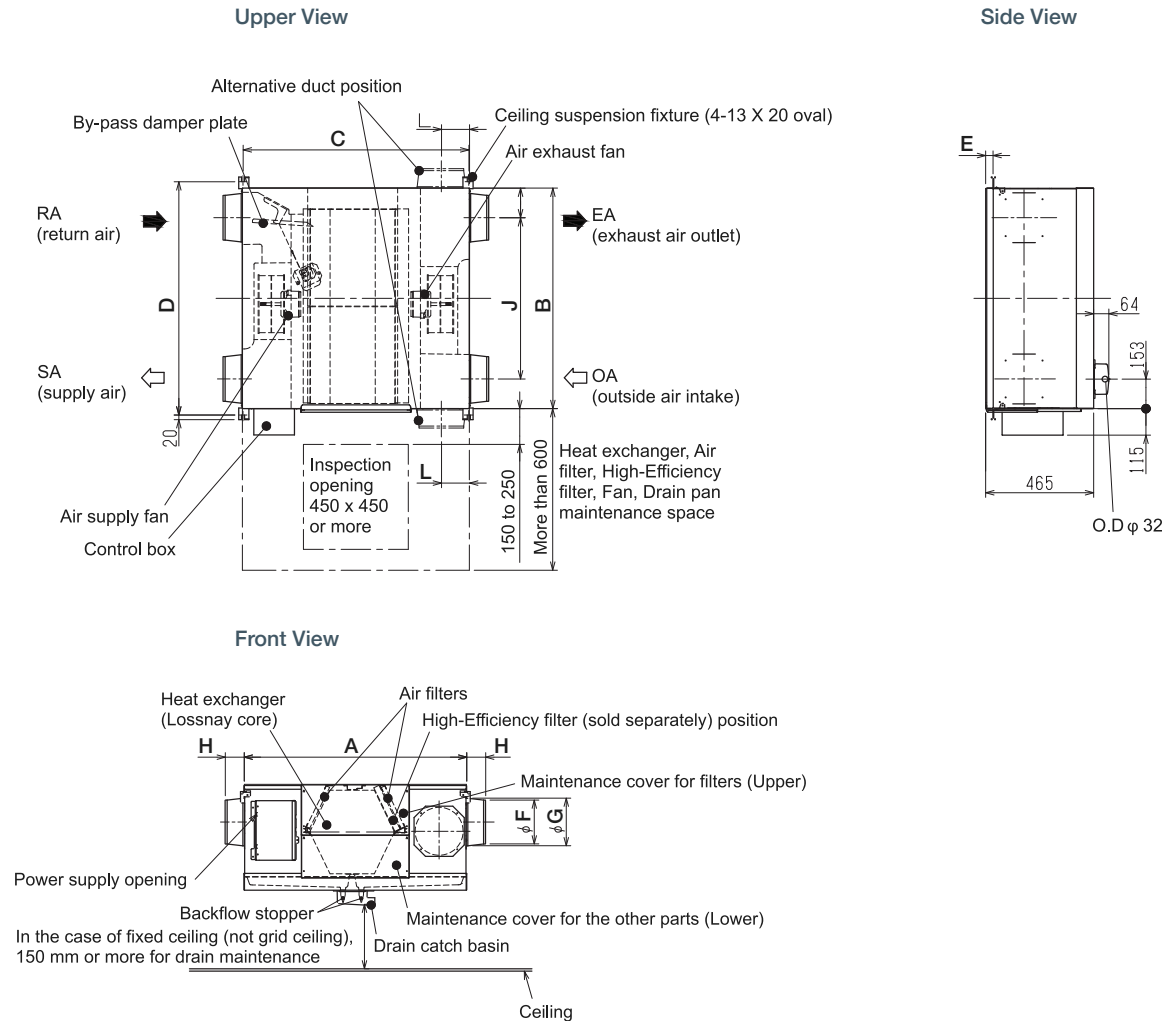

| | A | B | C | D | E | F | G | H | J | L |
|--------------|------|------|------|------|----|-----|-----|----|-----|-----|
| LGH-50RVS-E | 974 | 946 | 969 | 1001 | 32 | 192 | 208 | 83 | 692 | 120 |
| LGH-80RVS-E | 1185 | 997 | 1179 | 1051 | 55 | 242 | 258 | 82 | 683 | 161 |
| LGH-100RVS-E | 1185 | 1224 | 1179 | 1279 | 55 | 242 | 258 | 82 | 910 | 161 |

GUF-RD4


Lossnay Outdoor Air Processing Unit

The **GUF-RD4** fresh air processing units combine a Lossnay Mechanical Ventilation with Heat Recovery (MVHR) unit with a DX coil connectable to a VRF system, to heat and cool the supply air delivered to the space. The combination of these technologies provides effective tempering of fresh air entering commercial spaces, taking the load off other cooling/heating services, and eliminating any chance of draughts.

Key Features & Benefits

- Smart combination of a Lossnay & City Multi indoor unit, integrated into one model
- Single unit saves on space and installation costs
- Uses heat recovery technology for maximum energy efficiency
- Heating / cooling with no recirculation of extracted air in the space
- Benefits from free cooling when ambient conditions allow

R410A

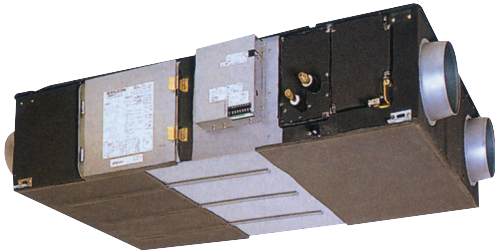


| MODEL | | GUF-50RD4 | GUF-100RD4 |
|-------------------------------------|-------------------------------|----------------|----------------|
| CAPACITY (kW) | Heating (nominal) | 6.21 (2.04) | 12.56 (4.26) |
| | Cooling (nominal) | 5.57 (1.94) | 11.44 (4.12) |
| | UK Heating (High Performance) | 6.42 (2.25) | 13.00 (4.70) |
| | UK Heating (COP Priority) | 5.93 (2.08) | 12.01 (4.34) |
| | UK Total Cooling | 5.03 (1.58) | 10.27 (3.32) |
| POWER INPUT (kW) | Lo-Hi | 0.150 / 0.265 | 0.370 / 0.505 |
| AIRFLOW (m³/h) | Lo-Hi | 400-500 | 800-1000 |
| EXTERNAL STATIC PRESSURE (Pa) | Lo-Hi | 90 - 140 | 90 - 140 |
| TEMPERATURE EXCHANGE EFFICIENCY (%) | Lo-Hi | 80 - 77.5 | 81.5 - 79.5 |
| SOUND PRESSURE LEVEL (dBA) | Lo-Hi | 29.5 - 34.5 | 34 - 39 |
| WEIGHT (kg) | | 54 | 92 |
| DIMENSIONS (mm) | Width | 1016 | 1231 |
| | Depth | 1288 | 1580 |
| | Height | 317 | 398 |
| ELECTRICAL SUPPLY | | 220-240v, 50Hz | 220-240v, 50Hz |
| PHASE | | Single | Single |
| RUNNING CURRENT (A) | Lo-Hi | 0.70-1.15 | 1.73-2.20 |
| FUSE RATING (BS88) - HRC (A) | | 6 | 6 |
| MAINS CABLE No. Cores | | 3 | 3 |

Notes: The figures in () indicate the heat recovery at Lossnay core. Total value is capacity of Lossnay core and refrigerant coil. The current and input are based on the above air volume. The sound pressure at the air outlets (45° angle 1.5m ahead) is about 6dBA greater than the indicated value (high speed). Specifications may be subject to change without notice.


Side View

Upper View

Side View

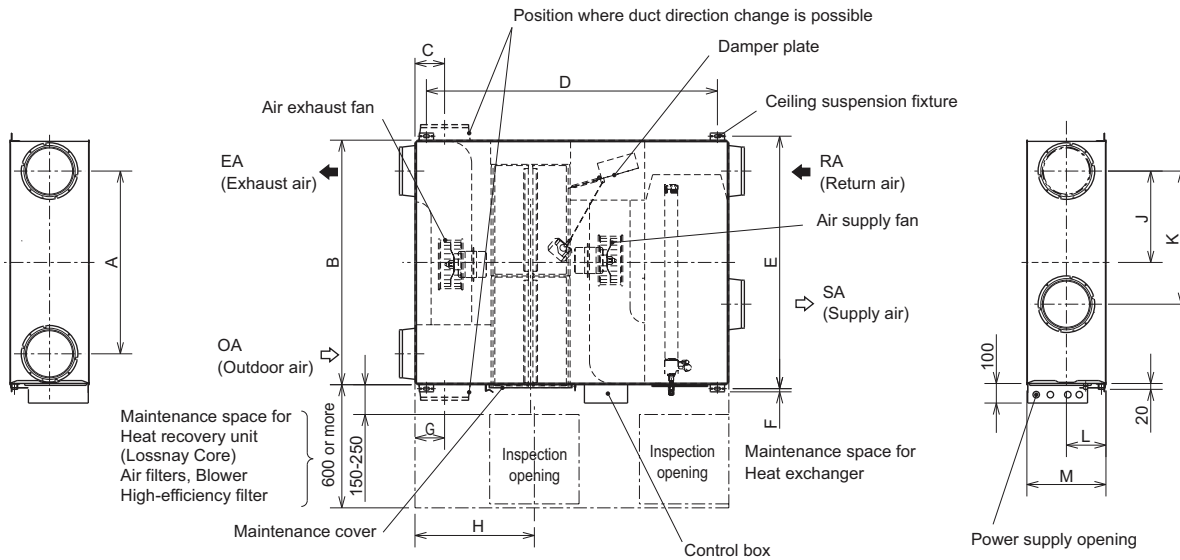

Front View

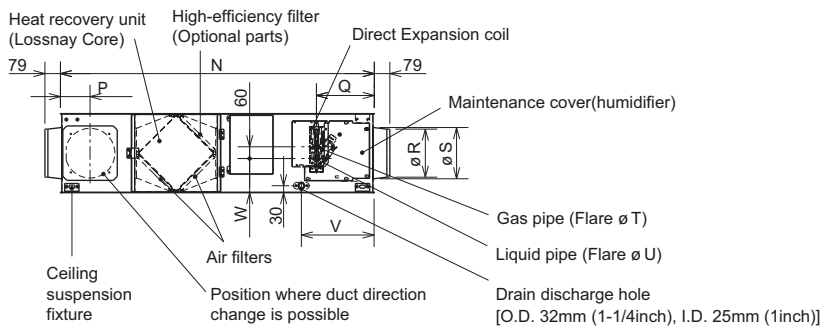

| Model | A | B | C | D | E | F | G | H | J | K | L |
|------------|-----|-------|-----|-------|-------|-----|-------|------|-------|-----|-------|
| GUF-50RD4 | 745 | 1,016 | 124 | 1,185 | 1,048 | 22 | 124 | 450 | 372.5 | 435 | 158.5 |
| GUF-100RD4 | 920 | 1,231 | 149 | 1,465 | 1,271 | 16 | 149 | 600 | 460 | 670 | 199 |
| Model | M | N | P | Q | R | S | T | U | V | W | Y |
| GUF-50RD4 | 317 | 1,288 | 124 | 266 | 192 | 208 | 12.7 | 6.35 | 347 | 99 | 135 |
| GUF-100RD4 | 398 | 1,580 | 149 | 280 | 242 | 258 | 15.88 | 9.52 | 361 | 110 | 169 |

VL-CZPVU-L/R-E

Residential Lossnay

The **VL-CZPVU-L/R-E** residential Lossnay range of Mechanical Ventilation with Heat Recovery (MVHR) units create an environment of constant clean and healthy air at home. These systems are designed to continuously extract from bathrooms, kitchens, toilets and utility rooms where air can become polluted, whilst supplying a balanced flow of fresh air from outside to spaces such as bedrooms and living rooms. The Lossnay unit minimises the energy lost by recovering the heat from the extracted air, transferring this to the supplied fresh air.

Key Features & Benefits

- Ultra quiet noise levels
- Optional filters placed within the MVHR unit for particulate matter and NOx
- Full summer bypass function with auto mode and settable temperature parameters
- Digital controller included for ease of commissioning and use
- Boost signal via live switch or volt free contact, with settable delay and overrun timers
- Optional cloud control for connection to MELCloud and smart devices
- Suitable for use in individual houses or in multi-residential apartment applications



| MODEL | | VL-250CZPVU-L/R-E | VL-350CZPVU-L/R-E | VL-500CZPVU-L/R-E |
|--|------------------------|-------------------|-------------------|-------------------|
| DIMENSIONS (mm) | Width x Depth x Height | 595 x 386 x 565 | 658 x 462 x 623 | 725 x 586 x 632 |
| WEIGHT (kg) | | 26 | 32 | 39 |
| ELECTRICAL POWER SUPPLY | | 220-240V 50Hz | 220-240V 50Hz | 220-240V 50Hz |
| MAX RUNNING CURRENT (A) | | 1.0 | 1.32 | 2.3 |
| SUMMER BYPASS | | Full Bypass | Full Bypass | Full Bypass |
| SPIGOT DIAMETER (mm) | | 125 | 150 | 160 / 180 |
| STANDARD FILTER (ISO 16890:2016/EN779:2012) | Outside Air | Coarse 55% / G3 | Coarse 55% / G3 | Coarse 55% / G3 |
| | Return Air | Coarse 55% / G3 | Coarse 55% / G3 | Coarse 55% / G3 |
| OPTIONAL FILTER(S) | Supply Air | NOx 90% | NOx 90% | NOx 90% |
| | Outside Air | ePM2.5 50% | ePM2.5 50% | ePM2.5 50% |

| SAP 2012 PCDB DATA | SFP W/(l/s) | HEAT EXCHANGE EFFICIENCY (%) | SFP W/(l/s) | HEAT EXCHANGE EFFICIENCY (%) | SFP W/(l/s) | HEAT EXCHANGE EFFICIENCY (%) |
|--------------------|-------------|------------------------------|-------------|------------------------------|-------------|------------------------------|
| K + 1 (21 l/s) | 0.62 | 90 | 0.86 | 90 | 0.80 | 91 |
| K + 2 (29 l/s) | 0.67 | 89 | 0.80 | 90 | 0.72 | 90 |
| K + 3 (37 l/s) | 0.79 | 88 | 0.84 | 89 | 0.74 | 90 |
| K + 4 (45 l/s) | 1.00 | 87 | 0.96 | 89 | 0.82 | 89 |
| K + 5 (53 l/s) | 1.19 | 87 | 1.08 | 88 | 0.91 | 88 |
| K + 6 (61 l/s) | - | - | 1.28 | 87 | 1.09 | 88 |
| K + 7 (69 l/s) | - | - | - | - | 1.24 | 88 |

Accessories

Remote Controllers

P-RCC-E

Remote controller cover and 1m cable with noise filter for VL-CZPVU-E (extendable to 200m)

Filters

P-250F-E

Replacement Coarse 55% / G3 filter for VL-250CZPVU-E

P-350F-E

Replacement Coarse 55% / G3 filter for VL-350CZPVU-E

P-500F-E

Replacement Coarse 55% / G3 filter for VL-500CZPVU-E

P-250PF-E

ePM_{2.5} 50% / M6 filter for VL-250CZPVU-E

P-350PF-E

ePM_{2.5} 50% / M6 filter for VL-350CZPVU-E

P-500PF-E

ePM_{2.5} 50% / M6 filter for VL-500CZPVU-E

P-250NF-E

NOx 90% supply air filter for VL-250CZPVU-E

P-350NF-E

NOx 90% supply air filter for VL-350CZPVU-E

P-500NF-E

NOx 90% supply air filter for VL-500CZPVU-E

Noise Attenuators

P-250SB-E

Acoustic top box for VL-250CZPVU-E

P-350SB-E

Acoustic top box for VL-350CZPVU-E

P-500SB-E

Acoustic top box for VL-500CZPVU-E

Sensors

P-09CSW-E


Wall mounted CO₂ sensor for VL-CZPVU-E

P-09HSD-E

Duct mounted plug and play humidity sensor for VL-CZPVU-E


Product Dimensions

VL-250CZPVU-L/R-E

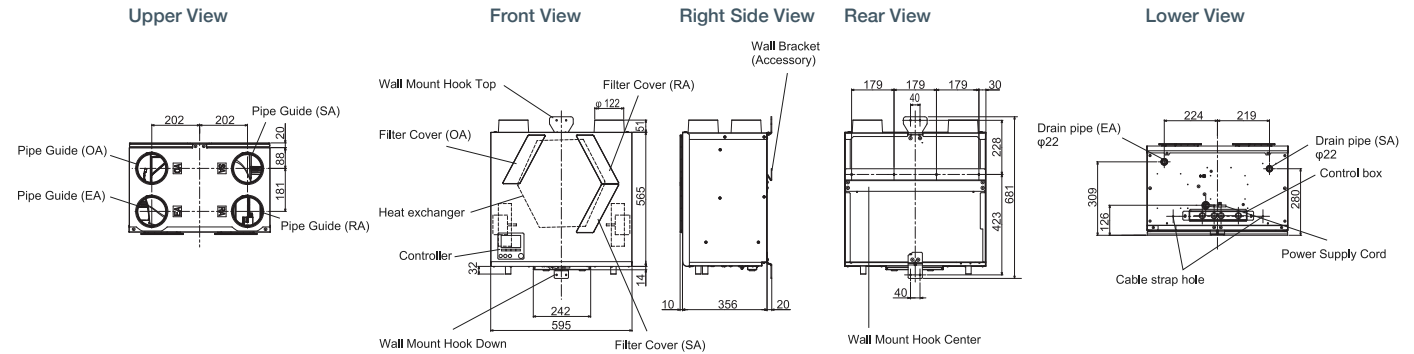


Product Dimensions

VL-350CZPVU-L/R-E

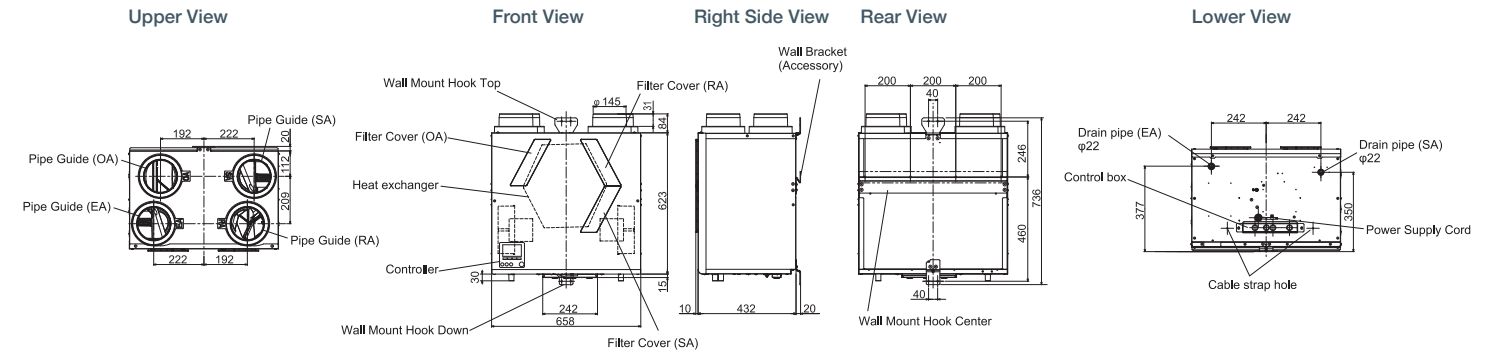

Product Dimensions

VL-500CZPVU-L/R-E

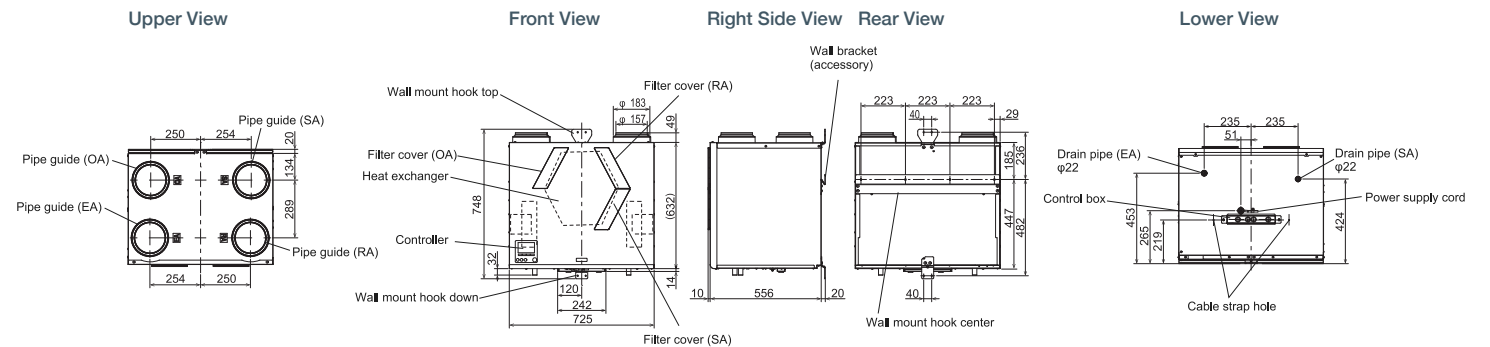

Notes: The above dimensional drawings are for a left sided unit. For the right sided unit dimensional drawings, please see the databook.

CP-500CM-L/R

Cooling Module



Enhance your home's protection against overheating with the **CP-500CM-L/R** cooling module - perfectly paired with the VL-500CZPVU-L/R-E residential Lossnay MVHR. This innovative system delivers tempered fresh air to help prevent overheating, supporting compliance with Part O building regulations.

Featuring a self-contained direct expansion system, advanced inverter technology, and lower GWP R32 refrigerant, it provides efficient cooling while meeting sustainability targets.

Designed with Part O compliance at its core, it offers flexible activation temperatures, customisable capacity steps, and overshoot temperature controls, giving you total confidence in maintaining compliant indoor conditions.

Key Features & Benefits

- Multi-zone activation - connect up to four room temperature sensors to detect cooling requirements from different areas
- Low system height - efficient use of space, maximising a home's floor area by allowing other services to be placed underneath the system
- Quiet performance - enjoy a restful nights sleep even in the hottest summer's without the distraction of excess noise
- Eco-friendly & efficient - the inverter-controlled compressor uses lower GWP R32 refrigerant, delivering powerful cooling while reducing environmental impact
- Hassle-free installation - designed for simplicity, ensuring a smooth and efficient setup process
- Flexible airflow - operational airflow as low as 50l/s allows precise capacity selection for each home's unique needs
- Behind-the-scenes control - ensures adherence to Part O regulations, while preventing unnecessary end-user adjustments



| MODEL | | CP-500CM-L/R |
|------------------------------|--|------------------|
| OPERATION AIR FLOW (l/s) | | 50 - 140 |
| DIMENSIONS (mm) | | 725 x 556 x 497 |
| (Width x Depth x Height) | | 725 x 586 x 1169 |
| WEIGHT (kg) | | 38 |
| | | 77 |
| REFRIGERANT | | R32 |
| REFRIGERANT CHARGE (kg) | | 0.55 |
| COMPRESSOR MANAGEMENT | | Inverter |
| SOUND POWER LEVEL (dB(A)) | | 52.4 |
| DUCT SPIGOT SIZE (mm) | | 160 |
| ELECTRICAL SUPPLY | | 220-240V, 50Hz |
| MAX RUNNING CURRENT (A) | | 7.6 |
| FUSE RATING (BS88) - HRC (A) | | 10 |


| MODEL | | PROCON OVERHEAT THERMOSTAT (OHT) |
|-------------------|--|--|
| DESCRIPTION | | Manages activation and operation of cooling function. Reads internal temperature against set activation point, and manages interlock signals and system status |
| CONNECT TO | | VL-500CZPVU-L/R-E CP-500CM-L/R |
| ELECTRICAL SUPPLY | | Powered via Lossnay MVHR CN105 |
| DIMENSIONS (mm) | | 190 x 42 x 180 |
| WEIGHT (kg) | | 1.1 |
| CONTROL | | Up to 4x 10K3A1 ¹ |
| | | VFC |
| | | VFC |
| | | VFC |

Notes: ¹ 1 x 10K3A1 temperature sensor supplied with Procon OHT.


VFC: Volt Free Contact

LOSSNAY + COOLING MODULE


LEFT CONFIGURATION

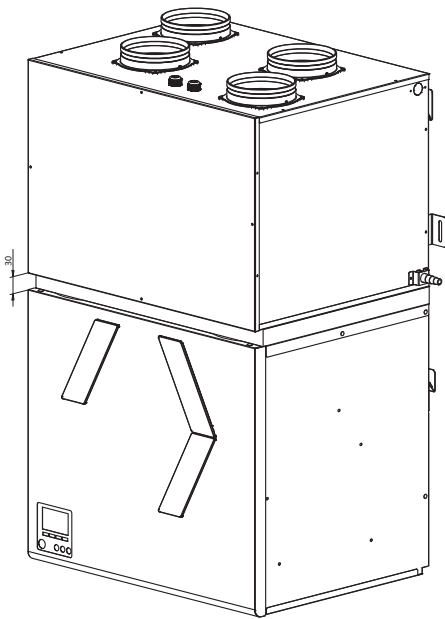


Top View



Front View




Side View




LOSSNAY + COOLING MODULE


RIGHT CONFIGURATION

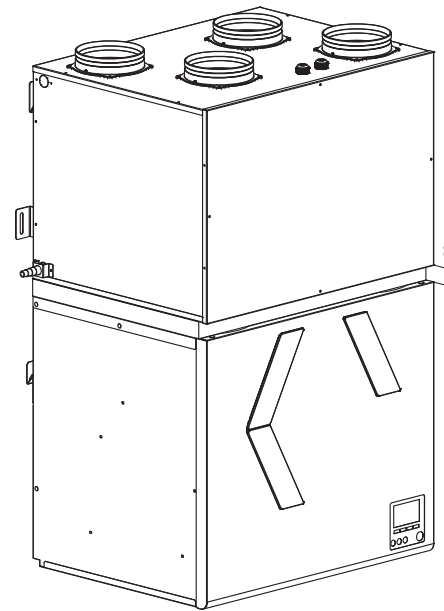


Top View



Front View



Side View



s-AIRME-G07 HR-P C

Air Handling Unit

The Mitsubishi Electric AIRME Compact Air Handling Units (AHU's) incorporate a frameless structure to achieve a line-up of units that are as compact as possible, maximising air tightness and improving thermal properties.

The **s-AIRME-G07 HR-P** range of AHU's utilises a combination of Mr Slim R32 Power Inverter heat pump technology, energy efficient plate heat exchanger heat recovery technology, and an integrated control system. This integration of technologies results in highly advanced, efficient systems that are easy to install and commission, making them ideal for offices, shopping centres, theatres and other large, open spaces.

Key Features & Benefits

- Mr Slim R32 Power Inverter heat pump technology enables energy efficient tempering of fresh air
- Plate heat exchanger for effective heat recovery
- Self-supporting, one-piece construction for maximum air tightness and minimal thermal bridging
- Constant volume EC plug fans for greater efficiency and cost savings
- Easy air flow commissioning with selectable target air volume control
- Fully integrated controls and single point power supply, regardless of accessories, for ease of installation
- Wide range of optional accessories, making these units a perfect solution for a variety of applications




| MODEL | s-AIRME-G07 HR-P C 3000 | s-AIRME-G07 HR-P C 5000 | s-AIRME-G07 HR-P C 7500 | s-AIRME-G07 HR-P C 10000 | s-AIRME-G07 HR-P C 12500 | s-AIRME-G07 HR-P C 15000 |
|--|------------------------------------|---|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| RATED AIR VOLUME (m ³ /s) | 0.83 | 1.38 | 2.08 | 2.77 | 3.47 | 4.16 |
| AIR VOLUME RANGE (m ³ /s) | 0.56 - 0.83 | 0.91 - 1.38 | 1.19 - 2.08 | 1.73 - 2.77 | 2.19 - 3.47 | 2.35 - 4.16 |
| EXTERNAL STATIC PRESSURE (Pa) | Standard fans | 300 | 500 | 300 / 500 ¹ | 300 | 500 |
| | Up-rated fans | - | 500 | - | 500 | - |
| COOLING CAPACITY (kW) | DX Coil Capacity | 19.5 | 31.5 | 43.5 | 63.4 | 77.9 |
| | Heat Recovery Capacity | 8.89 | 14.8 | 22.7 | 30 | 37.3 |
| | Total Capacity | 28.39 | 46.3 | 66.2 | 93.4 | 115.2 |
| HEATING CAPACITY (kW) | DX Coil Capacity | 16.7 | 27.2 | 36.6 | 53.5 | 66.8 |
| | Heat Recovery Capacity | 20.6 | 34.3 | 53.1 | 70.1 | 87.2 |
| | Total Capacity | 37.3 | 61.5 | 89.7 | 123.6 | 154 |
| HEAT RECOVERY EFFICIENCY (%) | Cooling | 73.8 | 73.5 | 75.3 | 74.6 | 74.3 |
| | Heating | 72.7 | 72.7 | 74.6 | 74 | 73.6 |
| SPECIFIC FAN POWER (SFP _{int}) (W/(l/s)) | 0.775 | 0.936 | 0.812 | 0.736 | 0.81 | 0.691 |
| SOUND POWER LEVEL (dB(A)) | Fresh/Outdoor | 82 | 89 | 85 | 85 | 86 |
| | Supply | 82 | 89 | 85 | 85 | 86 |
| | Return | 80 | 88 | 84 | 85 | 86 |
| | Exhaust | 80 | 88 | 84 | 85 | 86 |
| | Breakout | 64 | 74 | 67 | 67 | 71 |
| UNIT DIMENSIONS (WxDxH) (mm) | 2950 x 1385 x 1675 | 2950 x 1785 x 1675 | 3200 x 1885 x 2200 | 3650 x 2185 x 2280 | 3775 x 2385 x 2480 | 3946 x 2585 x 2480 |
| BASE WEIGHT (kg) | 750 | 950 | 1250 | 1600 | 1750 | 2100 |
| STANDARD FILTRATION | Fresh air 1st stage | ISO Coarse 50% / G4 | | | | |
| | Fresh air 2nd stage | ISO ePM1 50% / F7 Bag Filter | | | | |
| | Return air | ISO Coarse 50% / G4 | | | | |
| CONSTRUCTION | Panels | 60mm sandwich panels with thermal break, galvanised steel sheets with a pre-painted external finish | | | | |
| | Insulation | 45 kg/m ³ density polyurethane foam | | | | |
| EN1886 ACHIEVED CLASSES (Deflection/Leakage/Thermal transmittance/Thermal bridging/Filter bypass leakage) | D1(M) / L1(M) / T2 / TB2 / F9(M) | | | | | |
| ELECTRICAL POWER REQUIREMENTS | 400VAC / 3ph+Positive Earth / 50Hz | | | | | |
| REQUIRED OUTDOOR UNITS | Power Inverter (R32) | 1 x PUZ-ZM200 | 1 x PUZ-ZM125 1 x PUZ-ZM200 | 1 x PUZ-ZM200 1 x PUZ-ZM250 | 2 x PUZ-ZM200 1 x PUZ-ZM250 | 4 x PUZ-ZM200 2 x PUZ-ZM250 |
| OUTDOOR UNIT PIPE RUN (m) | | 30 | 30 | 30 | 30 | 30 |



Note: Please refer to Mr Slim section for outdoor unit specification data. The specification data is based on the rated conditions below, at the rated air flows. *1 300Pa for the supply fan, 500Pa for the return fan.

| RATED CONDITIONS | SUMMER | | WINTER | |
|------------------|---------|--------|---------|--------|
| INDOOR | 23°C DB | 50% RH | 21°C DB | 50% RH |
| OUTDOOR | 35°C DB | 50% RH | -5°C DB | 85% RH |

Front View

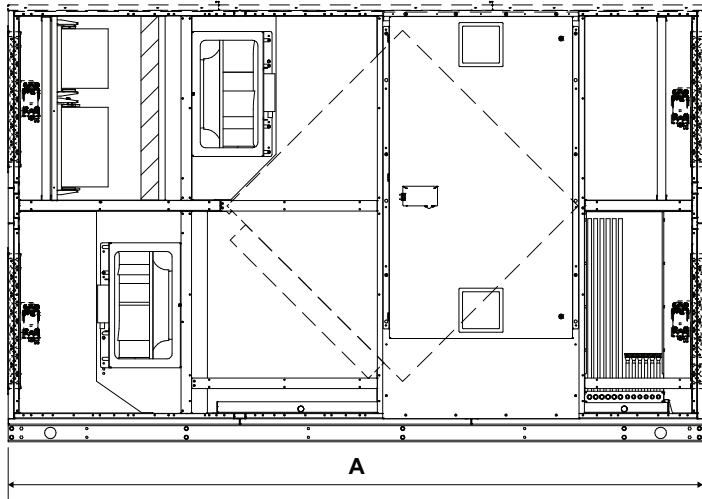


Side View

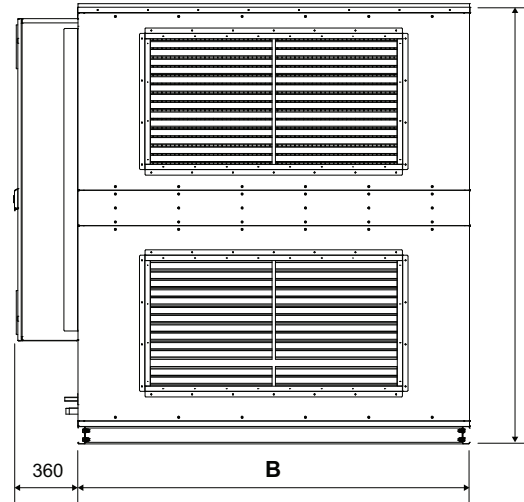

POST HEATING
OPTION

Upper View

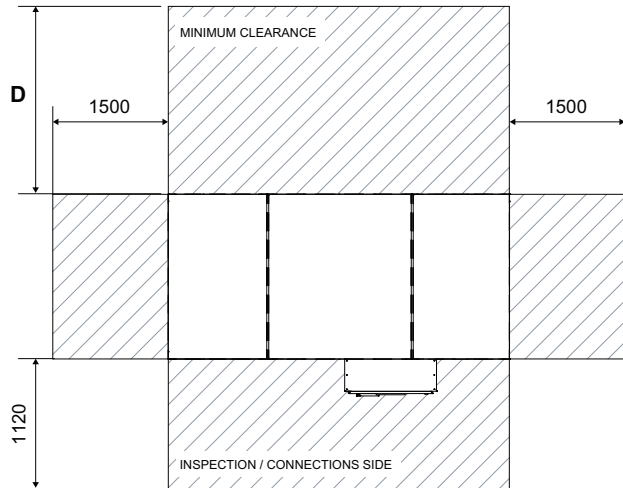

| Model | A (mm) | B (mm) | C (mm) | D (mm) |
|-------|--------|--------|--------|--------|
| 3000 | 2950 | 1025 | 1675 | 1225 |
| 5000 | 2950 | 1425 | 1675 | 1625 |
| 7500 | 3200 | 1525 | 2200 | 1725 |
| 10000 | 3650 | 1825 | 2280 | 2025 |
| 12500 | 3755 | 2025 | 2480 | 2225 |
| 15000 | 3946 | 2225 | 2480 | 2425 |

Note: Base unit. Options may change dimensions and/or weight.

Ventilation Accessories / Optional Extras

| DESCRIPTION | MODEL REF. |
|--|--------------|
| Remote Controllers | |
| Lossnay Remote Controller for LGH-RVX3-E, LGH-RVXT3-E and LGH-RVS-E | PZ-62DR-EB |
| LGH-RVX3-E | |
| Standard replacement filter (Coarse 60%) for LGH-15RVX3-E | PZ-15RF3-E |
| Standard replacement filter (Coarse 60%) for LGH-25RVX3-E | PZ-25RF3-E |
| Standard replacement filter (Coarse 60%) for LGH-35RVX3-E | PZ-35RF3-E |
| Standard replacement filter (Coarse 60%) for LGH-50RVX3-E | PZ-50RF3-E |
| Standard replacement filter (Coarse 60%) for LGH-65RVX3-E | PZ-65RF3-E |
| Standard replacement filter (Coarse 60%) for LGH-80RVX3-E / LGH-160RVX3-E (2 sets required) | PZ-80RF3-E |
| Standard replacement filter (Coarse 60%) for LGH-100RVX3-E / LGH-200RVX3-E (2 sets required) | PZ-100RF3-E |
| ePM ₁ 75% grade filter for LGH-15RVX3-E | PZ-15RFP3-E |
| ePM ₁ 75% grade filter for LGH-25RVX3-E | PZ-25RFP3-E |
| ePM ₁ 75% grade filter for LGH-35RVX3-E | PZ-35RFP3-E |
| ePM ₁ 75% grade filter for LGH-50RVX3-E | PZ-50RFP3-E |
| ePM ₁ 75% grade filter for LGH-65RVX3-E | PZ-65RFP3-E |
| ePM ₁ 75% grade filter for LGH-80RVX3-E / LGH-160RVX3-E (2 sets required) | PZ-80RFP3-E |
| ePM ₁ 75% grade filter for LGH-100RVX3-E / LGH-200RVX3-E (2 sets required) | PZ-100RFP3-E |
| Wall mounted plug and play CO ₂ sensor with traffic light signals for LGH-RVX3-E | PZ-70CSW-E |
| Duct mounted plug and play CO ₂ sensor for LGH-RVX3-E | PZ-70CSD-E |
| Vertical mounting bracket for LGH-15-50RVX3-E | PZ-1VS-E |
| Vertical mounting bracket for LGH-65-100RVX3-E | PZ-2VS-E |
| External signal relay for LGH-RVX3-E | PZ-4GS-E |
| LGH-RVXT3-E | |
| Standard replacement filter (coarse 60%) for LGH-RVXT3-E | PZ-250TRF-E |
| ISO 16890 ePM ₁ 75%, ePM _{2.5} 80%, ePM ₁₀ 95% filter for LGH-RVXT3-E | PZ-250TPF-E |
| Wall mounted plug and play CO ₂ sensor with traffic light signals for LGH-RVXT3-E | PZ-70CSW-E |
| Duct mounted plug and play CO ₂ sensor for LGH-RVXT3-E | PZ-70CSD-E |
| External signal relay for LGH-RVXT3-E | PZ-4GS-E |
| LGH-RVS-E | |
| Replacement Coarse 35% / G3 filter for LGH-50RVS-E | PZ-S50RF-E |
| Replacement Coarse 35% / G3 filter for LGH-80RVS-E | PZ-S80RF-E |
| Replacement Coarse 35% / G3 filter for LGH-100RVS-E | PZ-S100RF-E |
| ePM ₁₀ 80% / M6 filter for LGH-50RVS-E | PZ-S50RFM-E |
| ePM ₁₀ 80% / M6 filter for LGH-80RVS-E | PZ-S80RFM-E |
| ePM ₁₀ 80% / M6 filter for LGH-100RVS-E | PZ-S100RFM-E |
| ePM ₁ 65% / F8 filter for LGH-50RVS-E | PZ-S50RFH-E |
| ePM ₁ 65% / F8 filter for LGH-80RVS-E | PZ-S80RFH-E |
| ePM ₁ 65% / F8 filter for LGH-100RVS-E | PZ-S100RFH-E |
| Wall mounted plug and play CO ₂ sensor with traffic light signals for LGH-RVS-E | PZ-70CSW-E |
| Duct mounted plug and play CO ₂ sensor for LGH-RVS-E | PZ-70CSD-E |
| External signal relay for LGH-RVS-E | PZ-4GS-E |

Ventilation Accessories / Optional Extras

| DESCRIPTION | MODEL REF. |
|--|------------|
| VL-CZPVU-E | |
| Replacement Coarse 55% / G3 filter for VL-250CZPVU-E | P-250F-E |
| Replacement Coarse 55% / G3 filter for VL-350CZPVU-E | P-350F-E |
| Replacement Coarse 55% / G3 filter for VL-500CZPVU-E | P-500F-E |
| ePM _{2.5} 50% / M6 filter for VL-250CZPVU-E | P-250PF-E |
| ePM _{2.5} 50% / M6 filter for VL-350CZPVU-E | P-350PF-E |
| ePM _{2.5} 50% / M6 filter for VL-500CZPVU-E | P-500PF-E |
| NOx 90% supply air filter for VL-250CZPVU-E | P-250NF-E |
| NOx 90% supply air filter for VL-350CZPVU-E | P-350NF-E |
| NOx 90% supply air filter for VL-500CZPVU-E | P-500NF-E |
| Acoustic top box for VL-250CZPVU-E | P-250SB-E |
| Acoustic top box for VL-350CZPVU-E | P-350SB-E |
| Acoustic top box for VL-500CZPVU-E | P-500SB-E |
| Remote controller cover and 1m cable with noise filter for VL-CZPVU-E (extendable to 200m) | P-RCC-E |
| Wall mounted CO ₂ sensor for VL-CZPVU-E | P-09CSW-E |
| Duct mounted plug and play humidity sensor for VL-CZPVU-E | P-09HSD-E |
| Weather Proof Housings | |
| Lossnay weather proof housings are also available for LGH-RVX3-E | |
| s-AIRME-G07 HR-P C | |
| Fans & Airflow | |
| High static pressure supply fan (500 Pa) | B503 |
| High static pressure exhaust fan (500 Pa) | B513 |
| Night Purge | B931 |
| Dampers | |
| Fresh Air | B551 |
| Supply Air | B561 |
| Return Air | B571 |
| Exhaust Air | B581 |
| Pre/Post Heating | |
| Pre-heating electric coil | B531 |
| Post-heating electrical coil*1 | 1333 |
| Pre-heating water coil | B532 |
| Post-heating water coil*1 | 1331 |
| Filters | |
| Bag Filters F9 ePM1 85% | 2521A |
| Activated charcoal filters | 2529 |
| Connectivity and Integration | |
| Modbus connection for BEMS | 4181 |
| Bacnet TCP-IP connection for BEMS | 4185 |
| Fan operation output signal | 3591 |
| Remote keyboard - wiring up to 200m | C9261063 |
| Remote keyboard - wiring up to 500m | C9261064 |
| Structural | |
| Weather canopy for outdoor installation | B541 |
| Weather protection grille on fresh air intake | B621 |
| Left handed configuration | 2963 |

Note: *1 Post heating elements increase unit length size.

Controls

Control Solutions





Contents

| | |
|--|-------------|
| The Importance of Controls | 5.4 |
| Which Controls Product for Which Application? | 5.7 |
| Which Controls Product for Which Function? | 5.8 |
| Centralised Controllers | 5.10 |
| Remote Controllers | 5.16 |
| Solution Interfaces | 5.22 |
| Simple Interfaces | 5.29 |
| Advanced Interfaces | 5.33 |
| BEMS Interfaces | 5.39 |
| Screen Examples | 5.44 |
| How to Quote | 5.46 |

The Importance of Controls

Time to take control

Operating an air conditioning, ventilation or heating system without effective controls can be costly in more ways than one. Not only are you likely to face higher monthly energy bills, it will also lead to an increase in carbon emissions - something that will become ever more important as businesses strive to keep up with tougher environmental legislation.

The right controls take building performance to the next level. With them, building systems become more responsive, easier to automate, monitor and maintain, and less costly to operate in the long-term.

The right controls can deliver a cost-effective solution that helps manage, monitor and report on the performance of all building services systems.

In order to achieve the UK's national objective of net-zero carbon emissions by 2050, commercial buildings will have to become much more energy efficient, and building controls will have a significant part in ensuring that happens.

Control technology is now widely available for buildings of all sizes, so it is possible to access the benefits whatever the scale or scope of your project.



Mitsubishi Electric technology


Mitsubishi Electric has been dedicated to producing energy efficient technology for over ninety years. Controls are an essential part of that. Mitsubishi Electric has long heritage in factory automation where the company leads the field in providing controls that enhance productivity, efficiency and energy use.

We have taken this extensive knowledge and experience and transferred it to the heart of our building services equipment.

We were also one of the first manufactures to provide an open gateway to our products to make integration easier for our customers. This enables direct connection of equipment into many common building energy management system (BEMS) platforms.

Mitsubishi Electric now offer the MELCloud platform to help you control, monitor and service your HVAC equipment. This includes performance and energy monitoring, as well as remote management of one or multiple systems, in order to save energy, cost and downtime.

From a simple hand-held controller to a centralised BEMS, Mitsubishi Electric puts its customers in control.

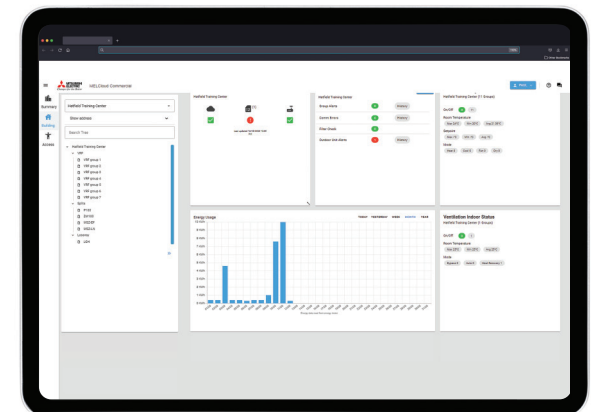

The European Standard EN 15232

“Energy Performance of Buildings - Impact of Building Automation, Controls and Building Management” was compiled in conjunction with the Europe-wide implementation of the directive for energy efficiency in buildings (Energy Performance of Buildings Directive EPBD) 2002/91/EG.

The Standard is incorporated into UK law and describes methods for evaluating the influence of building automation and technical building management on the energy consumption of buildings.

Four efficiency classes A to D have been introduced to this purpose. After a building has been equipped with building automation and control systems, it will be assigned one of these classes. The potential savings for thermal and electrical energy can be calculated for each class based on the building type and building purpose. The values of the energy class C are used as the reference for comparing the efficiency.

The diagram on the right, shows the differences in energy consumption for three building types in the energy efficiency classes A, B and D relative to the basis values in rating C. For example, by using class A, 30 % of the thermal energy can be saved in offices.

BS EN 15232: Function list and assignment to energy performance classes

| | Heating / Cooling Control | Ventilation / Air Conditioning Control | Lighting | Sun Protection |
|---|--|--|--|--|
| A | <ul style="list-style-type: none"> Individual room control with communication between controllers Indoor temperature control of distribution network water temperature Total interlock between heating and cooling control | <ul style="list-style-type: none"> Demand or presence dependent air flow control at room level Variable set point with load dependant compensation of supply temperature control Room or exhaust or supply air humidity control | <ul style="list-style-type: none"> Automatic daylight control Automatic occupancy detection manual on / auto off Automatic occupancy detection manual on / dimmed Automatic occupancy detection auto on / auto off Automatic occupancy detection auto on / dimmed | <ul style="list-style-type: none"> Combined light / blind / HVAC control |
| B | <ul style="list-style-type: none"> Individual room control with communication between controllers Indoor temperature control of distribution network water temperature Partial interlock between heating and cooling control (dependent on HVAC system) | <ul style="list-style-type: none"> Time dependent air flow control at room level Variable set point with outdoor temperature compensation of supply temperature control Room or exhaust or supply air humidity control | <ul style="list-style-type: none"> Manual daylight control Automatic occupancy detection manual on / auto off Automatic occupancy detection manual on / dimmed Automatic occupancy detection auto on / auto off Automatic occupancy detection auto on / dimmed | <ul style="list-style-type: none"> Motorised operation with automatic blind control |
| C | <ul style="list-style-type: none"> Individual room control with communication between controllers Indoor temperature control of distribution network water temperature Partial interlock between heating and cooling control (dependent on HVAC system) | <ul style="list-style-type: none"> Time dependent air flow control at room level Constant set point of supply temperature control Supply air humidity limitation | <ul style="list-style-type: none"> Manual daylight control Manual on / off switch + additional sweeping extinction signal Manual on / off switch | <ul style="list-style-type: none"> Motorised operation with manual blind control |
| D | <ul style="list-style-type: none"> No automatic control No control of distribution network water temperature No interlock between heating and cooling control | <ul style="list-style-type: none"> No air flow control at room level No supply temperature control No air humidity control | <ul style="list-style-type: none"> Manual daylight control Manual on/off switch + additional sweeping extinction signal Manual on/off switch | <ul style="list-style-type: none"> Manual operation for blinds |

Section from table 1 of the BSEN 15232:2007 [D]

Building Automation and Control (BAC) efficiency classes to EN 15232

| | Efficiency factor for thermal energy | | | Efficiency factor for electrical energy | | |
|---|--------------------------------------|--------|-------|---|--------|-------|
| | Office | School | Hotel | Office | School | Hotel |
| A High energy performance building automation and control system (BACS) and technical building management (TBM) | 0.70 | 0.80 | 0.68 | 0.87 | 0.86 | 0.90 |
| B Advanced BACS and TBM | 0.80 | 0.88 | 0.85 | 0.93 | 0.93 | 0.95 |
| C Standard BACS | 1 | 1 | 1 | 1 | 1 | 1 |
| D Non energy efficient BACS | 1.51 | 1.20 | 1.31 | 1.10 | 1.07 | 1.07 |

The Importance of Controls



The Internet of Things

The Internet of Things (or IoT) describes the revolution already under way, with a growing number of internet-enabled devices that can network and communicate with each other and with other web-enabled devices.

Mitsubishi Electric is at the forefront of this revolution and all our products are now connectable to the internet using the following solutions^{*1}.



| Features | MELCloud | MELCloud Commercial |
|----------|----------|---------------------|
|----------|----------|---------------------|

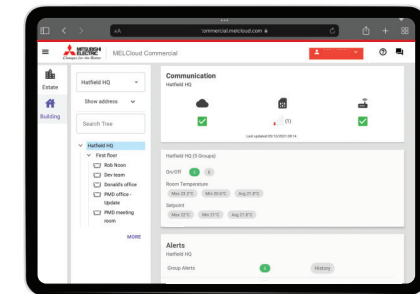

| Connect to | Wi-Fi | Ethernet or Cellular |
|------------------------|---|--------------------------------------|
| Compatibility | Air Conditioning, Ventilation and Heating | Air Conditioning and Ventilation |
| Third party control | X | ✓ (with option PAC-YG60/63MCA/66DCA) |
| SIM card provided | X | ✓ (eSIM) |
| Smartphone application | ✓ | ✓ |
| Tablet application | ✓ | ✓ |
| Web portal | ✓ | ✓ |

*1 VL-100 is not connectable to the Internet

Which Controls Product for Which Application?

Good controls will benefit any application. With a wide portfolio of control products, it is important to select the right control solution for each application.



| APPLICATION | SIZE | TYPICAL PRODUCT INSTALLED | CONTROL SOLUTIONS | CASE STUDY |
|-------------|-------|---|--|---|
| OFFICE | SMALL | City Multi VRF Systems Mr Slim Split-Systems Mr Slim IT Room Applications | PAR-41MAA AE-C400E or AT-50B PAC-YG66DCA or PAC-YG60MCA MELCloud Commercial MELCOBEMS SIP+ | Wholesaler PACAIR uses a Mitsubishi Electric Centralised Controller to provide complete control of the office air conditioning. The 10.4" touch screen controller and easy to use interface gives PACAIR the ability to set up a weekly time schedule, as well as offering a host of energy saving features. |
| | LARGE | City Multi VRF Systems City Multi Air Curtains City Multi PWFY Heat Pumps | PAR-41MAA AE-C400E or AT-50B MELCloud Commercial MELCOBEMS SIP+ | Mitsubishi Electric's Hatfield headquarters has been updated to new AE-C400E / EW-C50E controls to monitor and control all of the air conditioning equipment across 3 floors and 2 wings. This enables the system to operate as efficiently as possible, incorporating easy to use controls and allows for fully programmable scheduling that accommodates flexible working patterns. |
| HOTEL | SMALL | City Multi VRF Systems | PAR-CT01MAA-S/PB AE-C400E MELCloud Commercial MELCOBEMS SIP+ | The luxury 4-star Kingsmills Hotel provides a chic and contemporary venue for discerning Highlands travellers and focuses on relaxation, revitalisation and calm. The centralised controller delivers the efficiency and flexibility that both the hotel and its guests need, with air conditioning integrated with the room key card system combined with simple to use room controllers. |
| | LARGE | City Multi VRF Systems | PAR-CT01MAA-S/PB AE-C400E MELCOTEL2™ MELCloud Commercial MELCOBEMS SIP+ | The Premier Inn Hotel, Leicester uses the MELCOTEL2™ control interface to efficiently and effectively control air conditioning that provides heating and cooling to 135 bedrooms, the bar, restaurant and back offices. A variety of control strategies were implemented and monitored and analysed, resulting in a 30% decrease in average monthly system running costs and CO ₂ emissions. |
| RETAIL | SMALL | Mr Slim Split-System Mr Slim Air Curtains | MELCORETAIL MINI MELCloud Commercial MELCOBEMS SIP+ | Costa Coffee was one of the first to make use of the MELCORETAIL MINI to capitalise on its energy saving feature whilst ensuring that customers and staff were comfortable in the overall coffee shop environment. Across a year of monitoring the MELCORETAIL MINI helped achieve a 20% reduction in energy use, giving it a payback period of less than 2 months. |
| | LARGE | City Multi VRF Systems City Multi Air Curtains | MELCloud Commercial MELCOBEMS SIP+ | A pilot site for a major high street retail chain has demonstrated how connecting MELCloud Commercial to air conditioning can highlight ways of reducing energy or identify unnecessary use. Significant savings throughout the store were made by employing MELCloud Commercial, providing a consistent return on investment on a monthly basis. |
| LEISURE | SMALL | Mr Slim Split-System Mr Slim Air Curtains | MELCOBEMS MINI (A1M+) MELCloud Commercial MELCOBEMS SIP+ | The Castle golf course at St Andrews need a heating and cooling system that was as controllable and efficient as possible. The M2M interface controls and monitors the air conditioning to make sure it maximises energy saving, whilst allowing for continuous fine-tuning according to the golf clubs needs. |
| | LARGE | Mr Slim Split-System Mr Slim Air Curtains City Multi VRF Systems City Multi Air Curtains | MELCOBEMS MELCloud Commercial MELCOBEMS SIP+ | Fitness First uses monitoring BEMS to communicate with the air conditioning using Modbus, across its UK network. Dedicated Modbus Interfaces offer complete monitoring and control of the system and highlights the flexibility and potential for reducing running costs that our control systems have when working in conjunction with third party BEMS. |
| RESIDENTIAL | SMALL | Ecodan | MELCloud | A WW2 veteran has shown the way to a sustainable future with the installation of a hybrid Ecodan air source heat pump to work alongside his existing gas boiler. The hybrid system is designed specifically to work in conjunction with conventional boilers and the MELCloud Wi-Fi system also allows the heat pump to be monitored and controlled remotely |
| | LARGE | Ecodan | MELCloud AE-C400E | The renewable heating system for St Mungo's in Lewisham needs to cope with different heating loads and deal effectively with regular changes in tenancy and occupied hours. It also had to offer tenants the ability to alter the temperature of their individual flats, whilst allowing the charity full central control of the system. |

Which Controls Product for Which Function?

With a wide portfolio of control products, many functions are available. It is important to select the right control solution for each function.

| FUNCTION | SYSTEM SIZE | | | | | NOTES |
|-----------------------------|--|--|---|--|-------------------------|---|
| | SMALL OPTION 1 | OPTION 2 | OPTION 3 | OPTION 4 | LARGE OPTION 5 | |
| Remote On/Off or fire alarm | PAC-SA89TA | KTR-53A | MELCORETAIL MINI | AT-50B and PAC-YT51HAA | AE-C400E and PAC-YG10HA | On/Off remote controller button lock except KTR-53A |
| Monitor run and faults | PAC-SA88HA | MELCORETAIL MINI | AT-50B and PAC-YT51HAA | AE-C400E / EW-C50E and PAC-YG10HA | - | Relays or power supply may be required |
| Window interlocking | PAC-SA89TA | KTR-53A | - | - | - | Controller will be centrally controlled when window opened |
| Setpoint limit | PAR-41MAA | PAR-U02MEDA | AT-50B | AE-C400E / EW-C50E | AE-C400E | Available in Heat, Cool and Auto modes |
| Weekly timer | PAR-41MAA PAR-U02MEDA | AT-50B | AE-C400E / EW-C50E | AE-C400E | - | Setpoint, On/Off can be reset |
| Night set back | KTR-53A | PAR-41MAA PAR-U02MEDA | AE-C400E / EW-C50E / AT-50B | AE-C400E | - | KTR-53A requires thermostat, time switch, 12/24v AC/DC power supply |
| Energy monitoring | AE-C400E / EW-C50E Total Energy Measurement | AE-C400E / EW-C50E PAC-YG60MCA Total Energy Management | AE-C400E and EW-C50E Energy Apportioning | AE-C400E / EW-C50E PAC-YG60MCA Energy Apportioning | - | Different options for each choice. Meters required |
| Load shedding | EW-C50E and PAC-YG60MCA | AE-C400E and PAC-YG60MCA | - | - | - | Energy meters required |
| Trend logging | EW-C50E and PAC-YG60MCA | AE-C400E | - | - | - | CSV data available on a spreadsheet |

Notes: The PAC-SA89TA is also known as a 3 wire adaptor and the PAC-SA88HA is also known as a 5 wire adaptor. Disclaimer: These options are for guidance only.

Which Controls Product for Which Function?

With a wide portfolio of control products, many functions are available. It is important to select the right control solution for each function.

| FUNCTION | SYSTEM SIZE | | | NOTES |
|---|--------------------------|---|-------------------|--|
| | SMALL OPTION 1 | OPTION 2 | LARGE OPTION 3 | |
| Night mode | PAC-SA89TA | EW-C50E | AE-C400E | PAC-SA89TA requires a third party timer |
| Ambient tracking | AE-C400E and PAC-YG63MCA | MELCOBEMS MINI (A1M+) | AE-C400E | Option 1 is only available in cooling mode |
| Key card interlock for hotel | AE-C400E and PAC-SA89TA | AE-C400E / EW-C50E, MELCOTEL2™ and PAC-SA89TA | - | Volt free contact for key card normally open |
| Window sensor interlock for hotel | AE-C400E and PAC-SA89TA | AE-C400E / EW-C50E, MELCOTEL2™ and PAC-SA89TA | - | Volt free contact for window sensor normally closed |
| 2 setpoints (1 for cool and 1 for heat) | - | MELCOMMS MINI | AE-C400E | For instance, 19°C heat and 23°C cool. Fan only in between |
| Duty / Standby | PAR-41MAA | MELCOMMS MINI MELCOBEMS MINI (A1M+) | - | Backup, rotate, join in and high temperature function |
| A/C faults via Modbus and BACnet | MELCOBEMS MINI (A1M+) | - | - | SIM card not supplied |
| Optimised start | AE-C400E | - | - | - |
| Mini BEMS | MELCOBEMS MINI (A1M+) | AE-C400E | - | - |
| Occupancy sensor | PAR-U02MEDA | - | - | - |

Notes: The PAC-SA89TA is also known as a 3 wire adaptor and the PAC-SA88HA is also known as a 5 wire adaptor. Disclaimer: These options are for guidance only.

Centralised Controllers

A wide range of centralised controllers are available to monitor and control our equipment efficiently. Some of our centralised controllers can also be used to monitor and control third party equipment.

Key Features & Benefits

AT-50B



- 5" basic touch screen
- Centralised controller
- Monitor and control up to 50 indoor units
- Monitor and control general equipment

AE-C400E



- 12.1" capacitive touch screen, including high sensitivity, multi-touch support, better durability and improved clarity
- Centralised controller
- Monitor and control up to 50 indoor units (or up to 400 with EW-C50E)
- Designed for cloud connectivity - MELCloud ready
- USB C port
- Browser based
- 4G Ready - SIM or Antenna
- 3rd party energy meter inputs
- BMS connection ready - fixed IP address
- WEB-USER Pin code pre-installed

EW-C50E



- Extends capability of AE-C400E
- Web based controller
- Monitor and control up to 50 indoor units
- Monitor and control general equipment
- Energy monitoring, load shedding
- Onboard web browser
- Optional direct BACnet connection
- USB C port

MITSU10001-ROUTER-CPT



- QuSpot antenna with router
- Integrated solution with multi band antennas in one enclosure
- Perfect for sites where LAN connection is not available
- 4G LTE
- IP 67
- Mounting brackets included
- Versatile use (mobile and fixed installations)

PAC-SC51KUA



- M-NET power supply




PAC-SF46EPA




- M-NET transmission booster

Centralised Controllers

Technical Specification

| CENTRALISED CONTROLLERS | AT-50B | AE-C400E | KS10-RFFI |
|--------------------------------------|--|---|---|
| |  |  |  |
| Description | 5" Touch Screen Controller | 12.1 Capacitive Touch Screen Controller | AE-C400E Interface |
| Connect to | M-NET Network | M-NET Network | AE-C400E and EW-C50E |
| Max Number of Units | 50 | 50 and 4 Pulse Meters | - |
| Compatibility | M Series, Mr Slim, City Multi and Lossnay | M Series, Mr Slim, City Multi, Lossnay, e-Series, MEHITS Chillers ¹ and Ecodan QAHV/CAHV/CRHV ² | - |
| Power Supply | Via PAC-SC51KUA | 220-240v, 50Hz | 220-240v, 50Hz |
| Dimensions (mm) (WxDxH) | 180 x 30 x 120 | 306 x 71.8 x 211 | 130 x 30 x 80 |
| Control | | | |
| On/Off | ✓ | ✓ | - |
| Mode | ✓ | ✓ | - |
| Setpoint | ✓ | ✓ | - |
| Fan Speed | ✓ | ✓ | - |
| Air Direction | ✓ | ✓ | - |
| Permit/Prohibit | ✓ | ✓ | - |
| Filter Sign | ✓ | ✓ | - |
| Monitor | | | |
| On/Off | ✓ | ✓ | ✓ |
| Mode | ✓ | ✓ | - |
| Setpoint | ✓ | ✓ | - |
| Fan Speed | ✓ | ✓ | - |
| Air Direction | ✓ | ✓ | - |
| Permit/Prohibit | ✓ | ✓ | - |
| Filter Sign | ✓ | ✓ | - |
| Fault Codes | ✓ | ✓ | ✓ |
| Room Temperature | ✓ | ✓ | - |
| Weekly Schedule | ✓ | ✓ | - |
| Annual Schedule | x | ✓ | - |
| Night Set Back | ✓ | ✓ | - |
| Web Pages | x | ✓ | - |
| Optimised Start | x | ✓ | - |
| Automatic Setpoint Adjustment | x | ✓ | - |
| Load Shedding | x | ✓ | - |
| Occupied / Unoccupied Settings Reset | x | x | - |
| Remote Monitoring with M2M | x | ✓ | - |
| Simple Energy Monitoring | x | ✓ | - |
| Advanced Energy Monitoring | x | ✓ | - |



PAC-YK92TB-J

Wall Mounting Attachment

Used to attach the AE-C400E on to the surface of a wall. Ideal accessory where a recess in the wall isn't available.

Dimensions (mm): 304 x 94 x 209

PAC-YK94UTB-J

Electrical Box - In-wall Enclosure

Use to help protect and contain the AE-C400E within the wall.

Dimensions (mm): 346 x 60 x 230

PAC-YK96TK-J

Mounting Kit for Control Panel

For use when the AE-C400E is required to be installed inside a control panel enclosure with DIN Rail.

Dimensions (mm): 299 x 73 x 203

PAC-YK91RF-J

Replacement Wall Mounting Attachment

Replacement kit for mounting an AE-C400E to the wall.

Dimensions (mm): 293 x 20 x 203





PIN CODES:

- CENTRAL CONTROL ENERGY APPORTION CHARGE PIN
- CENTRAL CONTROL BACNET PIN

Notes: *1 MEHITS adaptor required. *2 End of 2025.

Centralised Controllers

Technical Specification

| CENTRALISED CONTROLLERS | EW-C50E | MITSU10001-ROUTER-CPT | PAC-SC51KUA | PAC-SF46EPA |
|--------------------------------------|---|---|---|---|
| |  |  |  |  |
| Description | Web Interface and AE-C400E expansion controller | QuSpot antenna with router | M-NET Power Supply | M-NET Transmission Booster |
| Connect to | M-NET Network | - | M-NET Network | M-NET Network |
| Max Number of Units | 50 and 4 Pulse Meters | - | 50 | - |
| Compatibility | M Series, Mr Slim, City Multi, Lossnay, e-Series, MEHITS Chillers ^{*1} and Ecodan QAHV/CAHV/CRHV ^{*2} | AE-C400E, EW-C50E, MCC-50E | AT-50B, EW-C50E and AE-C400E | M Series, Mr Slim and City Multi |
| Power Supply | 220-240v, 50Hz | - | 220-240v, 50Hz | 220-240v, 50Hz |
| Dimensions (mm) (WxDxH) | 185 x 60.3 x 278 | 160 x 160 x 243 160 x 189 x 347 (with brackets/accessories) | 271 x 72 x 169 | 360 x 59 x 340 |
| Control | | | | |
| | On/Off | ✓ | - | - |
| | Mode | ✓ | - | - |
| | Setpoint | ✓ | - | - |
| | Fan Speed | ✓ | - | - |
| | Air Direction | ✓ | - | - |
| | Permit/Prohibit | ✓ | - | - |
| | Filter Sign | ✓ | - | - |
| Monitor | | | | |
| | On/Off | ✓ | - | - |
| | Mode | ✓ | - | - |
| | Setpoint | ✓ | - | - |
| | Fan Speed | ✓ | - | - |
| | Air Direction | ✓ | - | - |
| | Permit/Prohibit | ✓ | - | - |
| | Filter Sign | ✓ | - | - |
| | Fault Codes | ✓ | - | - |
| | Room Temperature | ✓ | - | - |
| Weekly Schedule | ✓ | - | - | - |
| Annual Schedule | ✓ | - | - | - |
| Night Set Back | ✓ | - | - | - |
| Web Pages | ✓ | - | - | - |
| Optimised Start | ✓ | - | - | - |
| Automatic Setpoint Adjustment | ✓ | - | - | - |
| Load Shedding | ✓ | - | - | - |
| Occupied / Unoccupied Settings Reset | x | - | - | - |
| Remote Monitoring with M2M | ✓ | - | - | - |
| Simple Energy Monitoring | ✓ | - | - | - |
| Advanced Energy Monitoring | ✓ | - | - | - |


PIN CODES:

■ CENTRAL CONTROL ENERGY APPORTION CHARGE PIN


■ CENTRAL CONTROL BACNET PIN

Notes: *1 MEHITS adaptor required. *2 End of 2025.


System Diagram AT-50B

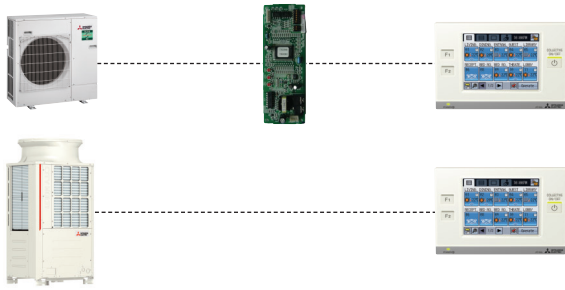


System Diagram AE-C400E

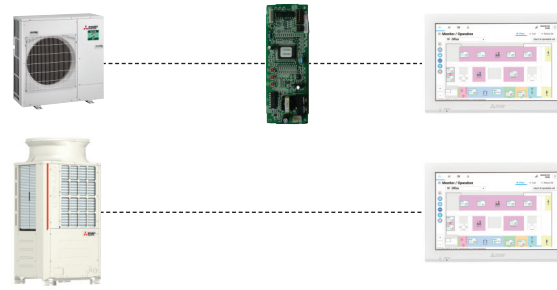

System Diagram EW-C50E

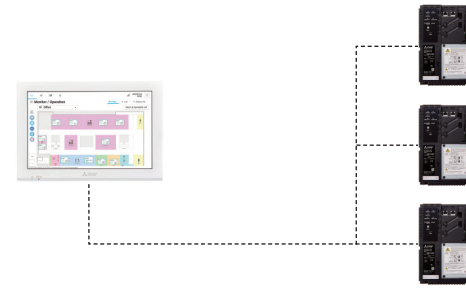


System Diagram EW-C50E

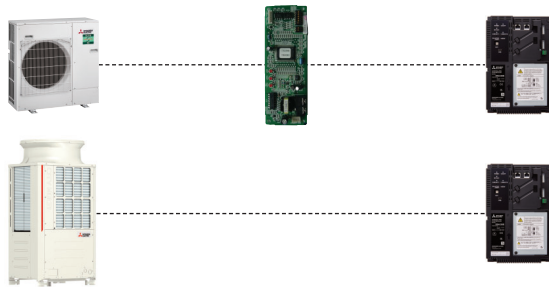

System Diagram MITSU10001-Router-CPT




System Diagram PAC-SC51KUA




System Diagram PAC-SF46EPA




Product Dimensions AT-50B

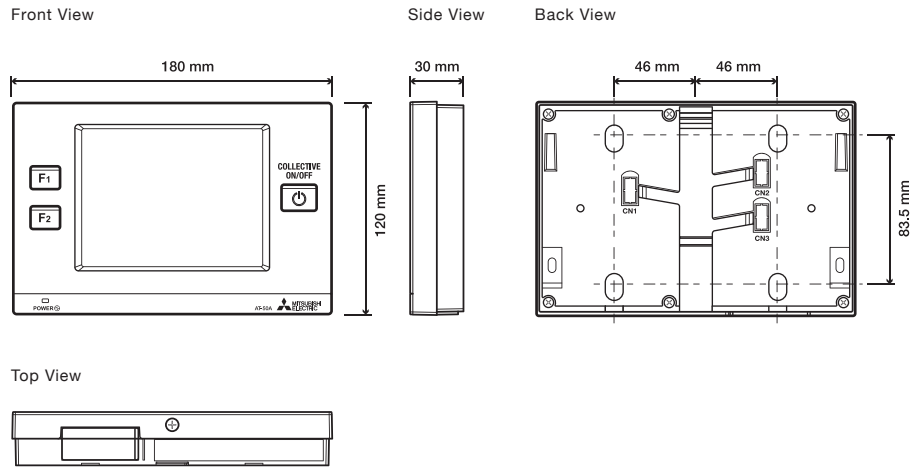


Product Dimensions AE-C400E

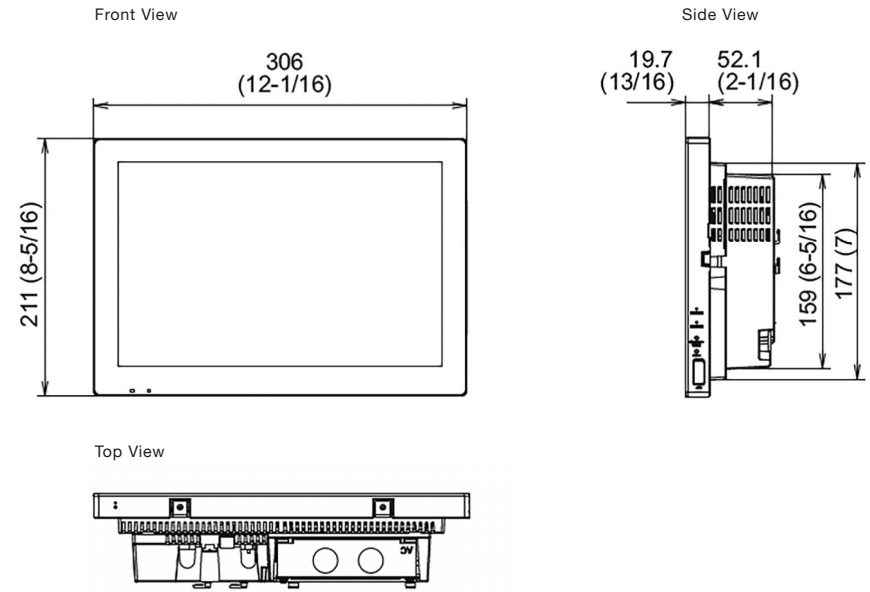

Product Dimensions EW-C50E

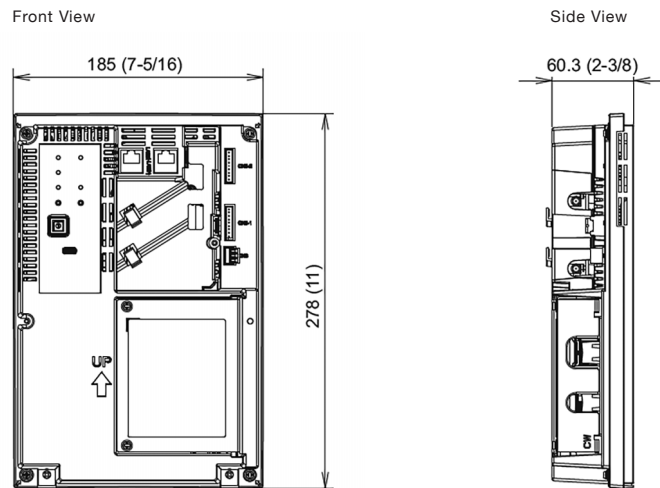


Product Dimensions MITSU10001-Router-CPT

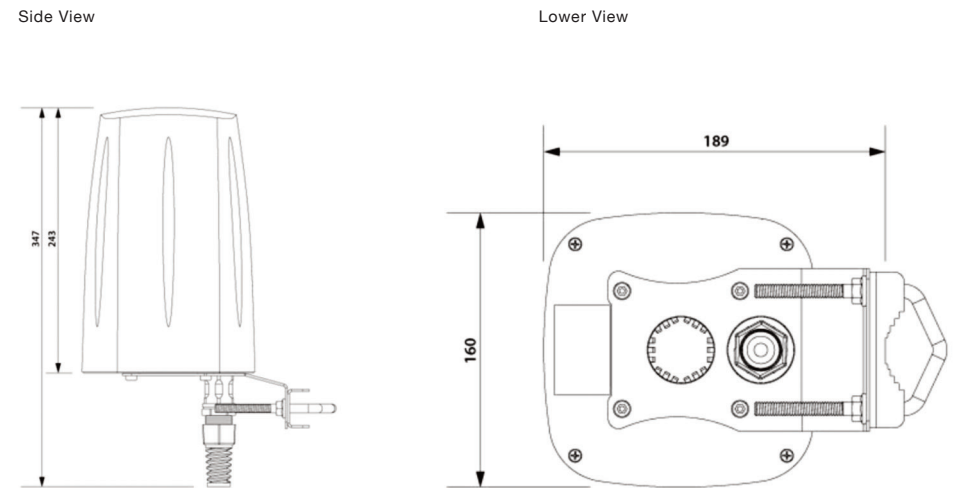


Product Dimensions

PAC-YK92TB-J

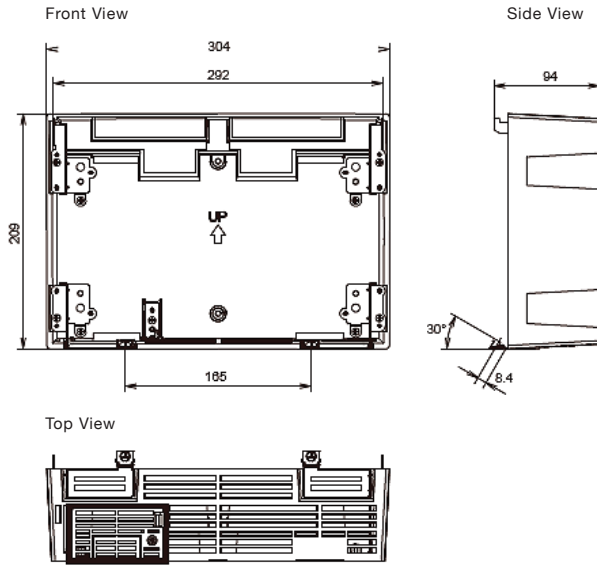


Product Dimensions

PAC-YK94UTB-J

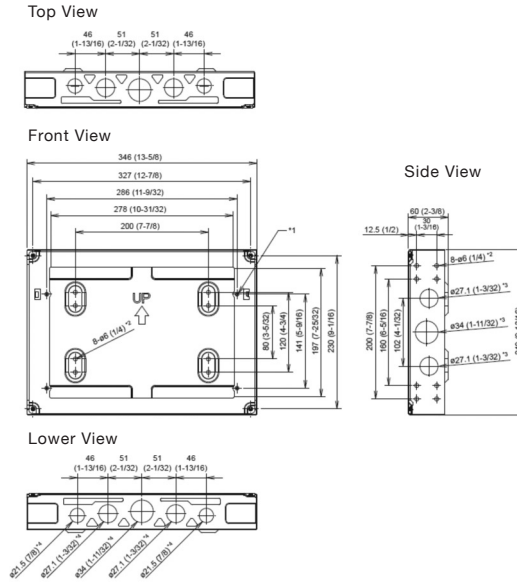


Product Dimensions

PAC-YK96TK-J

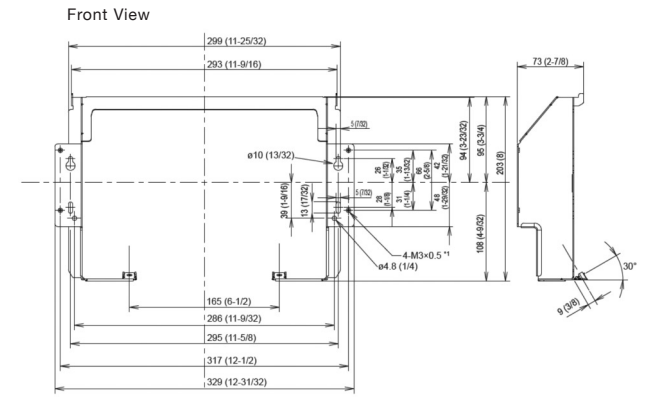


Product Dimensions

PAC-YK91RF-J

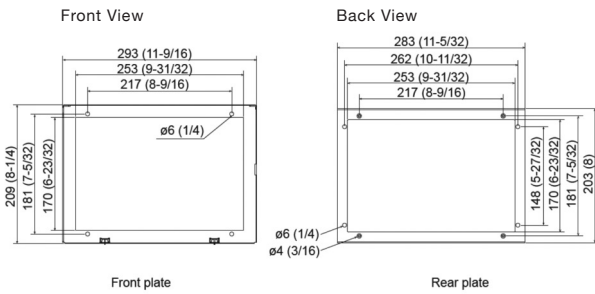


Product Dimensions

PAC-SC51KUA

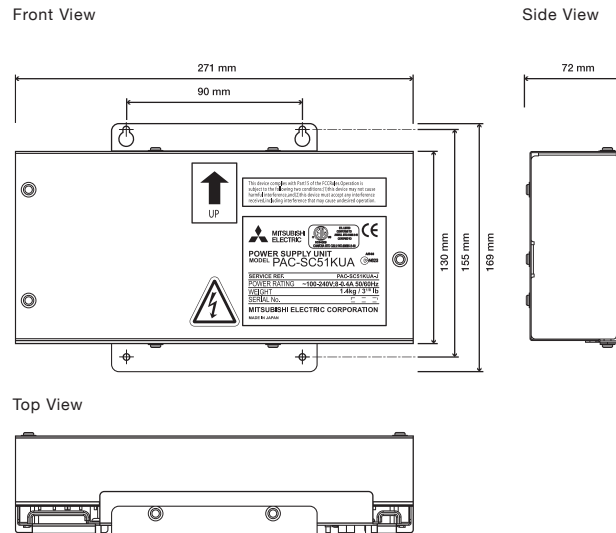

Product Dimensions

PAC-SF46EPA

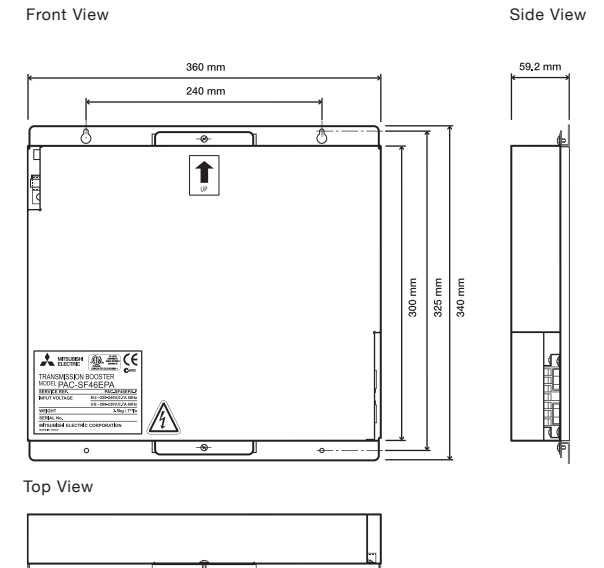

Remote Controllers

From a simplified controller perfect for hotel applications to a full backlight touch screen controller, we have the right remote controller to choose from.


Key Features & Benefits

PAR-CT01MAA-SB / PAR-CT01MAA-PB




- Simple to use
- Touch screen
- 180 colour screen
- 180 colour font display
- Backlight
- Fully configurable via smartphone App
- Customisable display
- Ability to display customer logos

PAR-U02MEDA



- Touch screen M-Net Controller
- Night set back, scheduling, setpoint limitation
- Built in occupancy/brightness sensor
- Backlight
- 0.5°C Set Point adjustment
- Dual Set Point

PAR-41MAA



- Displays model name and serial number on Mr Slim
- Night set back, scheduling, setpoint limitation
- 0.5°C Set Point adjustment
- Dual Set Point
- Run/Standby for Mr Slim
- Contact number under fault condition
- Backlight (White / Black options)
- Daylight saving function

PAR-FL / FA32MA



- Infrared solution
- Controller and receiver
- Controller able to control more than one receiver

PZ-62DR-EB




- Dedicated Lossnay controller
- Night set back, scheduling
- Flexible night purge
- Backlight

PAR-SL101A-E



- Wireless controller
- Weekly timer
- 3D Total Airflow for PLA-ZM/M
- 14°C cooling
- Individual vane setting for PLA-ZM/M/SM
- Dual Set Point
- Backlight

PAR-W31MAA / PAR-W21MAA



- Dedicated remote controller (see technical specification on page 7.18)
- Button lock
- Contact number under fault condition
- Fault codes

PAR-WT60R-E / PAR-WR61R-E



- Ecodan wireless controller
- New sleek flat panel design
- Backlight
- Ecodan receiver








PAC-IF082B-E



- Ecodan controller
- Touch Screen

Remote Controllers







Technical Specification

| REMOTE CONTROLLERS | PAR-CT01MAA-SB | PAR-CT01MAA-PB | PAR-U02MEDA | PAR-41MAA | PAR-FL32MA | PAR-FA32MA | PZ-62DR-EB | |
|---|---|---|---|---|---|---|---|---------------------------------|
| |  |  |  |  |  |  |  | |
| Description | Simplified Touch Screen Wired Remote Controller | Simplified Touch Screen Wired Remote Controller (Premium Finish) | Touch Screen Remote Controller | Standard Wired Remote Controller | Infrared Remote Controller | Infrared Receiver | Lossnay Wired Remote Controller | |
| Connect to | Indoor | Indoor | M-NET Network | Indoor | - | Indoor | Indoor | |
| Max Number of Units | 16 | 16 | 16 | 16 | - | 16 | 15 | |
| Compatibility | Mr Slim, City Multi and M Series via MAC-497IF-E | Mr Slim, City Multi and M Series via MAC-497IF-E | City Multi (M Series and Mr Slim via A2M adaptor)*1 | Mr Slim, City Multi and M Series via MAC-497IF-E or MAC-334IF-E | Mr Slim, City Multi and M Series via MAC-497IF-E | Mr Slim, City Multi and M Series via MAC-497IF-E | Lossnay LGH-RVX3(T)-E LGH-RVS-E | |
| Dimensions (mm) (WxDxH) | 65 x 14.1 x 120 | 65 x 14.1 x 120 | 140 x 25 x 120 | 120 x 14.5 x 120 | 57 x 18 x 157 | 70 x 18 x 120 | 120 x 19 x 120 | |
| Control | On/Off Mode Setpoint Fan Speed Air Direction Permit/Prohibit Filter Sign | ✓ ✓ ✓ ✓ ✓ ✓ ✓ | ✓ ✓ ✓ (0.5°C) ✓ ✓ ✓ ✓ | ✓ ✓ ✓ (0.5°C) ✓ ✓ ✓ ✓ | ✓ ✓ ✓ (0.5°C) ✓ ✓ ✓ ✓ | ✓ - - - - x x | - - - - - - - | ✓ ✓ - ✓ - - ✓ |
| Monitor | On/Off Mode Setpoint Fan Speed Air Direction Permit/Prohibit Filter Sign Fault Codes Room Temperature | ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ | ✓ ✓ ✓ (0.5°C) ✓ ✓ ✓ ✓ ✓ ✓ (0.5°C) | ✓ ✓ ✓ (0.5°C) ✓ ✓ ✓ ✓ ✓ ✓ (0.5°C) | ✓ ✓ ✓ (0.5°C) ✓ ✓ ✓ x x x | - - - - - - - LED - | ✓ ✓ - x - - ✓ - - | |
| Backlight | ✓ | ✓ | ✓ | ✓ | x | - | ✓ | |
| Setpoint Limitation | ✓ | ✓ | ✓ | ✓ | x | - | - | |
| Independent Vane Control | x | x | x | ✓ | x | - | - | |
| Contact Number under Fault Condition | x | x | x | ✓ | x | - | x | |
| Scheduling | ✓ | ✓ | Weekly | Weekly | x | - | Weekly | |
| Night Set Back | x | x | ✓ | ✓ | x | - | - | |
| Button Lock | ✓ | ✓ | ✓ | ✓ | x | - | ✓ | |
| Easy Maintenance with Mr Slim | x | x | x | ✓ | x | - | - | |
| Run / Standby with Mr Slim | x | x | x | ✓ | x | - | - | |
| Silent Mode with Mr Slim | x | x | x | ✓ | x | - | - | |
| Energy Saving with Mr Slim | x | x | x | ✓ | x | - | - | |
| Occupancy Sensor (PIR) | x | x | ✓ | x | x | - | - | |
| 3D Total Airflow with Mr Slim | x | x | x | ✓ | x | - | - | |
| Model Name and Serial Number Display with Mr Slim | x | x | x | ✓ | x | - | - | |
| Energy Consumption Monitoring with Mr Slim | x | x | x | ✓ | x | - | - | |
| 2+1 Backup Rotation with Mr Slim | x | x | x | ✓ | x | - | - | |
| Smart Defrost with Mr Slim | x | x | x | ✓ | x | - | - | |
| 14°C Cooling with Mr Slim | x | x | x | ✓ | x | - | - | |

Notes: Permit/Prohibit is via Centralised Controllers. ✓ = Yes, x = No, - = Not applicable. *1 M-NET Power Supply Required via PAC-SC51KUA for M Series & Mr Slim


Remote Controllers

Technical Specification

| REMOTE CONTROLLERS | PAR-SL101A-E | PAR-W31MAA | PAR-W21MAA | PAR-WT60R-E | PAR-WR61R-E | PAC-IF082B-E |
|--------------------------------------|---|---|---|---|---|---|
| |  |  |  |  |  |  |
| Description | Wireless Remote Controller | Standard Wired Remote Controller | Standard Wired Remote Controller | Wireless Remote Controller Transmitter | Wireless Remote Controller Receiver | Flow Temperature Controller FTC7 |
| Connect to | - | e-Series and Ecodan QAHV | PWFY, Mr Slim Air Curtains and Ecodan CAHV / CRHV | Ecodan PUZ | Ecodan PUZ | Ecodan PUZ |
| Max Number of Units | - | 6 (depends on unit connected) | 16 | 8 | 1 | 1 |
| Compatibility | Mr Slim PLA-ZM/M/SM PKA-M | e-Series and Ecodan CAHV/QAHV | PWFY and Ecodan CRHV | Ecodan PUZ | Ecodan PUZ | Ecodan PUZ |
| Dimensions (mm) (WxDxH) | 66 x 22 x 188 | 120 x 19 x 120 | 130 x 19 x 120 | 100 x 23 x 100 | 100 x 30 x 80 | 120 x 14.1 x 65 |
| Control | | | | | | |
| On/Off | ✓ | ✓ | ✓ | x | - | ✓ |
| Mode | ✓ | ✓ | ✓ | ✓ | - | ✓ |
| Setpoint | ✓ | ✓ | ✓ | ✓ | - | ✓ |
| Fan Speed | ✓ | x | x | x | - | x |
| Air Direction | ✓ | x | x | x | - | x |
| Permit/Prohibit | x | x | - | x | - | x |
| Filter Sign | x | x | x | x | - | x |
| Monitor | | | | | | |
| On/Off | ✓ | ✓ | ✓ | ✓ | - | ✓ |
| Mode | ✓ | ✓ | ✓ | ✓ | - | ✓ |
| Setpoint | ✓ | ✓ | ✓ | ✓ | - | ✓ |
| Fan Speed | ✓ | x | x | x | - | x |
| Air Direction | ✓ | x | x | x | - | x |
| Permit/Prohibit | ✓ | x | x | x | - | x |
| Filter Sign | x | x | x | x | - | x |
| Fault Codes | x | ✓ | ✓ | x | - | ✓ |
| Room Temperature | x | x | x | ✓ | - | ✓ |
| Backlight | ✓ | ✓ | x | ✓ | - | x |
| Setpoint Limitation | x | x | ✓ | ✓ | - | x |
| Independent Vane Control | ✓ | x | x | x | - | x |
| Contact Number under Fault Condition | x | ✓ | ✓ | x | - | x |
| Scheduling | Weekly | Weekly | Weekly | Weekly | - | Weekly |
| Night Set Back | x | x | x | ✓ | - | ✓ |
| Button Lock | x | x | ✓ | x | - | ✓ |
| Easy Maintenance with Mr Slim | x | x | x | - | - | - |
| Run / Standby with Mr Slim | x | x | x | - | - | - |
| Silent Mode with Mr Slim | x | x | x | - | - | - |
| Energy Saving with Mr Slim | x | x | x | - | - | - |
| Occupancy Sensor (PIR) | x | x | x | - | - | - |
| 3D Total Airflow with Mr Slim | ✓ | x | x | - | - | - |
| 14°C Cooling with Mr Slim | ✓ | x | x | - | - | - |

Notes: Prohibit is via Centralised Controllers. ✓ = Yes, x = No, - = Not applicable.


System Diagram PAR-CT01MAA-SB / PAR-CT01MAA-PB

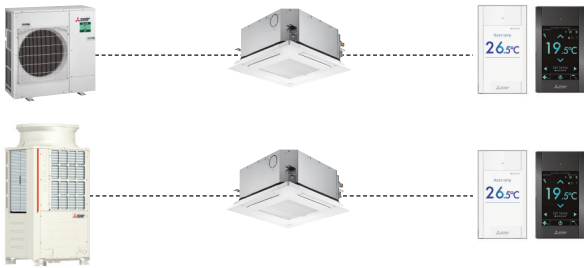


System Diagram PAR-U02MEDA




System Diagram PAR-41MAA

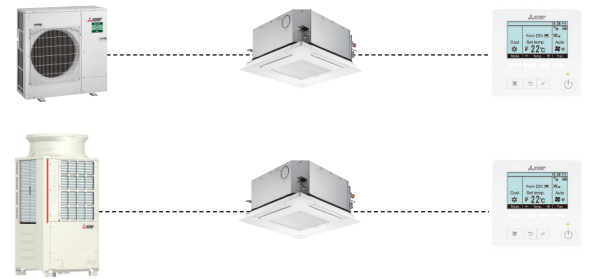

System Diagram PAR-FL / FA32MA

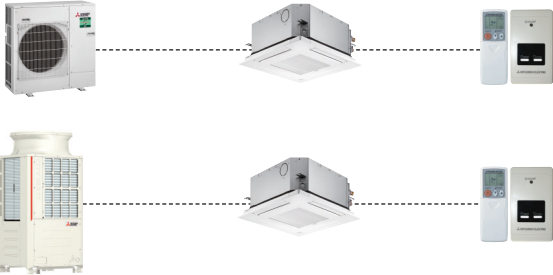

System Diagram PZ-62DR-EB



System Diagram PAR-SL101A-E




System Diagram PAR-W31MAA




System Diagram PAR-W21MAA




System Diagram PAR-WT60R-E / PAR-WR61R-E

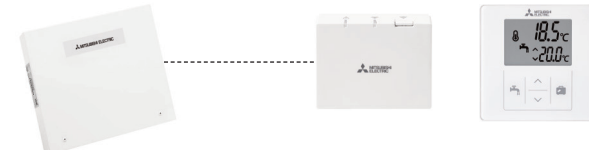


System Diagram PAC-IF082B-E

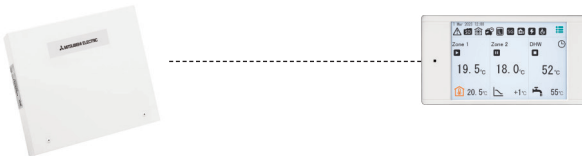


Product Dimensions PAR-CT01MAA-SB / PAR-CT01MAA-PB

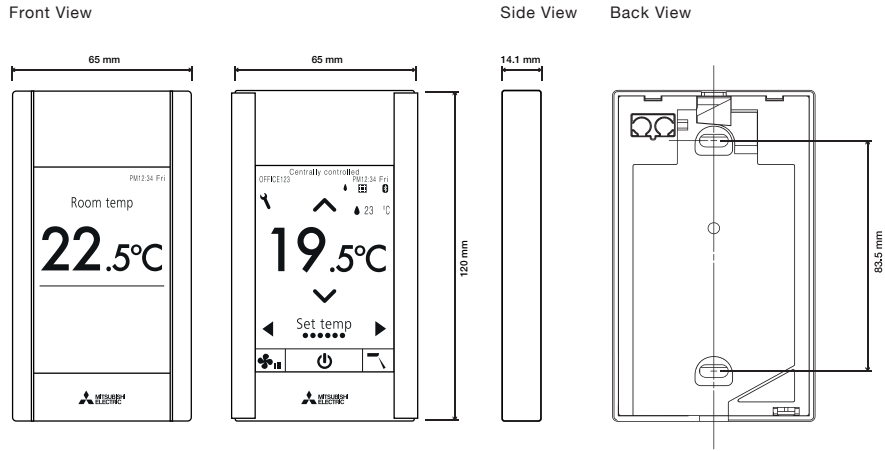


Product Dimensions PAR-U02MEDA

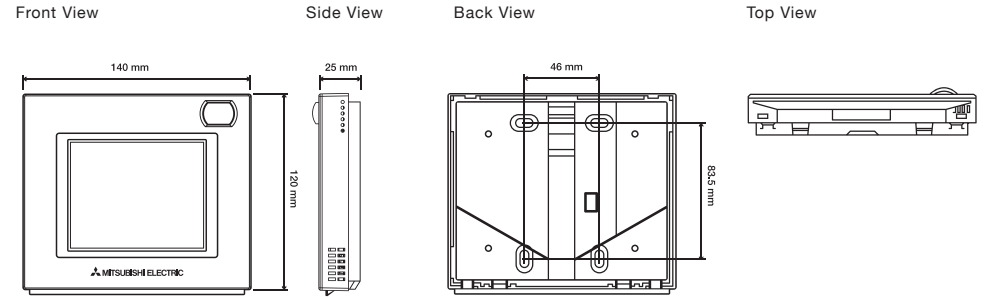


Product Dimensions PAR-41MAA

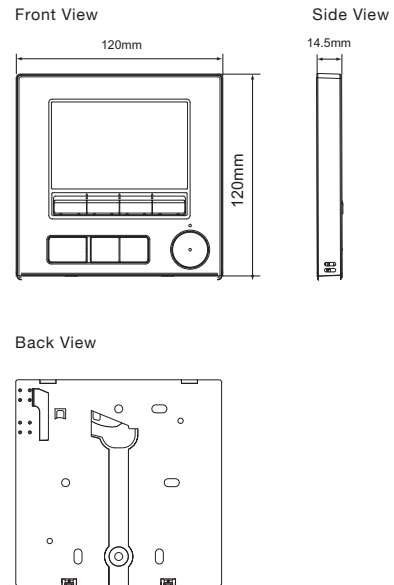


Product Dimensions PAR-FL32MA

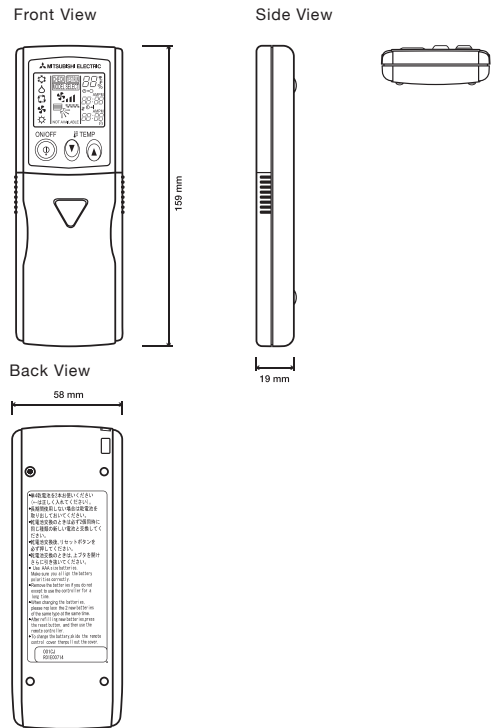


Product Dimensions PAR-FA32MA

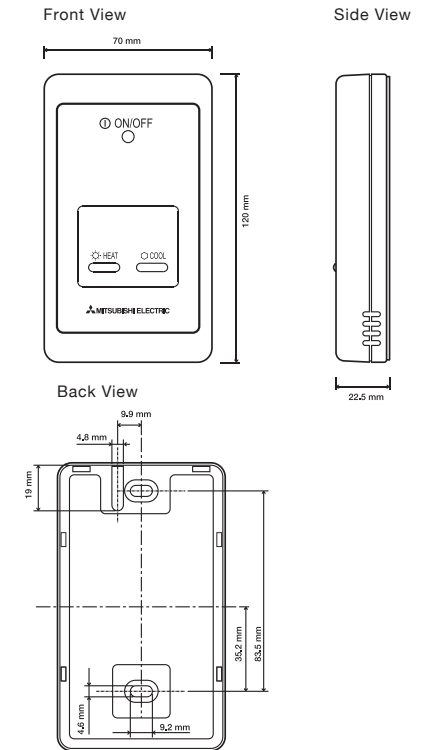


Product Dimensions PZ-62DR-EB / PAR-W31MAA

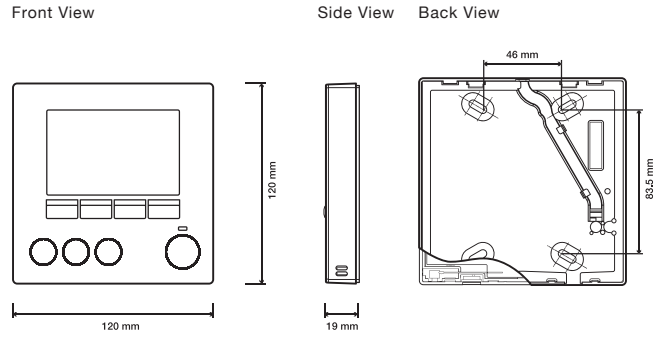


Product Dimensions PAR-SL101A-E

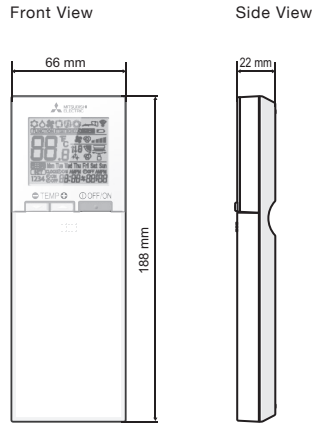


Product Dimensions PAR-W21MAA

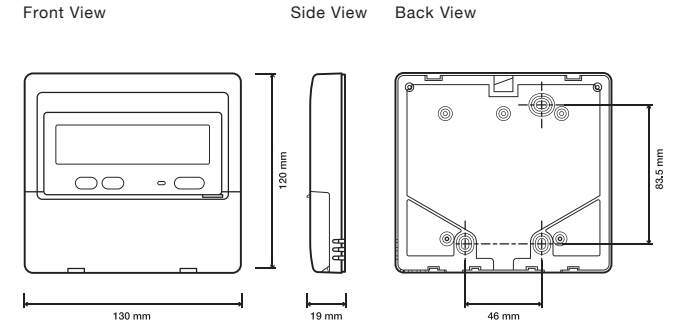


Product Dimensions PAR-WT60R-E

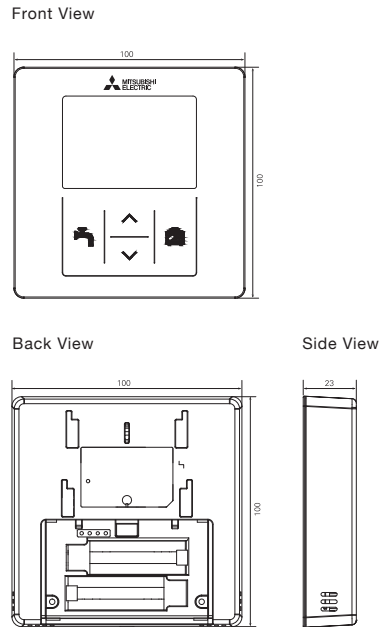

Product Dimensions PAR-WR61R-E

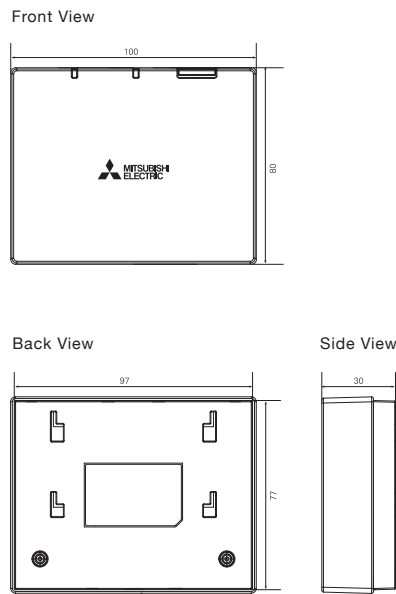

Product Dimensions PAC-IF082B-E

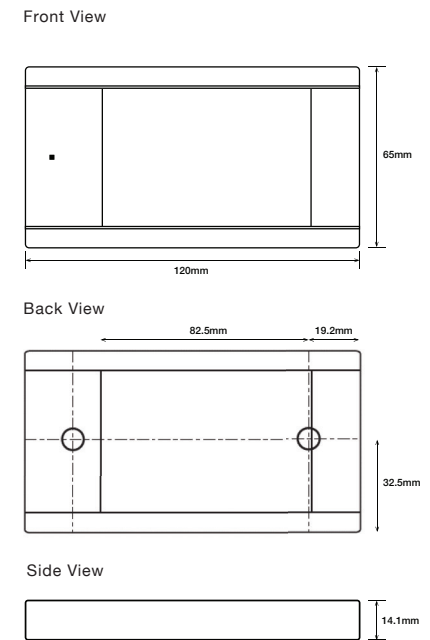

Solution Interfaces

Our dedicated solution interfaces now include new sector specific products such as our new **MELCloud Commercial** offering.

Key Features & Benefits

MELCLOUD COMMERCIAL



- Advanced remote control of indoor units across one or multiple sites
- Smart monitoring of outdoor unit performance for one or multiple buildings
- Energy monitoring via in-built CT Clamps or Modbus Energy Meters, for improved energy consumption & cost savings
- Real-time system data of indoor and outdoor units facilitates performance analysis, service, and ongoing maintenance
- Choice of subscription packages to meet customer requirements

MELCLOUD-CL-HA1-A1



- IoT Interface - MELCloud Home and MELCloud Commercial*
- LAN or Cellular options. Cellular and MELCloud Home option includes data plan** via eSIM
- Remotely control indoor and outdoor units
- Remote service and maintenance*
- Update interface software OTA (over the air)
- Wall mountable - bracket supplied

MELCOTEL2



- Monitor and control up to 200 indoor units
- Dedicated hotel interface
- Key card and non key card integration
- Automatic Setpoint adjustment
- Occupied / Unoccupied Settings Reset

MCC-50E



- Compatible with M Series, Mr Slim, City Multi and Lossnay ranges
- Cloud system connection device - MELCloud Commercial IoT platform
- 4G or LAN connection
- Remote access to control, monitor and provide service & maintenance for up to 50 indoor units

MELCOMMS MINI



- Monitor and control up to 8 indoor units
- Run / Standby panel
- Includes 2 x MELCOBEMS MINI (A1M+) Interfaces

ENERGY METERS



- Backlit LCD display
- Single-phase energy analyser
- DIN-rail mount

Solution Interfaces

Technical Specification

| SOLUTION INTERFACES | MELCLOUD COMMERCIAL | MCC-50E | MELCLOUD-CL-HA1-A1 | MELCOMMS MINI | MELCOTEL2 |
|---------------------|---------------------|---------|--------------------|---------------|-----------|
|---------------------|---------------------|---------|--------------------|---------------|-----------|



| Description | IoT Platform and Application | MELCloud IoT Gateway | MELCloud Interface Cellular/LAN | Run Standby Panel | AE-C400E Hotel Interface and display |
|---|---|--|--|---|---|
| Connect to | Web based (MCC-50E Required) | M-NET Network | CN105 (1.5m cable provided) | MELCOBEMS MINI (A1M+) | AE-C400E and EW-C50E |
| Max Number of Units | 50 | 50 Indoor / 50 Outdoor / 4 Energy Meters | 1 per Indoor Unit | 8 | 200 |
| Compatibility | M Series, Mr Slim, City Multi and Lossnay | M Series, Mr Slim, and City Multi | M Series, Mr Slim, City Multi, Lossnay, Ecodan, Air purifier, MELCloud Home, MELCloud Commercial | M Series and Mr Slim | City Multi |
| Power Supply | 220-240v, 50Hz | 220-240v, 50Hz | 220-240v, 50Hz (Power is taken from the indoor unit) | 220-240v, 50Hz | 220-240v, 50Hz |
| Dimensions (mm) (WxDxH) | - | 172 x 100 x 209 | 165 x 218 x 55 | 253 x 90 x 180 | 350 x 80 x 400 |
| Ethernet Capabilities | ✓ | 1x Ethernet Port | 1x Ethernet Port | x | x |
| SIM Card Provided | ✓ | Sold separately | On board eSIM | x | x |
| Inputs | ✓ Digital (via PAC-YG66) | USB / RJ45 / RS485 | RJ45 | x | x |
| Outputs | ✓ Digital (via PAC-YG66) | Data output via MELCloud Commercial platform | Data output via MELCloud Home and Commercial ² platforms | ✓ 1 Digital (Fault) | x |
| Network | - | IoT (MELCloud Commercial) / LAN / 4G | LAN or Cellular (LTE-M, 2G) | - | - |
| Control | On/Off ✓ Mode ✓ Setpoint ✓ Fan Speed ✓ Air Direction - Permit/Prohibit ✓ Schedule - Filter Sign ✓ Frost Protection - Holiday Mode - | DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ | DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ DI ✓ | ✓ ✓ ✓ x x x x x x x | ✓ ✓ ✓ x x x x x x x |
| Monitor | On/Off ✓ Mode ✓ Setpoint ✓ Fan Speed ✓ Air Direction - Permit/Prohibit ✓ Cloud Communication - Filter Sign ✓ Fault Code Alerts ✓ Room Temperature ✓ Daily kWh Energy - Monthly kWh Energy - Comfort Data - Building Status ✓ | DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ | DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ DO ✓ | ✓ ✓ ✓ x x x x x x x x x x x x | ✓ ✓ ✓ x x x x x x x x x x x x |
| Flexible Schedule Options | ✓ | Via MELCloud Commercial Platform | Via MELCloud Home / Commercial ² Platform | x | x |
| Night Setback | - | - | ✓ | x | ✓ |
| Web Pages | ✓ | MELCloud Commercial Platform | MELCloud Home / MELCloud Commercial ² Platform | x | x |
| Optimised Start | ✓ | - | ✓ ² | x | x |
| Automatic Setpoint Adjustment | - | - | ✓ ² | x | ✓ |
| Load Shedding | - | - | - | x | x |
| Occupied / Unoccupied Settings Reset | - | - | - | x | ✓ |
| Advanced Energy Monitoring ¹ | ✓ | Via MELCloud Commercial Platform | - | x | x |





Key:
DI = Digital Input.
DO = Digital Output.
AI = Analogue Input.
AO = Analogue Output.

Notes:
¹ Advanced Energy Monitoring: Energy status shows kWh consumed, including comparisons of individual buildings. With the addition of the PAC-YG***CA interfaces, third party equipment can also be monitored.

² MELCloud Commercial compatibility expected end 2025.


Solution Interfaces

Technical Specification

| ENERGY METERS | EM112 SINGLE-PHASE PULSE ENERGY METER EM112DINAV01XO1X | EM112 SINGLE-PHASE MODBUS ENERGY METER EM112DINAV01XS1X | EM340 THREE-PHASE PULSE ENERGY METER EM340DINAV23XO1X | EM340 THREE-PHASE MODBUS ENERGY METER EM340DINAV23XS1X |
|-------------------------|--|---|---|--|
| |  |  |  |  |
| Description | Single-phase LCD Energy Meter 230 V L-N, 5 (100) A, Pulse output | Single-phase LCD Energy Meter 230 V L-N, 5 (100) A, RS485 Modbus RTU | Three-phase LCD Energy Meter, 120 to 230 V L-N, 208 to 400 V L-L, 5 (65) A, Pulse output | Three-phase LCD Energy Meter, 120 to 230 V L-N, 208 to 400 V L-L, 5 (65) A, RS485 Modbus RTU |
| Compatibility | <ul style="list-style-type: none"> ■ PAC-YG60MCA ■ AE-C400E ■ EW-C50E ■ MCC-50E | <ul style="list-style-type: none"> ■ AE-C400E ■ EW-C50E ■ MCC-50E | <ul style="list-style-type: none"> ■ PAC-YG60MCA ■ AE-C400E ■ EW-C50E ■ MCC-50E | <ul style="list-style-type: none"> ■ AE-C400E ■ EW-C50E ■ MCC-50E |
| Features | <ul style="list-style-type: none"> ■ Backlit LCD Display ■ Single-phase energy analyser ■ DIN-rail mount ■ Connect up to 4 directly to PAC-YG60MCA | <ul style="list-style-type: none"> ■ Backlit LCD Display ■ Single-phase energy analyser ■ DIN-rail mount ■ Connect up to 4 directly to AE-C400E, EW-C50E or MCC-50E | <ul style="list-style-type: none"> ■ Backlit LCD Display ■ Three-phase energy analyser ■ DIN-rail mount ■ Connect up to 4 directly to PAC-YG60MCA | <ul style="list-style-type: none"> ■ Backlit LCD Display ■ Three-phase energy analyser ■ DIN-rail mount ■ Connect up to 4 directly to AE-C400E, EW-C50E or MCC-50E |
| Dimensions (mm) (WxDxH) | 35 x 63 x 90 | 35 x 63 x 90 | 54 x 63 x 91 | 54 x 63 x 91 |


System Diagram

MELCLOUD COMMERCIAL

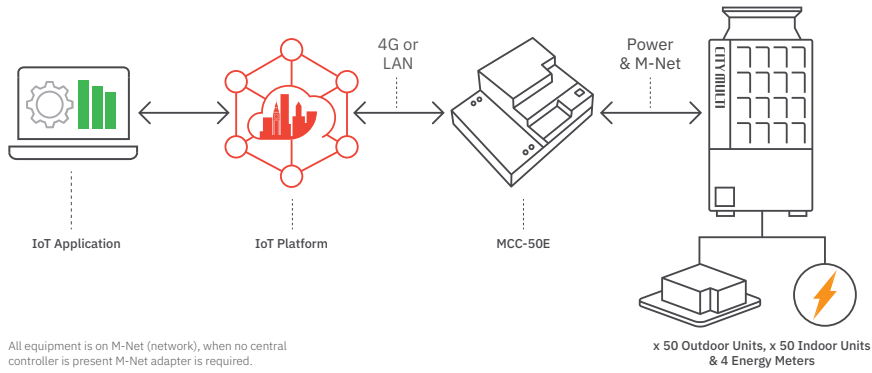


System Diagram

MCC-50E

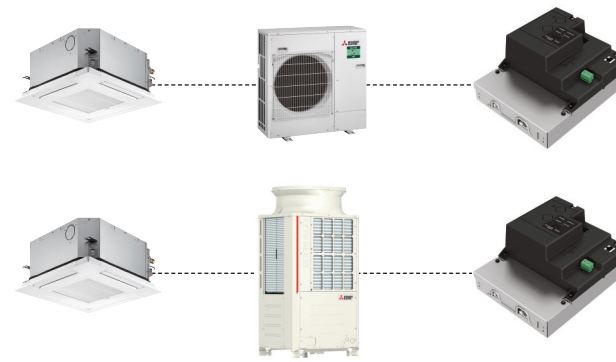

System Diagram

MELCLOUD-CL-HA1-A1

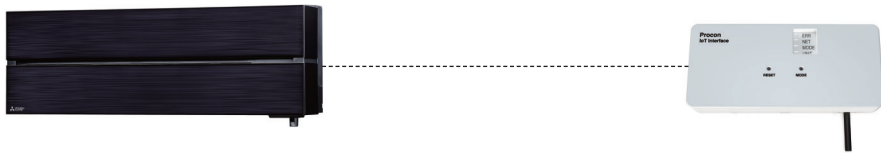

System Diagram

MELCOMMS MINI




System Diagram


MELCOTEL2




System Diagram EM112 Single-phase PULSE Energy Meter EM112DINAV01XO1X

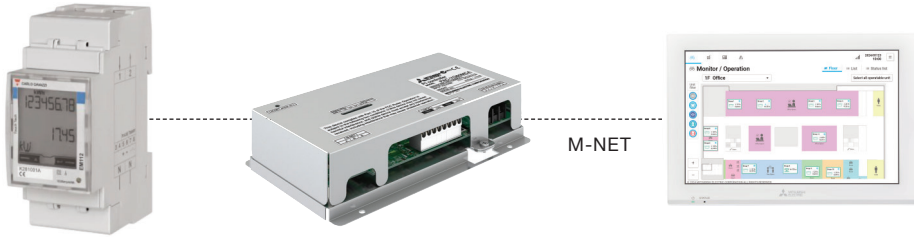


System Diagram EM340 Three-phase PULSE Energy Meter EM340DINAV23XO1X

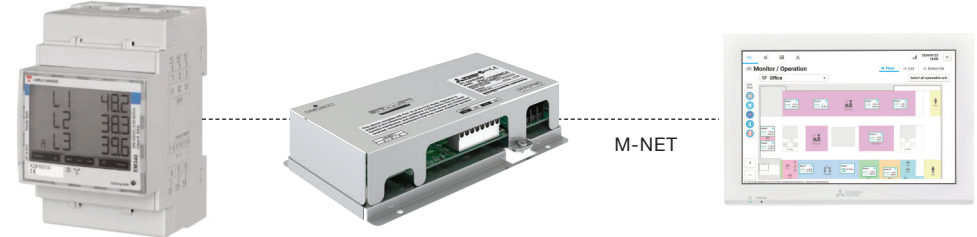

System Diagram EM112 Single-phase MODBUS Energy Meter EM112DINAV01XS1X

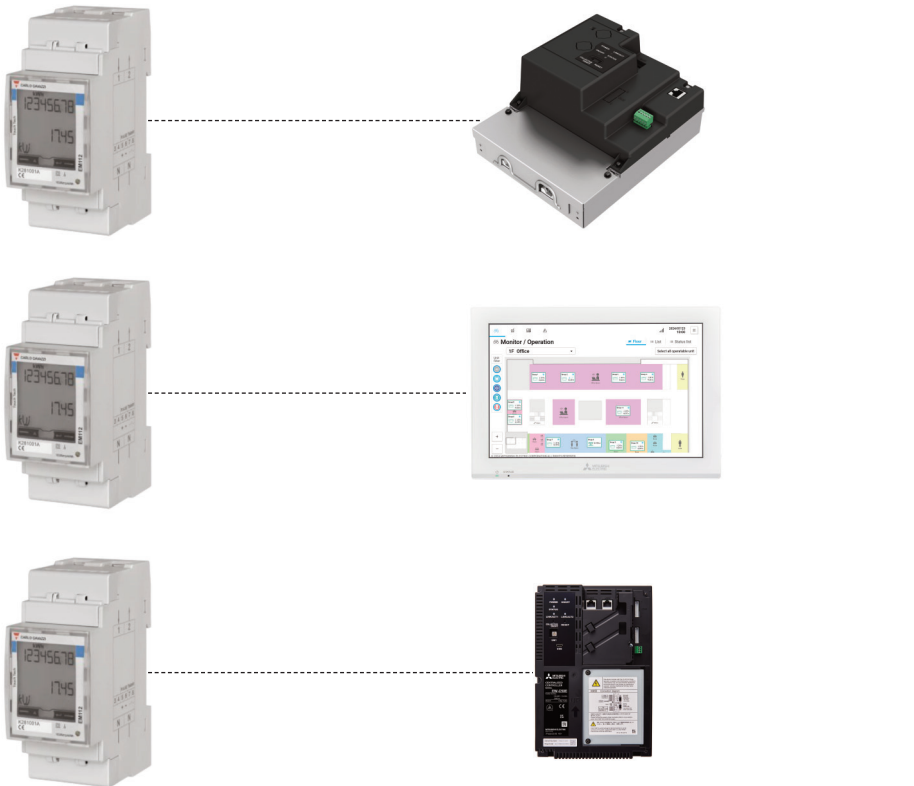


System Diagram EM340 Three-phase MODBUS Energy Meter EM340DINAV23XS1X

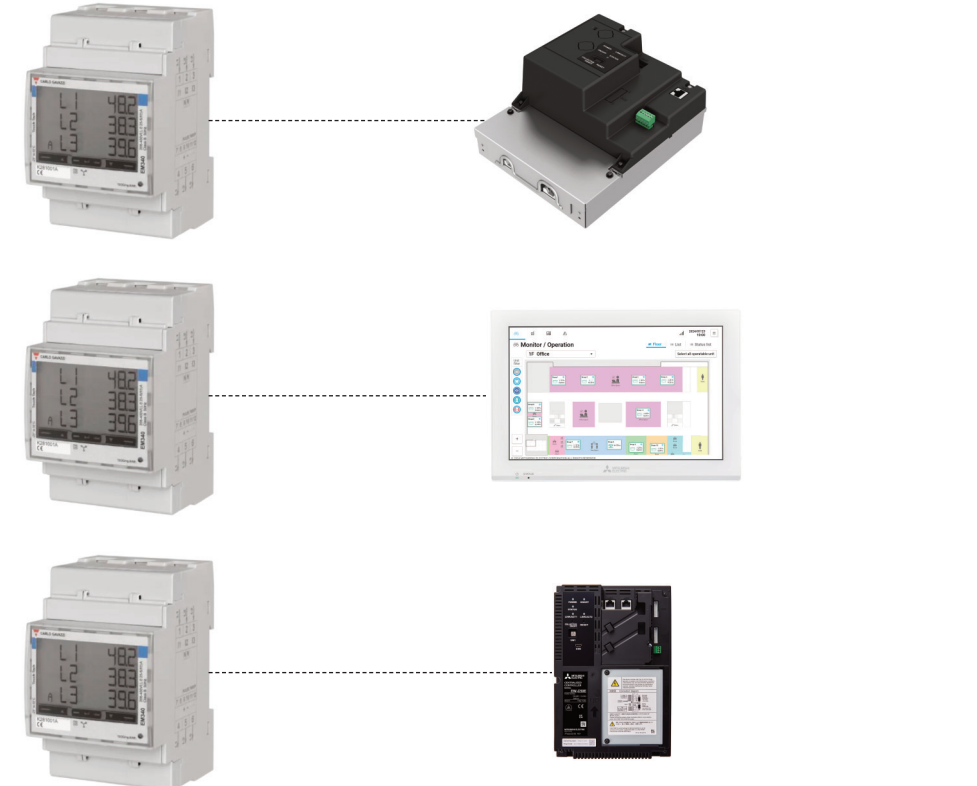

Product Dimensions


MCC-50E

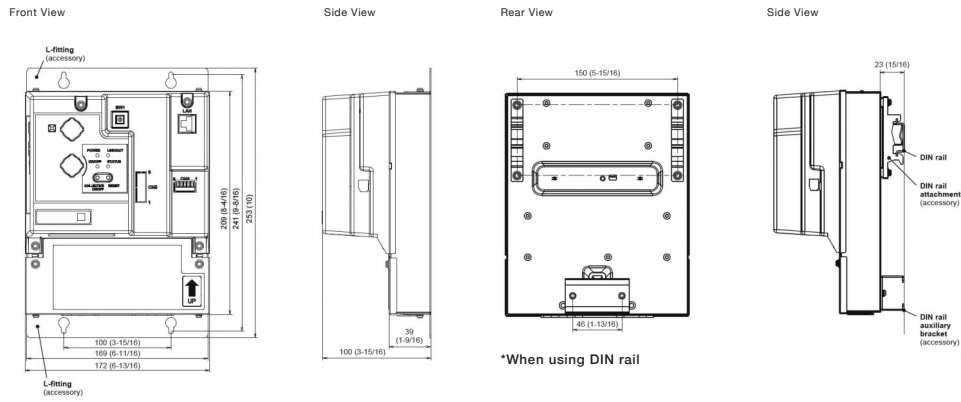

*When using L-fittings


Product Dimensions

MELCLOUD-CL-HA1-A1

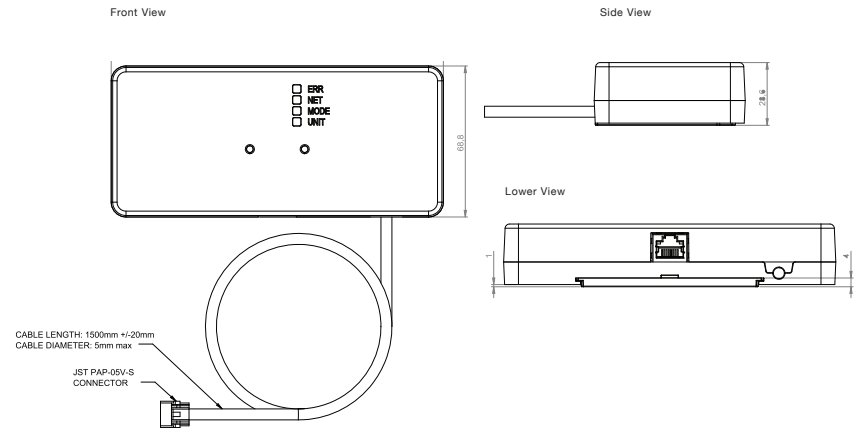


Product Dimensions

MELCOMMS MINI

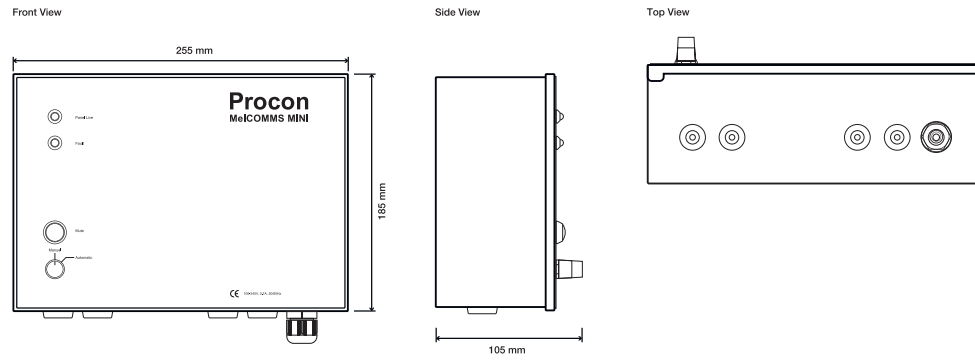


Product Dimensions

MELCOTEL2

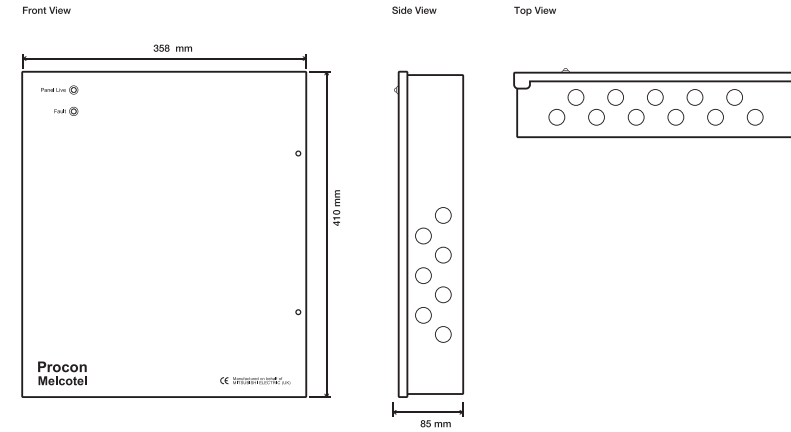


Product Dimensions EM112 Single-phase PULSE Energy Meter EM112DINAV01XO1X


Front View

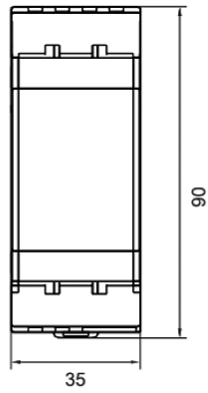


Side View

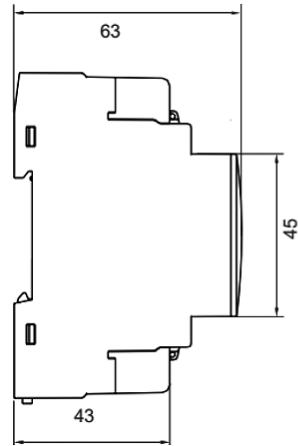
Product Dimensions EM112 Single-phase MODBUS Energy Meter EM112DINAV01XS1X


Front View

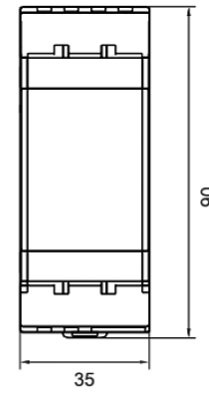


Side View

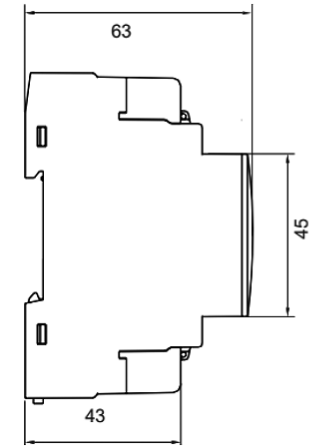
Product Dimensions EM340 Three-phase PULSE Energy Meter EM340DINAV23XO1X


Front View

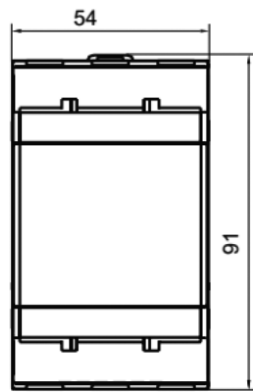


Side View

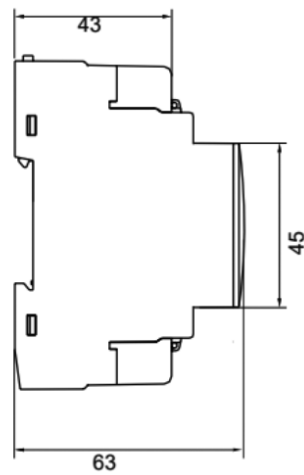
Product Dimensions EM340 Three-phase MODBUS Energy Meter EM340DINAV23XS1X

Front View

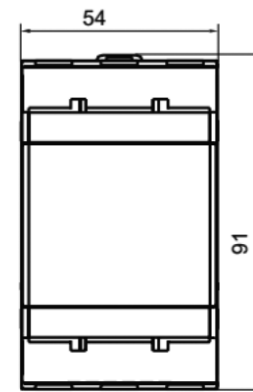

Side View

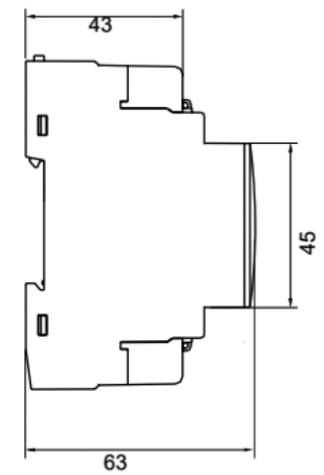

Simple Interfaces

A wide range of interfaces are available to allow third party equipment to monitor and control our units. Some interfaces are also available to monitor and control third party equipment from our centralised controllers.

Key Features & Benefits

PAC-SA89TA



- Also known as 3 wire adaptor
- Remote on/off
- Fire alarm input
- Night mode
- Demand control

PAC-SA88HA



- Heating and cooling signal
- Run and fault signal

PAC-YT51HAA



- Remote on/off
- Fire alarm input
- Common run and fault signal

PAC-YG10HA



- Remote on/off
- Fire alarm input
- Common run and fault signal

PAC-SK15MA-E



- Adaptor to connect Mr Slim PUZ-ZM35/50 units to M-NET

PAC-SJ95MA-E



- Adaptor to connect Mr Slim units to M-NET











PAC-SL16MA-E



- Adaptor to connect Mr Slim PUZ-ZM100-140 units to M-NET


Simple Interfaces

Technical Specification


| SIMPLE INTERFACES | PAC-SA89TA | PAC-SA89TA | PAC-SA88HA | PAC-SA88HA | PAC-SA88HA | PAC-YT51HAA | PAC-YG10HA | PAC-SK15MA-E | PAC-SJ95MA-E | PAC-SL16MA-E |
|-------------------------------------|--|---|---|---|---|---|---|---|---|---|
| |  |  |  |  |  |  |  |  |  |  |
| Description | On/Off Adaptor (3 wire adaptor) | Night Mode and Demand Control (3 wire adaptor) | Run and Fault Adaptor (5 wire adaptor) | Heat and Cool Adaptor (5 wire adaptor) | Run and Fault Adaptor (5 wire adaptor) | On/Off Run and Fault Adaptor | On/Off Run and Fault Adaptor (9 wire adaptor) | M-NET Converter | M-NET Converter | M-NET Converter |
| Connect to | Indoor | Outdoor | Indoor | Indoor | Outdoor | AT-50B | AE-C400E and EW-C50E | Outdoor | Outdoor | Outdoor |
| Max Number of Units | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Compatibility | Mr Slim and City Multi | Mr Slim and City Multi | Mr Slim and City Multi | City Multi | City Multi | AT-50B | AE-C400E and EW-C50E | Mr Slim PUZ-ZM35/50 Outdoor | Mr Slim Outdoor ¹ | Mr Slim PUZ-ZM100-140 Outdoor |
| Dimensions (mm) (WxDxH) | - | - | - | - | - | - | - | 120 x 44 x 321 | 140 x 15 x 50 | 140 x 15 x 50 |
| Control | | | | | | | | | | |
| On/Off | ✓ | ✓ | x | x | x | ✓ | ✓ | - | - | - |
| Mode | x | x | x | x | x | x | x | - | - | - |
| Setpoint | x | x | x | x | x | x | x | - | - | - |
| Fan Speed | x | x | x | x | x | x | x | - | - | - |
| Air Direction | x | x | x | x | x | x | x | - | - | - |
| Permit/Prohibit | x | x | x | x | x | x | x | - | - | - |
| Filter Sign | x | x | x | x | x | x | x | - | - | - |
| Monitor | | | | | | | | | | |
| On/Off | x | x | ✓ | x | ✓ | ✓ | ✓ | - | - | - |
| Mode | x | x | x | ✓ | x | x | x | - | - | - |
| Setpoint | x | x | x | x | x | x | x | - | - | - |
| Fan Speed | x | x | x | x | x | x | x | - | - | - |
| Air Direction | x | x | x | x | x | x | x | - | - | - |
| Permit/Prohibit | x | x | x | x | x | x | x | - | - | - |
| Filter Sign | x | x | x | x | x | x | x | - | - | - |
| Fault Codes | x | x | ✓ | ✓ | ✓ | ✓ | ✓ | - | - | - |
| Room Temperature | x | x | x | x | x | x | x | - | - | - |
| Fire Alarm | ✓ | ✓ | x | x | x | ✓ | ✓ | - | - | - |
| On/Off but Centrally Controlled | VFC | x | x | x | x | VFC | Via 24VDC | - | - | - |
| On/Off but NOT Centrally Controlled | x | x | x | x | x | x | x | - | - | - |
| Run and Fault Output | x | x | 12VDC | x | 12VDC | Via 24VDC | Via 24VDC | - | - | - |
| Heat and Cool Output | x | x | x | 12VDC | x | x | x | - | - | - |
| Night Mode and Demand Control | x | VFC | x | x | x | x | x | - | - | - |
| Connect Mr Slim to M-NET | - | - | - | - | - | - | - | ✓ | ✓ | ✓ |

Notes: VFC: Volt free contact. ¹ PAC-SJ95MA-E M-NET adaptor for PUZ-ZM60/71, PUZ-ZM200/250, PUZ-M100-250, PUZ-SM100-140.
 ✓ = Yes, x = No, - = Not applicable.


System Diagram PAC-SA89TA

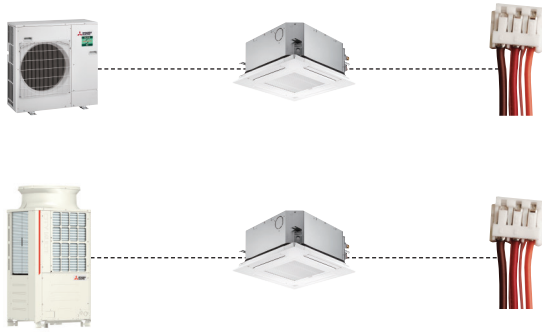

System Diagram PAC-SA88HA

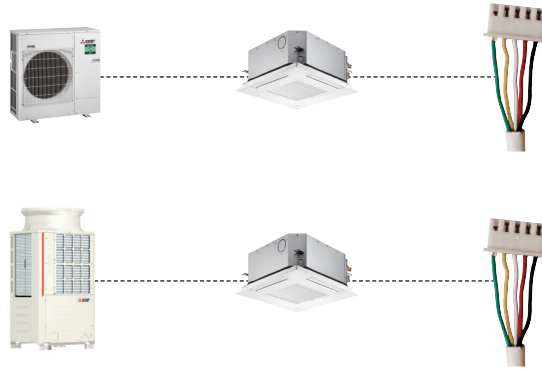

System Diagram PAC-YT51HAA

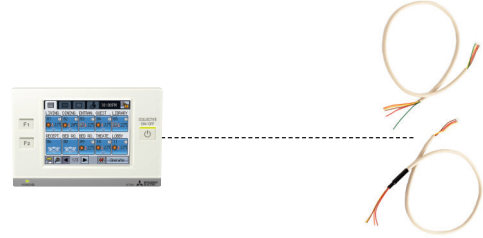

System Diagram PAC-YG10HA



System Diagram PAC-SK15MA-E




System Diagram PAC-SJ95MA-E



System Diagram PAC-SL16MA-E



Wiring Diagram PAC-SA89TA

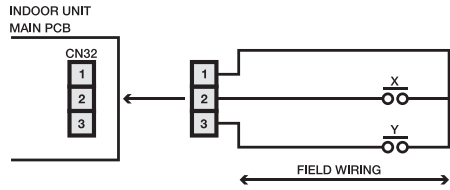


NOTE

- ON / OFF BUTTON ON THE REMOTE CONTROLLER NOT AVAILABLE
- ADAPTER WIRE COLOURS MAY VARY
- RELAYS NOT SUPPLIED

OPERATION

- X AND Y CLOSED TO START UNIT

Wiring Diagram PAC-SA88HA

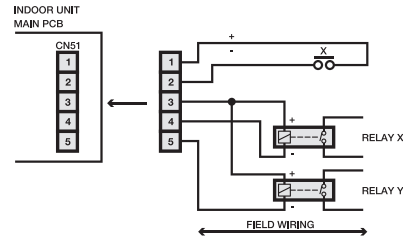


NOTE

- RELAYS NOT SUPPLIED
- X REQUIRES A PULSE SIGNAL TO START / STOP UNIT


OPERATION

- RELAY X SUPPLIED WITH 12V DC WHEN UNIT IS ON
- RELAY Y SUPPLIED WITH 12V DC WHEN UNIT IN FAULT


Wiring Diagram PAC-YT51HAA

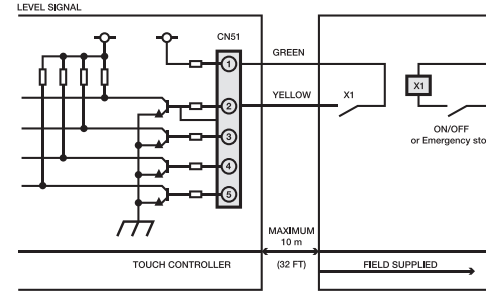

Wiring Diagram PAC-YG10HA

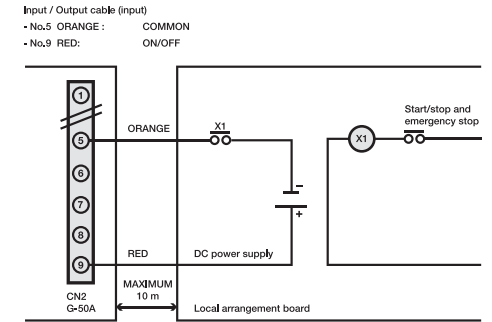

Wiring Diagram PAC-SA89TA




NOTE

X : Low noise mode or demand
 Y : Demand
 X, Y : Relay

Contact rating voltage $\geq 15VDC$
 Contact rating current $\geq 0.1A$
 Minimum applicable load $\leq 1mA$ at DC

Wiring Diagram PAC-SA88HA

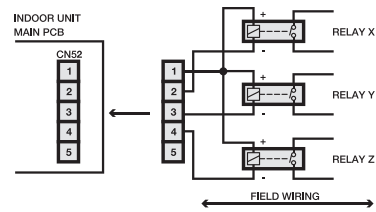


NOTE

- RELAYS NOT SUPPLIED


OPERATION

- RELAY X SUPPLIED WITH 12V DC WHEN FAN IS RUNNING
- RELAY Y SUPPLIED WITH 12V DC WHEN UNIT IS IN COOLING MODE AND THE REMOTE CONTROLLER IS ON OR OFF
- RELAY Z SUPPLIED WITH 12V DC WHEN UNIT IS IN HEATING MODE AND THE REMOTE CONTROLLER IS ON OR OFF


Wiring Diagram PAC-YT51HAA

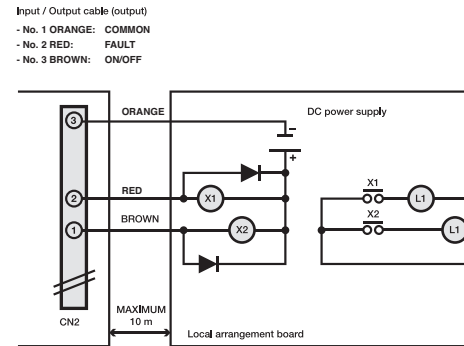

Wiring Diagram PAC-YG10HA

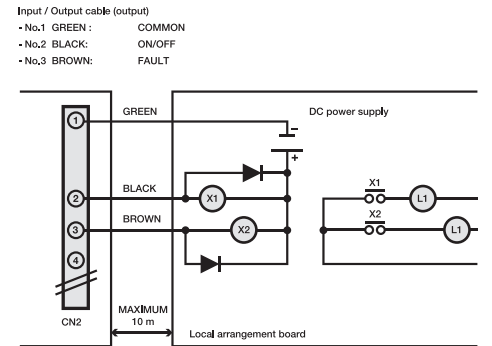


Product Dimensions PAC-SK15MA-E

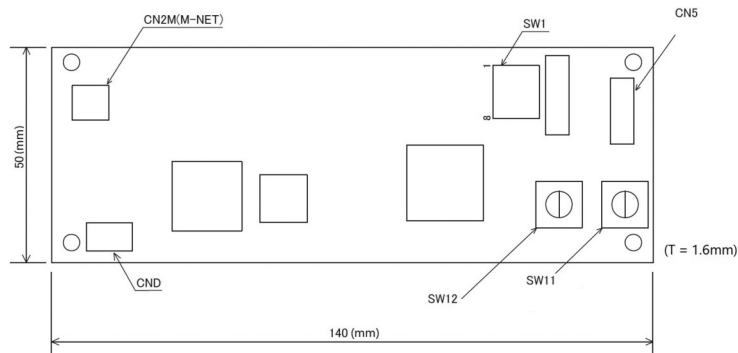

Notes: Dimensional drawing of board, for cover dimensions please see page 7.30

Product Dimensions PAC-SJ95MA-E / PAC-SL16MA-E

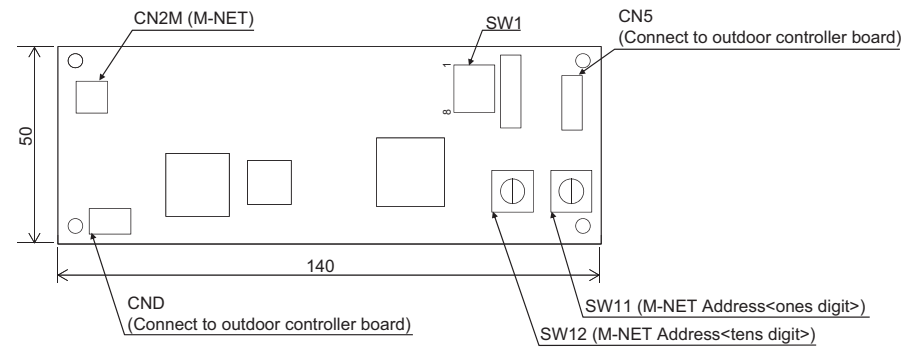

Advanced Interfaces

A wide range of interfaces are available to allow third party equipment to monitor and control our units. Some interfaces are also available to monitor and control third party equipment from our centralised controllers.

Key Features & Benefits

KTR-53A



- Remote on/off
- Run and fault volt free outputs

MELCORETAIL MINI



- On/off, fire alarm and lock input
- Setpoint and fan speed input
- Run, fault, heat and cool output
- 2 energy saving features

PAC-YG60MCA



- Monitor up to 4 energy meters

PAC-YG63MCA



- Monitor up to 2 temperature sensors

PAC-YG66DCA



- Monitor and control up to 2 pieces of general equipment

MAC-497IF-E



- Adaptor to connect remote controller to M Series
- Adaptor to connect M Series to M-NET

MAC-334IF-E



- Adaptor to connect remote controller to M Series
- Adaptor to connect M Series to M-NET
- 3rd party heating interlock






MAC-587IF-E



- Wi-Fi Interface for MELCloud solution
- ATA, Lossnay and ATW support
- WPS and Wi-Fi pin pairing
- WPS Push mode
- Setting via PAR-41MAA / PAR-SL101A-E

Advanced Interfaces

Technical Specification

| ADVANCED INTERFACES | KTR-53A | MELCORETAIL MINI | PAC-YG60MCA | PAC-YG63MCA | PAC-YG66DCA |
|-------------------------------------|--|---|---|---|---|
| |  |  |  |  |  |
| Description | On/Off and Run/Fault Adaptor | Retail Control and Input / Output Interface | Pulse Meter Interface | Temperature and Humidity Interface | Third Party Control and Interface |
| Connect to | Indoor | Indoor | M-NET Network | M-NET Network | M-NET Network |
| Max Number of Units | 1 | 1 | 4 Pulse Meters | 1 PT100, 1 Humidity Sensor | 2 General Equipment |
| Compatibility | Mr Slim and City Multi | M Series and Mr Slim | AE-C400E and EW-C50E | AE-C400E and EW-C50E | AE-C400E and EW-C50E |
| Power Supply | 12/24VAC/DC | - | 24VDC | 24VDC | 24VDC |
| Dimensions (mm) (WxDxH) | 130 x 30 x 80 | 173 x 19 x 51 | 200 x 45 x 120 | 200 x 45 x 120 | 200 x 45 x 120 |
| Control | | | | | |
| On/Off | ✓ | VFC | - | - | ✓ |
| Mode | - | 0 to 10VDC | - | - | x |
| Setpoint | - | 0 to 10VDC | - | - | x |
| Fan Speed | - | 0 to 10VDC | - | - | x |
| Air Direction | - | - | - | - | x |
| Permit/Prohibit | - | VFC | - | - | x |
| Filter Sign | - | - | - | - | x |
| Monitor | | | | | |
| On/Off | ✓ | VFC | - | - | ✓ |
| Mode | - | VFC | - | - | x |
| Setpoint | - | - | - | - | x |
| Fan Speed | - | - | - | - | x |
| Air Direction | - | - | - | - | x |
| Permit/Prohibit | - | - | - | - | x |
| Filter Sign | - | - | - | - | x |
| Fault Codes | ✓ | VFC | - | - | ✓ |
| Room Temperature | - | - | - | - | x |
| On/Off but Centrally Controlled | Option Lock/Unlock | VFC | x | - | - |
| On/Off but NOT Centrally Controlled | 12/24VAC/DC | VFC | x | - | - |
| Run Output | x | VFC | x | - | - |
| Fault Output | x | VFC | x | - | - |
| Energy Saving | x | VFC | x | - | - |
| Heat / Cool / Thermo Output | x | VFC | x | - | - |
| Pulse Weight | x | x | 0.1, 1.0 and 10 | - | - |

Notes: VFC: Volt free contact. ✓ = Yes, x = No, - = Not applicable.

Advanced Interfaces

Technical Specification

| ADVANCED INTERFACES | MAC-497IF-E | MAC-334IF-E | MAC-587IF-E |
|---------------------|-------------|-------------|-------------|
|---------------------|-------------|-------------|-------------|




| Description | Interface for MA Remote Controller | Interface for M-NET, MA Remote Controller, On/Off Input, Run/Fault Output and 3rd Party Heating Interlock (M Series) | AIR CONDITIONING | ECODAN* |
|-------------------------------------|------------------------------------|--|---|--------------------------|
| | | | MELCloud Wi-Fi Interface | MELCloud Wi-Fi Interface |
| Connect to | Indoor | Indoor | Indoor | Indoor |
| Max Number of Units | 1 | 1 | 1 | 1 |
| Compatibility | M Series and Mr Slim (SUZ) | M Series and Mr Slim (SUZ) | M Series, Mr Slim, City Multi and Lossnay | Ecodan FTC7 / FTC6 |
| Power Supply | - | - | - | - |
| Dimensions (mm) (WxDxH) | 128 x 30 x 76 | 160 x 55 x 70 | 41.5 x 18.5 x 73.5 | 41.5 x 18.5 x 73.5 |
| Control | On/Off | x | ✓ | ✓ |
| | Mode | x | ✓ | ✓ |
| | Setpoint | x | ✓ | ✓ |
| | Fan Speed | x | ✓ | x |
| | Air Direction | x | ✓ | x |
| Monitor | On/Off | x | ✓ | ✓ |
| | Mode | x | ✓ | ✓ |
| | Setpoint | x | ✓ | ✓ |
| | Fan Speed | x | ✓ | ✓ |
| | Air Direction | x | ✓ | ✓ |
| | Filter Sign | x | ✓ | ✓ |
| | Fault Codes | x | ✓ | ✓ |
| | Room Temperature | x | ✓ | ✓ |
| On/Off but Centrally Controlled | x | x | - | - |
| On/Off but NOT Centrally Controlled | x | ✓ | - | - |
| Heat / Cool / Thermo Output | x | ✓ | - | - |
| Set-Up of Room Temperature | ✓ | ✓ | - | - |
| Detector Position | ✓ | ✓ | - | - |

Notes: VFC: Volt free contact. ✓ = Yes, x = No, - = Not applicable. *For further technical specification on the MAC-587IF-E for Ecodan please refer to the Residential Heating Section of the Product Catalogue.


System Diagram KTR-53A



System Diagram MELCORETAIL MINI

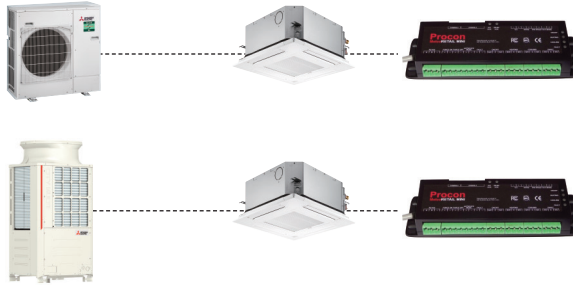

System Diagram PAC-YG60MCA



System Diagram PAC-YG63MCA



System Diagram PAC-YG66DCA




System Diagram MAC-497IF-E




System Diagram MAC-334IF-E



System Diagram MAC-334IF-E Heating Interlock

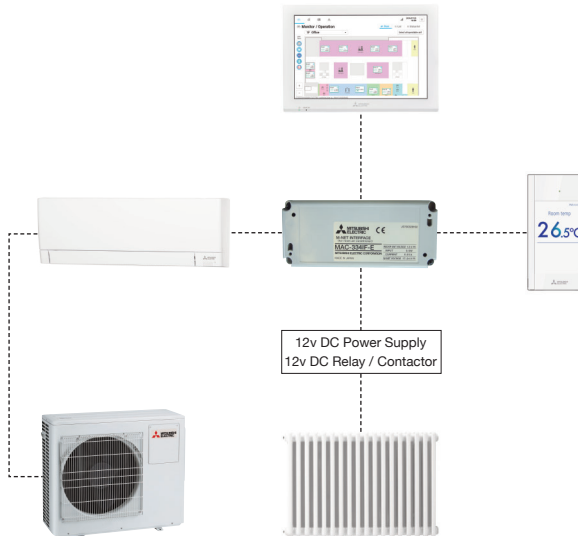


System Diagram MAC-587IF-E

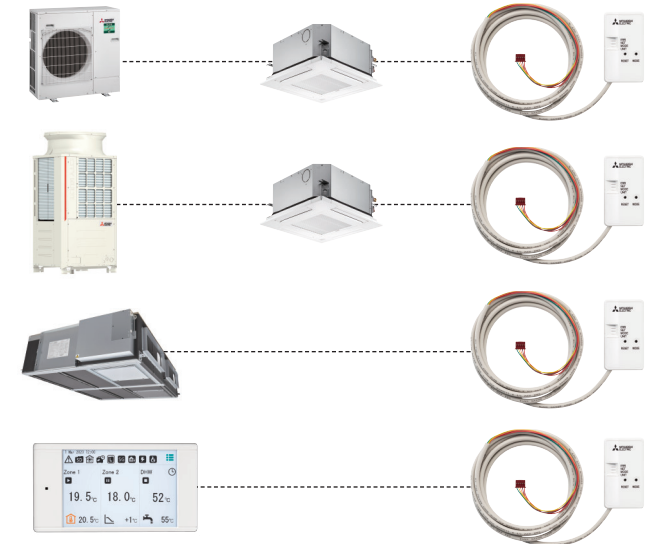


Product Dimensions

KTR-53A

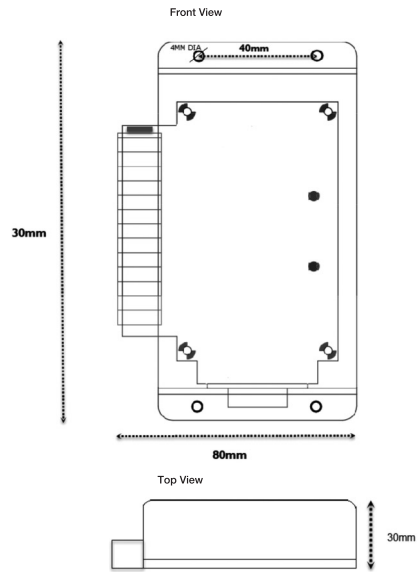


Product Dimensions

MELCORETAIL MINI

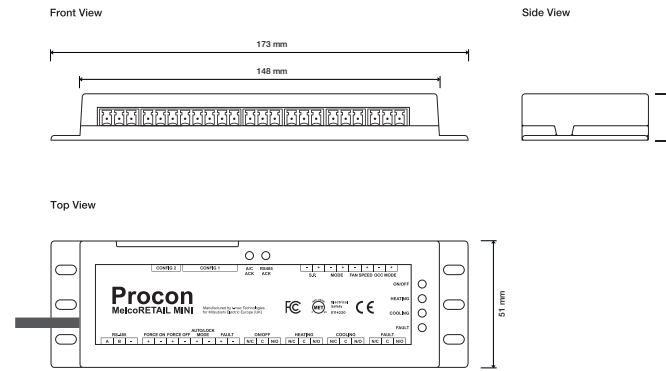


Product Dimensions

PAC-YG60MCA

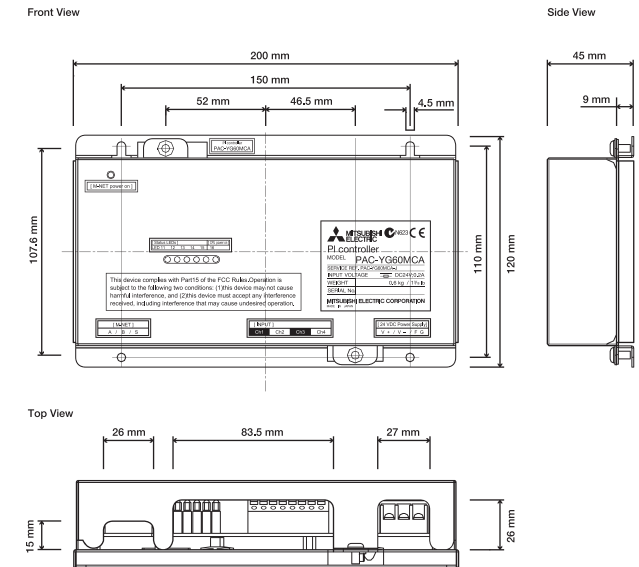


Product Dimensions

PAC-YG63MCA

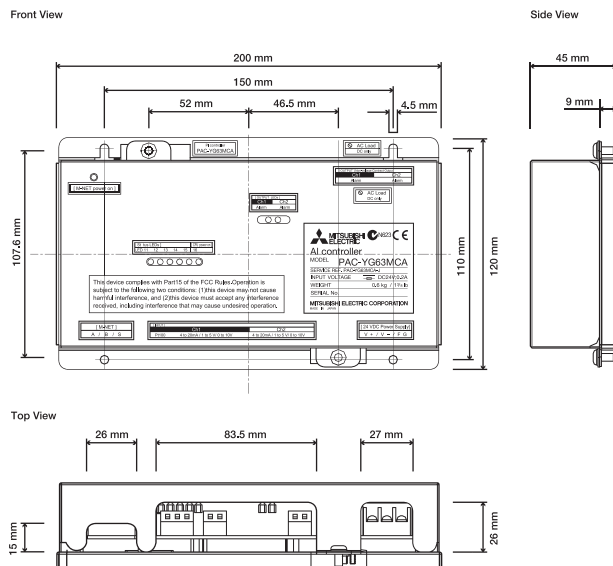


Product Dimensions

PAC-YG66DCA

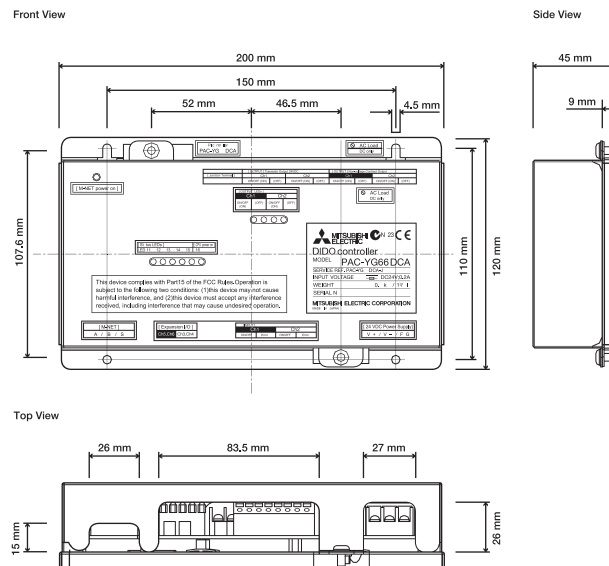


Product Dimensions

MAC-497IF-E

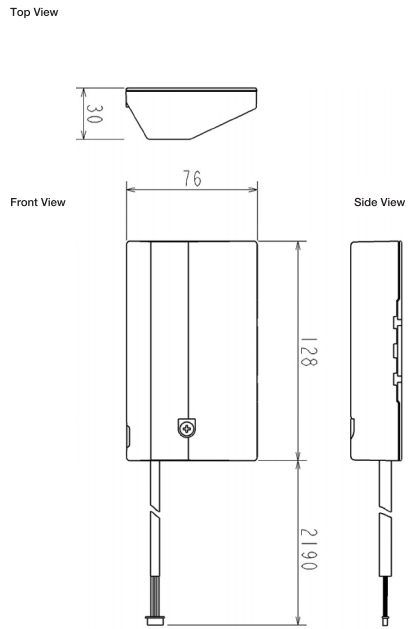


Product Dimensions

MAC-334IF-E

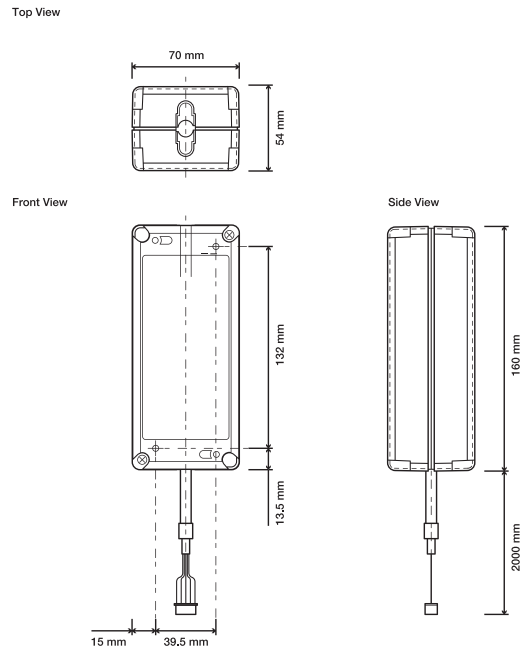

Product Dimensions

MAC-587IF-E

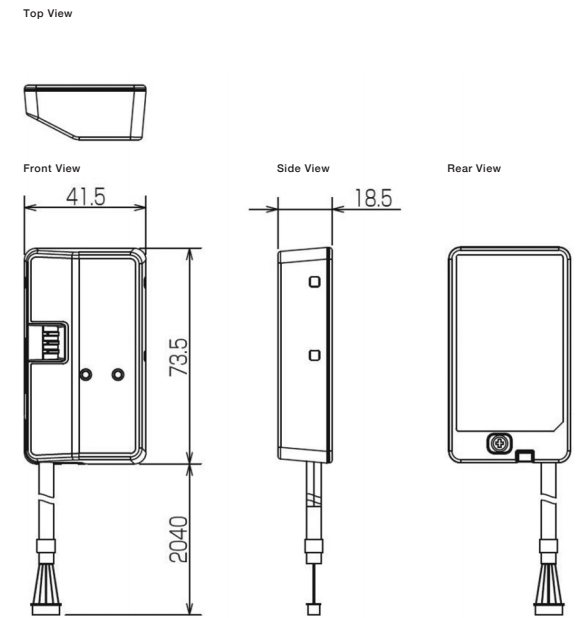

BEMS Interfaces

Building Energy Management Systems (BEMS) will allow a building to run efficiently. A wide range of interfaces are available to connect our systems simply to a BEMS.

Key Features & Benefits

MELCOBEMS MINI (A1M+)



- BACnet / Modbus IP
- Configuration via onboard webpage (local network)
- Firmware update over Ethernet (local network)
- Individually monitor and control indoor and outdoor unit (1 x A1M+ per unit)
- DIN rail mount option

MELCOBEMS MINI (KNX A1M+)



- KNX & BACnet / Modbus IP
- Configuration via onboard webpage (local network)
- Firmware update over Ethernet (local network)
- Individually monitor and control indoor and outdoor unit (1 x A1M+ per unit)
- DIN rail mount option

MELCOBEMS / MELCOBEMS2



- Monitor and control up to 50 indoor units
- Modbus and BACnet interface
- Energy monitoring

MELCOBEMS SIP+



- Control and Monitor up to 50 indoor units (up to 200 with EW-C50E)
- Multiprotocol, allowing data to be disseminated to one or many BMS, EMS & IoT systems
- Energy Monitoring

IQ4 XNC



- Monitor and control up to 50 indoor units
- Trend interface




MELCOJACE-8000



- Monitor and control up to 50 / 100 / 200 indoor units
- Tridium Niagara 4 compatible
- Built in HTML5 web page for plug & play
- On-board library Modbus & BACnet MSTP for Procon MELCOBEMS MINI (A1M+)
- No additional interface required, direct plug & play to centralised controllers
- On-board Wi-Fi application to allow commissioning by PC, tablet or smartphone
- BACnet
- Modbus

BEMS Interfaces

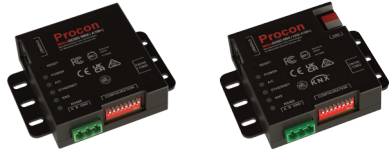Technical Specification

| BEMS INTERFACES | | MELCOBEMS MINI (A1M+) / (KNX A1M+) | | MELCOMBEMS / MELCOBEMS2 | | MELCOBEMS SIP+ | |
|-------------------------|---|---|--|---|---|---|--|
| | |  | |  | |  | |
| Description | Air to Air Splits Modbus/BACnet/KNX Interface. Air (Water) to Water & Lossnay Modbus/BACnet/KNX Interface | | AE-C400E, EW-C50E Modbus BACnet Interface | | Multiprotocol Gateway | | |
| Connect to | Indoor, Outdoor or Ecodan PCB | | AE-C400E and EW-C50E ² | | AE-C400E and EW-C50E ² | | |
| Max Number of Units | 1 | | 50 | | 200 | | |
| Compatibility | M Series, Mr Slim, City Multi, Ecodan FTC7/6/5/4, e-Series, Ecodan QAHV/CAHV/CRHV and Lossnay (LGH models) | | M Series, Mr Slim and City Multi | | M Series, Mr Slim, City Multi, e-Series, Lossnay and Ecodan | | |
| Power Supply | - | | 24VDC | | 24VDC | | |
| Dimensions (mm) (WxDxH) | 95 x 22.7 x 78.6 | | 102 x 32 x 180 | | 108 x 60 x 90 | | |
| Network | Modbus / BACnet IP / RS485 ¹ / KNX | | Modbus / BACnet RS485 and TCP/IP | | Bacnet IP / Modbus Sub TCP/IP and Serial / MQTT and REST (IoT protocols) | | |
| BEMS Compatibility | Cylon, Satchwell, Crestron, Invensys, Interactive Homes, North BT, Andover, Siemens, WEMS, RDM | | Cylon, Satchwell, Crestron, Invensys, Interactive Homes, North BT, Andover, Siemens, WEMS, Andover Controls, York BMS, Siemens, Priva Building Intelligence, Delta Controls, RDM | | Trend, Cylon, Satchwell, Crestron, Invensys, Interactive Homes, North BT, Andover, Siemens, WEMS, Andover Controls, York BMS, Siemens, Priva Building Intelligence, Delta Controls, RDM | | |
| Control | | Air to Air Splits and Lossnay | Air (Water) to Water | | | | |
| | On/Off | DI | AI | DI | DI | DI | |
| | Mode | AI | AI | AI | AI | AI | |
| | Setpoint | AI | AI | AI | AI | AI | |
| | Fan Speed | AI | - | AI | AI | AI | |
| | Air Direction | AI | - | AI | AI | AI | |
| | Permit/Prohibit | x | AI | DI | DI | DI | |
| | Filter Sign | DI | - | DI | DI | DI | |
| Monitor | On/Off | DO | DO | DO | DO | DO | |
| | Mode | AO | AO | AO | AO | AO | |
| | Setpoint | AO | AO | AO | AO | AO | |
| | Fan Speed | AO | - | AO | AO | AO | |
| | Air Direction | AO | - | AO | AO | AO | |
| | Permit/Prohibit | x | AO | DO | DO | DO | |
| | Filter Sign | DO | - | DO | DO | DO | |
| | Fault Codes | AO | AO | AO | AO | AO | |
| | Room Temperature | AO | AO | AO | AO | AO | |
| | Daily kW Energy | - | AO | With EW-C50E | With EW-C50E | With EW-C50E | |
| | Monthly kW Energy | - | AO | With EW-C50E | With EW-C50E | With EW-C50E | |



Key: DI = Digital Input. DO = Digital Output. AI = Analogue Input. AO = Analogue Output.

Notes: *1 Function only available on M Series, Mr Slim and City Multi. *2 ETA end 2025.

The MELCOBEMS can monitor indoor daily and monthly kWh when used in conjunction with AE-C400E, EW-C50E, PAC-YG60MCA on third party energy meters.

BEMS Interfaces

Technical Specification

| BEMS INTERFACES | IQ4 XNC | MELCOJACE-8000 | |
|-------------------------|--|---|---|
| |  |  | |
| Description | AE-C400E and EW-C50E Trend Interface ¹ | AE-C400E and EW-C50E Tridium Niagara Interface ² | |
| Connect to | AE-C400E and EW-C50E ⁴ | AE-C400E and EW-C50E ⁴ | |
| Max Number of Units | 50 | 50 / 100 / 200 | |
| Compatibility | M Series, Mr Slim, City Multi and Lossnay | M Series, Mr Slim, City Multi and Lossnay | |
| Power Supply | 220-240v, 50Hz | 24v, AC/DC | |
| Dimensions (mm) (WxDxH) | 263 x 46 x 150 | 171 x 61 x 110 | |
| Network | Trend | Niagara | |
| BEMS Compatibility | Trend | Any Niagara compatible BEMS | |
| Control | On/Off Mode Setpoint Fan Speed Air Direction Permit/Prohibit Schedule Filter Sign | DI AI AI AI AI DI - DI | ✓ ✓ ✓ ✓ ✓ ✓ - ✓ |
| Monitor | On/Off Mode Setpoint Fan Speed Air Direction Permit/Prohibit Cloud Communication Filter Sign Fault Codes Room Temperature Daily kWh Energy Monthly kWh Energy Comfort Data | DO AO AO AO AO DO - DO AO AO - - - - | ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ³ ✓ ³ - |

Key: DI = Digital Input. DO = Digital Output. AI = Analogue Input. AO = Analogue Output.

Notes: The PAC-YG***CA are not compatible with MELCOBEMS and IQ4 XNC.


¹ Synapsys Solutions Ltd, 1 Woodlands Court, Albert Drive, Burgess Hill, West Sussex, RH15 9TN, Telephone 0845 680 0303

² The MELCOJACE-8000 range is only available from Forest Rock Systems Ltd, Charmwood Building, Holywell Park, Ashby Road, Loughborough, LE11 3AQ. Telephone: 0845 5197958


³ The MELCOJACE-8000 can monitor indoor daily and monthly kWh when used in conjunction with AE-C400E, EW-C50E, PAC-YG60MCA on third party energy meters.

⁴ ETA end 2024.

System Diagram MELCOBEMS MINI (A1M+)

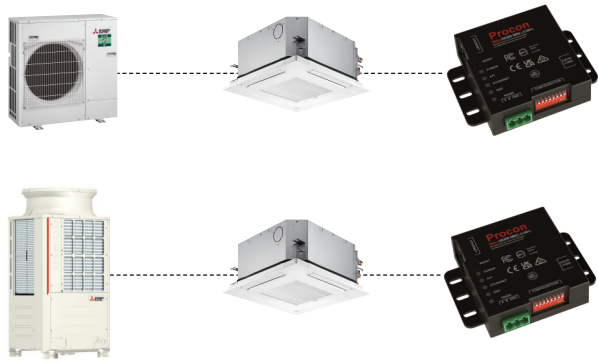

System Diagram MELCOBEMS MINI (KNX A1M+)

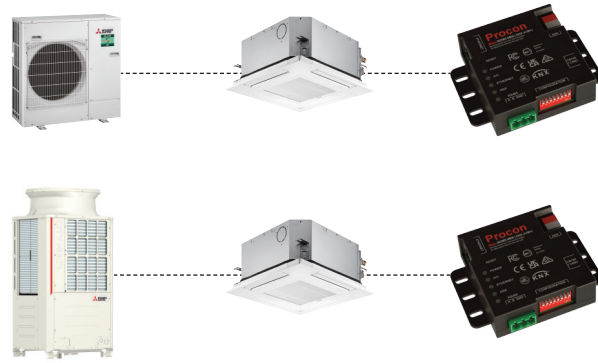


System Diagram MELCOBEMS / MELCOBEMS2




System Diagram MELCOBEMS SIP+



System Diagram IQ4 XNC

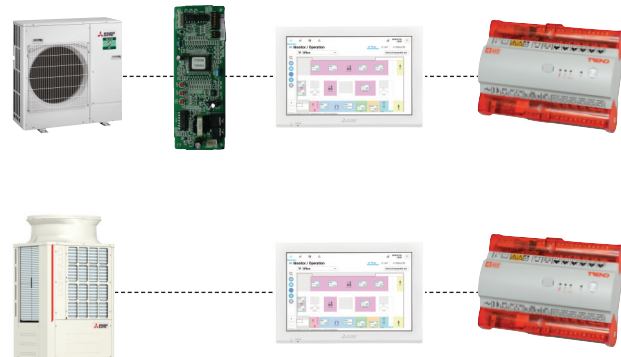


System Diagram MELCOJACE-8000

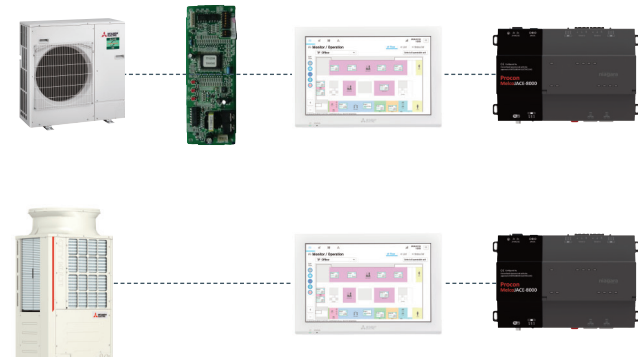


Product Dimensions

MELCOBEMS MINI (A1M+)

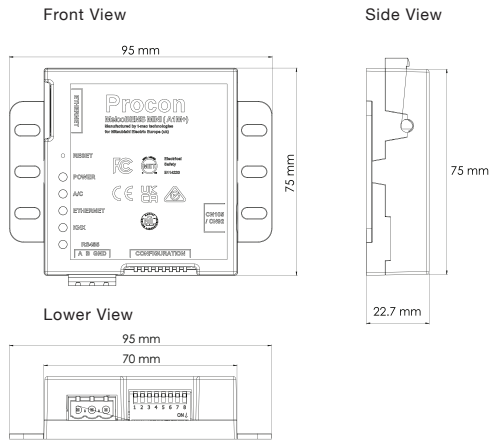


Product Dimensions

MELCOBEMS MINI (KNX A1M+)

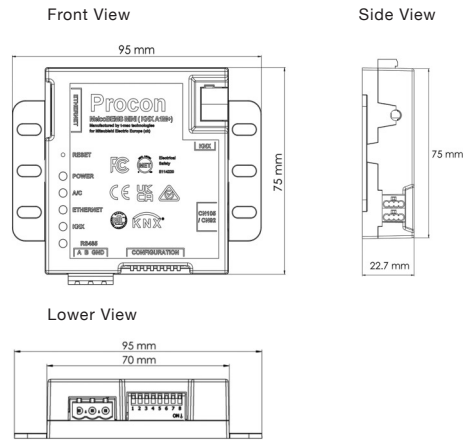


Product Dimensions

MELCOBEMS

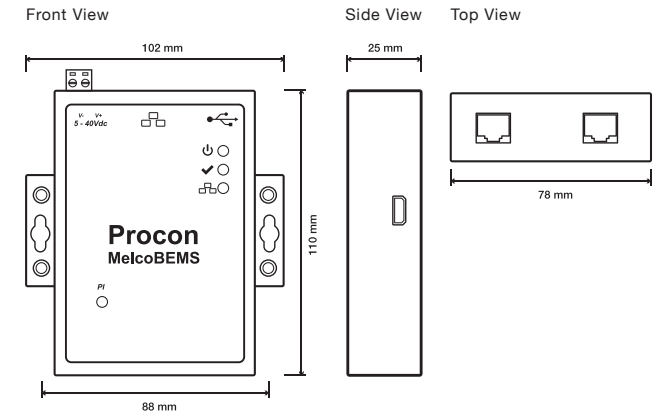


Product Dimensions

MELCOBEMS2

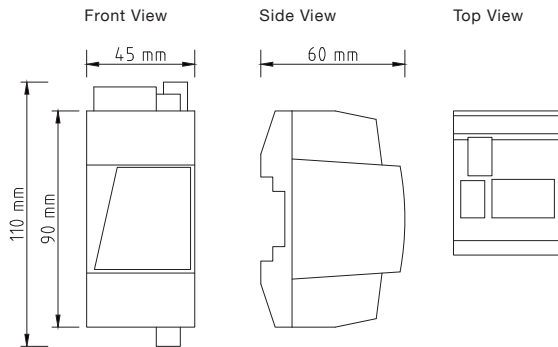


Product Dimensions

IQ4 XNC

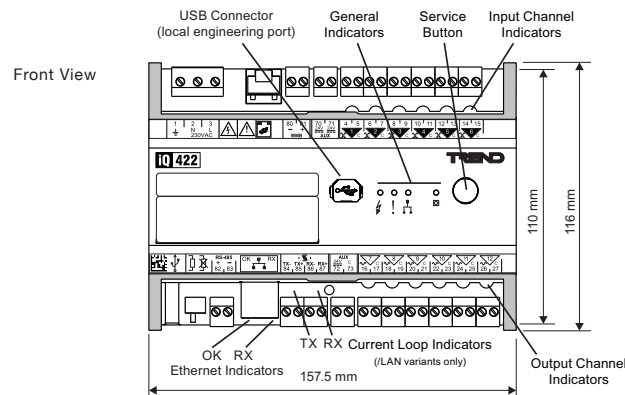




Product Dimensions

MELCOJACE-8000

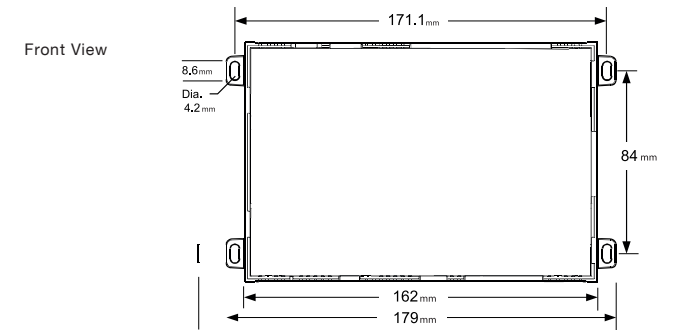

Product Dimensions


MELCOBEMS SIP+

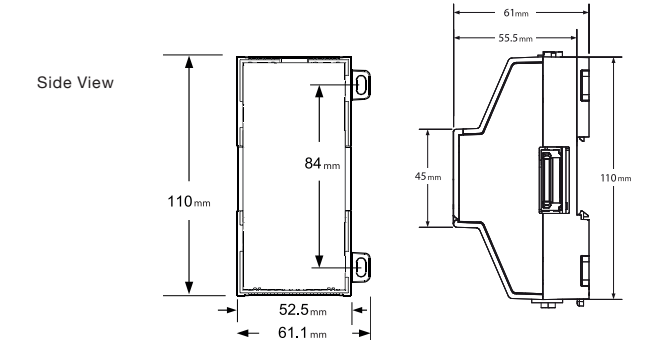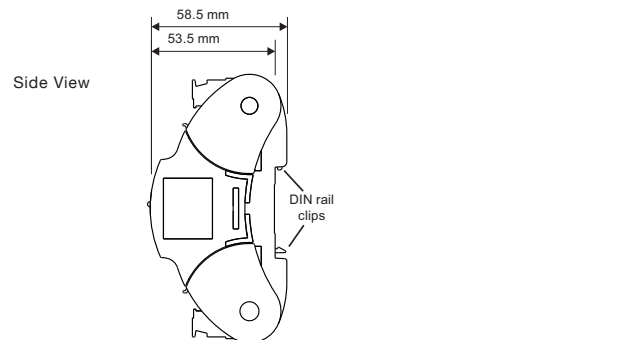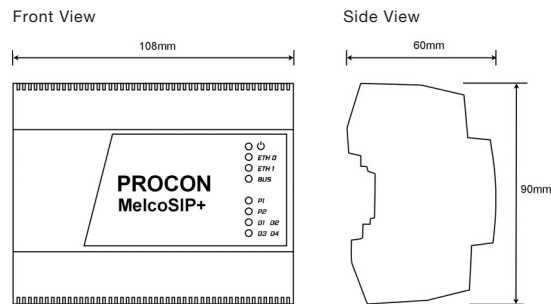


MELCloud Commercial

Monitor & Control App Screen Examples


Estate View

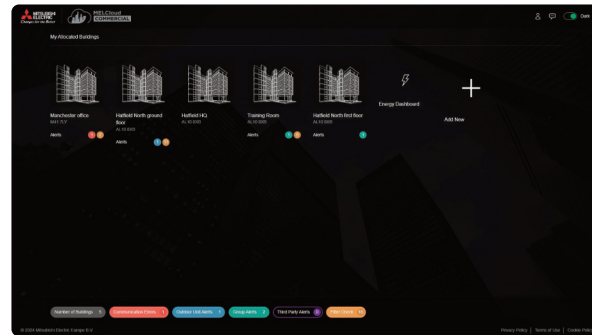


Building Level Monitoring & Energy Consumption

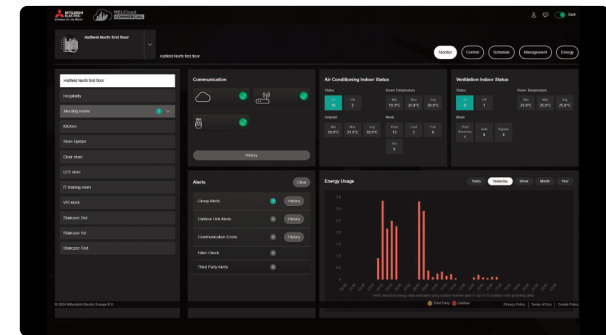


Room (Group) Level Monitoring

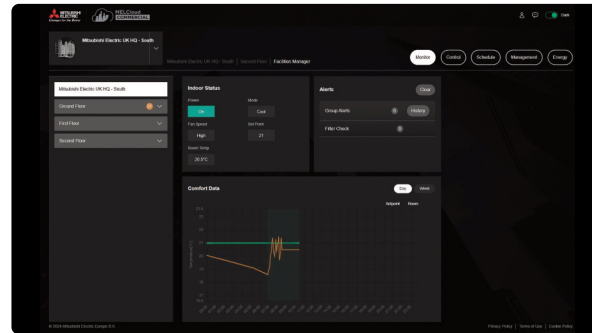


Building Level Control

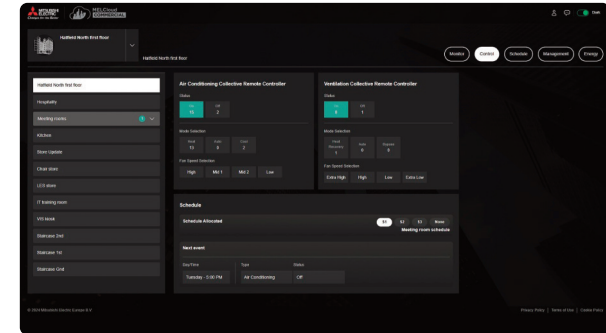

Room (Group) Level Monitoring

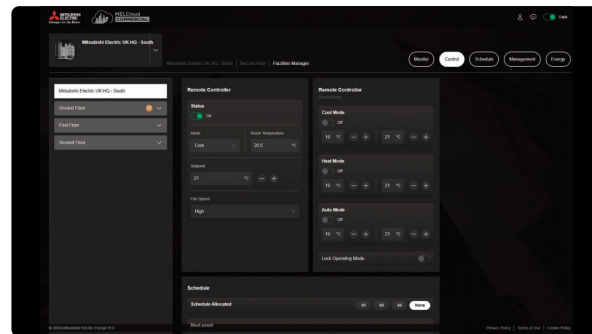


Building Level Scheduling

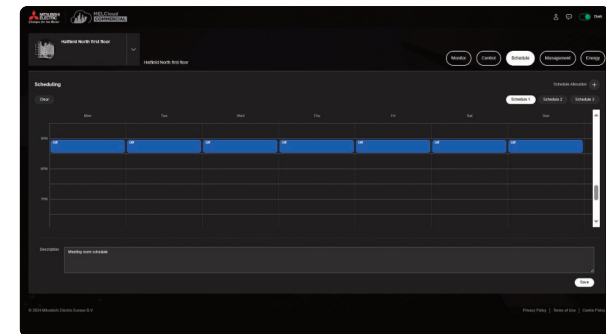


MELCloud Commercial

Advanced Energy Monitoring App Screen Examples


Estate Level Energy Monitoring

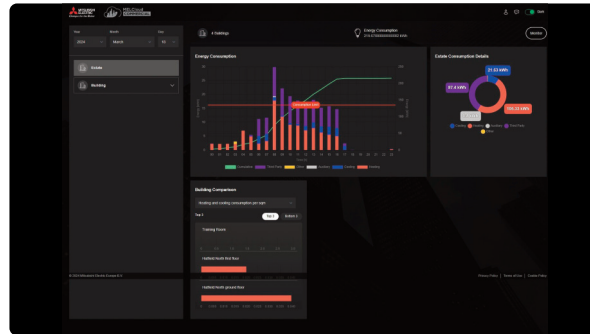


Building Level Energy Monitoring

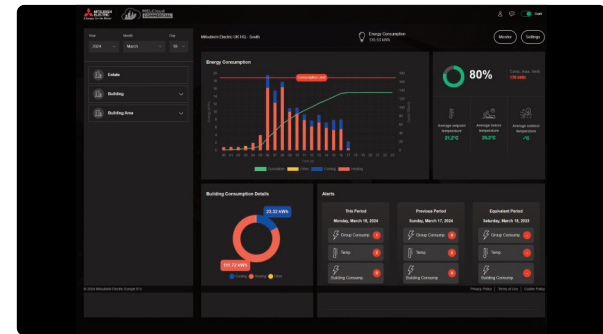

Room (Group) Level Energy Monitoring

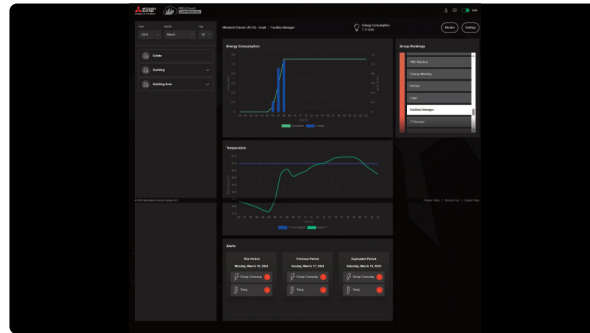


Room (Group) Level Temperature and Energy Limit Setting

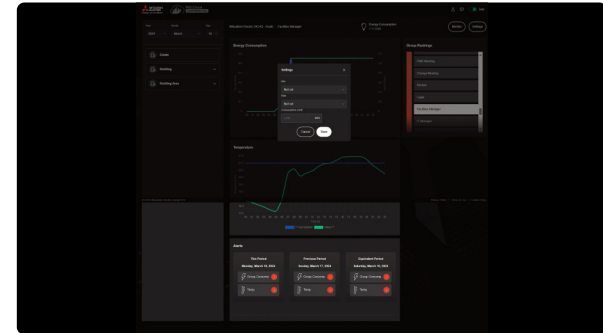

MELCloud Commercial

Service & Maintenance App Screen Examples

Service & Maintenance - System Diagram

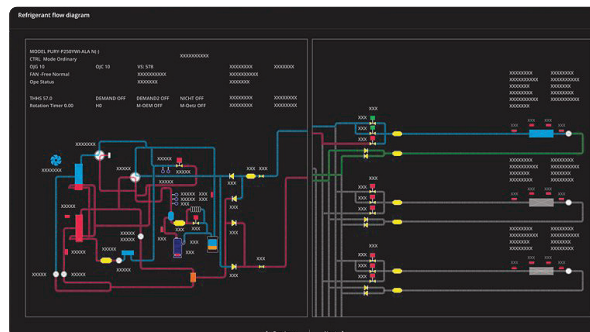

How to Quote


How to quote an AE-C400E System Controller with Energy Monitoring

Energy Management

The AE-C400E and EW-C50E centralised controllers come with the Energy Management PIN as standard.


- 4x Modbus Energy Meters can be connected directly to the centralised controller
- 4x Pulse Energy Meters can be connected to the centralised controller via PAC-YG60MCA PI Controller

Modbus or Pulse Meter Connection

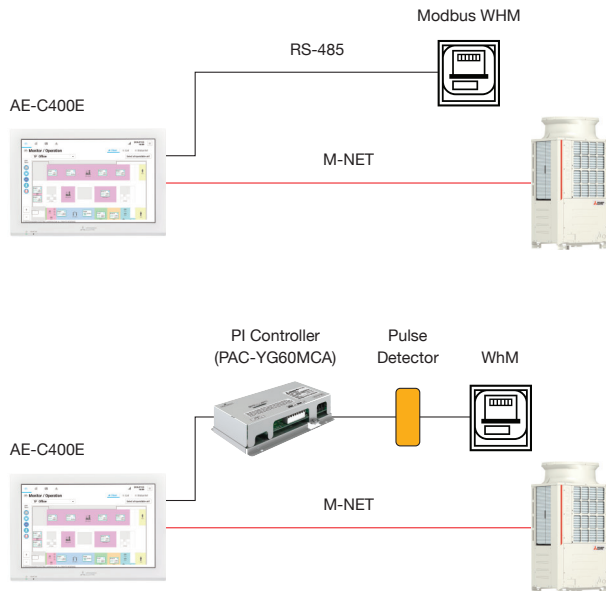


How to Quote Energy Apportioning

Note: Must use Pulse Energy Meters for Energy Apportioning

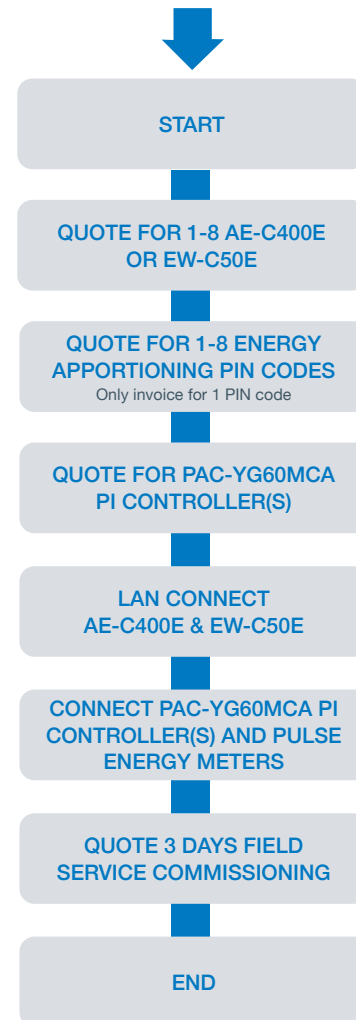

Example of Energy Apportioning System


Recommend 1 x Pulse Energy Meter per outdoor unit to improve granularity of data.

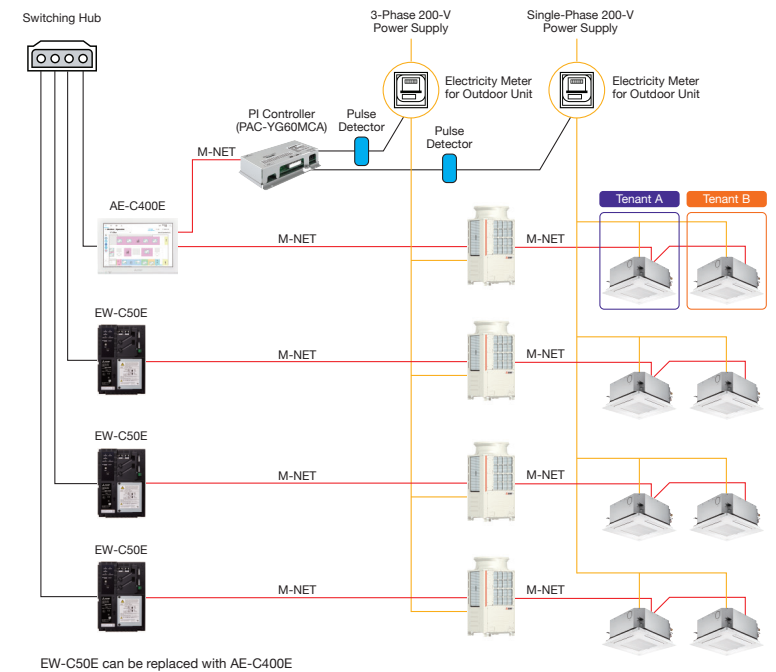


How to Quote

How to quote an AE-C400E System Controller & BACnet Option


How to quote up to 400 indoor units

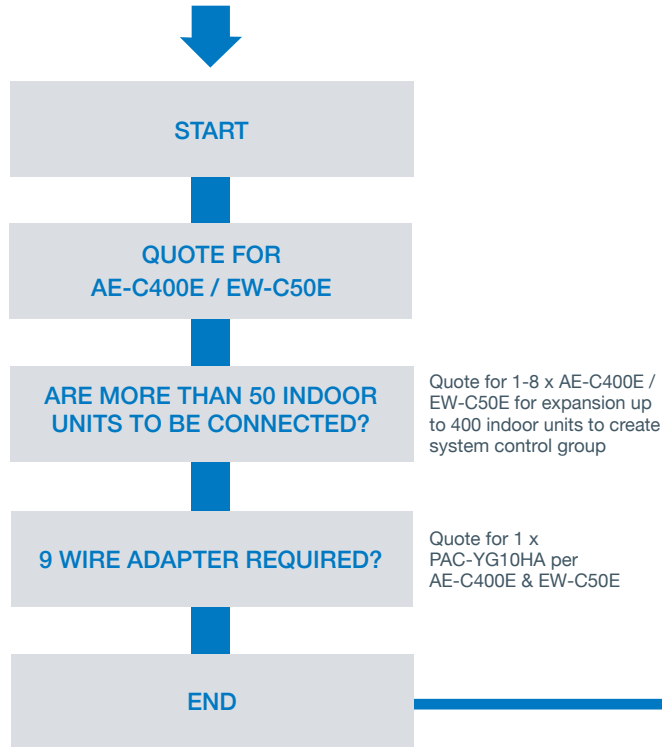

How to quote up to 2,000 indoor units

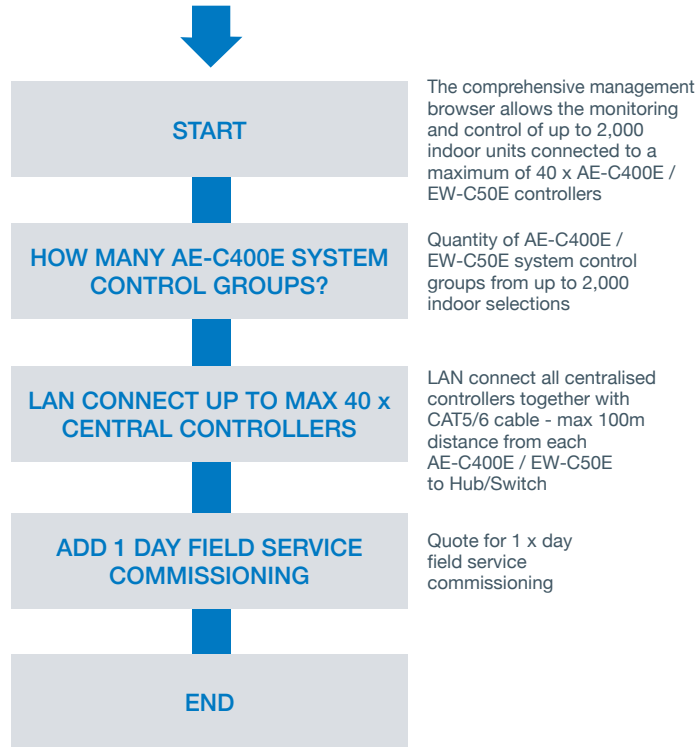

How to quote BACnet Option

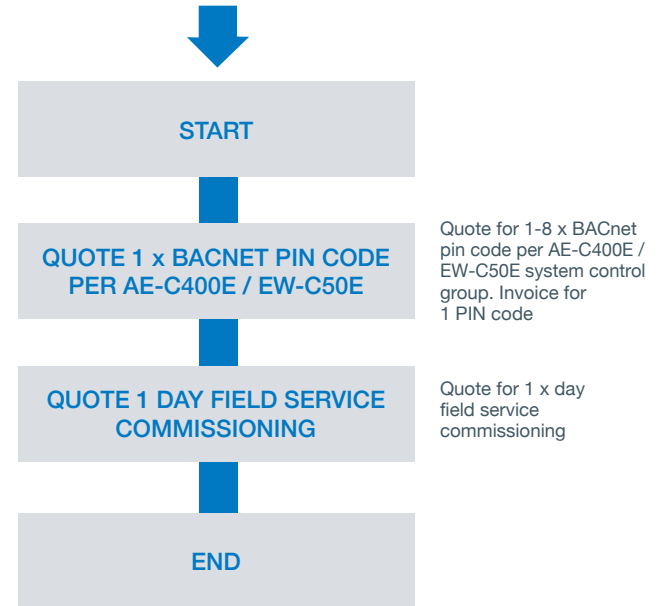

Services

Support at every step of the way





Support at every step of the way

At Mitsubishi Electric, we have not only developed an innovative range of cooling, heating, ventilation and control solutions, we have also examined how we support the market throughout the complete lifecycle of our products - from cradle to grave.

Whether in pre-sales design and specification, installation, or service and maintenance support, right through to our recycling programme, we can offer solutions that deliver the quality and excellence you would expect to make a world of difference.

Contents

| | |
|---|------|
| MELServe Technical Services | 6.4 |
| MELServe Chiller Service and Maintenance for Central Plant and IT Cooling | 6.9 |
| Mitsubishi Electric Product Training | 6.10 |
| Mitsubishi Electric Design and Consulting Services | 6.11 |
| Mitsubishi Electric Partner Programme | 6.12 |
| Mitsubishi Electric Deliveries | 6.14 |
| Mitsubishi Electric Website, Document Library and The Hub | 6.15 |
| Mitsubishi Electric CPD Information Guides | 6.15 |

MELServe Technical Services

Advanced, reliable technical support at every step of the way

Meeting today's energy challenges for our commercial premises demands more integrated thinking from everyone involved in the design, supply, installation, commissioning and maintenance of essential building services - whether it is for an individual property or a national estate.

Ever increasing energy bills, the need to reduce carbon emissions and a raft of challenging legislation are driving the demand for increased energy efficiency and control in the cooling, heating, ventilation and associated technologies that we use.

As a manufacturer, we realise that product development alone is not enough. To keep our products working at their optimum, we have developed the MELServe approach to ensure our customers are able to maximise the energy efficiency of their building's services right from the start.

MELServe offers a range of support that includes:

- Site Services
- 24/7/365 Technical Help Desk
- Spare Parts, Warranty & Returns
- CPD Accredited Technical Product Training


Whatever the challenge, we're here to help you meet it.

MELServe Customer Services & Support

Telephone: 0161 866 6089

Option 2 followed by:

- Option 1** - Technical Support
- Option 2** - Spares
- Option 3** - Warranty
- Option 4** - Site Visits
- Option 5** - Product Training

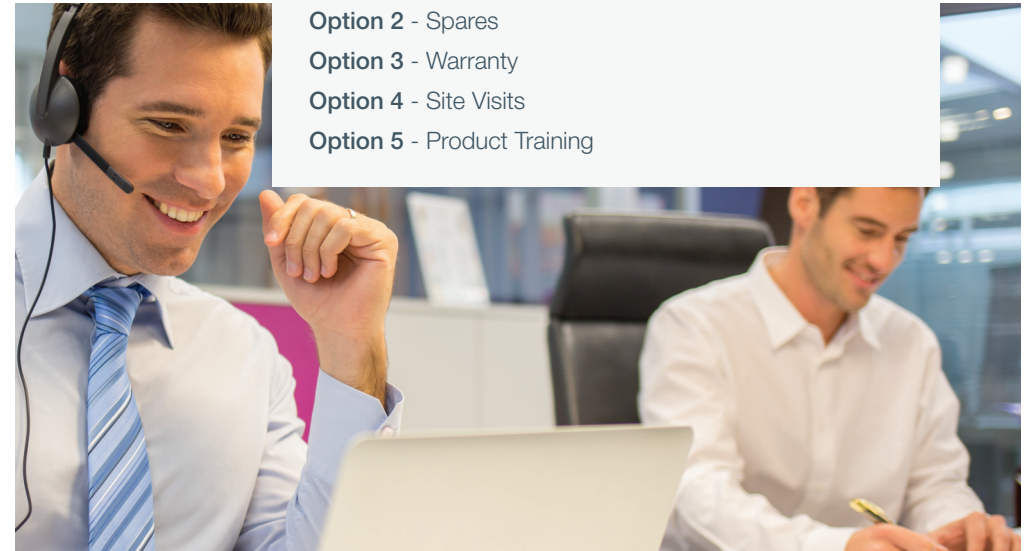

Commissioning

Our assisted commissioning service is aimed at both new and existing customers; the objective is to demonstrate how to commission our systems effectively, so that customers can carry out these tasks unassisted in the future.

Our commissioning service is available across our full product range including: **Air Conditioning, Controls, Hybrid VRF, e-Series Chillers and Commercial Heating products.**

During the commissioning process, our engineers will carry out the following tasks:

- Comprehensive inspection of the installed system to ensure the system meets Mitsubishi Electric specification
- Check the system addressing and advise on any incorrect settings
- For systems other than controls we will operate in both cooling and heating modes where applicable and record temperatures, pressures and water flow rates for the system
- Supervise the completion of commissioning logbooks



| Type of Commissioning | Detail | Control System | Commissioning Days | Charge Pin Codes | BACnet Pin Code |
|---------------------------|---|-----------------------------------|--------------------|------------------|-----------------|
| Air Conditioning | Max 2 City Multi systems per day | 1 x AE-C400E + 1-4 EW-C50E | 1 day | 1 - 5 | 1 - 5 |
| Controls | 1 x AE-C400E and up to 4 x EW-C50E per day | 2 x AE-C400E + 1-4 EW-C50E | 2 days | 1 - 10 | 1 - 10 |
| Hybrid VRF | ½ day pre installation visit ½ day mid installation visit 2 day commissioning visit | 3 x AE-C400E + 1-4 EW-C50E | 3 days | 1 - 15 | 1 - 15 |
| e-Series | Max 2 chillers per day | 4 x AE-C400E + 1-4 EW-C50E | 4 days | 1 - 20 | 1 - 20 |
| Commercial Heating | Ecodan CAHV - Max 2 units per day* Ecodan QAHV - 2 day commissioning visit (includes 1/2 day mid-install visit)* | 5 x AE-C400E + 1-4 EW-C50E | 5 days | 1 - 25 | 1 - 25 |

Whilst our engineer will supervise the successful completion of all tasks and address any questions or skill gaps that present themselves, it is the responsibility of the installing contractor under supervision to carry out all of the listed tasks. Whilst our engineer will supervise the successful completion of the commissioning logbooks, it is the responsibility of the customer to complete and submit the commissioning logbooks to Mitsubishi Electric unless specified.

For BACnet and/or Energy commissioning, the above times are guidance only and may differ based on quantity of units/systems.

*Transit bolts must be removed before we arrive on site. If transit bolts are not removed additional time and cost may be incurred.

Services and Support

MELSERVE
By Mitsubishi Electric

Fault Finding

Our Fault Finding service is carried out on new and existing installations to identify problems and offer resolutions to ensure the system is returned to a fully operational condition in the shortest possible timeframe.

Our Fault Finding service is available across our entire product range. During the Fault Finding process, our engineers will carry out assessments of the following to determine a resolution:

- System design, application and specification
- Standard of installation
- Operational performance of equipment
- Current and historic fault codes

Product

Detail

Air Conditioning

One day per reported fault

Controls

One day per reported fault

Hybrid VRF

One day per reported fault

e-Series Chillers

One day per reported fault

Commercial Heating

One day per reported fault

Note: Whilst our engineers will carry out a thorough assessment of the system and provide recommendations to rectify any issues, they do not carry spare parts and cannot provide a same day resolution in the event of part failure. If equipment failure due to manufacturing is discovered, no cost will be raised and the visit will be carried out F.O.C. It is the responsibility of the customer to provide access to all of the affected equipment on site. Whilst our engineer will identify any installation and setup issues that are affecting performance, it is the responsibility of the contractor to rectify any problems.



Health Checks

Our Health Check service is carried out on existing installations to ensure that the system is operating within our design parameters. The service is available to both new and existing customers and the objective is to establish a fully operational system.

Our Health Check service is available for the following product ranges: Air Conditioning including Hybrid VRF, e-Series Chillers and Commercial Heating products. During the Health Check process, our engineers will carry out the following tasks:

- Comprehensive visual inspection of the installed system to ensure the system meets Mitsubishi Electric specification
- Check the system addressing and advise on any incorrect settings
- Full operation in both cooling and heating modes where applicable
- Record operating data including temperatures, pressures and water flow rates of outdoor units, BC Boxes and indoor units to determine the correct operation






| Product | Detail |
|--------------------|-------------------------|
| Air Conditioning | Up to 3 systems per day |
| Hybrid VRF | Up to 2 systems per day |
| e-Series Chillers | Up to 4 systems per day |
| Commercial Heating | Up to 3 systems per day |

Note: Whilst our engineer will ensure the successful completion of all tasks and address any questions or skill gaps that present themselves, it is the responsibility of the contractor to provide access to all equipment. Whilst our engineer will identify any installation and setup issues that are affecting performance, it is the responsibility of the contractor to rectify any problems.



City Multi Stripdown

For installations where the City Multi outdoor unit(s) cannot be moved to the final location, Mitsubishi Electric offer a City Multi strip down service. Other products are available on request, please contact us for further information should you have a specific strip down requirement.

| Product Range | Model Reference |
|---|--|
|  | <p>PURY-EM/EP YNW-A1/2</p> <p>PURY-M/P YNW-A1/2 Small Module</p> <p>PUHY-M/P YNW-A1/2</p> |
|  | <p>PURY-EM/EP YNW-A1/2</p> <p>PURY-M/P YNW-A1/2 Large Module</p> <p>PUHY-P YNW-A2</p> |
|  | <p>PURY-EM/EP YNW-A1/2</p> <p>PURY-M/P YNW-A1/2 Extra Large Module</p> <p>PUHY-P YNW-A2</p> |

Chiller Service and Maintenance for Central Plant and IT Cooling

We are now able to bring Mitsubishi Electric quality to your service and maintenance contract, using the very latest technology for in-field reporting and diagnostics. Our highly trained and qualified chiller service and maintenance engineers are based nationwide, operating from our network of service offices. Our engineers are experienced in the servicing, maintenance and repair of chiller systems across the industry.

What we do:

- Comprehensive service and maintenance plans
- National coverage (four dedicated service centres)
- Fast response times
- Reactive-response and call-out service
- Spare parts
- F-Gas and REFCOM Elite accredited engineers
- 24/7 365 emergency call out service
- Service and maintenance for all manufacturers' applied products
- Commissioning / Start-up
- System checks
- Fault finding
- Extended warranties
- Strip-downs (model / application specific)



For further information and Service & Maintenance enquiries:

Telephone: 01707 278650

- Option 1 - Scotland
- Option 2 - London & South
- Option 3 - Manchester & North
- Option 4 - Midlands & Wales
- Option 5 - Applied Spares

Regional Office Emails:

- melservice.south@meuk.mee.com
- melservice.north@meuk.mee.com
- melservice.midlands@meuk.mee.com
- melservice.scotland@meuk.mee.com

Existing Customer Email: melservice.renewals@meuk.mee.com

New Customer Email: melservice@meuk.mee.com

Spare Parts Enquiries (CV/RC IT products) Email: melservice.appliedspares@meuk.mee.com

Services and Support



Product Training


Mitsubishi Electric provide specific, in-depth training at our state-of-the-art training centres across the UK, or via our award-winning online training, covering all aspects of installation, from design through to maintenance.

Providing product training for all levels of expertise, our courses are taught by experienced engineers, with a wealth of knowledge and are all CPD accredited. In addition to the CPD courses, we can also now offer LCL Level 3 Regulated Quality Framework (RQF) qualifications for heat pumps.



For bookings please telephone
0161 866 6089 (Option 2, Option 5)

| Product Range | Course | Reference |
|-------------------------|---|-----------|
| City Multi (VRF) | Design and Application | CMDA |
| City Multi (Hybrid VRF) | Hybrid VRF Design, Application, Installation and Commissioning | HVRF |
| City Multi | Installation and Commissioning | CMPT1 |
| City Multi | Service and Fault Finding | CMPT2 |
| City Multi | Monitor Tool | MT |
| M Series and Mr Slim | Installation, Service and Fault Finding | MPISF |
| M Series and Mr Slim | M&P Hands On | HO M&P |
| Ecodan | Design and Application Part 1 | ED&A |
| Ecodan | Installation and Commissioning Part 2 | EI&C |
| Ecodan | Service and Fault Finding Part 3 | ES&FF |
| Ecodan | Hands-on | EHO |
| Ecodan | Commercial Heating (CAHV) | CH |
| Lossnay | Design, Application, Installation and Commissioning | LOSSNAY |
| LCL Award L3 (RQF) | Low Temperature Heating and Hot Water Systems in Dwellings | LCL LTHWS |
| LCL Award L3 (RQF) | Installation and Maintenance of Air Source Heat Pump Systems (non-refrigerant circuits) | LCL ASHPS |

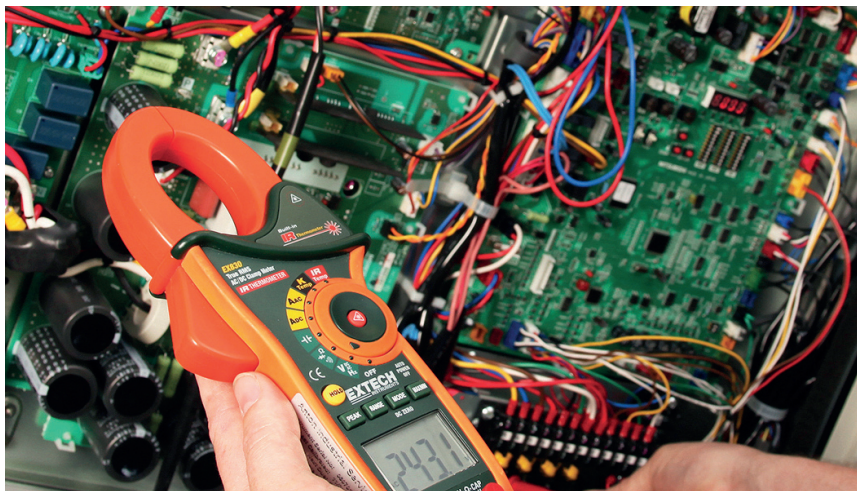

Design and Consulting Services

As part of the Mitsubishi Electric commitment to supporting robust application of our leading technologies, a team of consultant sales professionals work nationally with mechanical building services specifiers and consultants to achieve early engagement in project design.

Clients are able to apply cooling, heating, ventilation and controls confidently within their individual projects, with the emphasis on a solution-based philosophy to support 'as-designed' performance and efficiencies.

This approach helps projects realise 'as-specified' performance and efficiency levels - all designed to achieve the most efficient and cost-effective outcome for the building operator, whilst reducing the overall environmental impact.

As initial designs move from the drawing board through planning, procurement, installation and commissioning, to on-going operation and use, we work closely with our customers to balance capital expenditure, system efficiencies, installation costs, control strategies and running costs.



Working in the real world

At Mitsubishi Electric, we understand the real-world pressures of delivering commercial projects for your clients. Our dedicated team can support M&E contractors and help you tackle the challenges associated with a range of projects, including change of building layout (design evolution) without compromising the original design or performance criteria.

We also understand the link between effective design and achieving the best outcomes for building owners, operators, and users. The goal of our team is therefore to ensure robust design and implementation; every step of the way, from concept to commissioning.

Getting the right balance between capital cost, system efficiencies, installation costs and operating costs are key areas where we can support you. Each Business Development Manager has extensive product knowledge and application experience and is here to help with everything, including guidance on new and changing legislation.



Services and Support

PARTNER Programme

Mitsubishi Electric Partner Programme

The Mitsubishi Electric Partner Programme is inclusive and open to all qualifying air conditioning and heating installation companies, large or small.


Using the world-renowned Mitsubishi Electric brand, we will train, support and promote all qualifying companies as part of our aim to drive the industry forwards. Mitsubishi Electric recognises the importance of forging lasting relationships with professional companies who install our equipment. Our Partner Programme enables us to do just that.

Established in 2005 and designed to raise industry standards, our industry leading Partner Programme assures end users of a consistently high level of installation and after sales service that supports our systems. To be eligible to join our scheme in the first instance, prospective installation Partners must comply with the necessary building regulations and meet specific industry, programme and CSR standards.

All Partners are reviewed on a regular basis to ensure they continue to meet the required standards that makes them eligible to be part of the Mitsubishi Electric Partner Programme.

Register now at: les.mitsubishielectric.co.uk/installers/partner-programme

For any questions email: Partner@meuk.mee.com

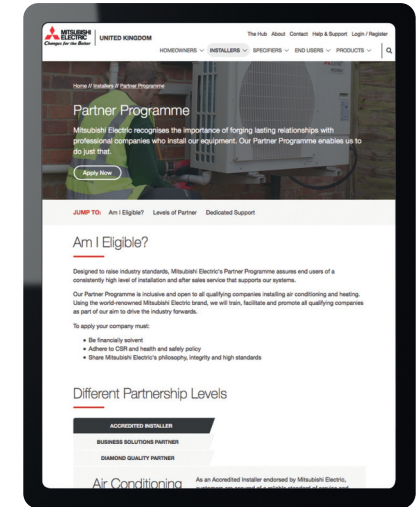

Partner Programme Benefits

■ Dedicated Partner Programme Team

Our dedicated Partner Programme Team are on hand to give Partners the support they need.

■ Mitsubishi Electric Customer Portal

We have developed our Customer Portal to help our Partners grow their business by enhancing their online presence on channels such as social media and via their own website. Product images, social media copy, easy to follow strategy guides and marketing training videos are just a few examples of free content that can be accessed.

Take a look today and see how you can use this to grow your business:

les.mitsubishielectric.co.uk/Security/login

■ Co-Marketing / Relationship Development Fund (RDF)

We will work with Partners to promote our relationship and generate awareness of the unique business benefits of the Partner Programme to end-users. We operate a Partner Programme Relationship Development Fund (RDF) allocated in relation to their commercial activities with Mitsubishi Electric.

■ Digital Marketing Packages

We're able to offer an exclusive and flexible digital marketing package for our Partners, using their RDF to increase their brand awareness.

■ Online Workwear and Promotional Goods Portal

Partners can take advantage of their RDF to enhance their company image with dual branded work wear and promotional items. We offer items such as: RAB and The North Face jackets, beanies, polo shirts, Stanley cups, pens, notepads and so much more.

■ Product and Industry Training

Our Partners receive a free allocation of training courses and additional courses can be funded from their Relationship Development Fund.



Grow Your Business
with Mitsubishi Electric

■ Extended Warranty

Partners can offer their customers up to 10 year warranty on selected products. Subject to T&Cs.

■ Committed Carbon Reduction Partner (CCRP)

Partners have access to a new accreditation reflecting a commitment towards sustainable practices. The CCRP accreditation will provide a competitive advantage for our Partners, showcasing a proven dedication to reducing the operational carbon footprint through an annually calculated reduction plan, helping them on the road to Net Zero.



■ Carbon Footprint Calculation

Partners are invited to use their RDF to conduct a Carbon Footprint Calculation of their business, a crucial step on the road to net zero. We've made this a simple process via our Partner portal, with the calculation work conducted using an approved supplier.

■ 24hr Technical Support

To assist our Partners in the maintenance of our equipment, we have a dedicated technical support team who will endeavour to speedily diagnose faults and offer solutions to the problems our Partners may encounter.

■ Find An Installer

Mitsubishi Electric works to promote our Partners through our 'Find an installer' web page, highlighting specific Partners to contact, depending on the type of project a consumer has.

■ Business Support Tools

We have made it easier to do business with Mitsubishi Electric through the introduction of new technologies and our business tools available to Partners.

■ Factory Visits & Events

Our Partners and their clients will have the opportunity to witness first-hand the manufacture of air conditioning and Ecodan units at our manufacturing facility in Scotland. We organise regular factory visits to our manufacturing facility in Scotland, along with other events designed to develop our Partners expertise and support them in growing their business.

Services and Support

Mitsubishi Electric Deliveries

At Mitsubishi Electric, we realise that our customers' businesses can depend on getting the right equipment on site at the right time.

That's why we have developed a comprehensive and flexible delivery programme with one of the longest delivery windows in the industry. With the ability to offer timed, weekend and Public Holiday deliveries, coupled with free 'Text Ahead' and 'Ring Ahead' functions, we aim to keep our customers informed every step of the way.

Delivery Notes

- Cut off for next day deliveries is 1.00pm on the working day prior to delivery, or 2.30pm for orders placed via e-shop
- Standard weekday delivery is between 8.00am and 5.30pm for pallet deliveries, and 7.00am and 7.00pm for parcel deliveries
- AM / PM / Timed / Weekend / Public Holiday deliveries are all available (additional notice needed and charges will apply - please refer to full delivery guidelines for further details)
- Standard delivery will normally be made on an 18T rigid lorry equipped with a tail lift and a single driver with a pump truck
- Other vehicle types will be utilised dependant on any site access issues and delivery size
- If there are access restrictions at your nominated delivery point and a vehicle other than an 18T lorry is required, this will need to be booked in advance and a charge may apply
- Our 'Text Ahead' and 'Ring Ahead' functions are available on most deliveries. For parcel providers, we offer 'Text Ahead' only
- Deliveries available via HIAB (Flatbed vehicle with crane) / with chapter 8 signage - require 48 hours' notice and extra charges may apply
- We offer a 2-man delivery service, removal of packaging and a stair walker - these require 48 hours' notice and extra charges will apply
- Mitsubishi Electric is an Associate Member of the Fleet Operator Recognition Scheme (FORS) and our dedicated fleet vehicles are FORS accredited to Bronze level
- Collection is also available from our Milton Keynes warehouse - this must be pre-arranged and require at least 3 hours' notice
- Returns to be notified within 30 working days - Terms and Conditions apply
- MEHITS product deliveries are subject to alternate delivery arrangements - Terms and Conditions apply
- Please ensure shortages or damages are marked on the delivery note and notified within 3 working days

Mitsubishi Electric Website, Document Library and The Hub

Website

For further information on any of our products and services please visit our website: les.mitsubishielectric.co.uk which has been designed to provide a detailed overview of the energy saving solutions we can provide you.

Document Library

Our website: library.mitsubishielectric.co.uk features all current operating and installation manuals, as well as product literature, case studies, CPD guides and more. There is no requirement for visitors to login to our sites to download the latest product and technical information. A document library app is also available allowing visitors to access this information simply from their tablet or smart phone.

The Hub - online content portal

The Hub is a new approach from Mitsubishi Electric which offers useful and informative comments and articles from both leading independent editors and technical experts on the issues affecting the built environment, please visit: thehub.mitsubishielectric.co.uk

e-Shop

Online ordering is available to all credit account customers across both Finished Goods (M Series and Mr Slim) and Spare Parts.

CPD Information Guides

Mitsubishi Electric is accredited by the Construction CPD Certification Service in many different areas, aimed at enhancing the knowledge of its customers and providing a view of the key issues facing our industry today. We have produced a number of Industry Information Guides that are available to download from our Document Library. We also run a number of CPD seminars and training courses across the UK. **To find out more, simply contact your local Mitsubishi Electric sales office.**



Sales Contacts



Corporate Sales
Tel: 0870 3000 070

Birmingham
Tel: 0121 329 1970

Bristol
Tel: 01454 202050

Wakefield
Tel: 01924 241120

London North & East Anglia
Tel: 01707 282480

London South
Tel: 01737 387170

Manchester
Tel: 0161 866 6060

Scotland
Tel: 01506 444960

Ireland
Tel: +353 (0)1 419 8800



Telephone: 01707 282880

MELServe Customer Services & Support: 0161 866 6089

Option 1 - Homeowners

Option 2 - Commercial Products

Option 3 - Residential Ecodan Installer
or Service Provider

Commercial Product Options (following Option 2)

Option 1 - Technical Support

Option 2 - Spares

Option 3 - Warranty

Option 4 - Site Visits

Option 5 - Training

Middlesex: 020 8783 1008

Scotland: 01786 450 348

email: livingenvironmentalsystems@meuk.mee.com

website: les.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division

Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England

General Enquiries Telephone: 01707 282880

IRELAND Mitsubishi Electric Europe Plunkett House, Grange Castle Business Park, Nangor Road, Dublin 22, Ireland

Telephone: Dublin (01) 419 8800 International code: (003531)

Country of origin: United Kingdom – Japan – Thailand – Malaysia. ©Mitsubishi Electric Europe 2025. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only and please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R515B (GWP:292), R454C (GWP:148), R1234ze (GWP:7) or R1234yf (GWP:4). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a hydrocarbon, R290 (GWP:0.02). *These GWP values are based on IPCC 6th edition.



Follow us @meuk_les
Follow us @green_gateway

Mitsubishi Electric
Cooling and Heating UK

Mitsubishi Electric
Living Environmental Systems UK

Mitsubishi Electric
Living Environmental Systems UK

mitsubishielectricuk_les

thehub.mitsubishielectric.co.uk