


LOSSNAY

HAND BOOK

FOR DEALERS

Model: LGH-15RX₃-E
 LGH-25RX₃-E
 LGH-35RX₃-E
 LGH-50RX₃-E
 LGH-80RX₃-E
 LGH-100RX₃-E
 LGH-100RX₃-E-60
 LGH-150RX₃-E
 LGH-200RX₃-E
 LGH-200RX₃-E-60

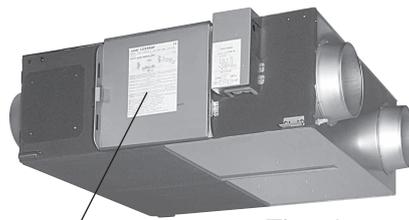

Nameplate

The picture shows LGH-100RX₃-E.


Repair work should be performed by the manufacturer, its service agent or similarly qualified person in order to avoid hazards.

5. Parts catalog

Please note the following when using the parts catalog.

1. When ordering parts, always indicate the part number, part name, and the number of parts required.
2. Parts are not always available, and it may take time for you to receive them.
3. There may be specification improvements or price changes.
4. Specifications and prices are correct as of July 2008.
5. Parts marked \triangle are critical for safety. To maintain safety and performance, always replace these parts with the parts prescribed.
6. The numbers that are circled in the exploded view are the same as the number for the part being indicated.


Description of screw abbreviations



Abbreviation	Description
PC screw	Cross recess flat head machine screw
PRC screw	Cross recess oval head machine screw
PP screw	Cross recess pan head machine screw
SW · PP screw	Cross recess pan head screw with spring washer
PPT screw	Cross recess tapping screw
PCT screw	Cross recess flat head tapping screw
PTT screw	Cross recess truss head tapping screw
PT screw	Cross recess truss head machine screw
SET screw	Slotted head stop screw
SQ · SET screw	Square head stop screw
P · SET screw	Pan head stop screw
PMT screw	Primer truss head screw
HS · SET screw	Hexagon head stop screw
P · R · W screw	Cross recess round wood screw
P · C · W screw	Cross recess flat head wood screw
P · R · C · W screw	Cross recess round and flat wood screw
R · W screw	Slotted round wood screw
PW · PP screw	Cross recess pan head screw with small washer
SW-PW · PP screw	Cross recess pan head machine screw with spring washer and flat washer


Model LGH-15RX3-E

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
1.	H00 312 007	PTT screw 4×6	22		Left-handed	
2.	R50 384 617	Flange	4			
3.	H00 000 487	PTT screw 4×8	18			
4.	R50 091 380	Hanger	4			
5.	H00 000 391	PT screw 5×8	8			
6.	R50 395 707	Maintenance cover	1			
7.	R50 395 381	Core guide	1			
8.	Y50 061 717	Filter	2	▲		
9.	R50 213 710	Lossnay core	1	▲		
10.	R50 476 381	Core guide	1			
11.	R50 354 704	Cover	2			
12.	R50 213 344	Hinge	1			
13.	M34 074 017	Special screw 4×11	1			
14.	Y50 029 712	Fix piece	1			
15.	Y50 061 704	Hanger cover	4			
16.	R50 361 717	Sound absorbing material	1	▲		

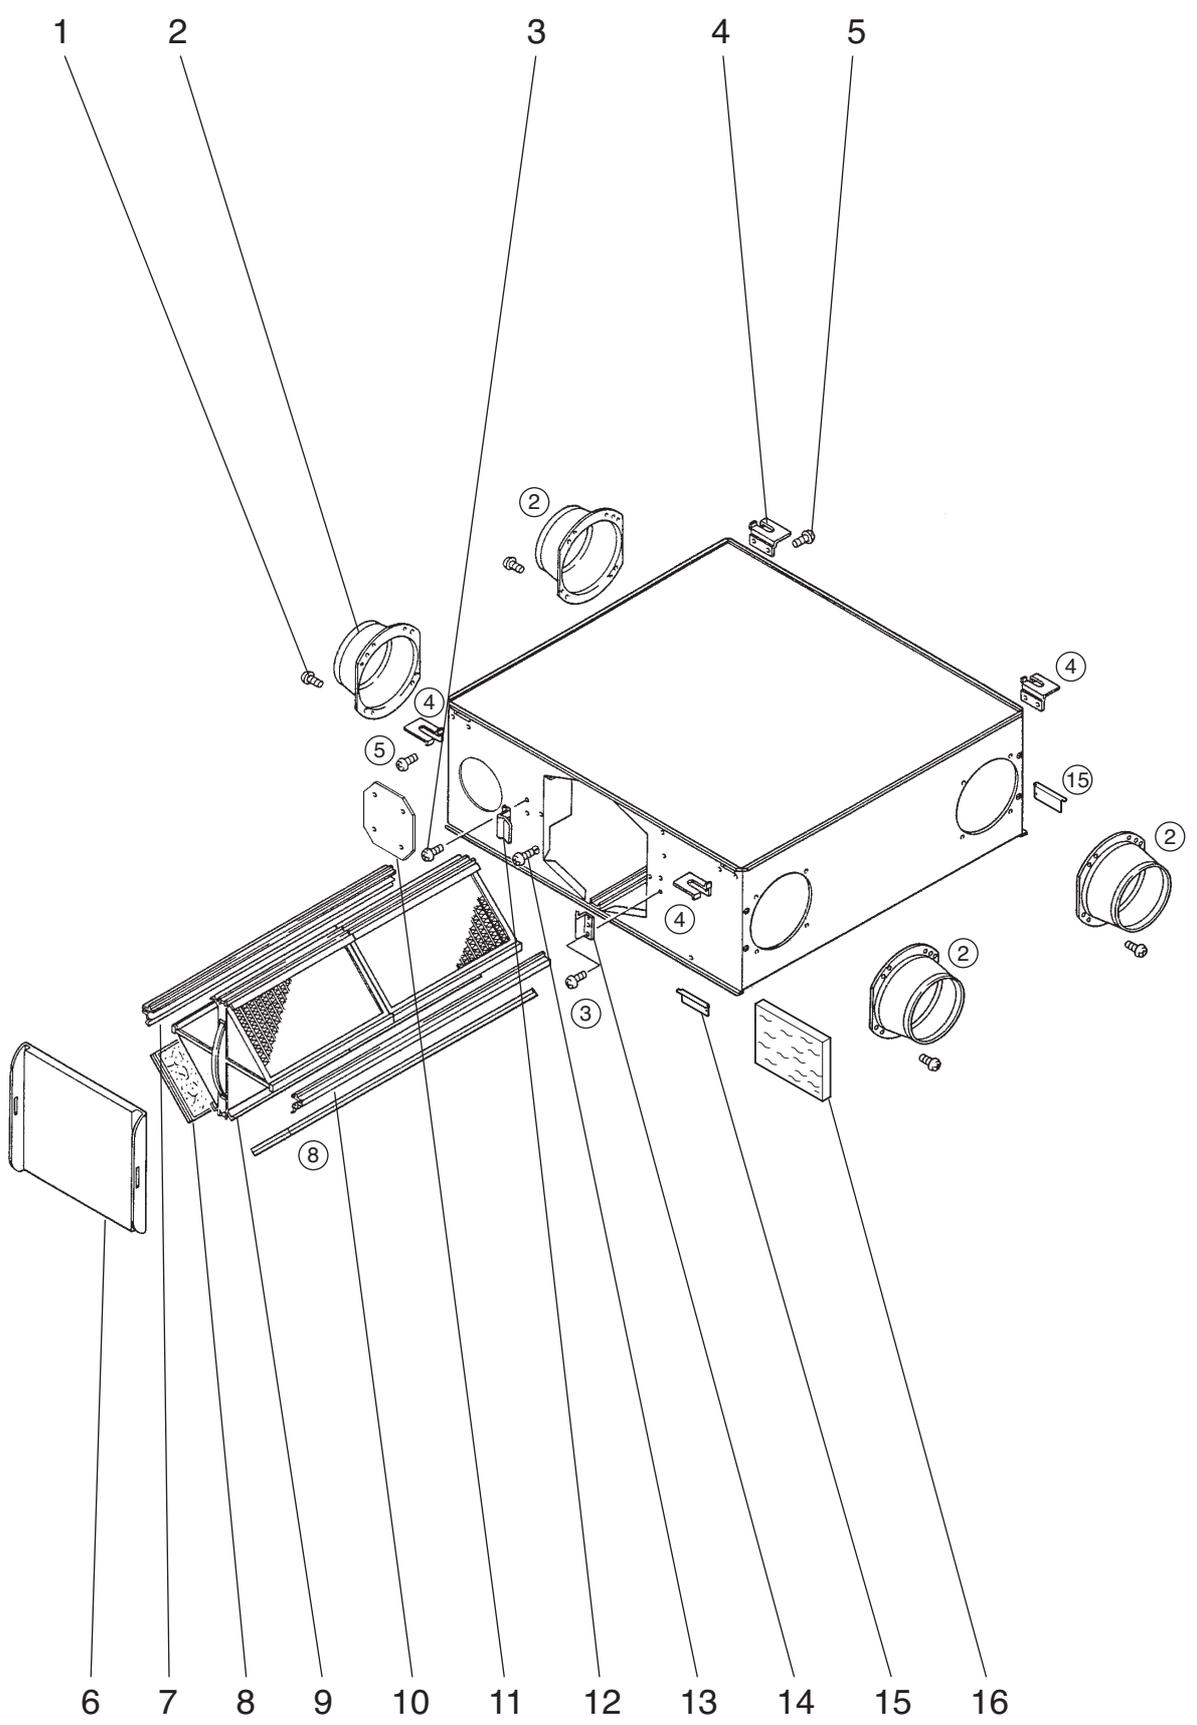


Model LGH-15RX3-E

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
21.	R50 331 067	Special nut(8)	2		Left-handed	
22.	M34 398 077	Tab washer	2			
23.	R50 354 480	Centrifugal fan	2	▲	φ 180	
24.	R50 028 465	Special washer	2		φ 8.1	
25.	Y50 061 453	Motor	1	▲		
26.	R50 214 708	Motor plate	4			
27.	H00 000 332	PTT screw 4×10	17			
28.	Y50 029 708	Motor fix plate	2			

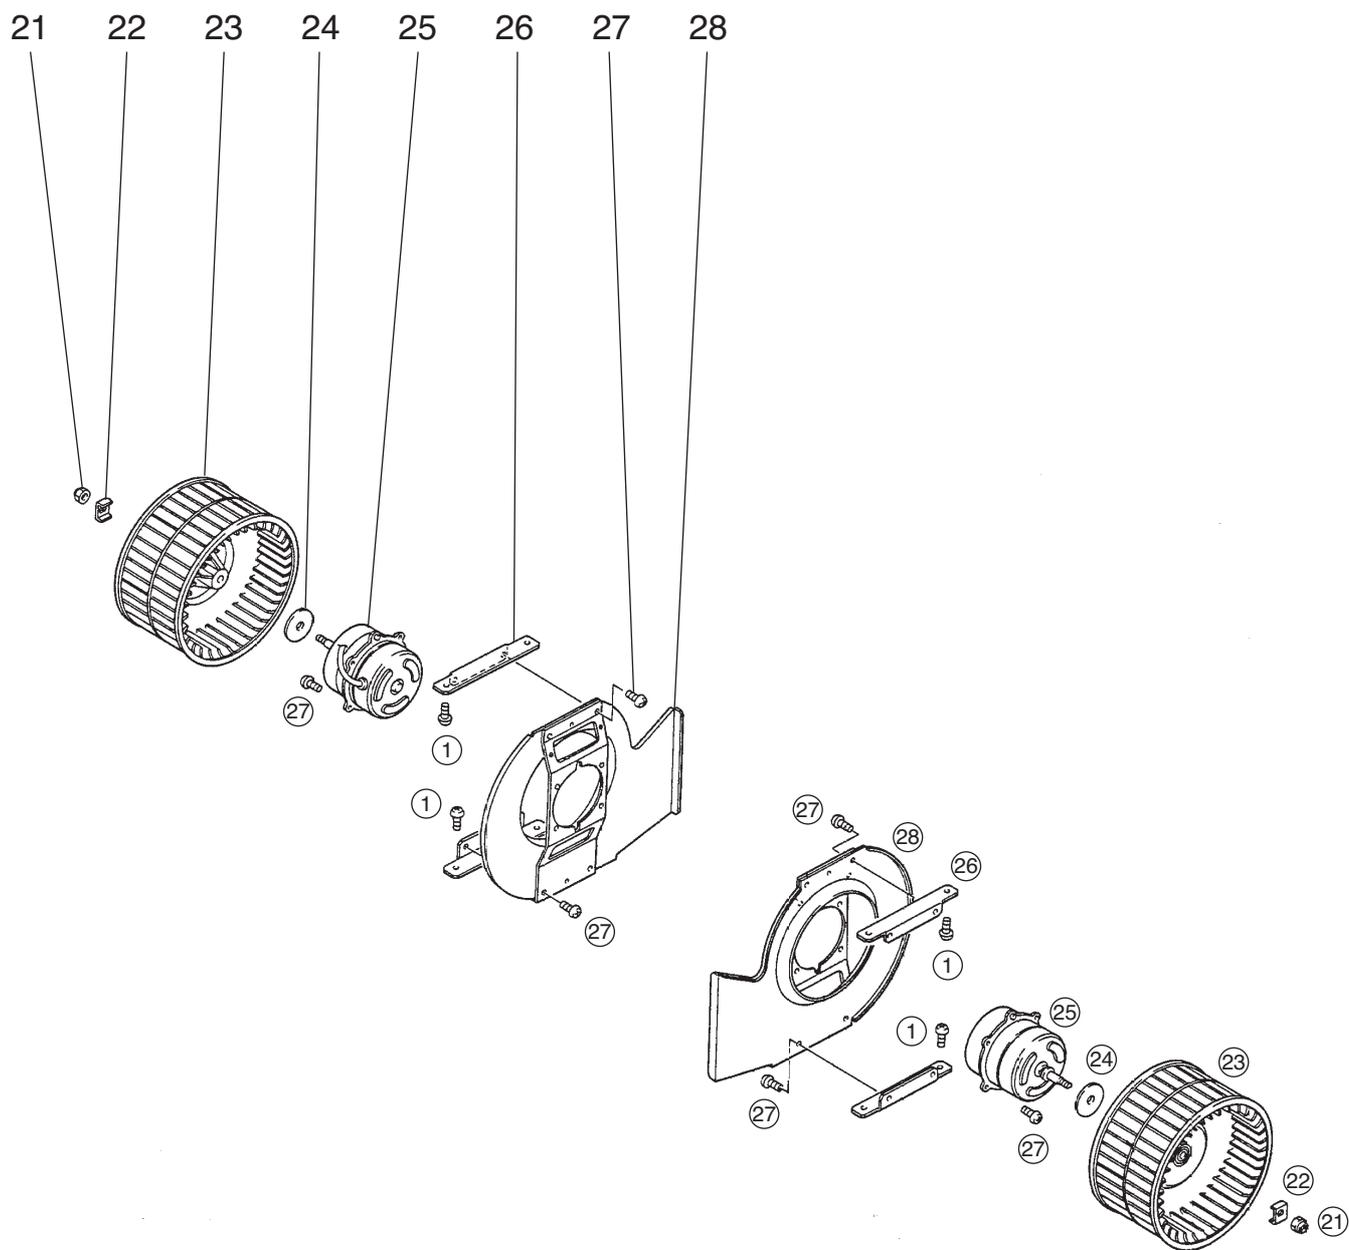


Model LGH-15RX3-E

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
31.	Y50 061 693	Damper motor cover	1			
32.	R50 541 715	Damper support	1			
33.	M31 234 089	Special bush	2			
34.	R50 095 156	Pull spring	1			
35.	R50 213 713	Damper	1			
36.	Y50 061 260	Damper motor	1	▲	220-240V	
37.	R50 054 225	Bush	2			
38.	R50 228 150	Rod	1			
39.	R50 399 224	Cord clip	3			
40.	Y50 061 215	Thermistor	1	▲	-30/100° C	
41.	R50 399 223	Cord clip	2			
42.	Y50 061 706	Control cover	1			
43.	K83 170 228	Cord band	1			
44.	M45 017 228	Cord band	1			
45.	Y50 047 216	Transformer	1	▲	230VAC	
46.	R50 385 283	Capacitor	2	▲	2.5 μ F•440VAC	
47.	H00 011 008	PT screw 4×8(BS)	1			
48.	H00 013 076	Lock washer(4)	2			
49.	H00 000 488	PTT screw 4×12	2			
50.	R50 072 236	Terminal block	1	▲	4P	
51.	Y50 061 226	Insulation plate	1			
52.	Y50 061 708	Circuit fix plate	1			
53.	H00 000 003	PP screw 4×8	2			
54.	Y50 061 171	Circuit board	1	▲	LG-X01-E	
55.	X40 139 095	Spacer	4			
56.	D42 019 095	Spacer	3			
57.	M35 164 224	Cord clip	1			
58.	Y50 047 226	Bush	2			
59.	K83 223 225	Bush	1			

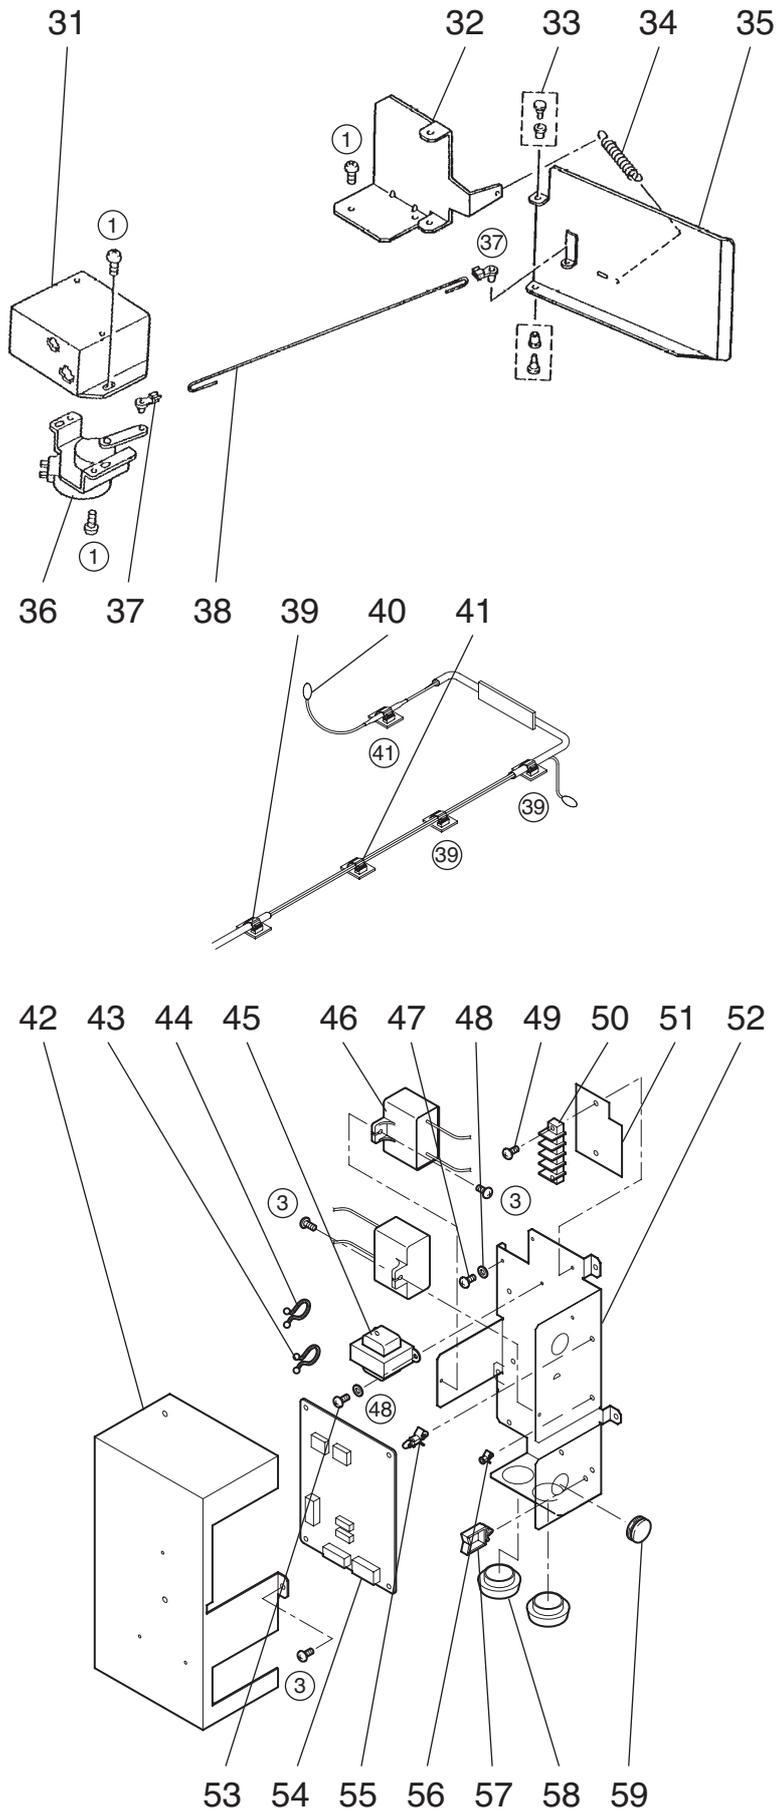


Model LGH-25RX3-E

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
1.	H00 312 007	PTT screw 4×6	22			
2.	R50 323 609	Flange	4			
3.	H00 000 487	PTT screw 4×8	18			
4.	R50 091 380	Hanger	4			
5.	H00 000 391	PT screw 5×8	8			
6.	R50 395 707	Maintenance cover	1			
7.	R50 395 382	Core guide	1			
8.	Y50 061 718	Filter	2	▲		
9.	R50 214 710	Lossnay core	2	▲		
10.	R50 476 382	Core guide	1			
11.	R50 354 704	Cover	2			
12.	R50 213 344	Hinge	1			
13.	M34 074 017	Special screw 4×11	1			
14.	Y50 029 712	Fix piece	1			
15.	Y50 061 704	Hanger cover	4			
16.	R50 354 718	Sound absorbing material	1	▲		

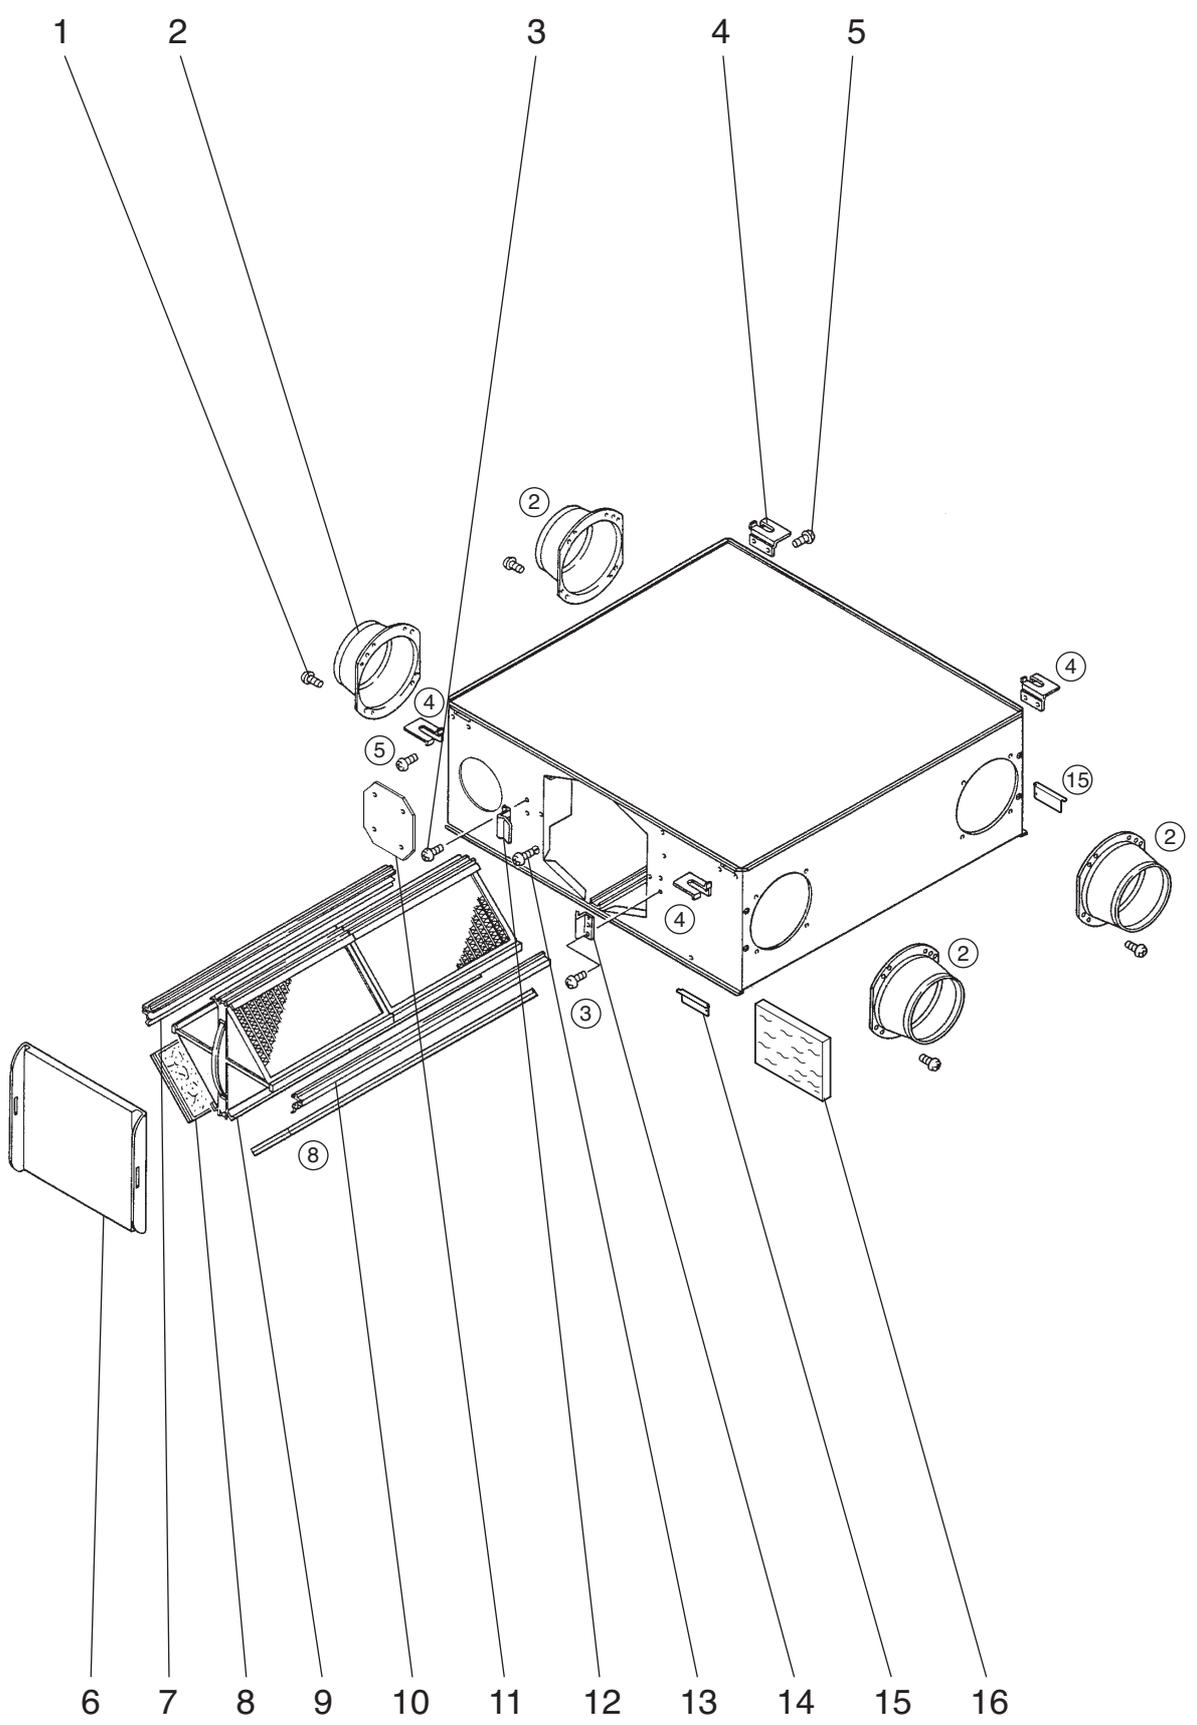



Model LGH-25RX3-E

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
21.	R50 331 067	Special nut(8)	2		Left-handed	
22.	M34 398 077	Tab washer	2			
23.	R50 354 480	Centrifugal fan	2	▲	φ 180	
24.	R50 028 465	Special washer	2		φ 8.1	
25.	Y50 061 454	Motor	1	▲		
26.	R50 214 708	Motor plate	4			
27.	H00 000 332	PTT screw 4×10	17			
28.	Y50 030 707	Motor fix plate	2			

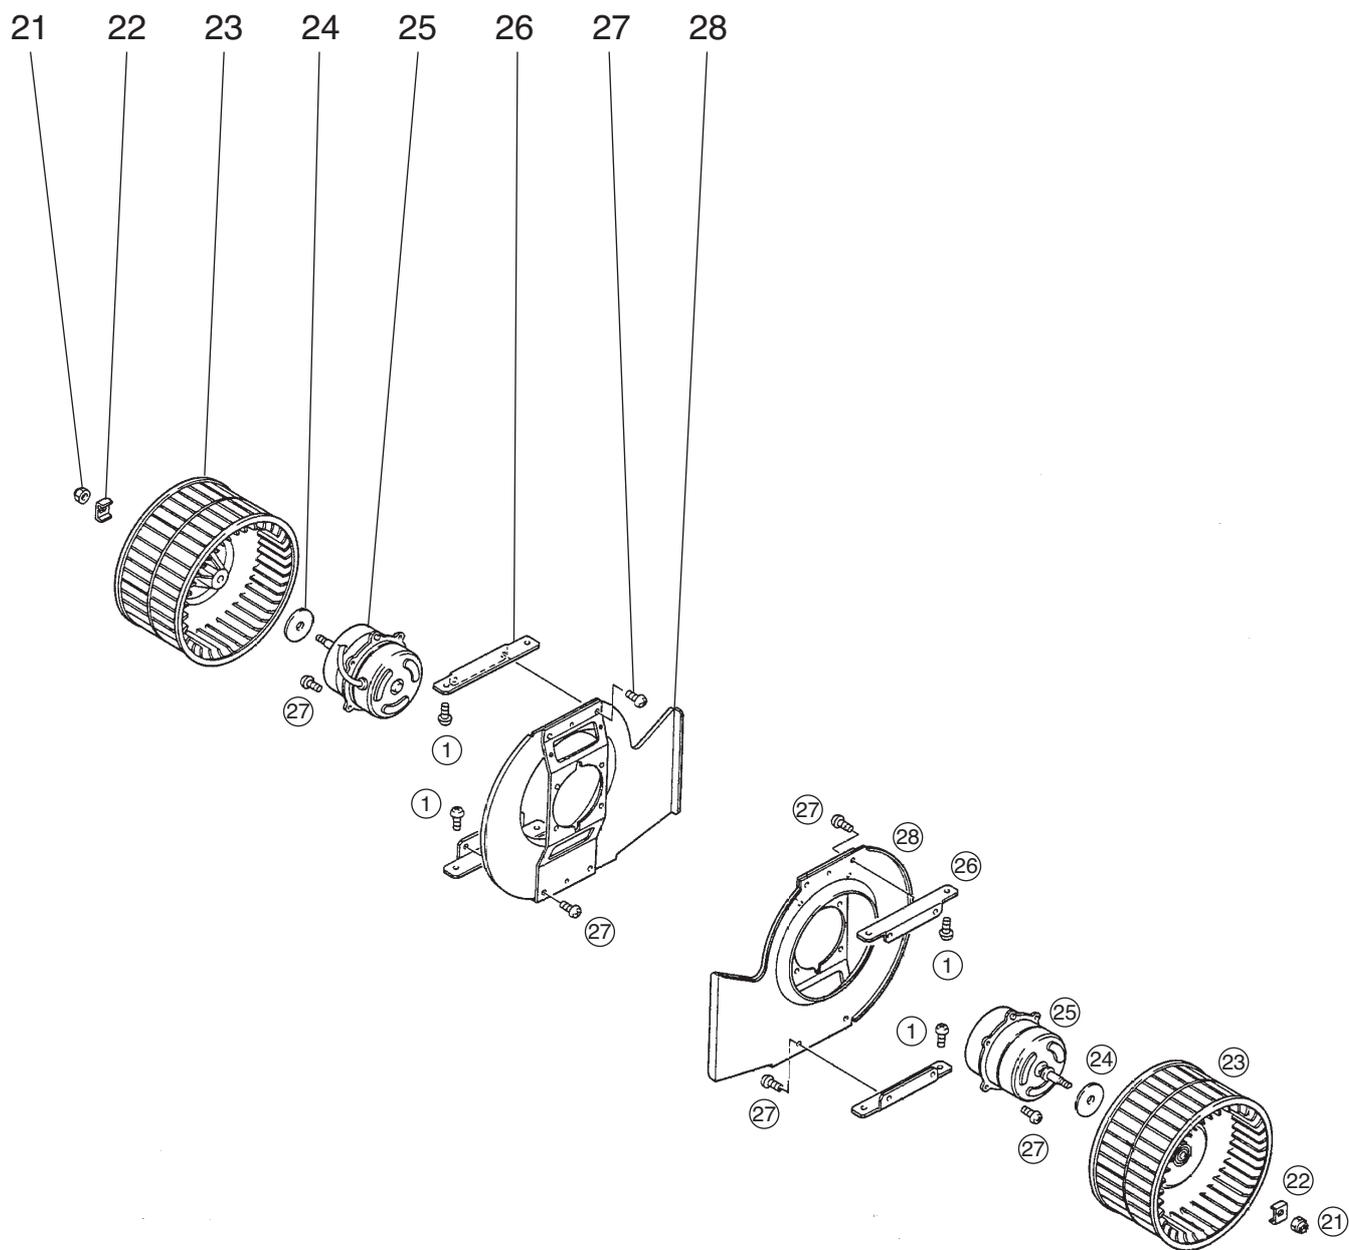


Model LGH-25RX3-E

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
31.	Y50 061 693	Damper motor cover	1			
32.	R50 541 715	Damper support	1			
33.	M31 234 089	Special bush	2			
34.	R50 095 156	Pull spring	1			
35.	R50 213 713	Damper	1			
36.	Y50 061 260	Damper motor	1	▲	220-240V	
37.	R50 054 225	Bush	2			
38.	R50 230 150	Rod	1			
39.	R50 399 224	Cord clip	2			
40.	Y50 061 216	Thermistor	1	▲		
41.	R50 399 223	Cord clip	2			
42.	Y50 061 706	Control cover	1			
43.	K83 170 228	Cord band	1			
44.	M45 017 228	Cord band	1			
45.	Y50 047 216	Transformer	1	▲	230VAC	
46.	R50 385 283	Capacitor	2	▲	2.5 μF•440VAC	
47.	H00 011 008	PT screw 4×8(BS)	1			
48.	H00 013 076	Lock washer(4)	2			
49.	H00 000 488	PTT screw 4×12	2			
50.	R50 072 236	Terminal block	1	▲	4P	
51.	Y50 061 226	Insulation plate	1			
52.	Y50 061 708	Circuit fix plate	1			
53.	H00 000 003	PP screw 4×8	2			
54.	Y50 061 171	Circuit board	1	▲	LG-X01-E	
55.	X40 139 095	Spacer	4			
56.	D42 019 095	Spacer	3			
57.	M35 164 224	Cord clip	1			
58.	Y50 047 226	Bush	2			
59.	K83 223 225	Bush	1			

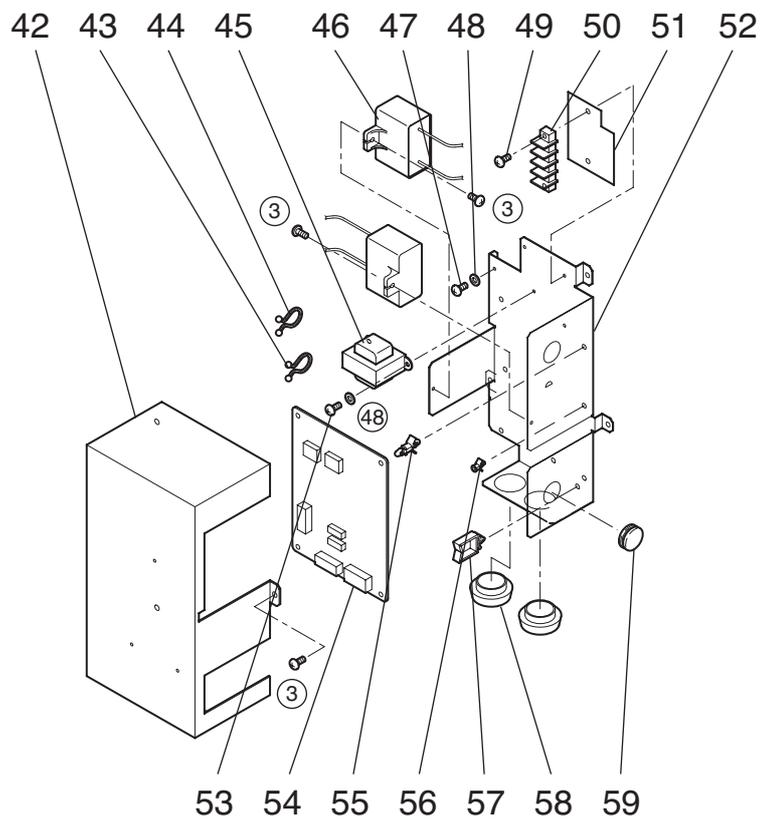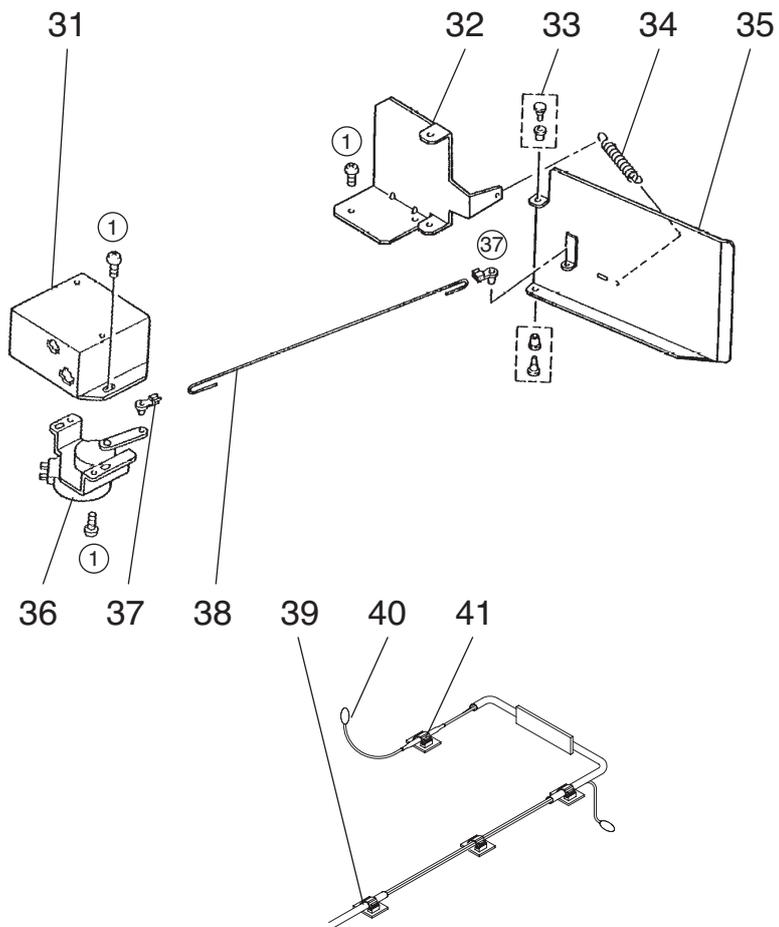


Model LGH-35RX3-E

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
1.	H00 312 007	PTT screw 4×6	23			
2.	R50 323 609	Flange	4			
3.	Y50 061 704	Hanger cover	4			
4.	H00 000 487	PTT screw 4×8	34			
5.	R50 091 380	Hanger	4			
6.	H00 000 583	PT screw 5×12	8			
7.	R50 351 707	Maintenance cover	1			
8.	R50 396 381	Core guide	1			
9.	Y50 062 717	Filter	2	▲		
10.	R50 215 710	Lossnay core	2	▲		
11.	R50 478 381	Core guide	1			
12.	R50 476 708	Cover	2			
13.	R50 213 344	Hinge	1			
14.	M34 074 017	Special screw 4×11	1			
15.	Y50 029 712	Fix piece	1			
16.	R50 365 717	Sound absorbing material	1	▲	SA	

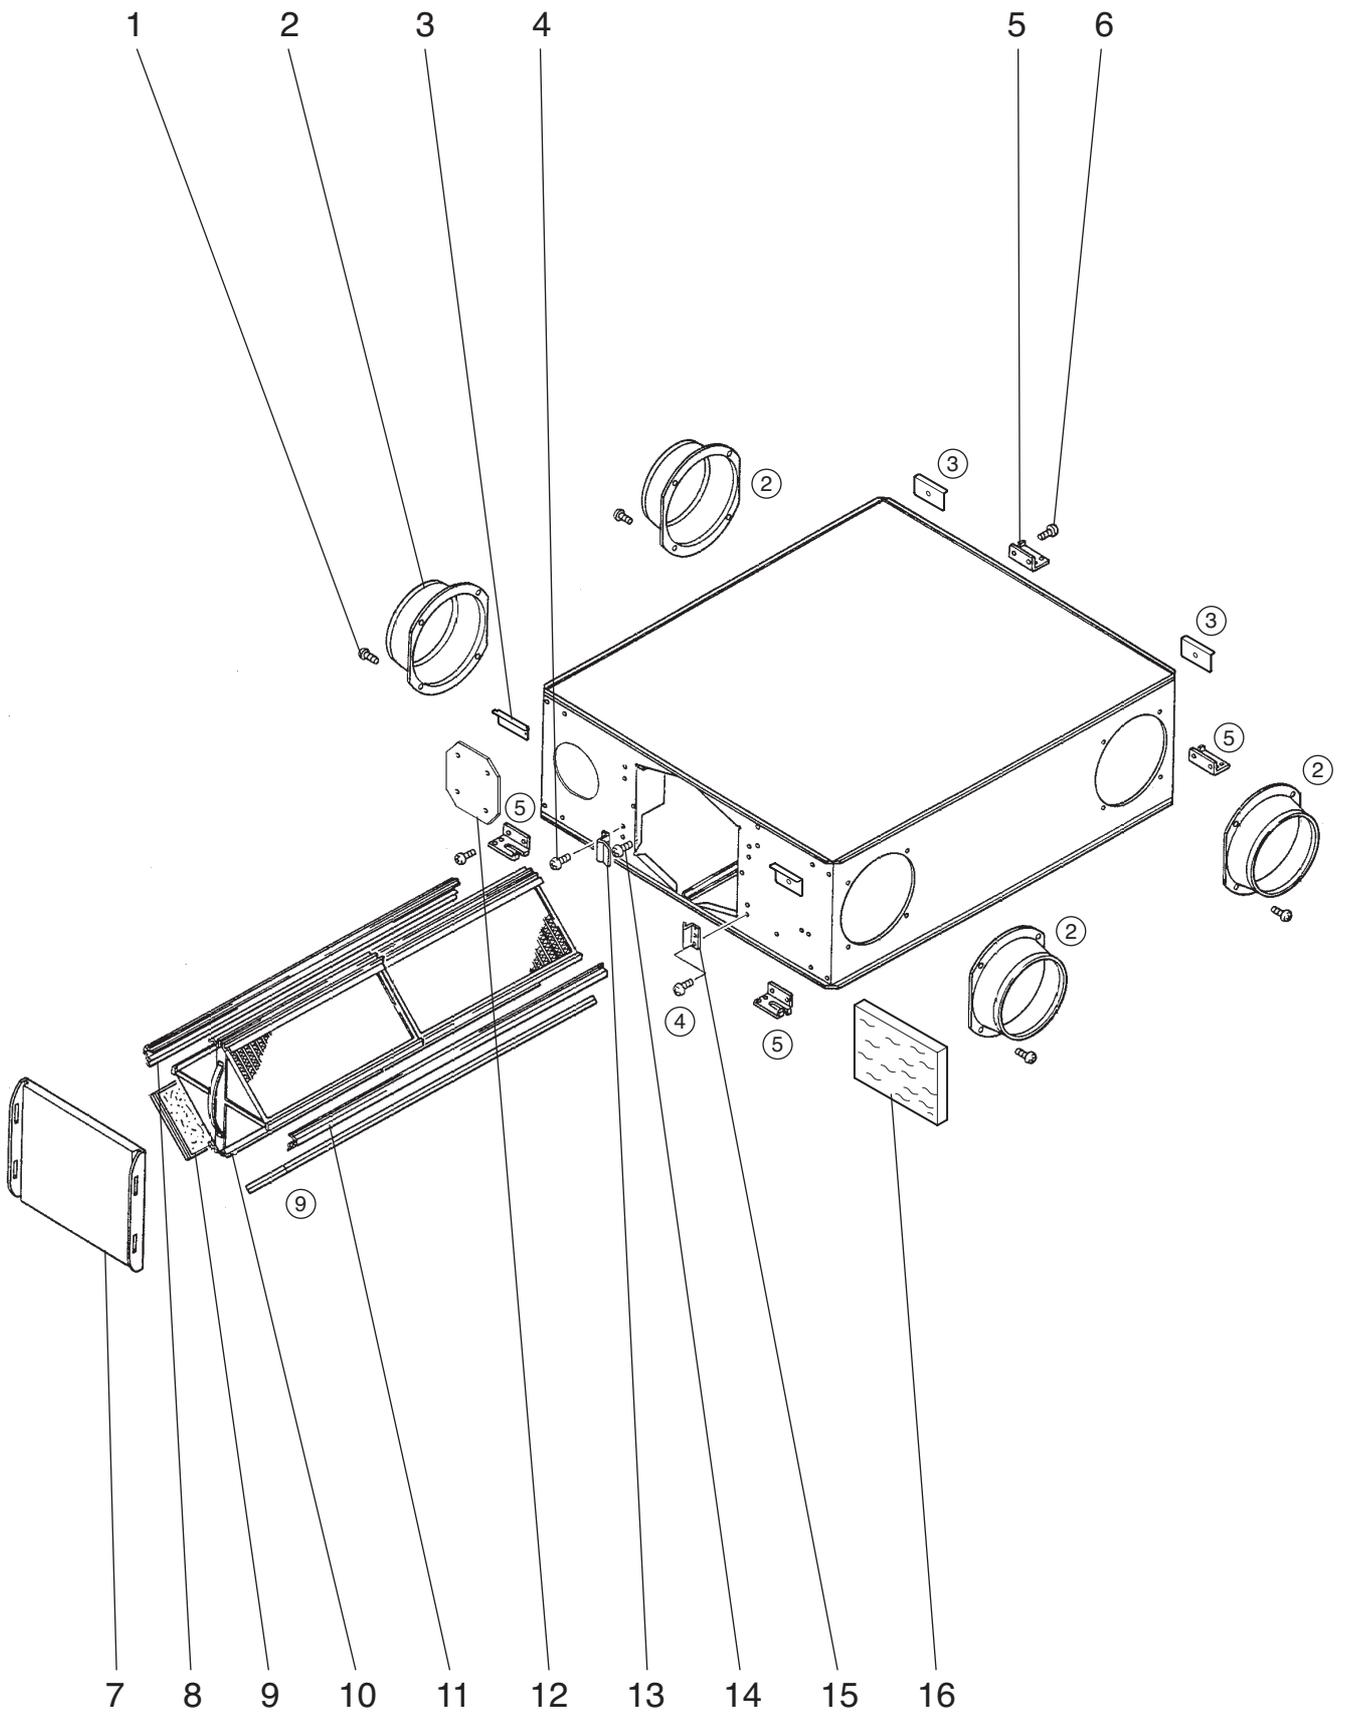


Model LGH-35RX3-E

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
21.	R50 331 067	Special nut(8)	2		Left-handed	
22.	M34 398 077	Tab washer	2			
23.	R50 351 480	Centrifugal fan	2	▲	φ 220	
24.	R50 215 708	Fan base	2			
25.	Y50 062 453	Motor	1	▲		
26.	R50 351 713	Motor fix plate	2			
27.	H00 000 390	PT screw 5×10	20			

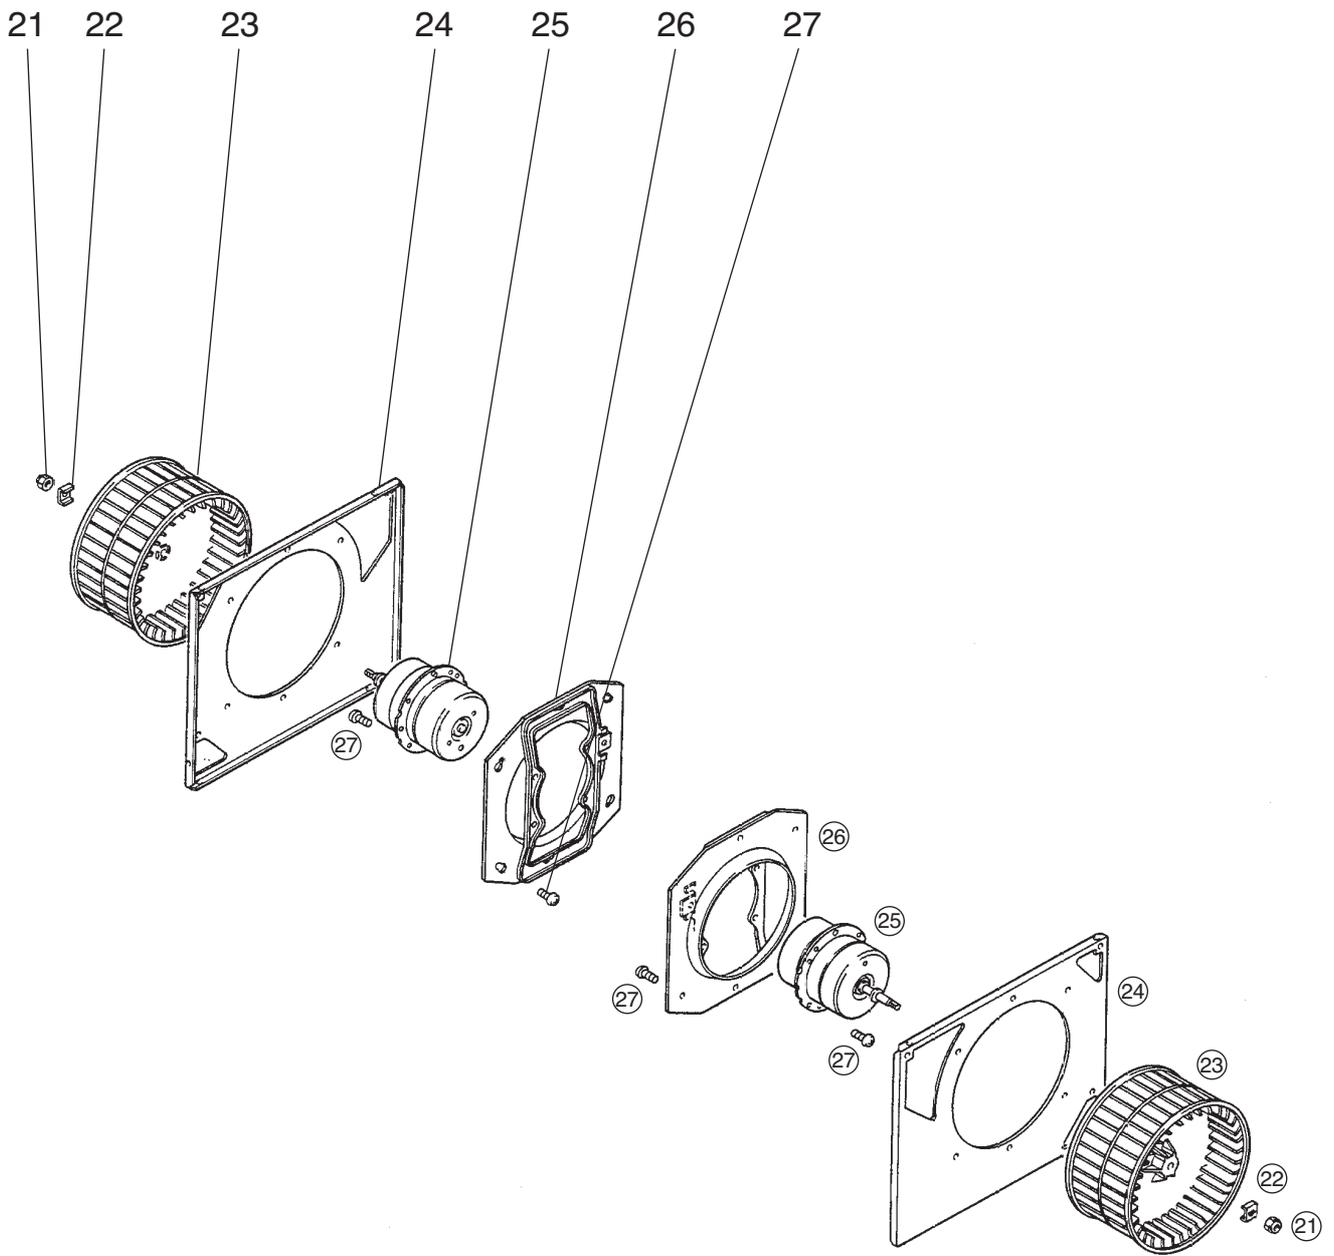


Model LGH-35RX3-E

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
31.	Y50 061 693	Damper motor cover	1			
32.	R50 069 156	Pull spring	1			
33.	R50 472 716	Damper support	1			
34.	M31 234 089	Special bush	2			
35.	R50 472 715	Damper	1			
36.	Y50 061 260	Damper motor	1	▲	220-240V	
37.	R50 054 225	Bush	2			
38.	R50 231 150	Rod	1			
39.	Y50 062 215	Thermistor	1	▲		
40.	R50 399 223	Cord clip	2			
41.	R50 399 224	Cord clip	3			
42.	Y50 061 706	Control cover	1			
43.	K83 170 228	Cord band	1			
44.	M45 017 228	Cord band	1			
45.	Y50 138 216	Transformer	1	▲	AC230V	
46.	R50 385 283	Capacitor	2	▲	2.5 μ F•440VAC	
47.	H00 011 008	PT screw 4×8(BS)	1			
48.	H00 013 076	Lock washer(4)	2			
49.	H00 000 488	PTT screw 4×12	2			
50.	R50 072 236	Terminal block	1	▲	4P	
51.	Y50 061 226	Insulation plate	1			
52.	Y50 061 708	Circuit fix plate	1			
53.	H00 000 003	PP screw 4×8	2			
54.	Y50 061 171	Circuit board	1	▲	LG-X01-E	
55.	X40 139 095	Spacer	4			
56.	D42 019 095	Spacer	3			
57.	M35 164 224	Cord clip	1			
58.	Y50 047 226	Bush	2			
59.	K83 223 225	Bush	1			

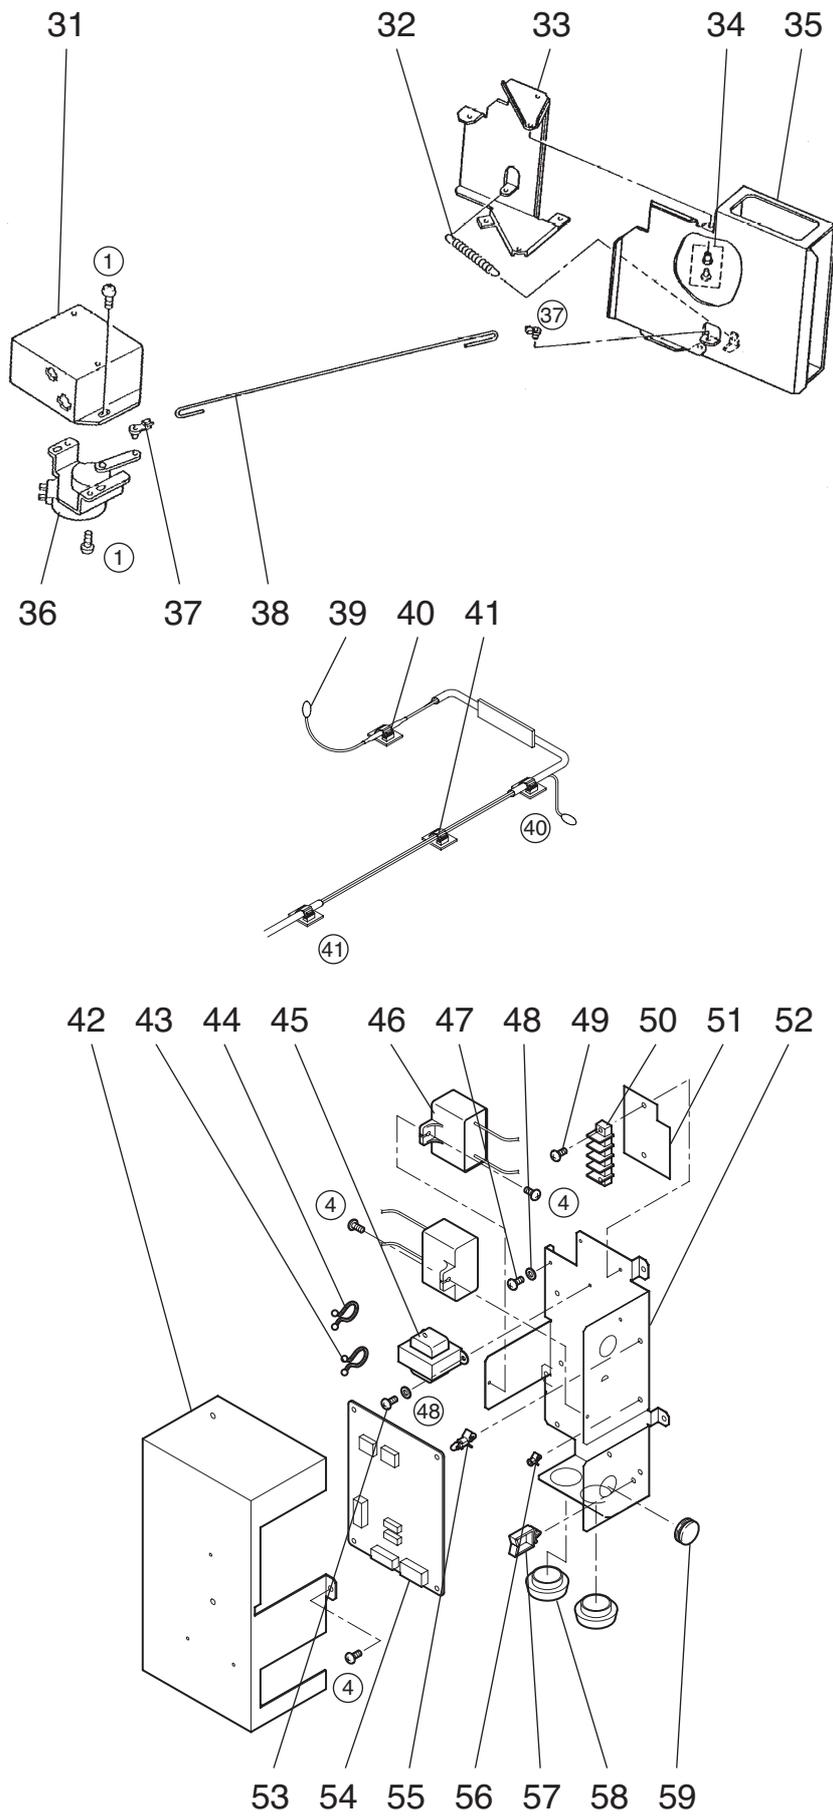


Model LGH-50RX3-E

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
1.	H00 312 007	PTT screw 4×6	23			
2.	R50 028 610	Flange	4			
3.	Y50 061 704	Hanger cover	4			
4.	H00 000 487	PTT screw 4×8	34			
5.	R50 091 380	Hanger	4			
6.	H00 000 583	PT screw 5×12	8			
7.	R50 351 707	Maintenance cover	1			
8.	R50 216 381	Core guide	1			
9.	Y50 062 718	Filter	2	▲		
10.	R50 216 710	Lossnay core	2	▲		
11.	R50 478 382	Core guide	1			
12.	R50 351 708	Cover	2			
13.	R50 213 344	Hinge	1			
14.	M34 074 017	Special screw 4×11	1			
15.	Y50 029 712	Fix piece	1			
16.	R50 351 717	Sound absorbing material	1	▲	SA	

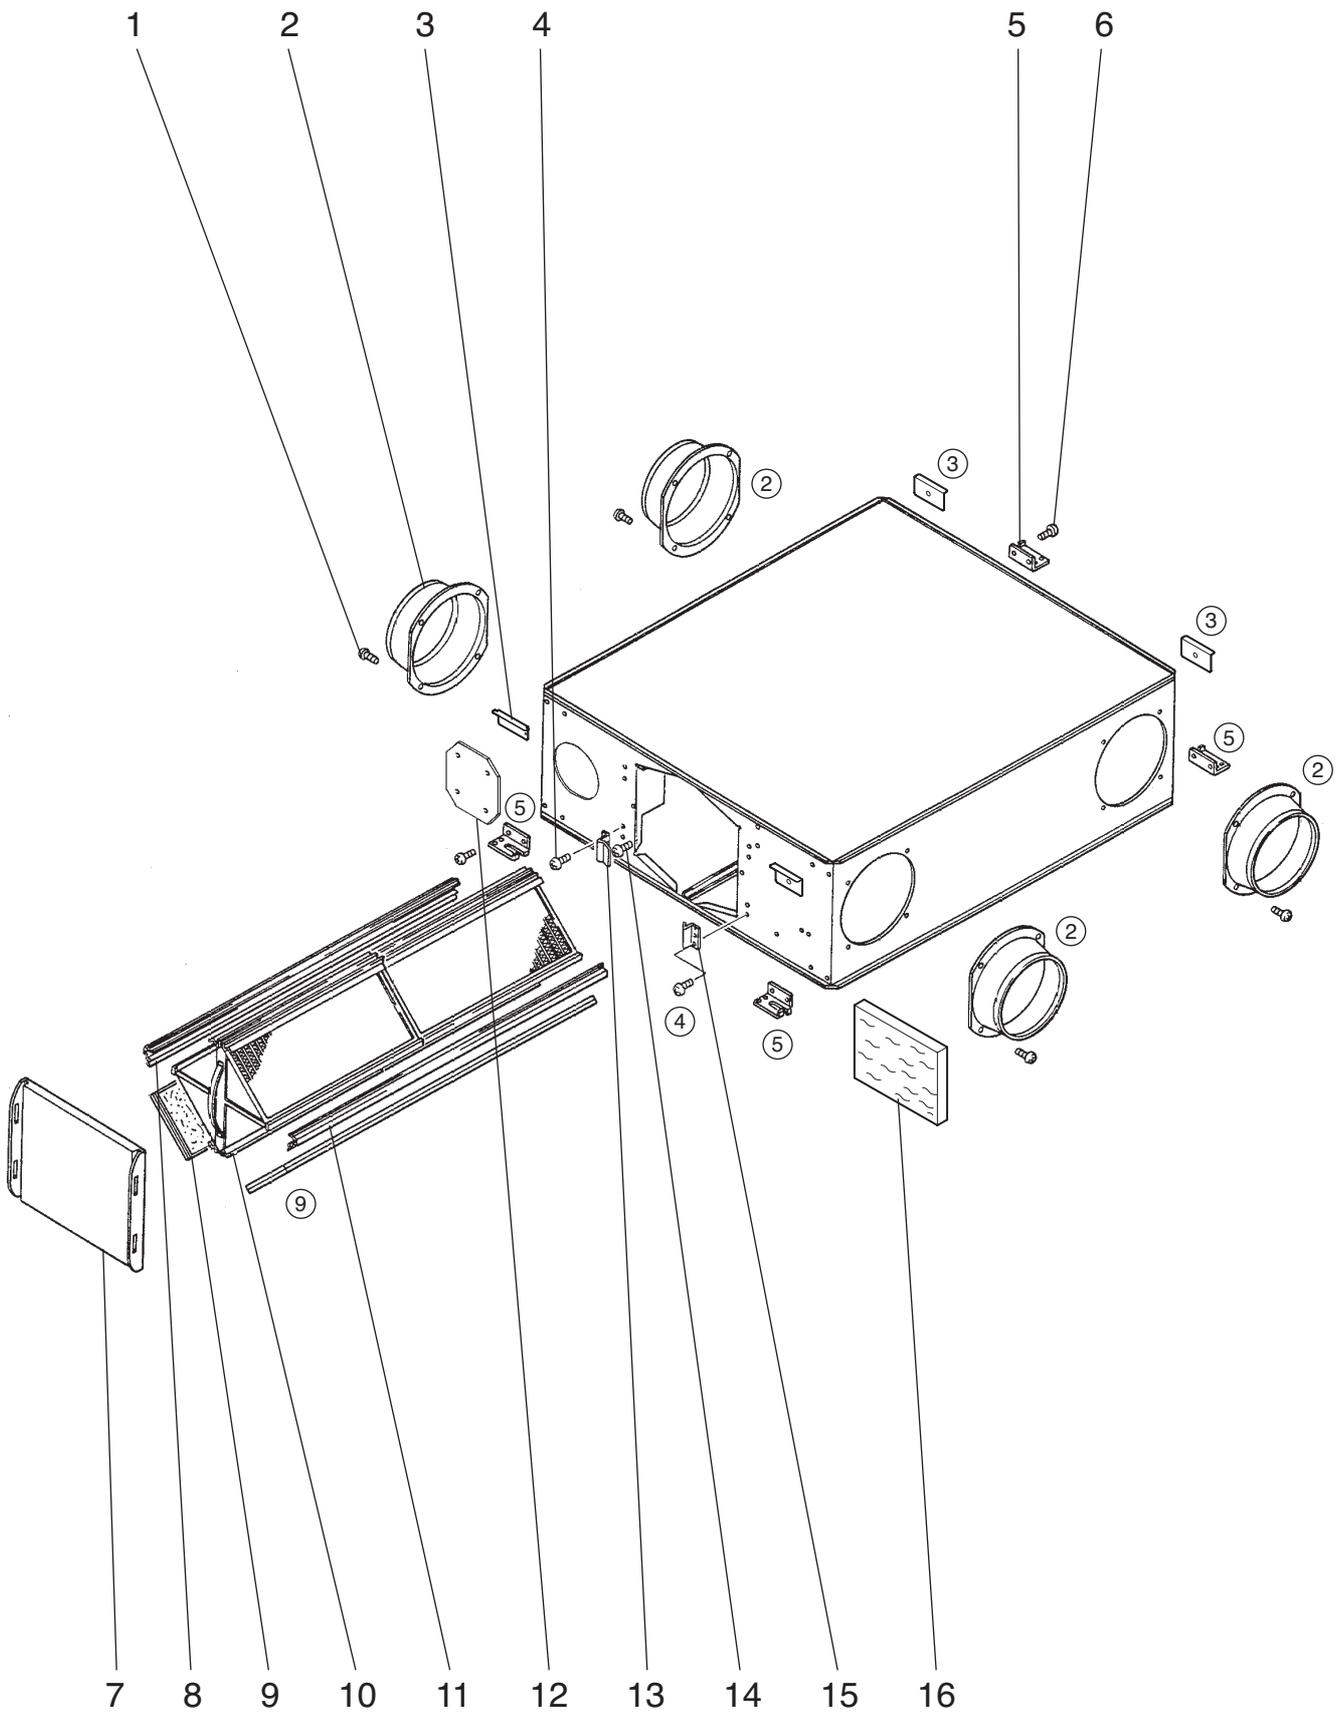


Model LGH-50RX3-E

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
21.	R50 331 067	Special nut(8)	2		Left-handed	
22.	M34 398 077	Tab washer	2			
23.	R50 351 480	Centrifugal fan	2	▲	φ 220	
24.	R50 215 708	Fan base	2			
25.	Y50 062 454	Motor	1	▲		
26.	R50 351 713	Motor fix plate	2			
27.	H00 000 390	PT screw 5×10	20			

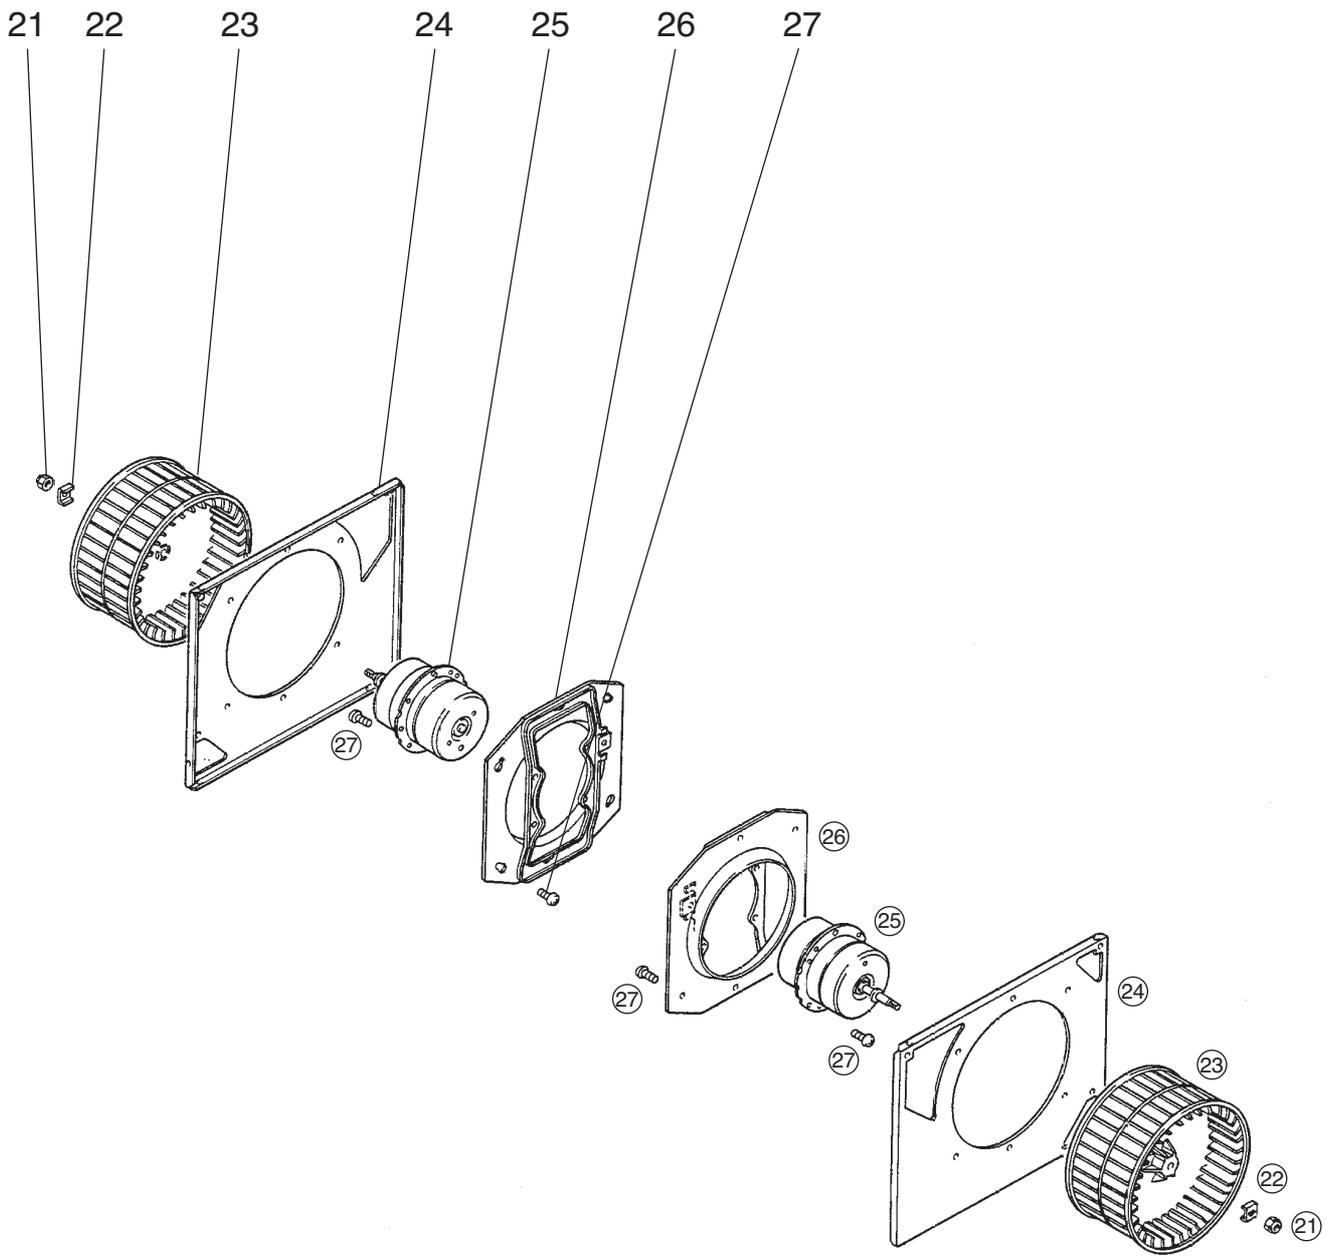


Model LGH-50RX3-E

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
31.	Y50 061 693	Damper motor cover	1			
32.	R50 069 156	Pull spring	1			
33.	R50 472 716	Damper support	1			
34.	M31 234 089	Special bush	2			
35.	R50 472 715	Damper	1			
36.	Y50 061 260	Damper motor	1	▲	220-240V	
37.	R50 054 225	Bush	2			
38.	R50 232 150	Rod	1			
39.	Y50 062 216	Thermistor	1	▲		
40.	R50 399 223	Cord clip	2			
41.	R50 399 224	Cord clip	3			
42.	Y50 061 706	Control cover	1			
43.	K83 170 228	Cord band	1			
44.	M45 017 228	Cord band	1			
45.	Y50 138 216	Transformer	1	▲	AC230V	
46.	Y50 057 283	Capacitor	2	▲	4.0 μ F•440VAC	
47.	H00 011 008	PT screw 4×8(BS)	1			
48.	H00 013 076	Lock washer(4)	2			
49.	H00 000 488	PTT screw 4×12	2			
50.	R50 072 236	Terminal block	1	▲	4P	
51.	Y50 061 226	Insulation plate	1			
52.	Y50 061 708	Circuit fix plate	1			
53.	H00 000 003	PP screw 4×8	2			
54.	Y50 061 171	Circuit board	1	▲	LG-X01-E	
55.	X40 139 095	Spacer	4			
56.	D42 019 095	Spacer	3			
57.	M35 164 224	Cord clip	1			
58.	Y50 047 226	Bush	2			
59.	K83 223 225	Bush	1			

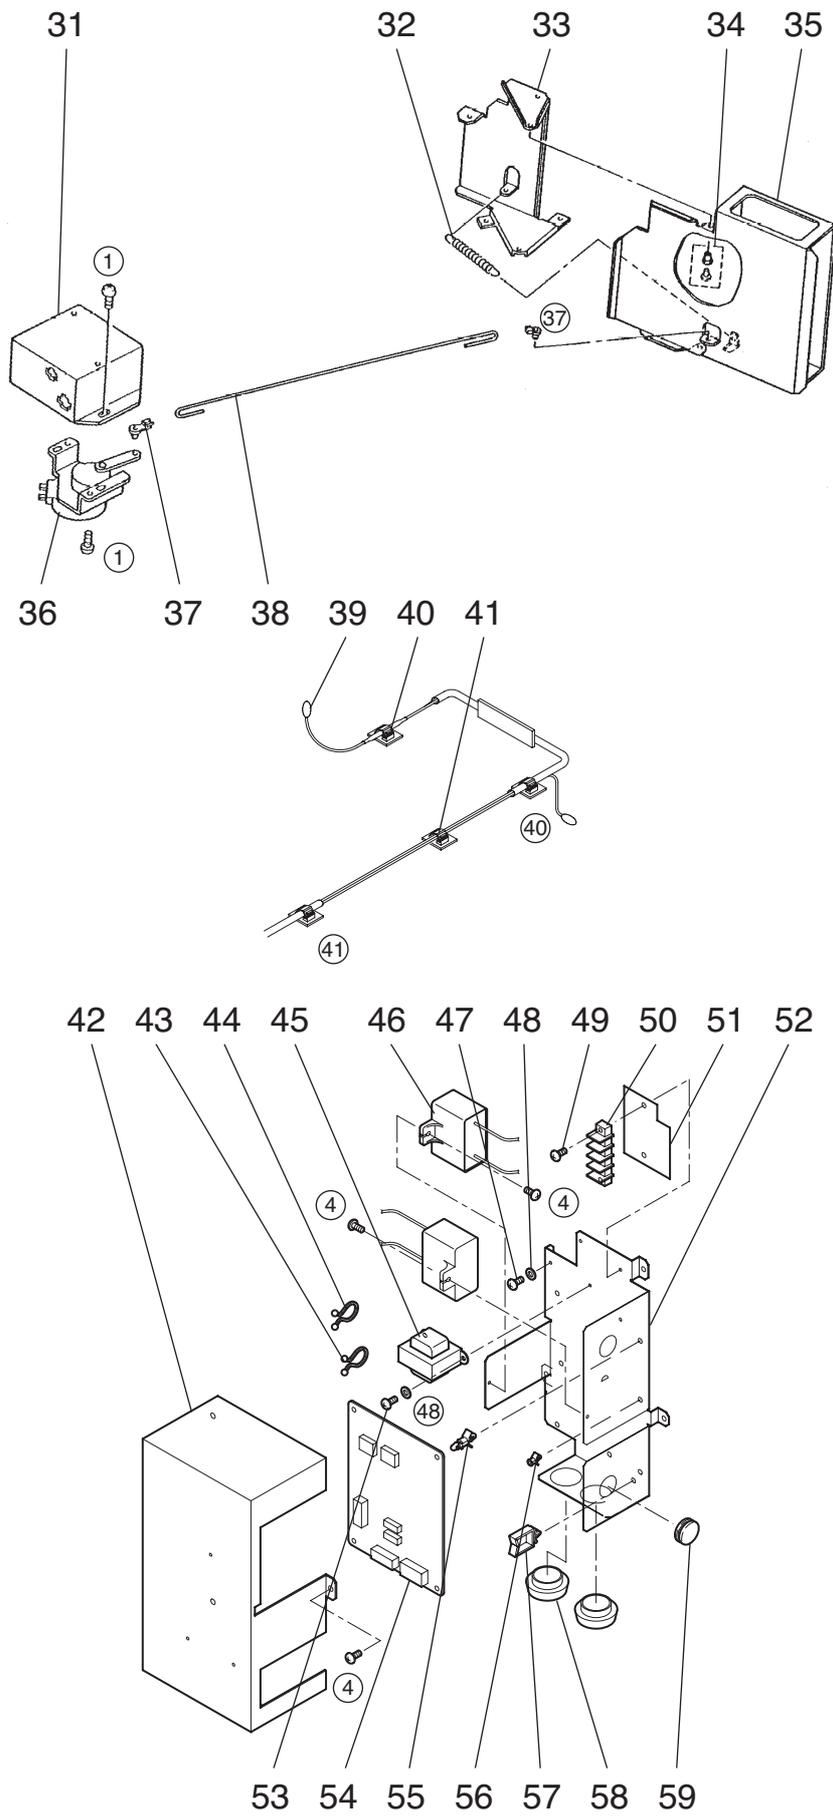


Model LGH-80RX3-E

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
1.	H00 000 487	PTT screw 4×8	18			
2.	Y50 021 609	Flange	4			
3.	R50 095 380	Hanger	4			
4.	H00 000 244	PT screw 6×12	16			
5.	R50 265 707	Maintenance cover	1			
6.	R50 218 381	Core guide	1			
7.	Y50 063 717	Filter	2	▲		
8.	R50 218 710	Lossnay core	2	▲		
9.	R50 480 381	Core guide	1			
10.	R50 358 704	Cover	2			
11.	R50 213 344	Hinge	1			
12.	M34 074 017	Special screw 4×11	1			
13.	Y50 029 712	Fix piece	2			
14.	Y50 126 718	Sound absorbing material	1			

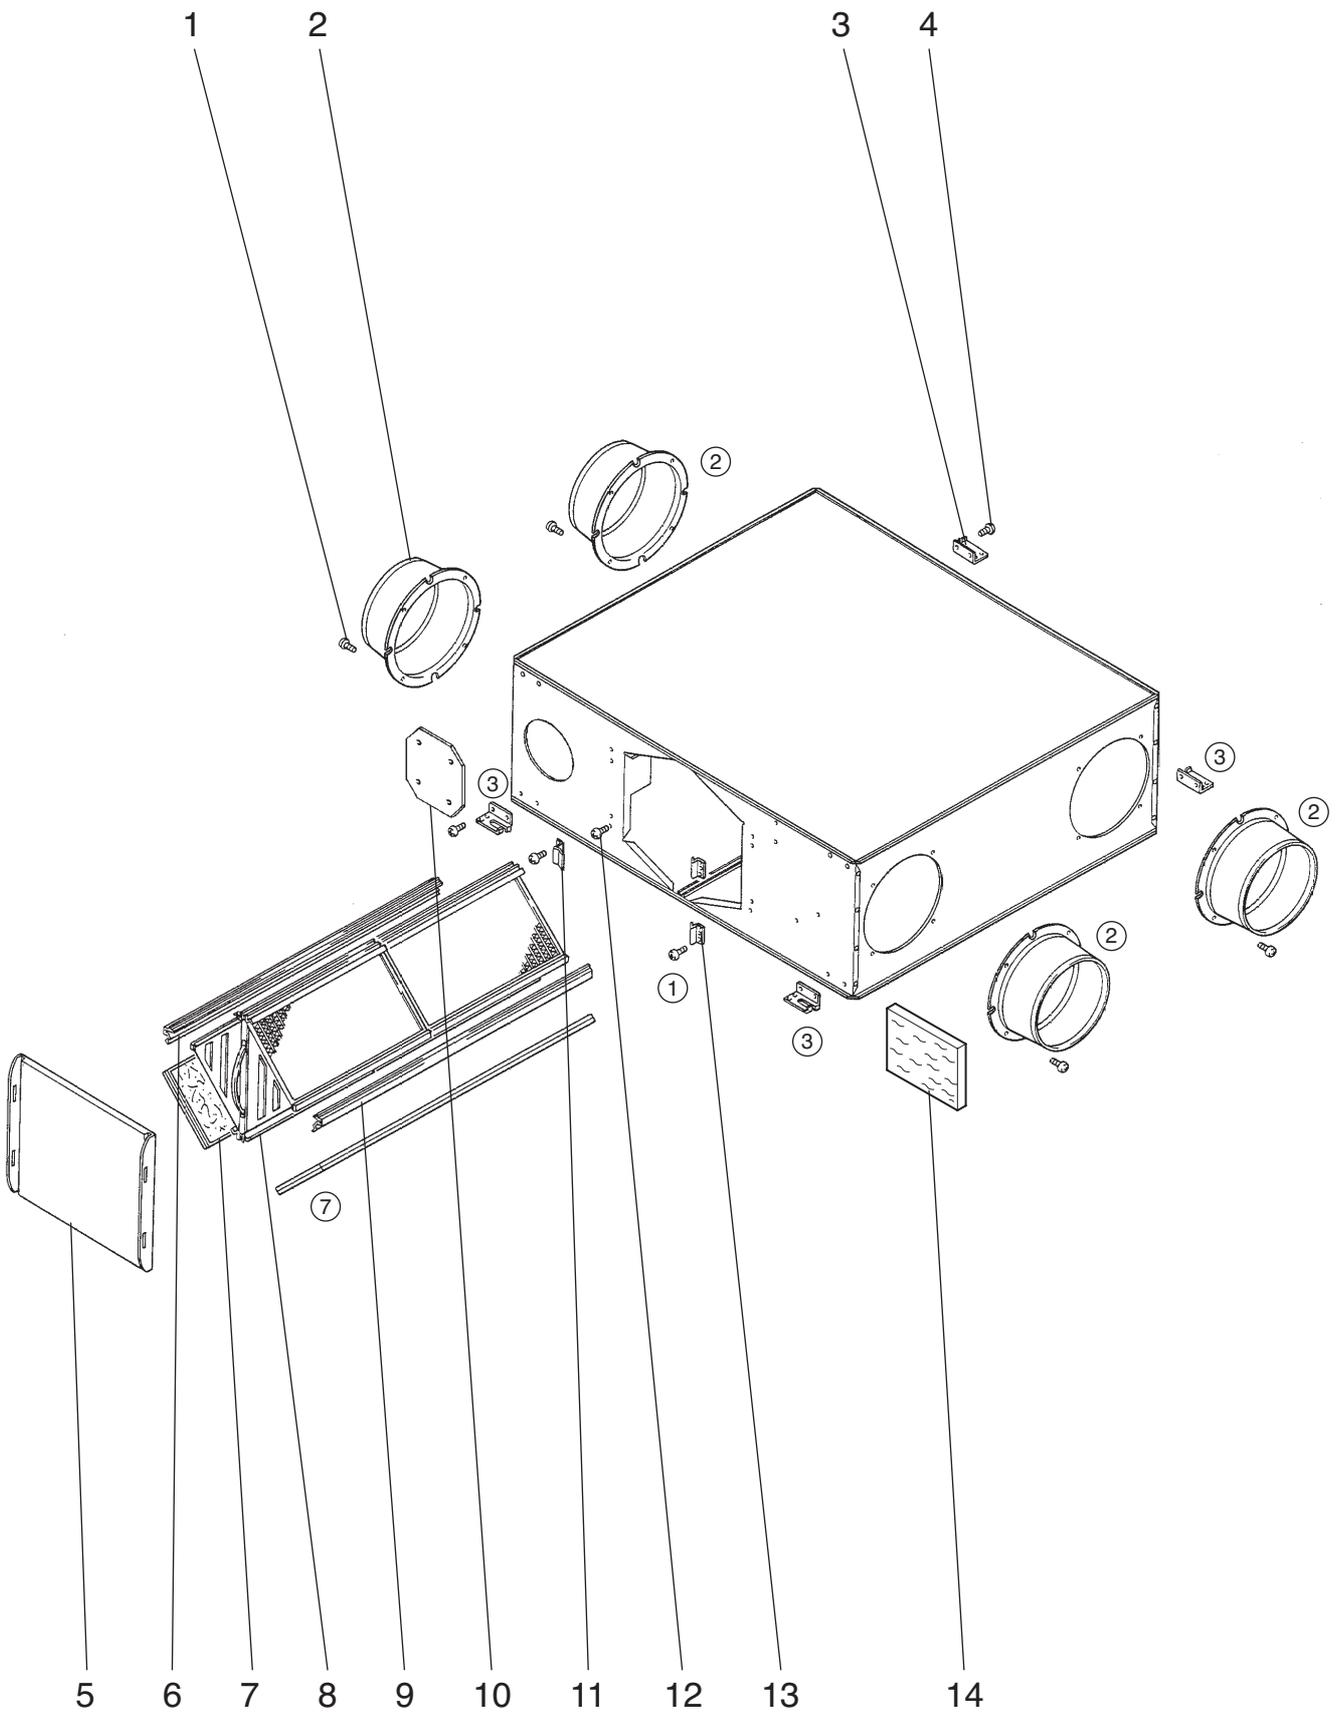



Model LGH-80RX3-E

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
21.	R50 218 067	Special nut(12)	2			
22.	K83 466 113	Washer(12)	2			
23.	R50 479 480	Centrifugal fan	2	▲	φ 245	
24.	H00 157 008	PT screw 6×20	8			
25.	M34 043 080	Special washer(6)	8			
26.	D40 135 095	Spacer	8			
27.	Y50 033 226	Bush	8			
28.	R50 480 707	Fan base	2			
29.	R50 264 711	Inlet ring	2			
30.	R50 264 712	Motor fix plate	2			
31.	H00 189 007	PTT screw 5×10	16			
32.	Y50 063 451	Motor	1	▲		
33.	H00 061 050	Nut(6)	8			

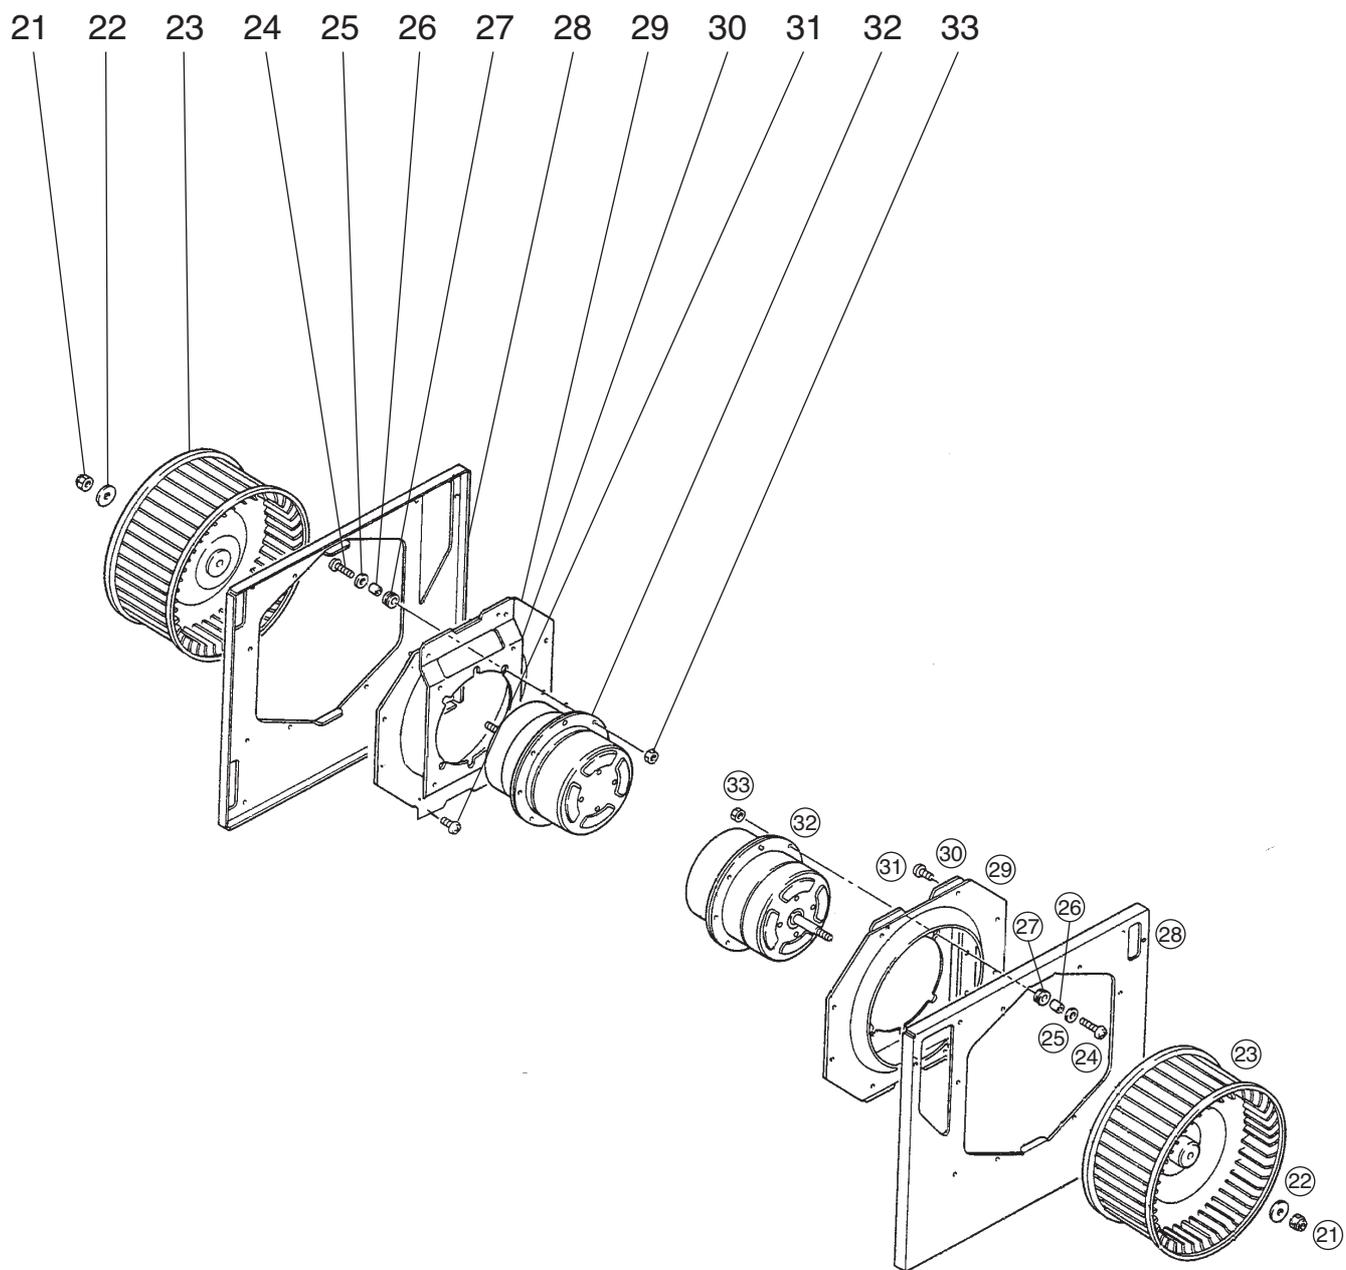


Model LGH-80RX3-E

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
41.	Y50 061 693	Damper motor cover	1			
42.	H00 312 007	PTT screw 4×6	2			
43.	R50 074 156	Pull spring	1			
44.	R50 473 715	Damper support	1			
45.	M31 234 089	Special bush	2			
46.	R50 271 715	Damper	1			
47.	Y50 061 260	Damper motor	1	▲	220-240V	
48.	R50 054 225	Bush	2			
49.	R50 265 150	Rod	1			
50.	Y50 063 215	Thermistor	1	▲		
51.	R50 399 223	Cord clip	4			
52.	R50 399 224	Cord clip	4			
53.	Y50 061 706	Control cover	1			
54.	K83 170 228	Cord band	1			
55.	M45 017 228	Cord band	1			
56.	H00 000 332	PTT screw 4×10	1			
57.	Y50 138 216	Transformer	1	▲	AC230V	
58.	Y50 063 283	Capacitor	2	▲	7.0 μ F·440VAC	
59.	H00 011 008	PT screw 4×8(BS)	1			
60.	H00 013 076	Lock washer(4)	2			
61.	H00 000 488	PTT screw 4×12	2			
62.	R50 072 236	Terminal block	1	▲	4P	
63.	Y50 061 226	Insulation plate	1			
64.	Y50 061 708	Circuit fix plate	1			
65.	H00 000 003	PP screw 4×8	2			
66.	Y50 061 171	Circuit board	1	▲	LG-X01-E	
67.	X40 139 095	Spacer	4			
68.	D42 019 095	Spacer	3			
69.	M35 164 224	Cord clip	1			
70.	Y50 047 226	Bush	2			
71.	K83 223 225	Bush	1			

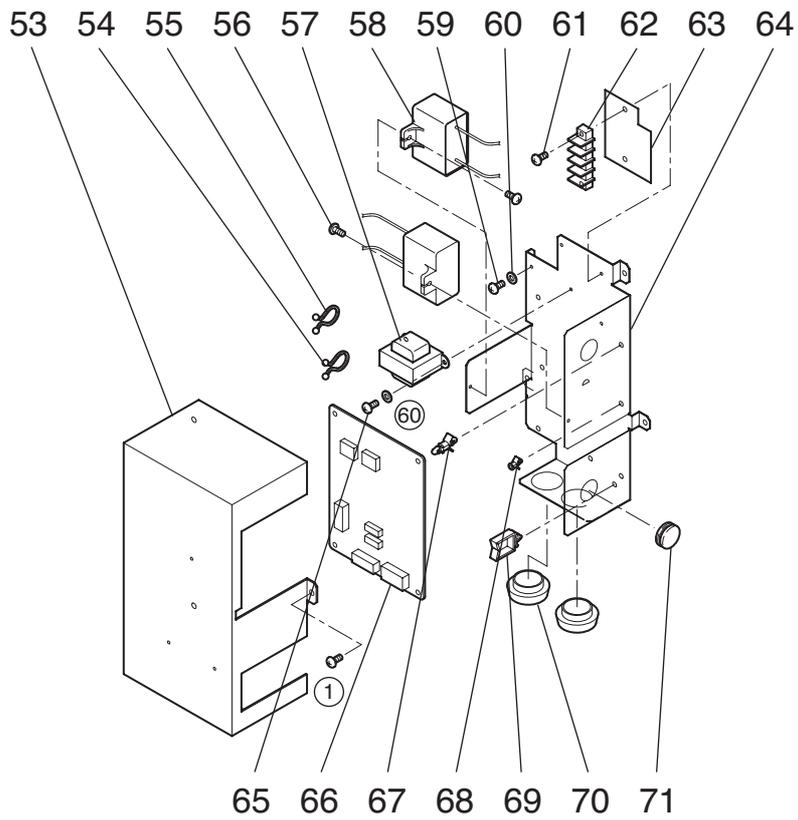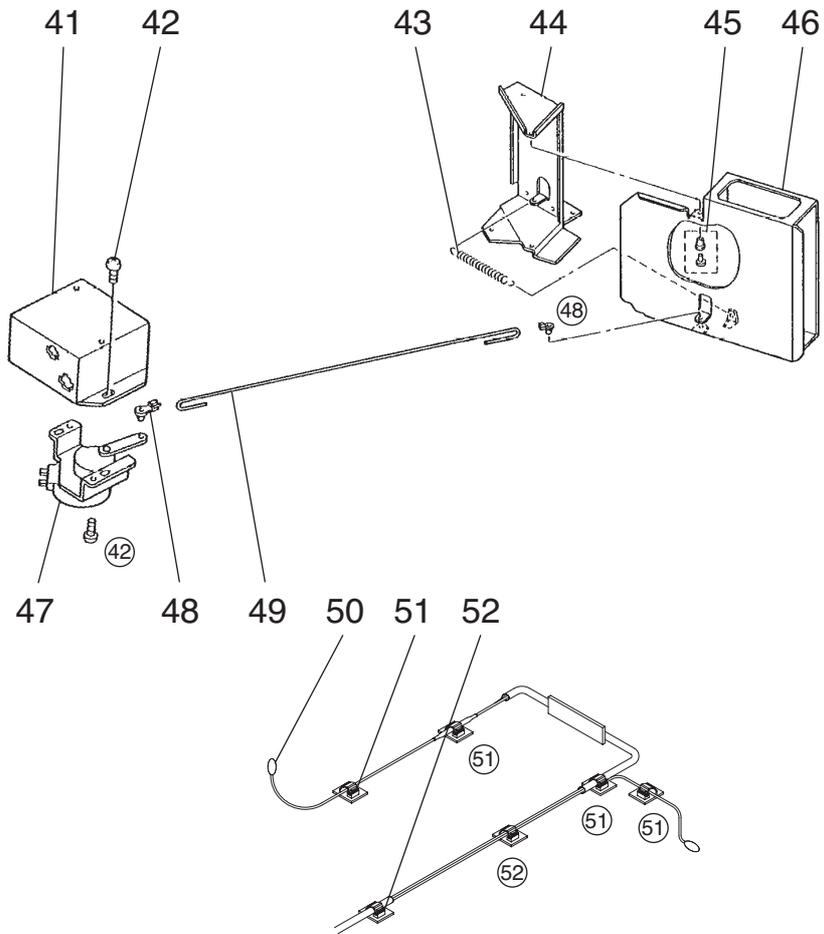


Model LGH-100RX3-E, LGH-100RX3-E-60

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
1.	H00 000 487	PTT screw 4×8	18			
2.	Y50 021 609	Flange	4			
3.	R50 095 380	Hanger	4			
4.	H00 000 244	PT screw 6×12	16			
5.	R50 265 707	Maintenance cover	1			
6.	R50 219 381	Core guide	1			
7.	Y50 063 718	Filter	2	▲		
8.	R50 219 710	Lossnay core	2	▲		
9.	R50 481 381	Core guide	1			
10.	R50 358 704	Cover	2			
11.	R50 213 344	Hinge	1			
12.	M34 074 017	Special screw 4×11	1			
13.	Y50 029 712	Fix piece	2			
14.	Y50 126 718	Sound absorbing material	1			

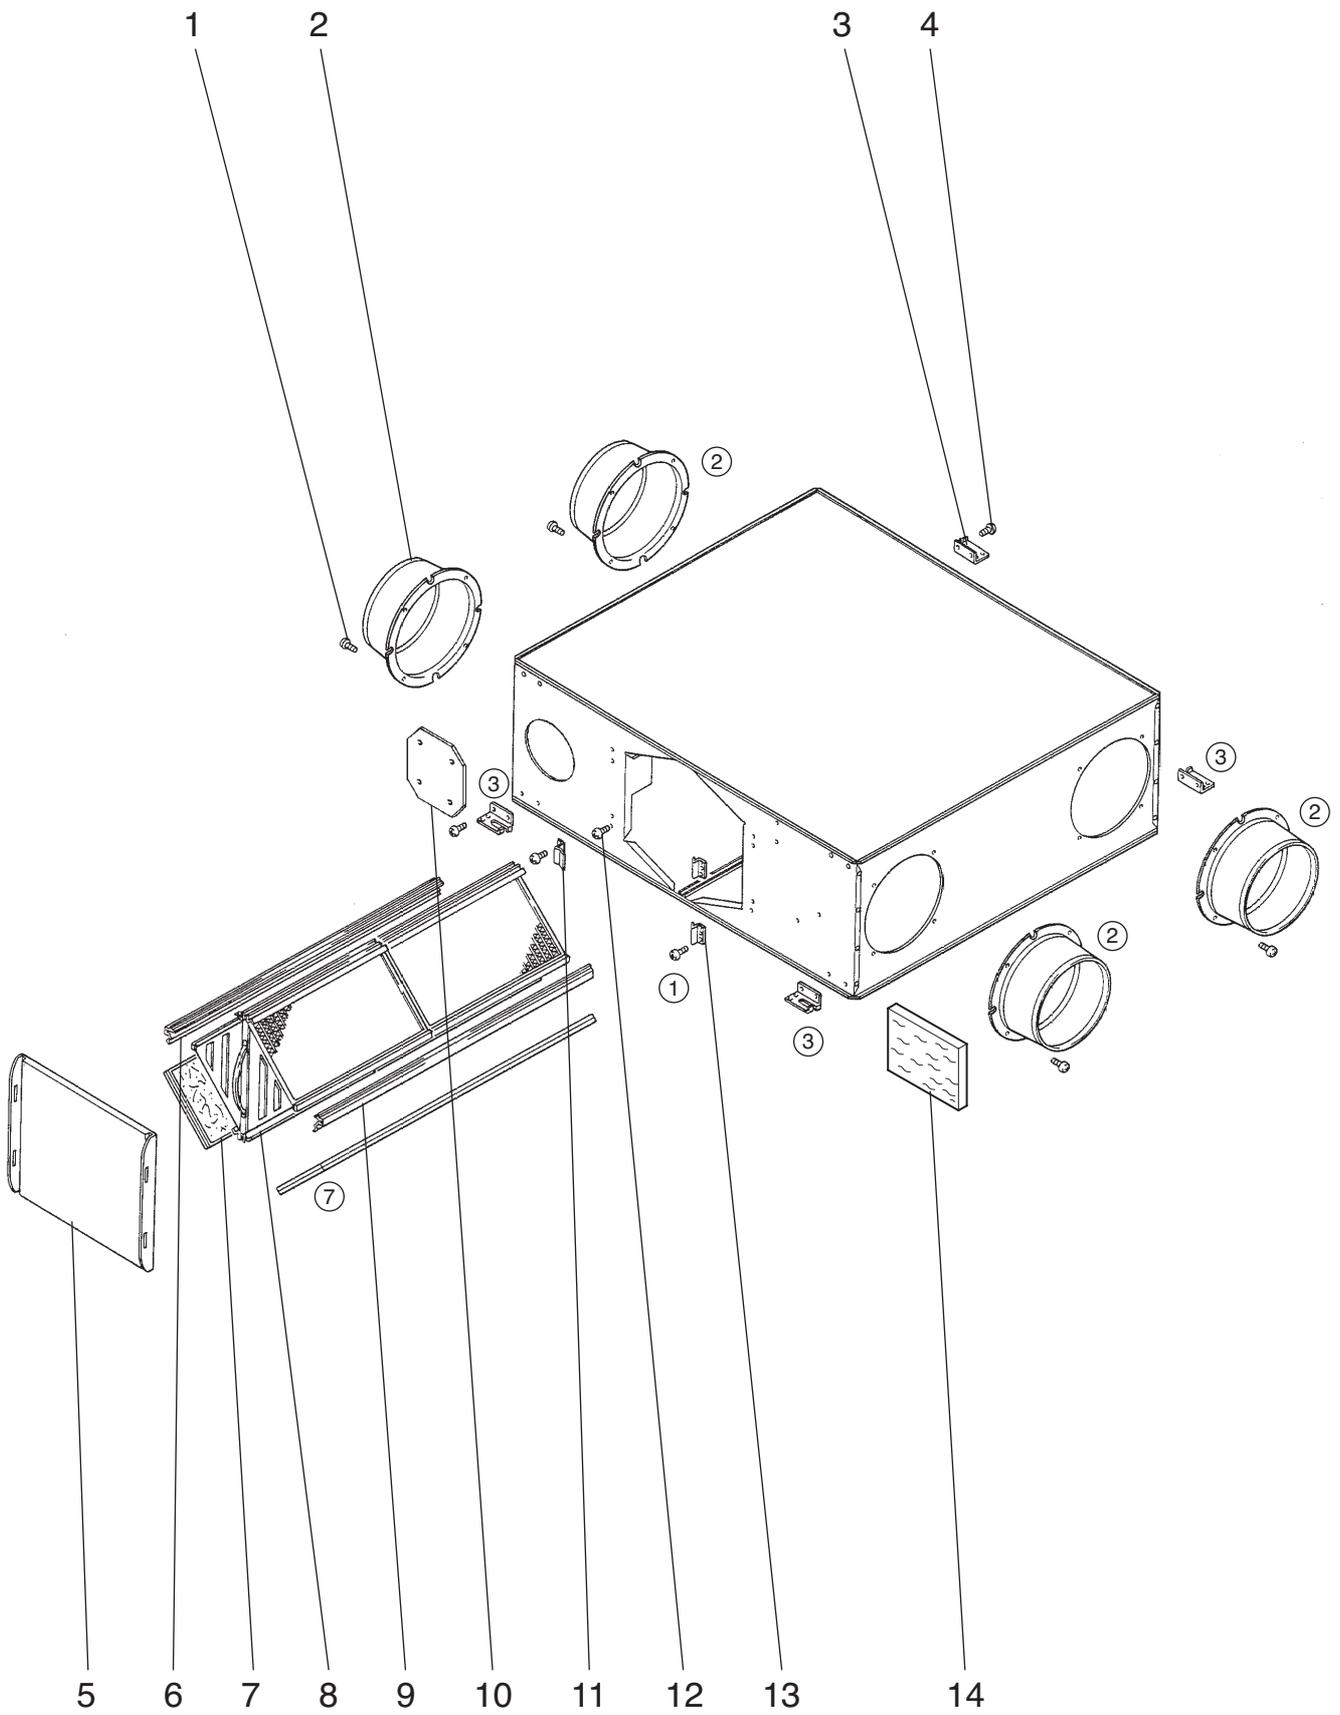



Model LGH-100RX3-E, LGH-100RX3-E-60

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
21.	R50 218 067	Special nut(12)	2			
22.	K83 466 113	Washer(12)	2			
23.	R50 479 480	Centrifugal fan	2	▲	φ 245	
24.	H00 157 008	PT screw 6×20	8			
25.	M34 043 080	Special washer(6)	8			
26.	R50 000 095	Spacer	8			
27.	Y50 033 226	Bush	8			
28.	R50 480 707	Fan base	2			
29.	R50 264 711	Inlet ring	2			
30.	R50 218 712	Motor fix plate	2			
31.	H00 189 007	PTT screw 5×10	16			
32.	Y50 063 452	Motor	2	▲	50Hz	
32.	Y50 063 453	Motor	2	▲	60Hz	
33.	H00 061 050	Nut(6)	8			

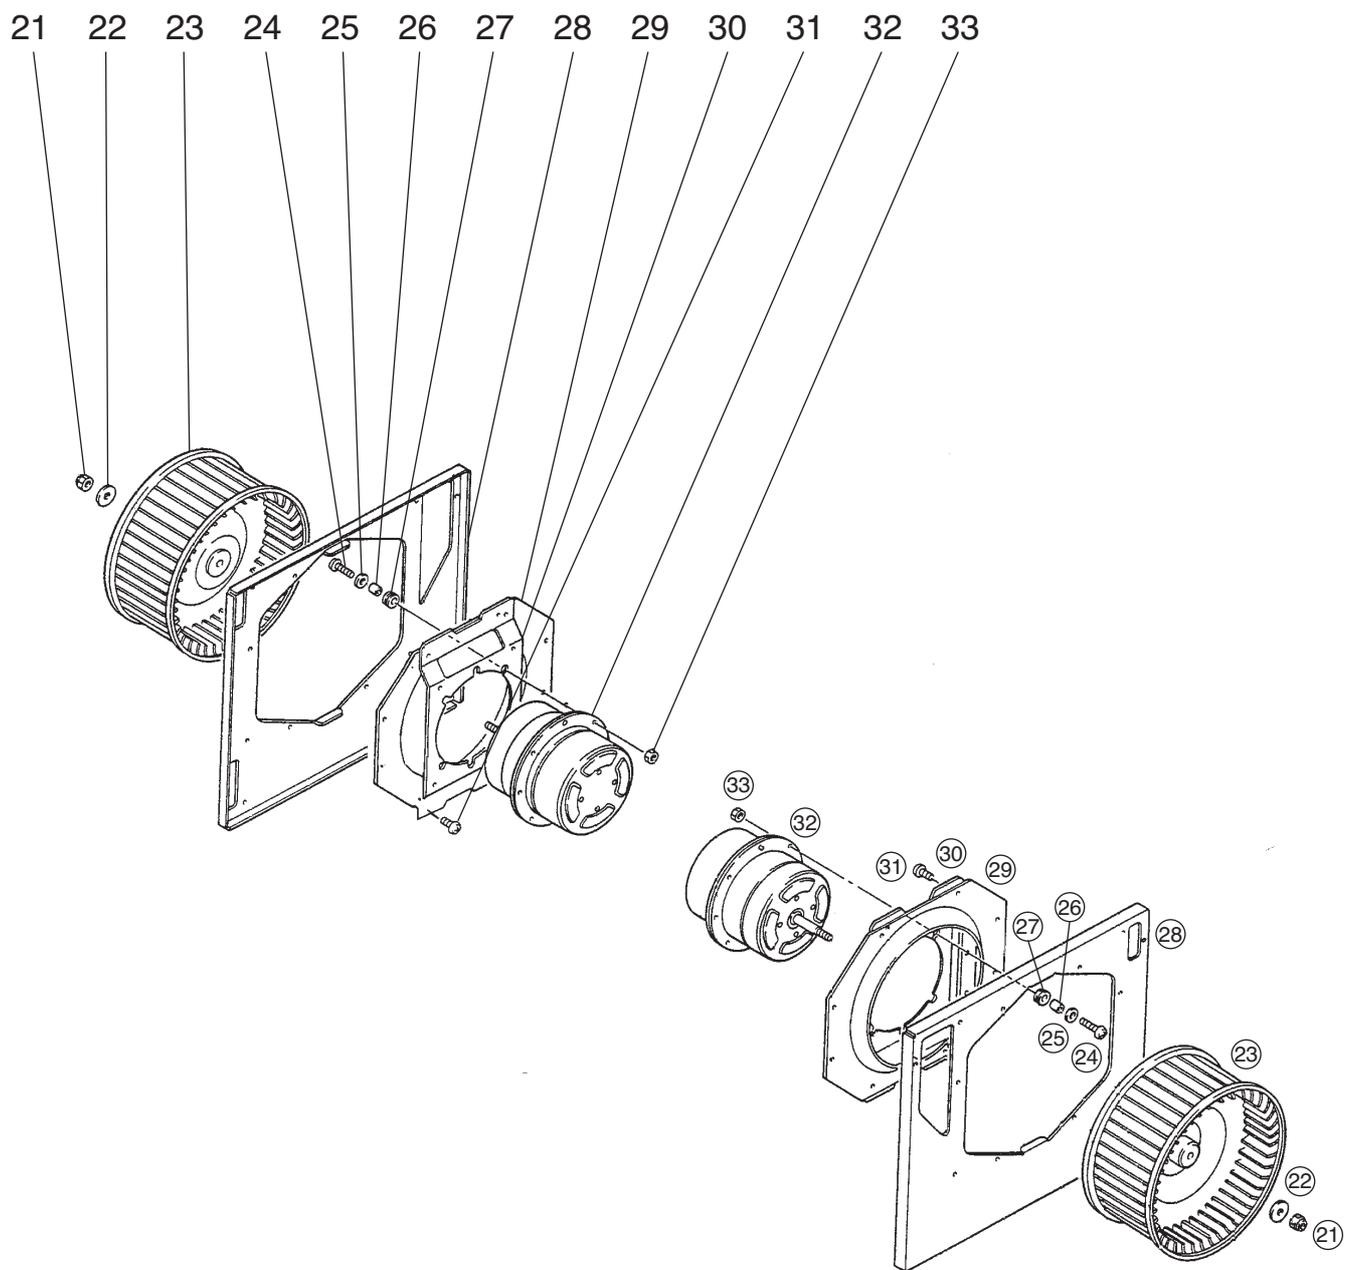


Model LGH-100RX3-E, LGH-100RX3-E-60

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
41.	Y50 061 693	Damper motor cover	1			
42.	H00 312 007	PTT screw 4×6	2			
43.	R50 074 156	Pull spring	1			
44.	R50 473 715	Damper support	1			
45.	M31 234 089	Special bush	2			
46.	R50 271 715	Damper	1			
47.	Y50 061 260	Damper motor	1	▲	220-240V	
48.	R50 054 225	Bush	2			
49.	R50 265 150	Rod	1			
50.	Y50 063 216	Thermistor	1	▲		
51.	R50 399 223	Cord clip	4			
52.	R50 399 224	Cord clip	4			
53.	Y50 061 706	Control cover	1			
54.	K83 170 228	Cord band	1			
55.	M45 017 228	Cord band	1			
56.	H00 000 332	PTT screw 4×10	1			
57.	Y50 138 216	Transformer	1	▲	AC230V	
58.	Y50 063 283	Capacitor	2	▲	7.0 μ F·440VAC	
59.	H00 011 008	PT screw 4×8(BS)	1			
60.	H00 013 076	Lock washer(4)	2			
61.	H00 000 488	PTT screw 4×12	2			
62.	R50 072 236	Terminal block	1	▲	4P	
63.	Y50 061 226	Insulation plate	1			
64.	Y50 061 708	Circuit fix plate	1			
65.	H00 000 003	PP screw 4×8	2			
66.	Y50 061 171	Circuit board	1	▲	LG-X01-E	
67.	X40 139 095	Spacer	4			
68.	D42 019 095	Spacer	3			
69.	M35 164 224	Cord clip	1			
70.	Y50 047 226	Bush	2			
71.	K83 223 225	Bush	1			

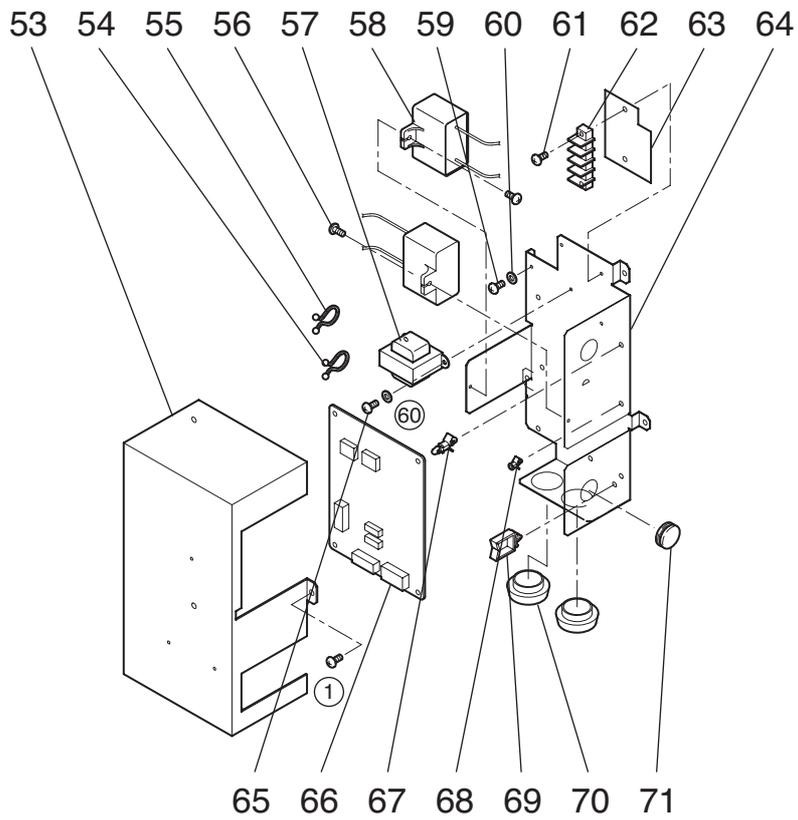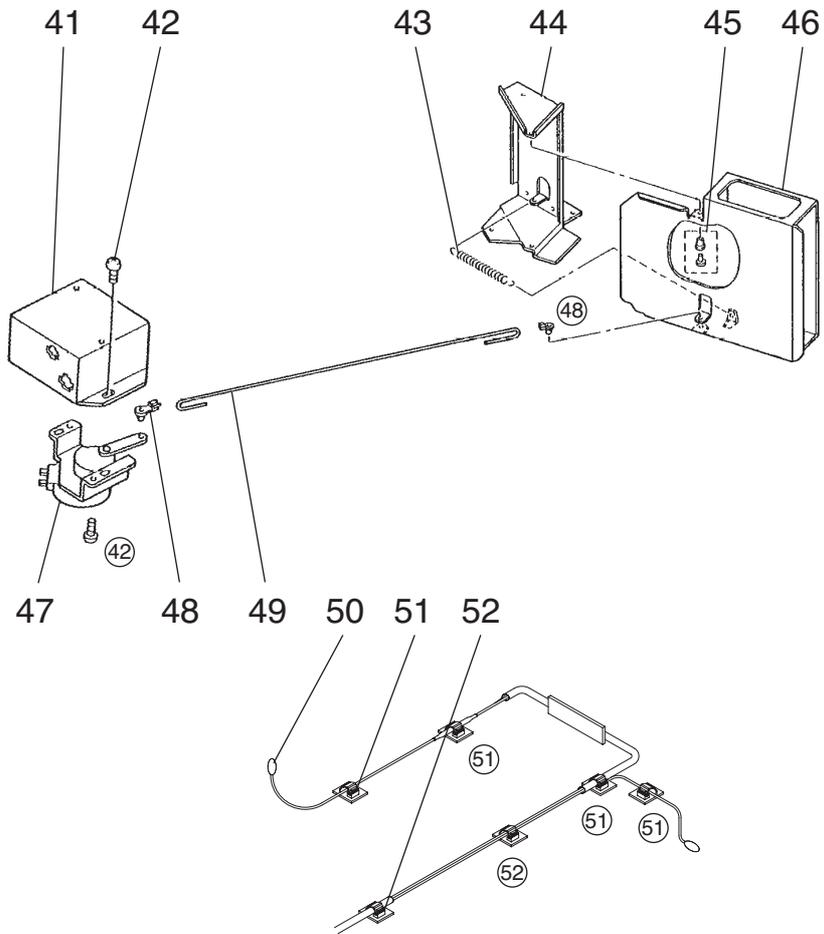

Model LGH-150RX3-E


No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
1.	H00 000 333	PTT screw 4×14	32			
2.	R50 220 607	Flange	4			
3.	R50 213 344	Hinge	2			
4.	R50 111 381	Hanger	8			
5.	H00 000 244	PT screw 6×12	24			
6.	R50 265 707	Maintenance cover	2			
7.	R50 218 381	Core guide	2			
8.	Y50 063 717	Filter	4		▲	
9.	R50 218 710	Lossnay core	4		▲	
10.	R50 480 381	Core guide	2			
11.	H00 000 487	PTT screw 4×8	35			
12.	Y50 029 712	Fix piece	4			
13.	Y50 126 718	Sound absorbing material	2			

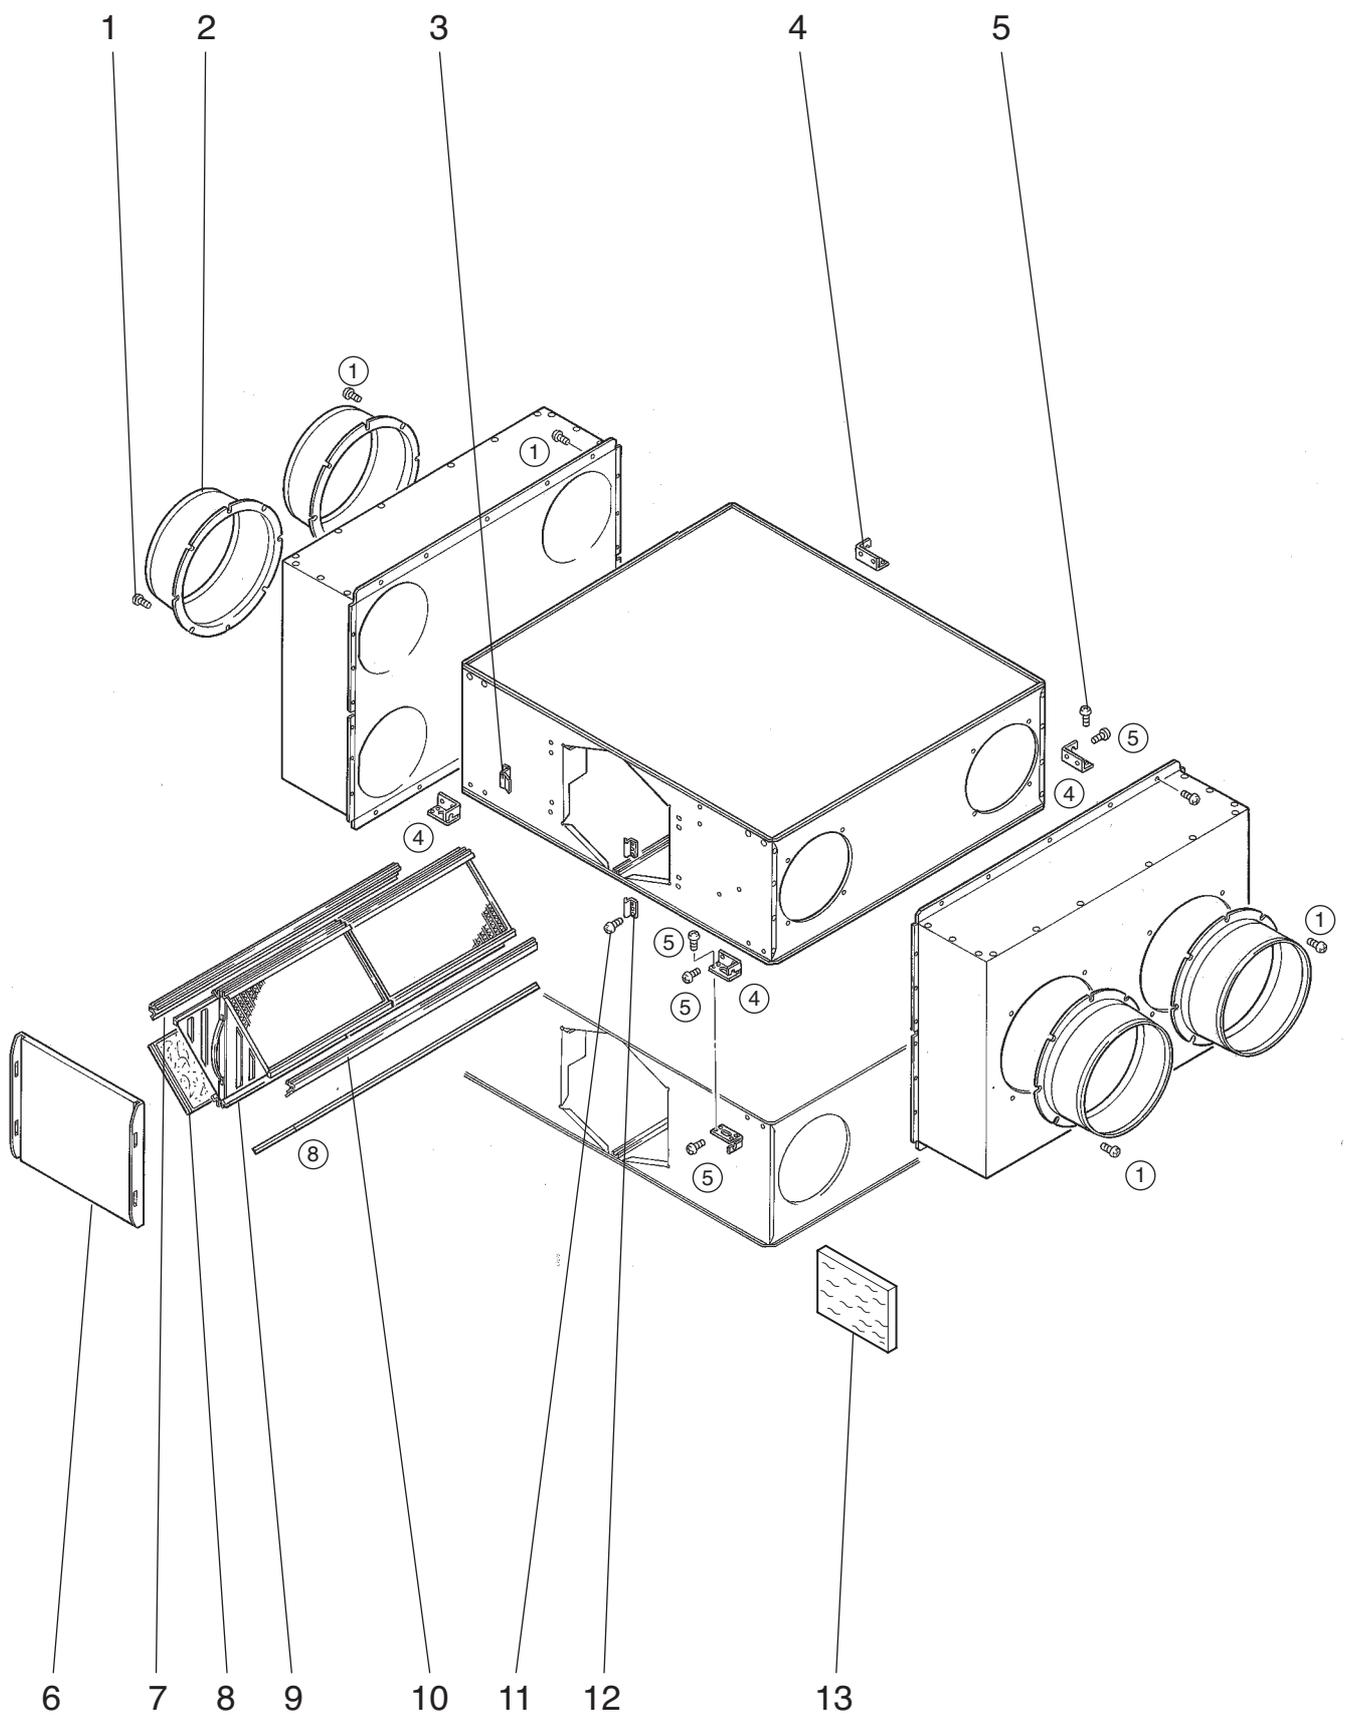

Model LGH-150RX3-E



No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
21.	R50 218 067	Special nut(12)	4			
22.	K83 466 113	Washer(12)	4			
23.	R50 479 480	Centrifugal fan	4	▲	φ 245	
24.	H00 157 008	PT screw 6×20	16			
25.	M34 043 080	Special washer(6)	16			
26.	D40 135 095	Spacer	16			
27.	Y50 033 226	Bush	16			
28.	R50 480 707	Fan base	4			
29.	H00 189 007	PTT screw 5×10	32			
30.	R50 264 711	Inlet ring	4			
31.	R50 264 712	Motor fix plate	4			
32.	Y50 063 451	Motor	4	▲		
33.	H00 061 050	Nut(6)	16			

21 22 23 24 25 26 27 28 29 30 31 32 33

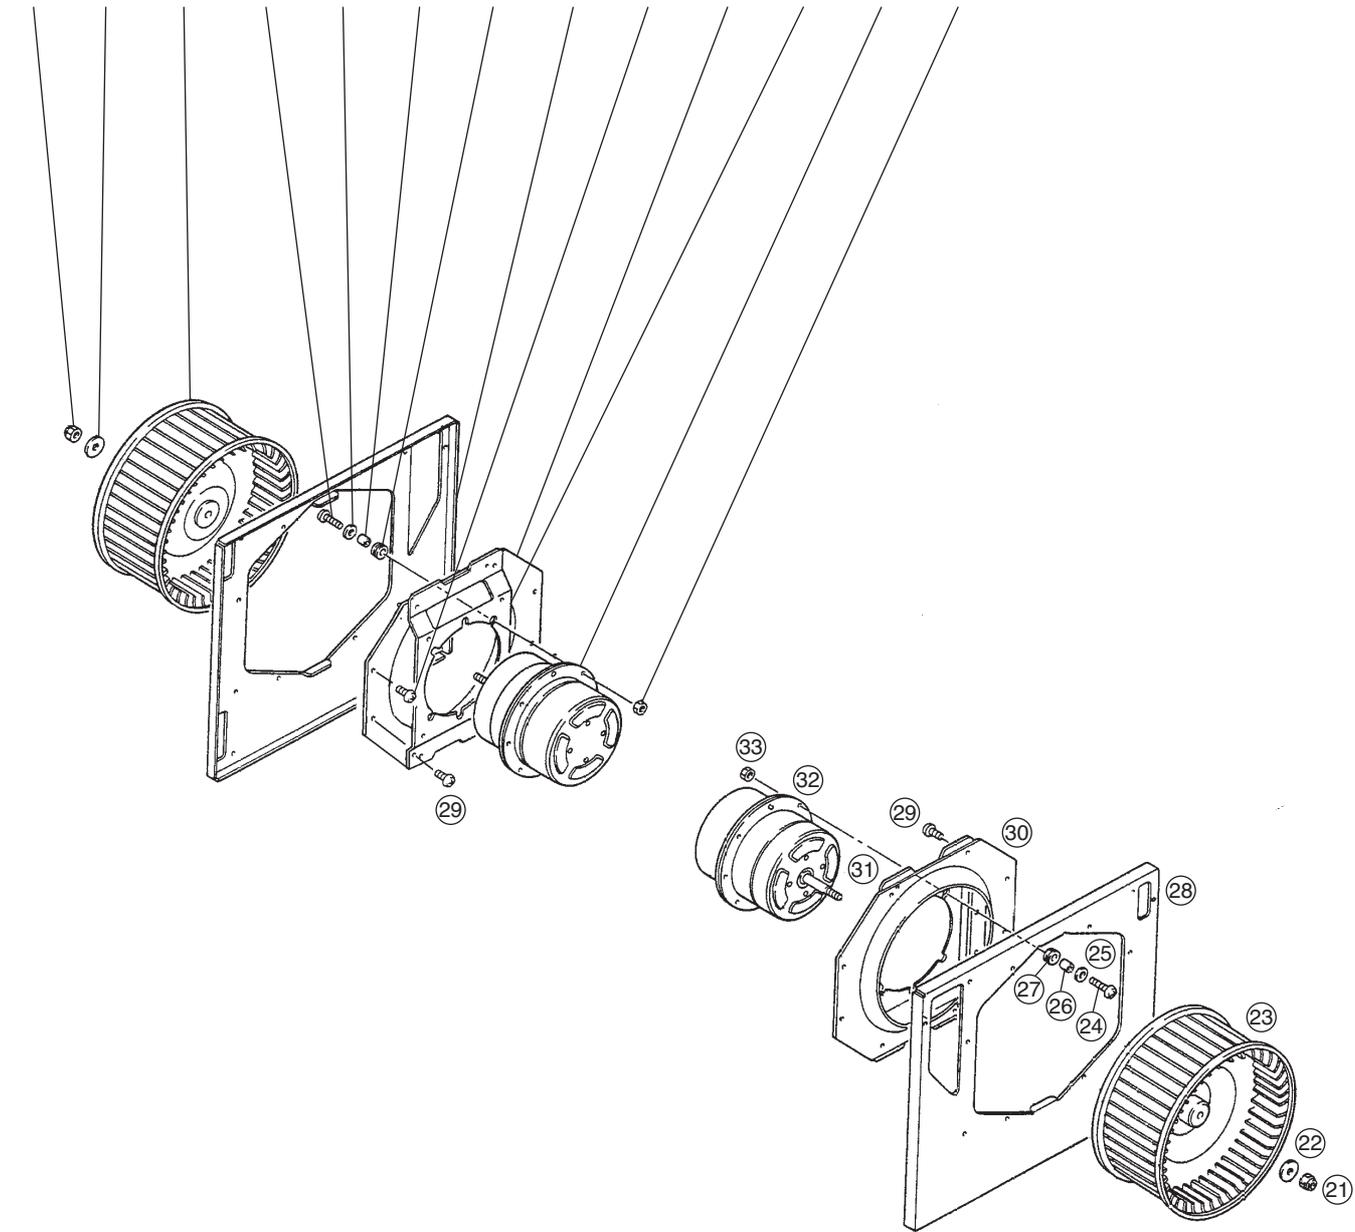


Model LGH-150RX3-E

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
41.	Y50 061 693	Damper motor cover	2			
42.	H00 312 007	PTT screw 4×6	8			
43.	R50 074 156	Pull spring	2			
44.	R50 473 715	Damper support	2			
45.	M31 234 089	Special bush	4			
46.	R50 271 715	Damper	2			
47.	Y50 061 260	Damper motor	2	▲	220-240V	
48.	R50 265 150	Rod	2			
49.	Y50 064 218	Thermistor	2	▲		
50.	R50 399 223	Cord clip	8			
51.	R50 399 224	Cord clip	4			
52.	Y50 045 707	Control cover	1			
53.	K83 170 228	Cord band	2			
54.	Y50 063 283	Capacitor	4	▲	7.0 μF·440VAC	
55.	H00 000 003	PP screw 4×8	5			
56.	H00 013 076	Lock washer(4)	4			
57.	Y50 138 216	Transformer	2	▲	AC230V	
58.	D42 019 095	Spacer	6			
59.	M35 164 224	Cord clip	8			
60.	Y50 064 706	Fix plate	1			
61.	X40 139 095	Spacer	8			
62.	R50 072 236	Terminal block	1	▲	4P	
63.	H00 000 488	PTT screw 4×12	4			
64.	Y50 061 226	Insulation plate	1			
65.	R50 069 236	Terminal block	1	▲	6P	
66.	D40 058 224	Cord clip	2			
67.	Y50 047 226	Bush	3			
68.	Y50 064 707	Hanger(cord)	1			
69.	Y50 061 171	Circuit board	2	▲	LG-X01-E	
70.	R50 054 225	Bush	2			
71.	H00 011 008	PT screw 4×8(BS)	1			

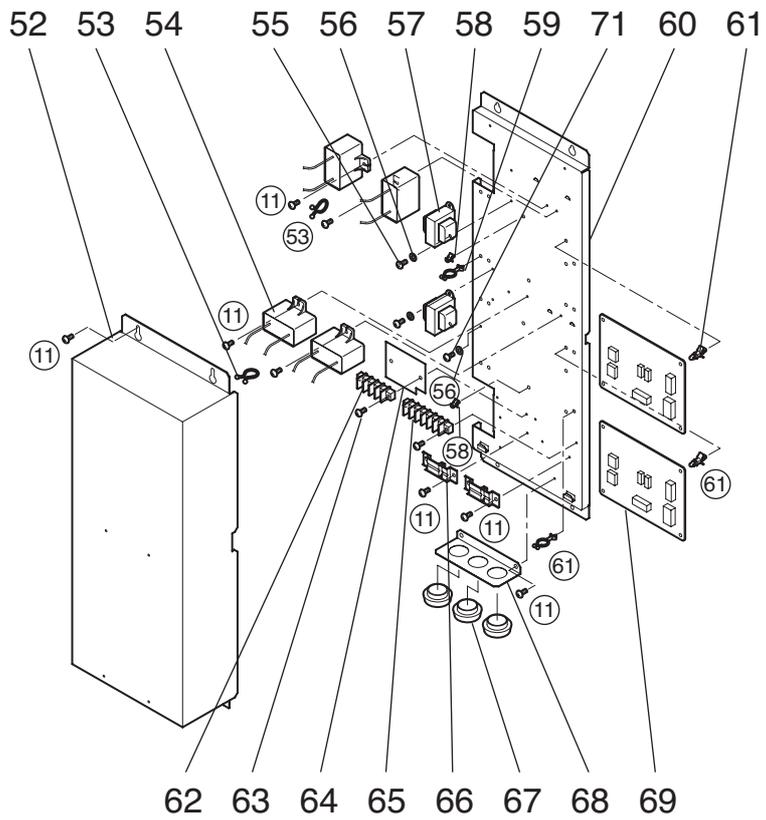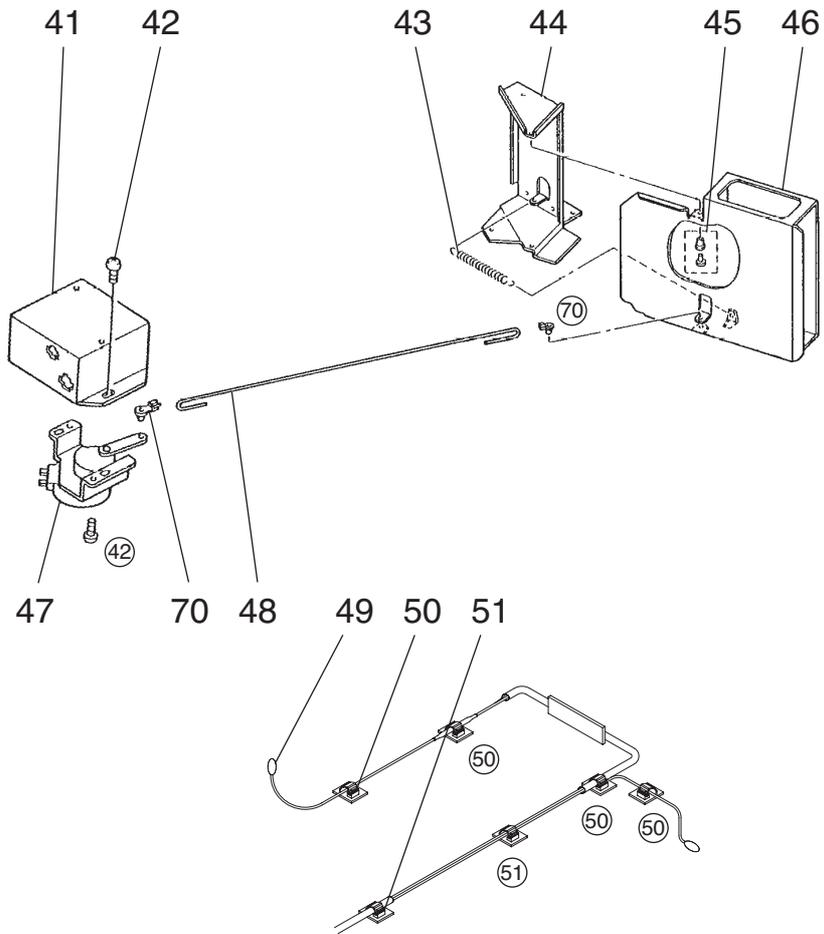


Model LGH-200RX3-E, LGH-200RX3-E-60

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
1.	H00 000 333	PTT screw 4×14	32			
2.	R50 220 607	Flange	4			
3.	R50 213 344	Hinge	2			
4.	R50 111 381	Hanger	8			
5.	H00 000 244	PT screw 6×12	24			
6.	R50 265 707	Maintenance cover	2			
7.	R50 219 381	Core guide	2			
8.	Y50 063 718	Filter	4	▲		
9.	R50 219 710	Lossnay core	4	▲		
10.	R50 481 381	Core guide	2			
11.	H00 000 487	PTT screw 4×8	35			
12.	Y50 029 712	Fix piece	4			
13.	Y50 126 718	Sound absorbing material	2			

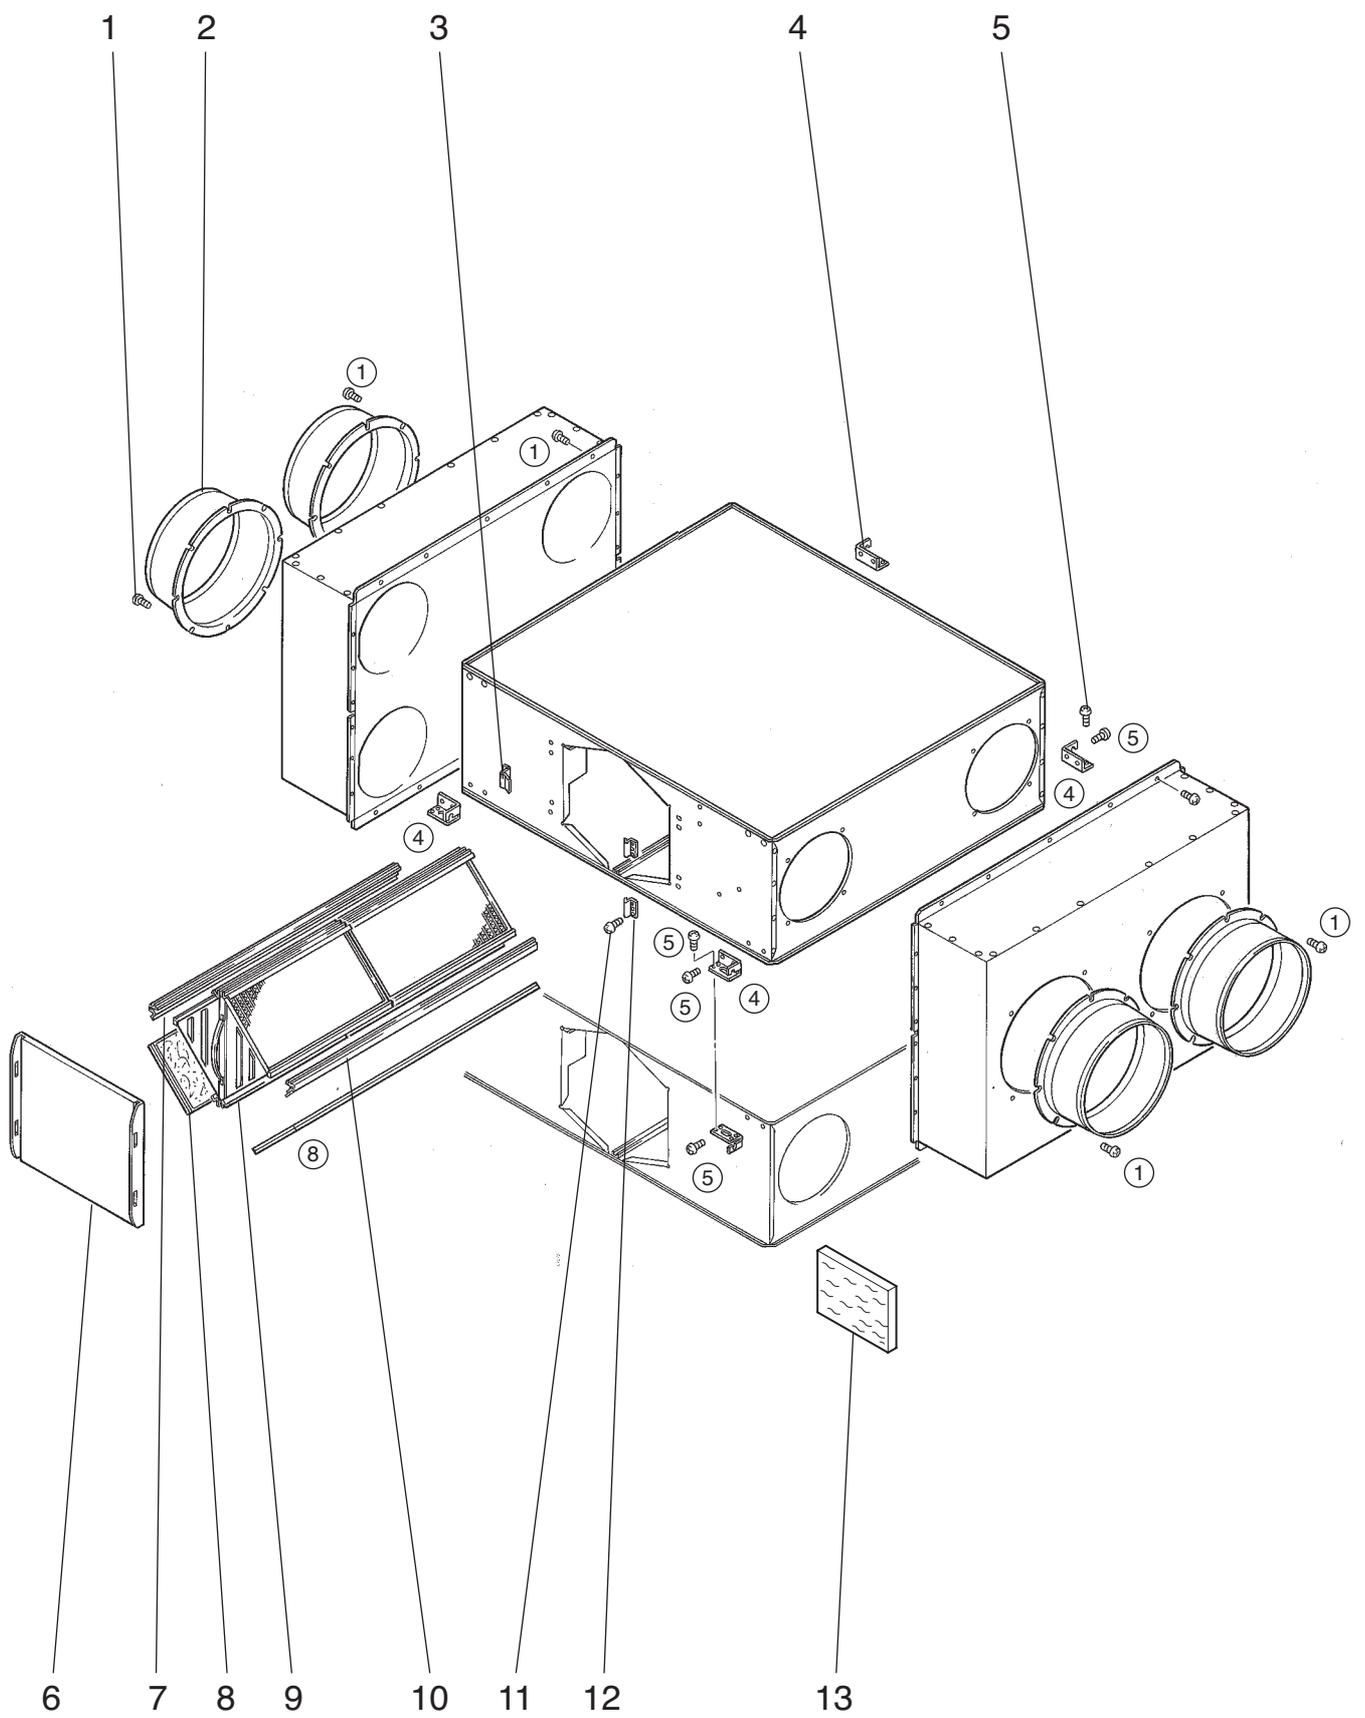

Model LGH-200RX3-E, LGH-200RX3-E-60

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
21.	R50 218 067	Special nut(12)	4			
22.	K83 466 113	Washer(12)	4			
23.	R50 479 480	Centrifugal fan	4	▲	φ 245	
24.	H00 157 008	PT screw 6×20	16			
25.	M34 043 080	Special washer(6)	16			
26.	R50 000 095	Spacer	16			
27.	Y50 033 226	Bush	16			
28.	R50 480 707	Fan base	4			
29.	H00 189 007	PTT screw 5×10	32			
30.	R50 264 711	Inlet ring	4			
31.	R50 218 712	Motor fix plate	4			
32.	Y50 063 452	Motor	4	▲	50Hz	
32.	Y50 063 453	Motor	4	▲	60Hz	
33.	H00 061 050	Nut(6)	16			

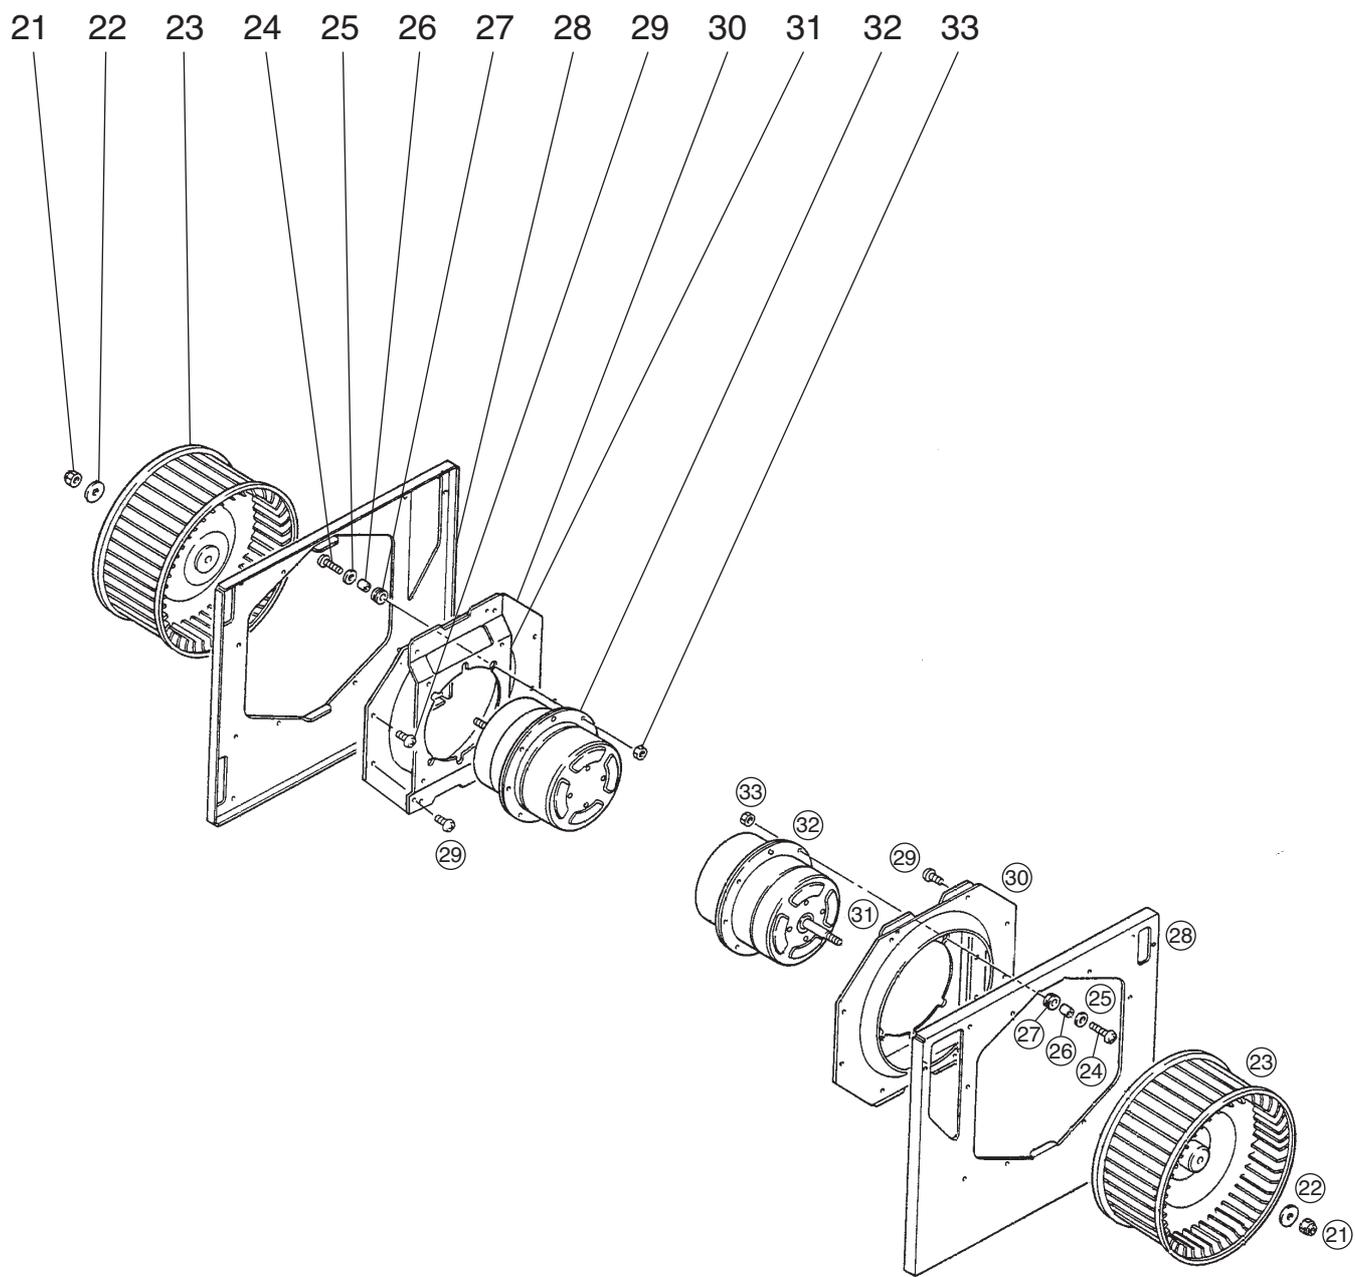

Model LGH-200RX3-E, LGH-200RX3-E-60

No.	Parts No.	Name of part	Q'ty pcs/unit	Critical for safety	Remarks	Price
41.	Y50 061 693	Damper motor cover	2			
42.	H00 312 007	PTT screw 4×6	8			
43.	R50 074 156	Pull spring	2			
44.	R50 473 715	Damper support	2			
45.	M31 234 089	Special bush	4			
46.	R50 271 715	Damper	2			
47.	Y50 061 260	Damper motor	2	▲	220-240V	
48.	R50 265 150	Rod	2			
49.	Y50 064 217	Thermistor	2	▲		
50.	R50 399 223	Cord clip	8			
51.	R50 399 224	Cord clip	4			
52.	Y50 045 707	Control cover	1			
53.	K83 170 228	Cord band	2			
54.	Y50 063 283	Capacitor	4	▲	7.0 μF·440VAC	
55.	H00 000 003	PP screw 4×8	5			
56.	H00 013 076	Lock washer(4)	4			
57.	Y50 138 216	Transformer	2	▲	AC230V	
58.	D42 019 095	Spacer	6			
59.	M35 164 224	Cord clip	8			
60.	Y50 064 706	Fix plate	1			
61.	X40 139 095	Spacer	8			
62.	R50 072 236	Terminal block	1	▲	4P	
63.	H00 000 488	PTT screw 4×12	4			
64.	Y50 061 226	Insulation plate	1			
65.	R50 069 236	Terminal block	1	▲	6P	
66.	D40 058 224	Cord clip	2			
67.	Y50 047 226	Bush	3			
68.	Y50 064 707	Hanger(cord)	1			
69.	Y50 061 171	Circuit board	2	▲	LG-X01-E	
70.	R50 054 225	Bush	4			
71.	H00 011 008	PT screw 4×8(BS)	1			

Revision record

U042

Revision	Date	Overview
A	2008-07-21	<p>Parts Nos. were changed due to the changeover to DecaBDE-free parts.</p> <p>Page 23 Parts No. of No.25 was Y50 061 451. Page 29 Parts No. of No.25 was Y50 061 452. Page 35 Parts No. of No.25 was Y50 062 451. Page 41 Parts No. of No.25 was Y50 062 452. Page 47, 53, 59, 65 Parts No. of No.27 was R50 217 225. Page 61 Parts No. of No.49 was Y50 064 215.</p> <p>Other revisions</p> <p>Page 21 Parts No. of No.10 was R50 261 381. Page 25, 31 Parts No. of No.32 was R50 213 715. Page 27 Parts No. of No.10 was R50 395 383. Page 33 Parts No. of No.11 was R50 396 382. Parts No. of No.12 was R50 354 704. Page 37, 43 Parts No. of No.33 was R50 215 716. Parts No. of No.35 was R50 215 715. Parts No. of No.45 was Y50 047 216. Page 39 Parts No. of No.11 was R50 263 381. Page 45 Parts No. of No.14 was R50 358 717. Page 45, 51 Parts No. of No.5 was R50 397 708. Parts No. of No.9 was R50 265 381. Page 47, 53 Parts No. of No.23 was R50 357 480. Parts No. of No.28 was Y50 033 707. Page 49, 55, 61 Parts No. of No.44 was R50 218 716. Parts No. of No.57 was Y50 047 216. Page 49, 55 Quantity (Q'ty pcs/unit) of No.60 was 1. Page 51 Parts No. of No.9 was R50 266 381. Page 57 Parts No. of No.13 was R50 358 717. Page 57, 63 Parts No. of No.6 was R50 397 708. Parts No. of No.10 was R50 265 381. Page 59, 65 Parts No. of No.23 was R50 357 480. Parts No. of No.28 was Y50 033 707. Page 63 Parts No. of No.10 was R50 266 381. Page 67 Parts No. of No.44 was R50 218 716. Parts No. of No.57 was Y50 047 216.</p>