

# TECHNICAL & SERVICE MANUAL

## Series PLA

## Ceiling Cassettes R407C

Indoor unit  
[Model names]

PLA-P3AA

PLA-P4AA

PLA-P5AA

PLA-P6AA

[Service Ref.]

**PLA-P3AA.UK**  
**PLA-P3AA<sub>1</sub>.UK**  
**PLA-P4AA.UK**  
**PLA-P4AA<sub>1</sub>.UK**  
**PLA-P5AA.UK**  
**PLA-P5AA<sub>1</sub>.UK**  
**PLA-P6AA.UK**  
**PLA-P6AA<sub>1</sub>.UK**




**Revision:**

- "12. PARTS LIST" has been modified.
- Program timer <PAC-YT32PTA> has been added in "13. OPTIONAL PARTS".

**Note:**

- Refer to the OCT03 REVISED EDITION-E as for control relation. This manual does not cover outdoor units. When servicing them, please refer to the service manual No.OC180 REVISED EDITION-A OC261 and this manual in a set.

- Please void OC241 REVISED EDITION-A.

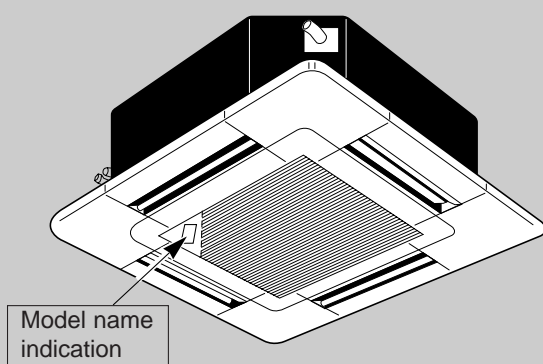

PLA-P•AA.UK PLA-P•AA<sub>1</sub>.UK

PLA-P•AA.UK

PLA-P•AA<sub>1</sub>.UK

WIRELESS REMOTE  
CONTROLLER

WIRED REMOTE  
CONTROLLER

## CONTENTS

1. TECHNICAL CHANGES .....	2
2. COMBINATION OF INDOOR AND OUTDOOR UNITS--	3
3. SAFETY PRECAUTION .....	3
4. PART NAMES AND FUNCTIONS .....	5
5. SPECIFICATIONS .....	11
6. DATA .....	23
7. OUTLINES AND DIMENSIONS .....	52
8. WIRING DIAGRAM .....	53
9. REFRIGERANT SYSTEM DIAGRAM.....	54
10. TROUBLESHOOTING .....	58
11. DISASSEMBLY PROCEDURE .....	60
12. PARTS LIST .....	63
13. OPTIONAL PARTS .....	68

**Revision:**

1. " 12. PARTS LIST " has been modified on page 65, 66 and 67.

Page	Revise point	Service Ref.	Incorrect	Correct
65	FUNCTIONAL PARTS No.7 HEAT EXCHANGE	PLA-P5AA.UK PLA-P5AA1.UK	S70 E21 480	S70 E24 480
		PLA-P6AA.UK PLA-P6AA1.UK	S70 E22 480	S70 E25 480
66	FUNCTIONAL PARTS No.12 TERMINAL BLOCK	PLA-P3AA.UK PLA-P3AA1.UK PLA-P4AA.UK PLA-P4AA1.UK	S70 517 716	S70 E01 716
67	FUNCTIONAL PARTS No.12 TERMINAL BLOCK	PLA-P5AA.UK PLA-P5AA1.UK PLA-P6AA.UK PLA-P6AA1.UK		

Spare INDOOR CONTROLLER BOARD for PLA-P3AA.UK, PLA-P3AA1.UK, PLA-P4AA.UK, PLA-P4AA1.UK, PLA-P5AA.UK, PLA-P5AA1.UK, PLA-P6AA.UK and PLA-P6AA1.UK are unified.

Page	Revise point	Service Ref.	Old parts code	New part code
66	FUNCTIONAL PARTS No.7 INDOOR CONTROLLER BOARD	PLA-P3AA.UK PLA-P3AA1.UK	S70 E24 310	S70 E20 310*
		PLA-P4AA.UK PLA-P4AA1.UK	S70 E25 310	
67	FUNCTIONAL PARTS No.7 INDOOR CONTROLLER BOARD	PLA-P5AA.UK PLA-P5AA1.UK	S70 E26 310	
		PLA-P6AA.UK PLA-P6AA1.UK	S70 E27 310	

DRAIN PUMP has been changed.

Page	Revise point	Service Ref.	Old part code	New part code
66	FUNCTIONAL PARTS No.3 DRAIN PUMP	PLA-P3AA.UK PLA-P3AA1.UK PLA-P4AA.UK PLA-P4AA1.UK	S70 E01 355	S70 E02 355
67	FUNCTIONAL PARTS No.3 DRAIN PUMP	PLA-P5AA.UK PLA-P5AA1.UK PLA-P6AA.UK PLA-P6AA1.UK		

2. The description "The part name of symbol "I.B" is "SPCB" " is added on both pages of wiring diagram and part list.

## 1 TECHNICAL CHANGES

**PLA-P3AA.UK → PLA-P3AA<sub>1</sub> PLA-P4AA.UK → PLA-P4AA<sub>1</sub>.UK**

**PLA-P5AA.UK → PLA-P5AA<sub>1</sub> PLA-P6AA.UK → PLA-P6AA<sub>1</sub>.UK**

- REMOTE CONTROLLER has changed. (PAR-S27A-E → PAR-20MAA-E, PAR-SL95A-E → PAR-SL97A-E)
- Outdoor unit which are connected to PLA-P\*AA.UK and PLA-P\*AA<sub>1</sub>.UK have been added.

## 2

# COMBINATION OF INDOOR AND OUTDOOR UNITS

	Indoor unit	Outdoor unit										
		Heat pump type					Cooling only type					
		PUH-P					PU-P					
		3		4		5	6	3		4	5	6
VGA	YGA	YGA	YGA	YGA	YGA	VGA	YGA	YGA	YGA	YGA		
Heat pump without electric heater or Cooling only	PLA-P3AA.UK	○	○	—	—	—	—	○	○	—	—	—
	PLA-P4AA.UK	—	—	○	—	—	—	—	—	○	—	—
	PLA-P5AA.UK	—	—	—	○	—	—	—	—	—	○	—
	PLA-P6AA.UK	—	—	—	—	—	○	—	—	—	—	○

	Indoor unit	Outdoor unit											
		Heat pump type						Cooling only type					
		PUH-P						PU-P					
		3		4		5	6	3		4		5	6
VGAA.UK	YGAA.UK	VGAA.UK	YGAA.UK	YGAA.UK	YGAA.UK	VGAA.UK	YGAA.UK	VGAA.UK	YGAA.UK	YGAA.UK	YGAA.UK		
Heat pump without electric heater or Cooling only	PLA-P3AA.UK	○	○	—	—	—	—	○	○	—	—	—	—
	PLA-P3AA1.UK	○	○	—	—	—	—	○	○	—	—	—	—
	PLA-P4AA.UK	—	—	○	○	—	—	—	—	○	○	—	—
	PLA-P4AA1.UK	—	—	○	○	—	—	—	—	○	○	—	—
	PLA-P5AA.UK	—	—	—	—	○	—	—	—	—	—	○	—
	PLA-P5AA1.UK	—	—	—	—	○	—	—	—	—	—	○	—
	PLA-P6AA.UK	—	—	—	—	—	○	—	—	—	—	—	○
	PLA-P6AA1.UK	—	—	—	—	—	○	—	—	—	—	—	○

## 3

# SAFETY PRECAUTION

### Cautions for devices that use R407C refrigerant.

- **Do not use the existing refrigerant piping.**  
-The old refrigerant and lubricating oil in the existing piping contains a large amount of chlorine which may cause the lubricating oil of the new unit to deteriorate.
- **Use “low residual oil piping”.**  
-If there is a large amount of residual oil (hydraulic oil, etc.) inside the piping and joints, deterioration of the lubricating oil will result.
- **Store the piping to be used during installation indoors and keep both ends of the piping sealed until just before brazing. (Store elbows and other joints in a plastic bag.)**  
-If dust, dirt, or water enters the refrigerant cycle, deterioration of the oil and compressor trouble may result.
- **Use Suniso 4GS or 3GS (small amount) as the lubricating oil to coat flares and flange connection parts.**  
-The lubricating oil used with the air conditioner is highly hygroscopic. If it is used, water may be mixed in and deterioration of the lubricating oil may result.
- **Use liquid refrigerant to charge the system.**  
-If gas refrigerant is used to charge the system, the composition of the refrigerant in the cylinder will change and performance may drop.
- **Do not use a refrigerant other than R407C.**  
-If another refrigerant (R22, etc.) is used, the chlorine in the refrigerant may cause the lubricating oil to deteriorate.
- **Use a vacuum pump with a reverse flow check valve.**  
-The vacuum pump oil may flow back into the refrigerant cycle and cause the lubricating oil to deteriorate.

## [1] Service tools

Use the below service tools as exclusive tools for R407C refrigerant.

No.	Tool name	Specifications
①	Gauge manifold	·Only for R407C.
		·Use the existing fitting SPECIFICATIONS. (UNF7/16)
		·Use high-tension side pressure of 35kgf/cm <sup>2</sup> or over.
②	Charge hose	·Only for R407C.
		·Use pressure performance of 52kgf/cm <sup>2</sup> or over.
③	Electronic scale	
④	Gas leak detector	·Use the detector for R134a or R407C.
⑤	Adapter for reverse flow check.	·Attach on vacuum pump.
⑥	Refrigerant charge base.	
⑦	Refrigerant cylinder.	·For R407C ·Top of cylinder (Brown)
		·Cylinder with syphon
⑧	Refrigerant recovery equipment.	

## [2] Notice on repair service


- After recovering all the refrigerant in the unit, work may be started.
- Do not release the refrigerant in the air.
- After completing the repair service, recharge the system with the specified amount of the liquid refrigerant.

## [3] Refrigerant recharging

### (1) Refrigerant recharging process

Direct charging from the cylinder.

- Confirm that the cylinder is suitable for syphoning.
- Raise the cylinder and recharge the unit by syphoning liquid refrigerant.

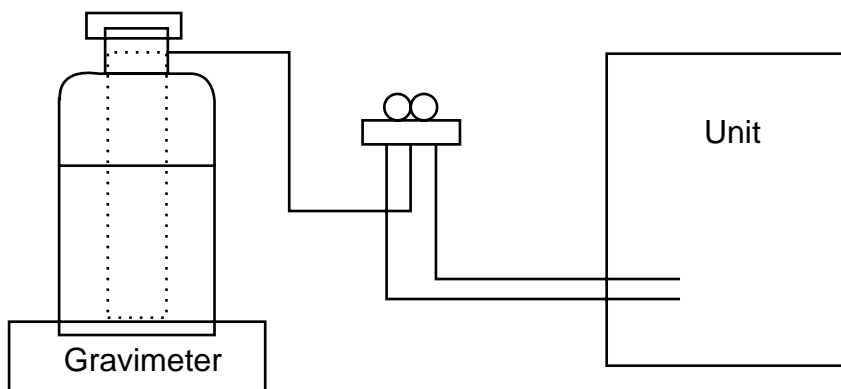

### (2) Recharge when refrigerant leakage has occurred.

- After recovering all the refrigerant in the unit, work may be started.
- Do not release the refrigerant in the air.
- After completing the repair service, recharge the system with the specified amount of the liquid refrigerant.

# 4


## PART NAMES AND FUNCTIONS

### ● Indoor Unit

PLA-P3AA.UK, PLA-P4AA.UK, PLA-P5AA.UK, PLA-P6AA.UK  
 PLA-P3AA1.UK, PLA-P4AA1.UK, PLA-P5AA1.UK, PLA-P6AA1.UK

#### Horizontal Air Outlet

Sets airflow of horizontal automatically during cooling or dehumidifying.

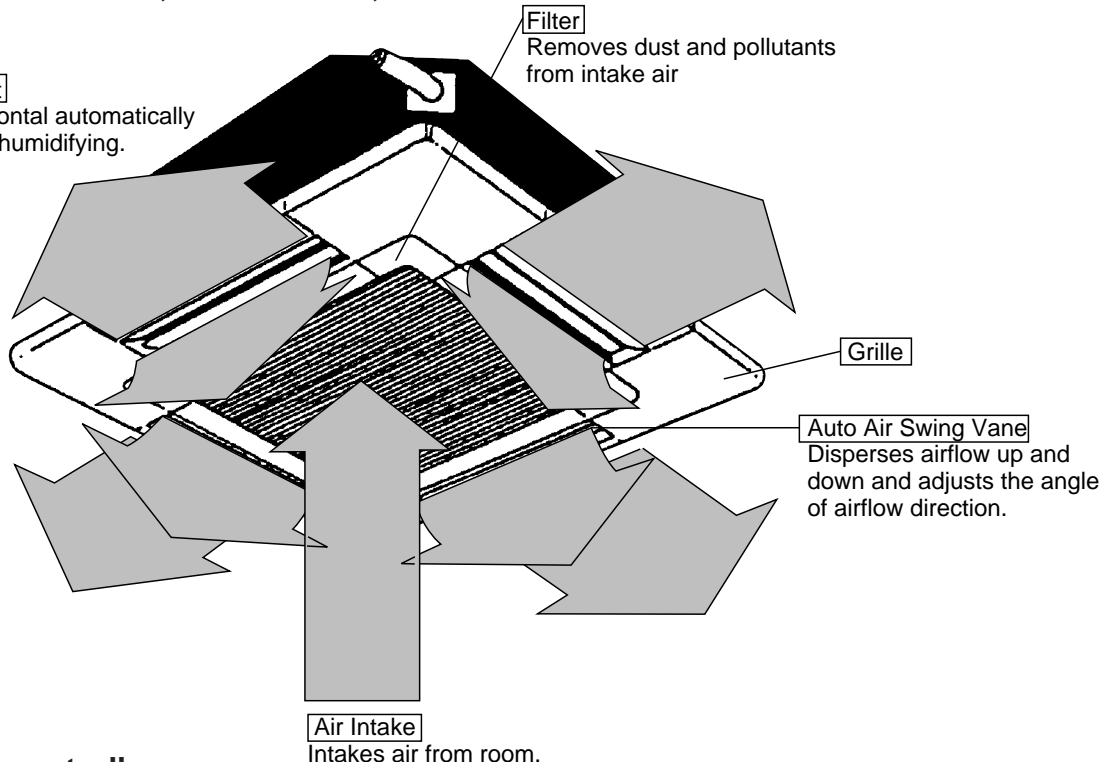

### ● Wired remote controller

On the controls are set, the same operation mode can be repeated by simply pressing the ON/OFF button.

PLA-P3AA.UK, PLA-P4AA.UK, PLA-P5AA.UK, PLA-P6AA.UK


### ● Operation buttons

The diagram shows a Mitsubishi Electric remote controller with various buttons and their functions explained in callout boxes:

- ⌚ button**: This switches between continuous operation and the timer operation.
- CLOCK ON/OFF button**: This sets the current time, start time and stop time.
- 📶 button**: This sets the ventilation fan speed.
- ON/OFF button**: This switches between the operation and stop modes each time it is pressed. The lamp on this button lights during operation.
- 🔄 button**: This adjusts the vertical angle of the ventilation.
- TEMP. button**: This sets the room temperature. The temperature setting can be performed in 1°C units. Setting range: Cooling 19°C to 30°C, Heating 17°C to 28°C.
- 🔍 button**: This resets the filter cleaning indication display.
- 📶 button**: This sets the ventilation fan speed.
- 🔄 button**: This switches the horizontal fan motion ON and OFF. (Not available for this model.)
- 🔍 button**: This sets the ventilation fan speed.
- CHECK-TEST RUN button**: Only press this button to perform an inspection check or test operation. Do not use it for normal operation.

The remote controller display shows 'MITSUBISHI ELECTRIC', 'CENTRALLY CONTROLLED', 'INDOOR UNIT ADDRESS', and 'OUT AVAILABLE'. It also features a digital display showing '28.0°C' and '88%'. Buttons include 'ON/OFF', 'TEMP.', 'TIMER SET', 'FILTER', 'CHECK', 'TEST RUN', and 'CLOCK ON/OFF'.

## ● Display

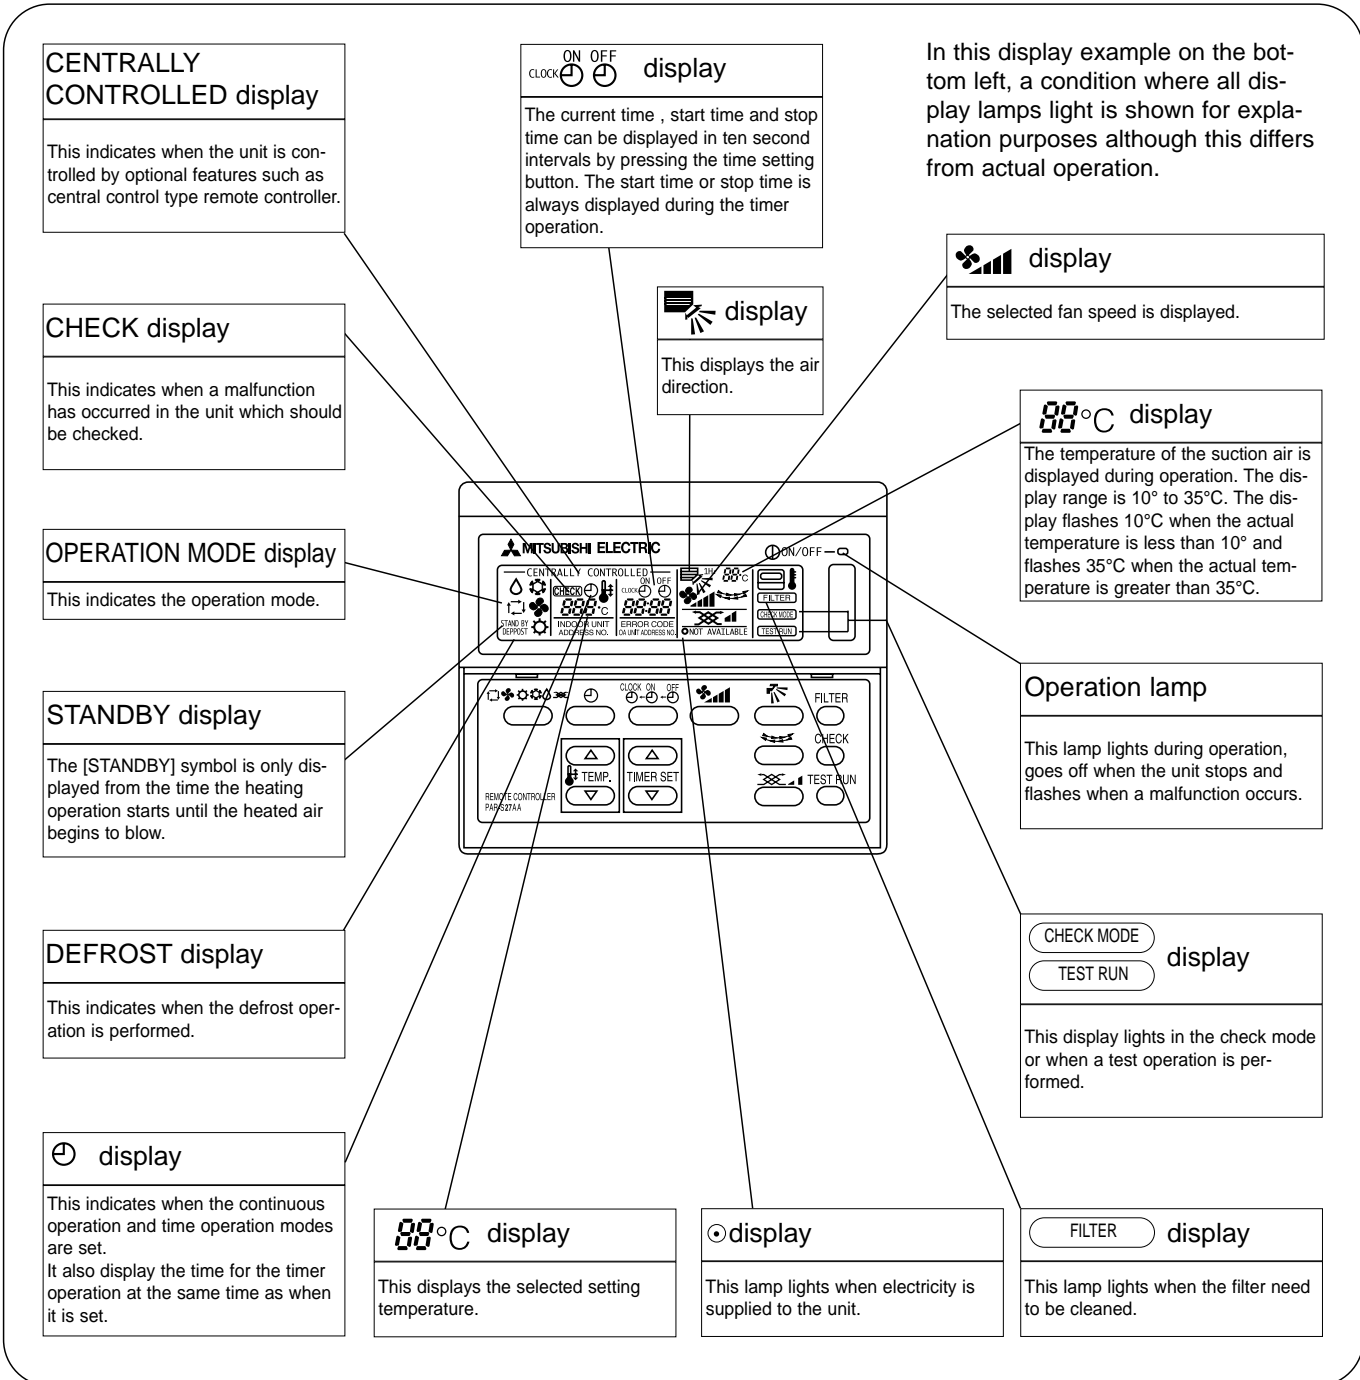


### Caution


- Only the ⊙ display lights when the unit is stopped and power supplied to the unit.
- When power is turned ON for the first time the (CENTRAL CTRL) display appears to go off momentarily but this is not a malfunction.
- "NOT AVAILABLE" is displayed when the button are pressed. This indicates that this room unit is not equipped with the fan direction adjustment function and the louver function.
- When power is turned ON for the first time, it is normal that "HO" is displayed on the room temperature indication (For max. 2minutes ). Please wait until this "HO" indication disappears then start the operation.

**PLA-P3AA1.UK, PLA-P4AA1.UK, PLA-P5AA1.UK, PLA-P6AA1.UK**

**● Operation buttons**

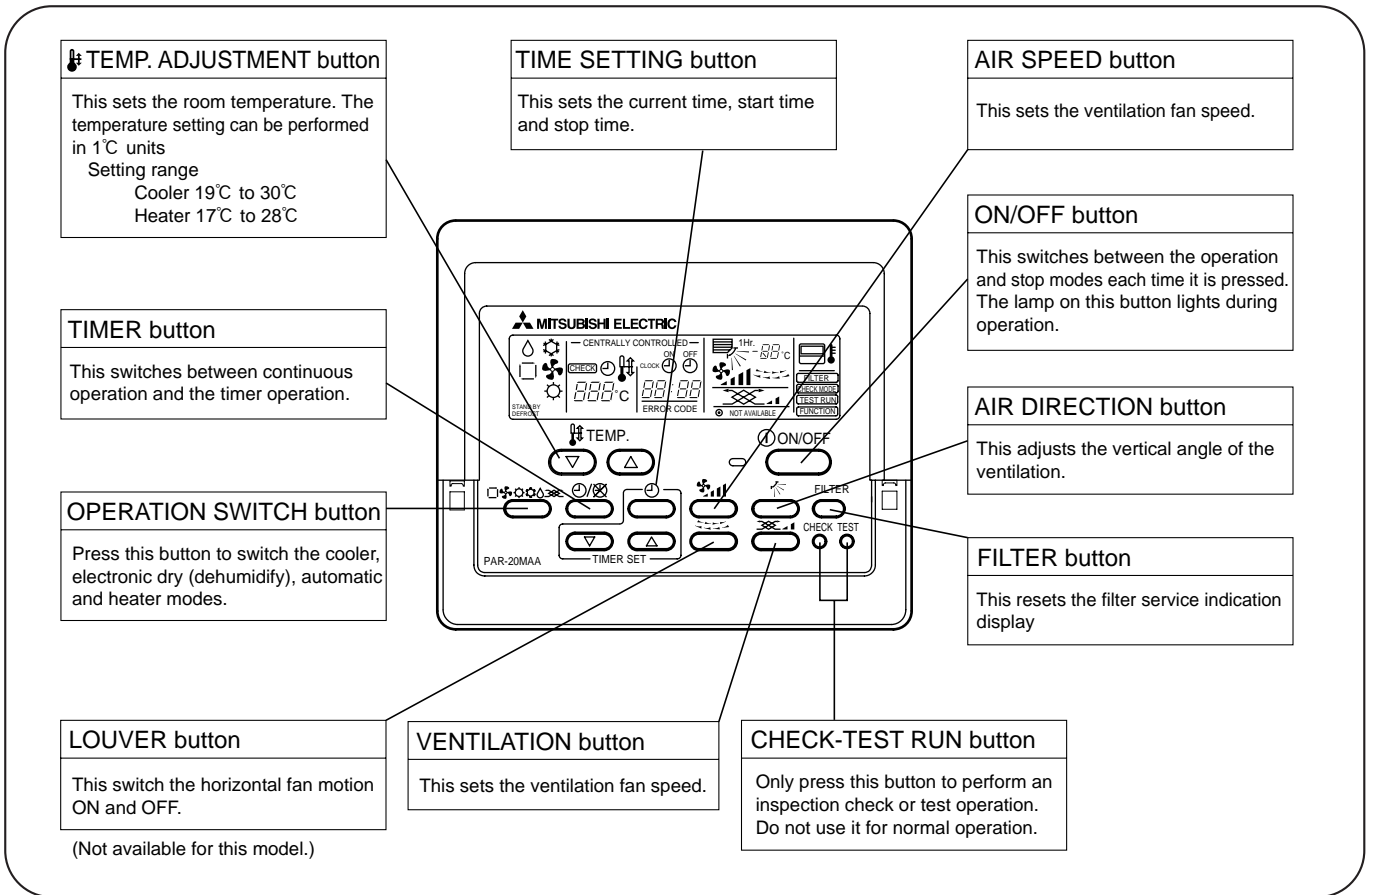

## ● Display

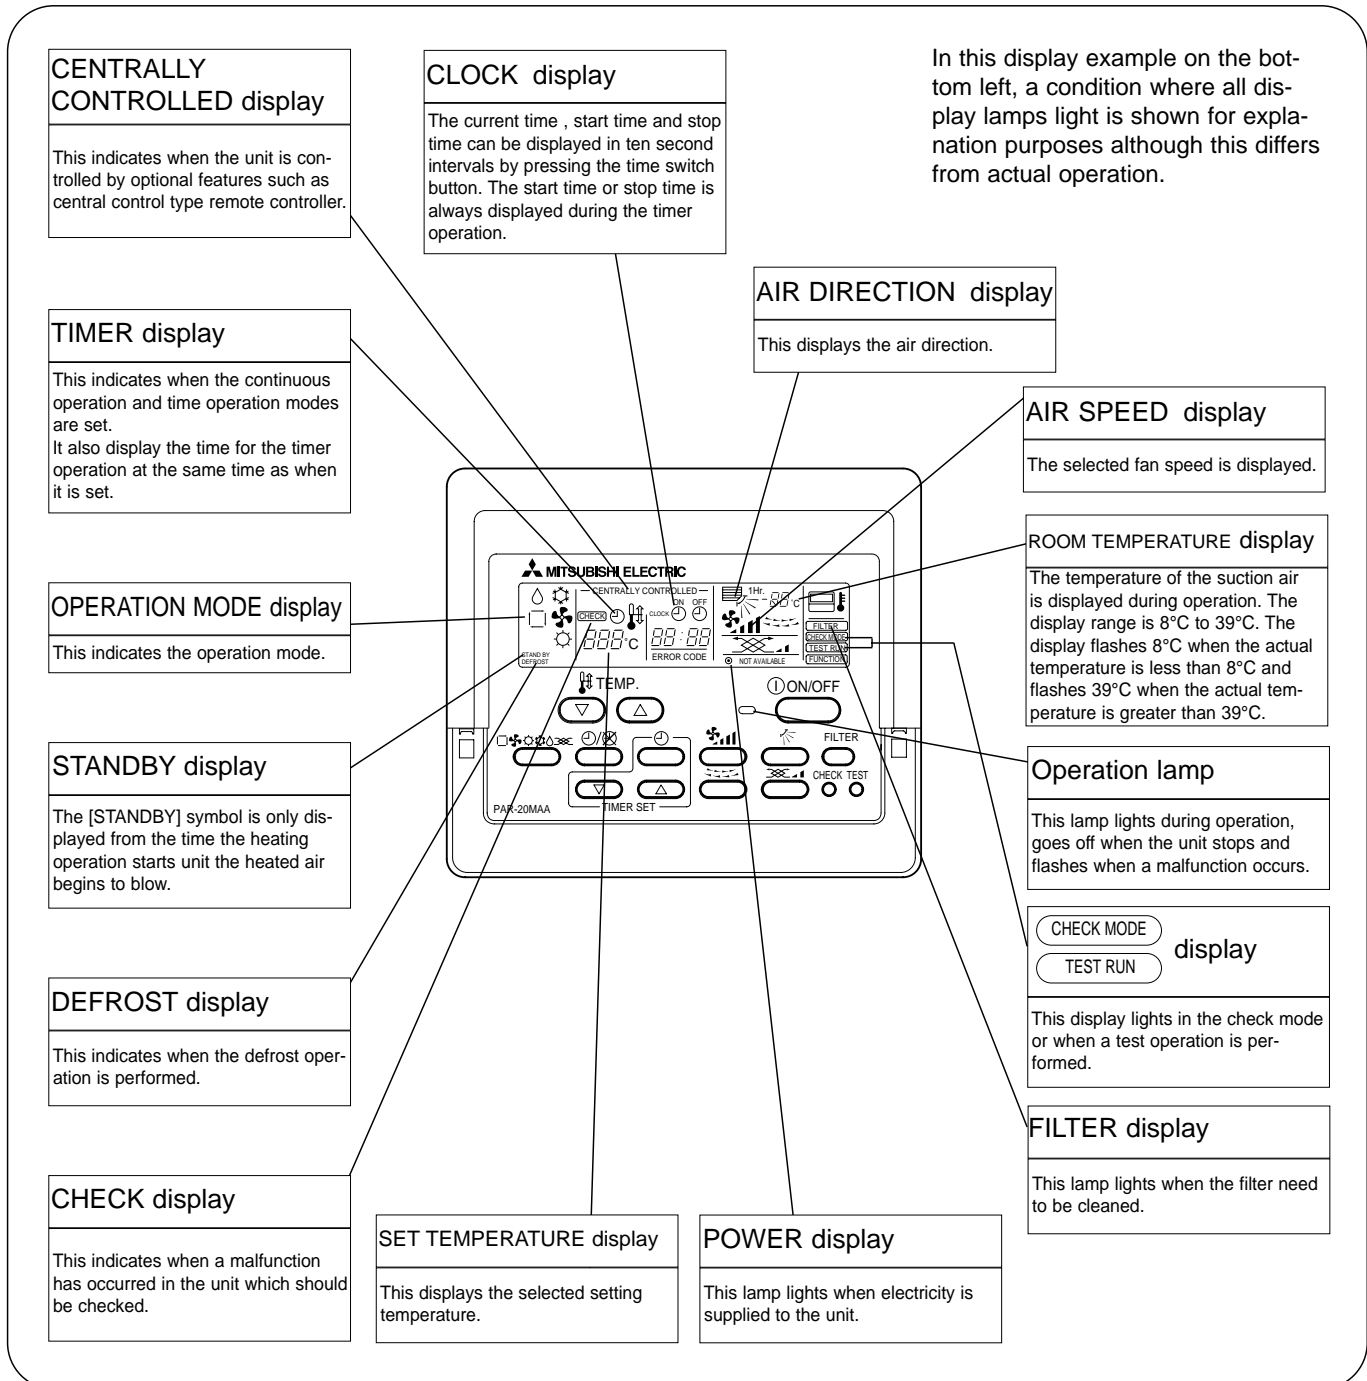


### Caution


- Only the Power display lights when the unit is stopped and power supplied to the unit.
- "NOT AVAILABLE" is displayed when the Air speed button are pressed. This indicates that this room unit is not equipped with the fan direction adjustment function and the louver function.
- When power is turned ON for the first time, it is normal that "H0" is displayed on the room temperature indication (For max. 2minutes). Please wait until this "H0" indication disappears then start the operation.



● **Wireless remote controller**  
**PLA-P3AA.UK, PLA-P4AA.UK, PLA-P5AA.UK, PLA-P6AA.UK**


● When cover is open.


 display  
 Lights up while transmission to the indoor unit is mode using switches.


 display  
 OPERATION MODE display  
 Operation mode display indicates which operation mode is in effect.


● **FUNCTION** display  
 Lights up when function are set.

● **TEST RUN** ● **CHECK** display  
 CHECK&TEST RUN display indicates that the unit is being checked or test-run.

 display  
 Displays when batteries are dead.

 display  
 The vertical direction of airflow is indicated.

 display  
 FAN SPEED display indicates which fan speed has been selected.


 display  
 The unit is turned ON and OFF alternately each time the button is pressed.

**ADDRESS display**  
 Displays the refrigerant address.


**UNIT NO. display**  
 Displays the number of unit..

**FUNCTION NO. display**  
 Displays the mode.



**SELECTION NO. display**  
 Displays the selection number..



 display  
 SET TEMP. display indicates desired temperature set.



**CLOCK display**  
 Displays the current time.


“  ” display  
 Flashes when the current time is displayed.


**TIMER display**  
 Displays when in timer operation or when setting timer.

“  ” “  ” display  
 Displays the order of timer operation.

“  - | ” “  - O ” display  
 Displays whether timer is on or off.

“  ” “  ” display  
 Displays when the current time and the timer time can be changed.

 **TEMP. button**  
 SET TEMPERATURE button sets any desired room temperature.

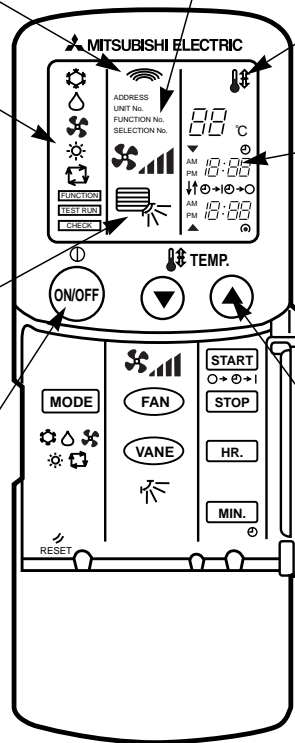


● When cover is open.

**MODE SELECT button**  
 Used to switch the operation mode between cooling , drying , blowing , heating and auto mode.


**FAN SPEED SELECT button**  
 Used to change the fan speed.

**VANE CONTROL button**  
 Used to change the airflow direction.

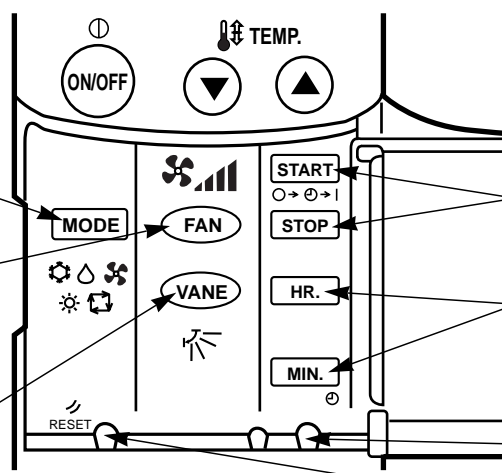


**TIMER CONTROL buttons**  
 STOP (OFF timer): when this switch is set, the air conditioner will be automatically stopped at the preset time.  
 START (ON timer): when this switch is set, the air conditioner will be automatically started at the preset time.

**HR. and MIN. buttons**  
 Buttons used to set the “hour and minute” of the current time and timer settings.

 button  
**RESET button**

**PLA-P3AA1.UK, PLA-P4AA1.UK, PLA-P5AA1.UK, PLA-P6AA1.UK**

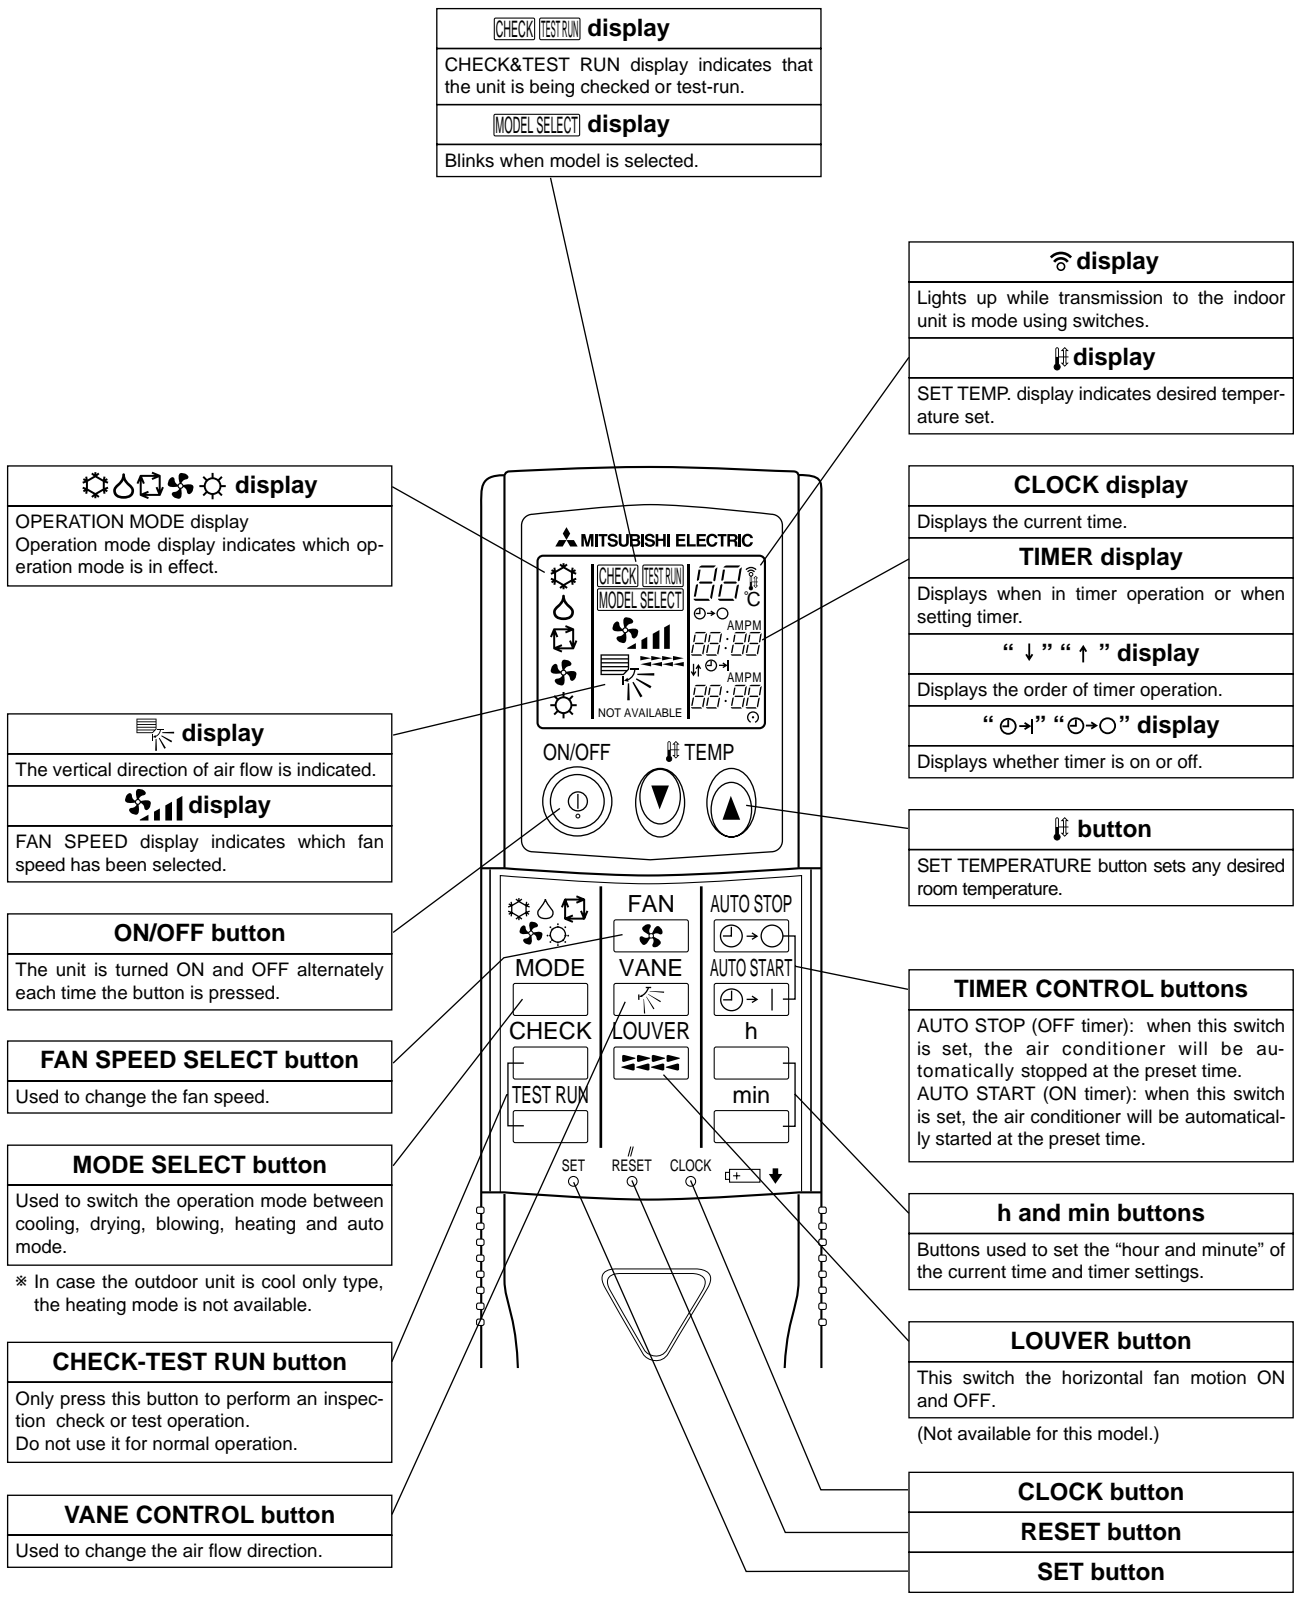

# 5

# SPECIFICATIONS

## 1.Heat pump type

Item		Service Ref.	PLA-P3AA.UK	
Function			Cooling	Heating
Capacity		Btu/h	26,600	31,700
		W	7,800	9,300
Total input		k W	3.51	3.65
Service Ref.			PLA-P3AA.UK	
Power supply (phase, cycle, voltage)			Single phase, 50Hz, 220-230-240V	
Input		k W	0.17	0.17
Running current		A	0.81	0.81
Starting current		A	1.0	1.0
External finish (Panel)			Munsell 0.70Y 8.59/0.97	
Heat exchanger			Plate fin coil	
Indoor unit	Fan	Fan (drive) × No.	Turbo fan (direct) × 1	
		Fan motor output	kW	
		Airflow (Low-Medium2-Medium1-High)	m <sup>3</sup> / min (CFM)	
		External static pressure	Pa (mmAq)	
Booster heater		kW	—	
Operation control & Thermostat			Remote controller & built-in	
Sound level (Low-Medium2-Medium1-High)		dB	28-30-32-34	
Unit drain pipe I.D.		mm (in.)	32 (1-1/4)	
Dimensions	W	mm (in.)	UNIT : 840 (33-1/16)	PANEL : 950 (37-3/8)
	D	mm (in.)	UNIT : 840 (33-1/16)	PANEL : 950 (37-3/8)
	H	mm (in.)	UNIT : 258 (10-1/2)	PANEL : 30 (1-3/16)
Weight		kg (lbs.)	UNIT : 24 (53)	PANEL : 5 (11)
Service Ref.			PUH-P3VGA / PUH-3YGA	
Power supply (phase, cycle, voltage)			Single phase, 50Hz, 220-230-240V / 3 phase, 50Hz, 380-400-415V (4wires)	
Running current		A	14.64/5.46	15.43/5.76
Starting current		A	93/41	
External finish			Munsell 5Y 8/1	
Refrigerant control			Linear expansion valve	
Compressor			Hermetic	
Model			NE52VNJM / NE52YDJM	
Motor output		kW	2.5	
Starter type			Line start	
Protection devices			Internal thermostat, HP switch, Discharge thermo. / Thermal relay Discharge thermo, HP switch, Anti-phase protector.	
Heat exchanger			Plate fin coil	
Outdoor unit	Fan	Fan (drive) × No.	Propeller (direct) × 1	
		Fan motor output	kW	
		Airflow	m <sup>3</sup> / min (CFM)	
Crankcase heater		W	38	
Defrost method			Reverse cycle	
Sound level	Cooling	dB	49	
	Heating	dB	51	
Dimensions	W	mm (in.)	900 (35-7/16)	
	D	mm (in.)	330+20 (13+3/4)	
	H	mm (in.)	855 (33-5/8)	
Weight		kg (lbs.)	82 (181)	
Refrigerant			R407C	
Charge		kg (lbs.)	3.7 (8.2)	
Oil (Model)		L	1.6 (MEL56)	
Pipe size O.D.	Liquid	mm (in.)	9.52 (3/8)	
	Gas	mm (in.)	15.88 (5/8)	
Connection method	Indoor side		Flared	
	Outdoor side		Flared	
Between the indoor & outdoor units	Height difference		Max. 50m	
	Piping length		Max. 50m	

**NOTE:** 1. Rating conditions (ISO T1)  
Cooling Indoor : D.B. 27°C (80°F) W.B. 19°C (66°F) Outdoor : D.B. 35°C (95°F) W.B. 24°C (75°F)  
Heating Indoor : D.B. 20°C (68°F) Outdoor : D.B. 7°C (45°F) W.B. 6°C (43°F)  
Refrigerant piping length (one way) : 5m (16ft.)

2. Guaranteed operating range

		Indoor	Outdoor
Cooling	Upper limit	D.B. 35°C, W.B. 22.5°C	D.B. 46°C
	Lower limit	D.B. 19°C, W.B. 15°C	D.B. -5°C
Heating	Upper limit	D.B. 28°C	D.B. 24°C, W.B. 18°C
	Lower limit	D.B. 17°C	D.B. -11°C, W.B. -12°C

3. Above data based on indicated voltage  
Indoor unit Single phase 240V 50Hz  
Outdoor unit Single phase 240V 50Hz / 3 phase 415V 50Hz

Item		Service Ref.	PLA-P4AA.UK		
Function			Cooling	Heating	
Capacity		Btu/h	33,100	36,200	
		W	9,700	10,600	
Total input		k W	3.62	3.80	
Indoor unit	Service Ref.		PLA-P4AA.UK		
	Power supply (phase, cycle, voltage)		Single phase, 50Hz, 220-230-240V		
	Input		k W	0.26	0.26
	Running current		A	1.25	1.25
	Starting current		A	2.0	2.0
	External finish (Panel)		Munsell 0.70Y 8.59/0.97		
	Heat exchanger		Plate fin coil		
	Fan (drive) × No.		Turbo fan (direct) × 1		
	Fan motor output		kW	0.120	
	Airflow (Low-Medium2-Medium1-High)		m <sup>3</sup> / min (CFM)	20-23-26-28 (705-810-920-990)	
	External static pressure		Pa (mmAq)	0 (direct blow)	
	Booster heater		kW	—	
	Operation control & Thermostat		Remote controller & built-in		
	Sound level (Low-Medium2-Medium1-High)		dB	33-36-39-41	
	Unit drain pipe I.D.		mm (in.)	32 (1-1/4)	
Dimensions	W	mm (in.)	UNIT : 840 (33-1/16) PANEL : 950 (37-3/8)		
	D	mm (in.)	UNIT : 840 (33-1/16) PANEL : 950 (37-3/8)		
	H	mm (in.)	UNIT : 298 (11-3/4) PANEL : 30 (1-3/16)		
Weight		kg (lbs.)	UNIT : 30 (66) PANEL : 5 (11)		
Outdoor unit	Service Ref.		PUH-P4YGA		
	Power supply (phase, cycle, voltage)		3 phase, 50Hz, 380-400-415V (4wires)		
	Running current		A	5.49	5.79
	Starting current		A	45	
	External finish		Munsell 5Y 8/1		
	Refrigerant control		Linear expansion valve		
	Compressor		Hermetic		
	Model		NE56YDJM		
	Motor output		kW	2.7	
	Starter type		Line start		
	Protection devices		Anti-phase protector, Thermal relay, Discharge thermo, HP switch		
	Heat exchanger		Plate fin coil		
	Fan (drive) × No.		Propeller (direct) × 2		
	Fan motor output		kW	0.070+0.070	
	Airflow		m <sup>3</sup> / min (CFM)	85 (3,000)	
Crankcase heater		W	38		
Defrost method		Reverse cycle			
Sound level	Cooling	dB	51		
	Heating	dB	53		
Dimensions	W	mm (in.)	900 (35-7/16)		
	D	mm (in.)	330+20 (13+3/4)		
	H	mm (in.)	1,260 (49-5/8)		
Weight		kg (lbs.)	96 (212)		
Refrigerant piping	Refrigerant		R407C		
	Charge		kg (lbs.)	4.0 (8.8)	
	Oil (Model)		L	1.6 (MEL56)	
	Pipe size O.D.	Liquid	mm (in.)	9.52 (3/8)	
		Gas	mm (in.)	19.05 (3/4)	
	Connection method	Indoor side	Flared		
		Outdoor side	Flared		
Between the indoor & outdoor units	Height difference	Max. 50m			
	Piping length	Max. 50m			

**NOTE:** 1. Rating conditions (ISO T1)  
Cooling Indoor : D.B. 27°C (80°F) W.B. 19°C (66°F) Outdoor : D.B. 35°C (95°F) W.B. 24°C (75°F)  
Heating Indoor : D.B. 20°C (68°F) Outdoor : D.B. 7°C (45°F) W.B. 6°C (43°F)  
Refrigerant piping length (one way) : 5m (16ft).

2. Guaranteed operating range

		Indoor	Outdoor
Cooling	Upper limit	D.B. 35°C, W.B. 22.5°C	D.B. 46°C
	Lower limit	D.B. 19°C, W.B. 15°C	D.B. -5°C
Heating	Upper limit	D.B. 28°C	D.B. 24°C, W.B. 18°C
	Lower limit	D.B. 17°C	D.B. -11°C, W.B. -12°C

3. Above data based on indicated voltage  
Indoor unit Single phase 240V 50Hz  
Outdoor unit 3 phase 415V 50Hz



Service Ref.			PLA-P5AA.UK	
Function			Cooling	Heating
Capacity			43,700	54,600
			12,800	16,000
Total input			5.55	5.93
Service Ref.			PLA-P5AA.UK	
Power supply (phase, cycle, voltage)			Single phase, 50Hz, 220-230-240V	
Input			0.30	0.30
Running current			1.43	1.43
Starting current			2.0	2.0
External finish (Panel)			Munsell 0.70Y 8.59/0.97	
Heat exchanger			Plate fin coil	
Fan (drive) × No.			Turbo fan (direct) × 1	
Fan motor output			0.120	
Airflow (Low-Medium2-Medium1-High)			22-25-28-30 (775-880-990-1,060)	
External static pressure			0 (direct blow)	
Booster heater			—	
Operation control & Thermostat			Remote controller & built-in	
Sound level (Low-Medium2-Medium1-High)			35-38-41-43	
Unit drain pipe I.D.			32 (1-1/4)	
Dimensions			UNIT : 840 (33-1/16) PANEL : 950 (37-3/8)	
			UNIT : 840 (33-1/16) PANEL : 950 (37-3/8)	
			UNIT : 298 (11-3/4) PANEL : 30 (1-3/16)	
Weight			UNIT : 30 (66) PANEL : 5 (11)	
Service Ref.			PUH-P5YGA	
Power supply (phase, cycle, voltage)			3 phase, 50Hz, 380-400-415V (4wires)	
Running current			8.39	8.74
Starting current			79	
External finish			Munsell 5Y 8/1	
Refrigerant control			Linear expansion valve	
Compressor			Hermetic	
Model			HE86YAA	
Motor output			4.3	
Starter type			Line start	
Protection devices			Internal thermostat, Anti-phase protector, Thermal relay, HP switch, LP switch, Discharge thermo.	
Heat exchanger			Plate fin coil	
Fan (drive) × No.			Propeller (direct) × 2	
Fan motor output			0.075+0.075	
Airflow			95 (3,360)	
Crankcase heater			38	
Defrost method			Reverse cycle	
Sound level			53	
			55	
Dimensions			1,050 (41-5/16)	
			330+20 (13+3/4)	
			1,260 (49-5/8)	
Weight			122 (269)	
Refrigerant			R407C	
Charge			5.8 (12.8)	
Oil (Model)			2.0 (MEL32)	
Pipe size O.D.			9.52 (3/8)	
			19.05 (3/4)	
Connection method			Flared	
			Flared	
Between the indoor & outdoor units			Max. 50m	
			Max. 50m	

**NOTE:** 1. Rating conditions (ISO T1)  
Cooling : Indoor: D.B. 27°C (80°F) W.B. 19°C (66°F) Outdoor: D.B. 35°C (95°F) W.B. 24°C (75°F)  
Heating : Indoor: D.B. 20°C (68°F) Outdoor: D.B. 7°C (45°F) W.B. 6°C (43°F)  
Refrigerant piping length (one way) : 5m (16ft.)

2. Guaranteed operating range

		Indoor	Outdoor
Cooling	Upper limit	D.B. 35°C, W.B. 22.5°C	D.B. 46°C
	Lower limit	D.B. 19°C, W.B. 15°C	D.B. -5°C
Heating	Upper limit	D.B. 28°C	D.B. 24°C, W.B. 18°C
	Lower limit	D.B. 17°C	D.B. -11°C, W.B. -12°C

3. Above data based on indicated voltage  
Indoor unit Single phase 240V 50Hz  
Outdoor unit 3 phase 415V 50Hz

Item	Service Ref.	PLA-P6AA.UK		
Function		Cooling	Heating	
Capacity	Btu/h	48,000	57,300	
	W	14,300	16,800	
Total input	k W	6.70	6.77	
Indoor unit	<b>Service Ref.</b>	<b>PLA-P6AA.UK</b>		
	Power supply (phase, cycle, voltage)	Single phase, 50Hz, 220-230-240V (4wires)		
	Input	k W	0.34	0.34
		Running current	A	1.64
		Starting current	A	2.0
	External finish (Panel)	Munsell 0.70Y 8.59/0.97		
	Heat exchanger	Plate fin coil		
	Fan	Fan (drive) × No.	Turbo fan (direct) × 1	
		Fan motor output	kW	0.120
		Airflow (Low-Medium2-Medium1-High)	m <sup>3</sup> / min (CFM)	22-25-28-30 (775-880-990-1,060)
		External static pressure	Pa (mmAq)	0 (direct blow)
	Booster heater	kW	—	
	Operation control & Thermostat	Remote controller & built-in		
	Sound level (Low-Medium2-Medium1-High)	dB		37-40-43-45
	Unit drain pipe I.D.	mm (in.)	32 (1-1/4)	
	Dimensions	W	mm (in.)	UNIT : 840 (33-1/16) PANEL : 950 (37-3/8)
		D	mm (in.)	UNIT : 840 (33-1/16) PANEL : 950 (37-3/8)
H		mm (in.)	UNIT : 298 (11-3/4) PANEL : 30 (1-3/16)	
Weight	kg (lbs.)	UNIT : 32 (71)	PANEL : 5 (11)	
Outdoor unit	<b>Service Ref.</b>	<b>PUH-P6YGA</b>		
	Power supply (phase, cycle, voltage)	3 phase, 50Hz, 380-400-415V (4wires)		
	Running current	A	10.17	10.28
		Starting current	A	84
		External finish	Munsell 5Y 8/1	
	Refrigerant control	Linear expansion valve		
	Compressor	Hermetic		
		Model	HE101YAA	
		Motor output	kW	5.1
		Starter type	Line start	
		Protection devices	Internal thermostat, Anit-phase protector, Thermal relay, HP switch, LP switch, Discharge thermo.	
	Heat exchanger	Plate fin coil		
	Fan	Fan (drive) × No.	Propeller (direct) × 2	
		Fan motor output	kW	0.075+0.075
		Airflow	m <sup>3</sup> / min (CFM)	100 (3,530)
	Crankcase heater	W	38	
	Defrost method	Reverse cycle		
Sound level	Cooling	dB		55
	Heating	dB		57
Dimensions	W	mm (in.)	1,050 (41-5/16)	
	D	mm (in.)	330+20(13+3/4)	
	H	mm (in.)	1,260 (49-5/8)	
Weight	kg (lbs.)	122 (269)		
Refrigerant piping	Refrigerant	R407C		
	Charge	kg (lbs.)	5.8 (12.8)	
		Oil (Model)	L	2.0 (MEL32)
	Pipe size O.D.	Liquid	mm (in.)	9.52 (3/8)
		Gas	mm (in.)	19.05 (3/4)
	Connection method	Indoor side	Flared	
		Outdoor side	Flared	
Between the indoor & outdoor units	Height difference	Max. 50m		
	Piping length	Max. 50m		

**NOTE:** 1. Rating conditions (ISO T1)  
Cooling : Indoor: D.B. 27°C (80°F) W.B. 19°C (66°F) Outdoor: D.B. 35°C (95°F) W.B. 24°C (75°F)  
Heating : Indoor: D.B. 20°C (68°F) Outdoor: D.B. 7°C (45°F) W.B. 6°C (43°F)  
Refrigerant piping length (one way) : 5m (16ft.)

2. Guaranteed operating range

		Indoor	Outdoor
Cooling	Upper limit	D.B. 35°C, W.B. 22.5°C	D.B. 46°C
	Lower limit	D.B. 19°C, W.B. 15°C	D.B. -5°C
Heating	Upper limit	D.B. 28°C	D.B. 24°C, W.B. 18°C
	Lower limit	D.B. 17°C	D.B. -11°C, W.B. -12°C

3. Above data based on indicated voltage  
Indoor unit Single phase 240V 50Hz  
Outdoor unit 3 phase 415V 50Hz

Service Ref.			PLA-P3AA.UK / PLA-P3AA1.UK		
Item					
Function			Cooling	Heating	
Capacity	Btu/h		26,600	31,700	
	W		7,800	9,300	
Total input	k W		3.44	3.50	
Indoor unit	Service Ref.		PLA-P3AA.UK / PLA-P3AA1.UK		
	Power supply (phase, cycle, voltage)		Single phase, 50Hz, 220-230-240V		
	Input	k W	0.17	0.17	
	Running current	A	0.81	0.81	
	Starting current	A	1.0	1.0	
	External finish (Panel)		Munsell 0.70Y 8.59/0.97		
	Heat exchanger		Plate fin coil		
	Fan	Fan (drive) × No.		Turbo fan (direct) × 1	
		Fan motor output		0.070	
		Airflow (Low-Medium2-Medium1-High)	m <sup>3</sup> / min (CFM)	15-16-18-20 (530-565-635-705)	
		External static pressure		0 (direct blow)	
	Booster heater		kW		
	Operation control & Thermostat		Remote controller & built-in		
	Sound level (Low-Medium2-Medium1-High)		dB		
	Unit drain pipe I.D.		mm (in.)		
Dimensions	W	mm (in.)	UNIT : 840 (33-1/16)	PANEL: 950 (37-3/8)	
	D	mm (in.)	UNIT : 840 (33-1/16)	PANEL: 950 (37-3/8)	
	H	mm (in.)	UNIT : 258 (10-1/2)	PANEL: 30 (1-3/16)	
Weight		kg (lbs.)	UNIT : 24 (53)	PANEL: 5 (11)	
Outdoor unit	Service Ref.		PUH-P3VGAA.UK / PUH-P3YGAA.UK		
	Power supply (phase, cycle, voltage)		Single phase, 50Hz, 220-230-240V / 3 phase, 50Hz, 380-400-415V (4wires)		
	Running current	A	14.81/5.29	15.76/5.63	
	Starting current	A	93/47		
	External finish		Munsell 5Y 7/1		
	Refrigerant control		Linear expansion valve		
	Compressor		Hermetic		
	Model		NE52VNJMT / NE52YDKMT		
	Motor output		kW		
	Starter type		Line start		
	Protection devices		Internal thermostat, HP switch, Discharge thermo. / Thermal relay, HP switch, Discharge thermo.		
	Heat exchanger		Plate fin coil		
	Fan	Fan (drive) × No.		Propeller (direct) × 1	
		Fan motor output		kW	
		Airflow		m <sup>3</sup> / min (CFM)	
Crankcase heater		W			
Defrost method		Reverse cycle			
Sound level	Cooling	dB	49		
	Heating	dB	51		
Dimensions	W	mm (in.)	900 (35-7/16)		
	D	mm (in.)	330+20 (13+3/4)		
	H	mm (in.)	855 (33-5/8)		
Weight		kg (lbs.)	82 (181)		
Refrigerant piping	Refrigerant		R407C		
	Charge		kg (lbs.)		
	Oil (Model)		L		
	Pipe size O.D.	Liquid	mm (in.)	9.52 (3/8)	
		Gas	mm (in.)	15.88 (5/8)	
	Connection method		Indoor side		
		Outdoor side			
Between the indoor & outdoor units		Height difference			
		Piping length			

**NOTE:** 1. Rating conditions (ISO T1)  
Cooling Indoor : D.B. 27°C (80°F) W.B. 19°C (66°F) Outdoor : D.B. 35°C (95°F) W.B. 24°C (75°F)  
Heating Indoor : D.B. 20°C (68°F) Outdoor : D.B. 7°C (45°F) W.B. 6°C (43°F)  
Refrigerant piping length (one way) : 5m (16ft.)

2. Guaranteed operating range

		Indoor	Outdoor
Cooling	Upper limit	D.B. 35°C, W.B. 22.5°C	D.B. 46°C
	Lower limit	D.B. 19°C, W.B. 15°C	D.B. -5°C
Heating	Upper limit	D.B. 28°C	D.B. 24°C, W.B. 18°C
	Lower limit	D.B. 17°C	D.B. -11°C, W.B. -12°C

3. Above data based on indicated voltage  
Indoor unit Single phase 240V 50Hz  
Outdoor unit Single phase 240V 50Hz / 3 phase 415V 50Hz

Item			Service Ref.	PLA-P4AA.UK / PLA-P4AA1.UK		
Function				Cooling	Heating	
Capacity			Btu/h	33,100	36,200	
			W	9,700	10,600	
Total input			k W	3.69	3.93	
Indoor unit	Service Ref.			PLA-P4AA.UK / PLA-P4AA1.UK		
	Power supply (phase, cycle, voltage)			Single phase, 50Hz, 220-230-240V		
	Input			k W	0.26	0.26
	Running current			A	1.25	1.25
	Starting current			A	2.0	2.0
	External finish (Panel)			Munsell 0.70Y 8.59/0.97		
	Heat exchanger			Plate fin coil		
	Fan (drive) × No.			Turbo fan (direct) × 1		
	Fan motor output			kW	0.120	
	Airflow (Low-Medium2-Medium1-High)			m <sup>3</sup> / min (CFM)	20-23-26-28 (705-810-920-990)	
	External static pressure			Pa (mmAq)	0 (direct blow)	
	Booster heater			kW	—	
	Operation control & Thermostat			Remote controller & built-in		
	Sound level (Low-Medium2-Medium1-High)			dB	33-36-39-41	
	Unit drain pipe I.D.			mm (in.)	32 (1-1/4)	
Dimensions			W	UNIT : 840 (33-1/16) PANEL : 950 (37-3/8)		
			D	UNIT : 840 (33-1/16) PANEL : 950 (37-3/8)		
			H	UNIT : 298 (11-3/4) PANEL : 30 (1-3/16)		
Weight			kg (lbs.)	UNIT : 30 (66) PANEL : 5 (11)		
Outdoor unit	Service Ref.			PUH-P4VGAA.UK / PUH-P4YGAA.UK		
	Power supply (phase, cycle, voltage)			Single phase, 50Hz, 220-230-240V/ 3 phase, 50Hz, 380-400-415V (4wires)		
	Running current			A	15.71/ 5.55	16.58/ 5.86
	Starting current			A	99/49	
	External finish			Munsell 5Y 7/1		
	Refrigerant control			Linear expansion valve		
	Compressor			Hermetic		
	Model			NE56VNJMT/ NE56YDKMT		
	Motor output			kW	2.7	
	Starter type			Line start		
	Protection devices			Internal thermostat, HP switch, Discharge thermo. / Thermal relay, HP switch, Discharge thermo.		
	Heat exchanger			Plate fin coil		
	Fan (drive) × No.			Propeller (direct) × 2		
	Fan motor output			kW	0.070+0.070	
	Airflow			m <sup>3</sup> / min (CFM)	85 (3,000)	
Crankcase heater			W	38		
Defrost method			Reverse cycle			
Sound level			Cooling	51		
			Heating	53		
Dimensions			W	900 (35-7/16)		
			D	330+20 (13+3/4)		
			H	1,260 (49-5/8)		
Weight			kg (lbs.)	96 (212)		
Refrigerant piping	Refrigerant			R407C		
	Charge			kg (lbs.)	4.0 (8.8)	
	Oil (Model)			L	1.3 (MEL56)	
	Pipe size O.D.			Liquid	9.52 (3/8)	
				Gas	19.05 (3/4)	
	Connection method			Indoor side	Flared	
				Outdoor side	Flared	
Between the indoor & outdoor units			Height difference	Max. 50m		
			Piping length	Max. 50m		

**NOTE:** 1. Rating conditions (ISO T1)  
Cooling Indoor : D.B. 27°C (80°F) W.B. 19°C (66°F) Outdoor : D.B. 35°C (95°F) W.B. 24°C (75°F)  
Heating Indoor : D.B. 20°C (68°F) Outdoor : D.B. 7°C (45°F) W.B. 6°C (43°F)  
Refrigerant piping length (one way) : 5m (16ft.)

2. Guaranteed operating range

		Indoor	Outdoor
Cooling	Upper limit	D.B. 35°C, W.B. 22.5°C	D.B. 46°C
	Lower limit	D.B. 19°C, W.B. 15°C	D.B. -5°C
Heating	Upper limit	D.B. 28°C	D.B. 24°C, W.B. 18°C
	Lower limit	D.B. 17°C	D.B. -11°C, W.B. -12°C

3. Above data based on indicated voltage  
Indoor unit Single phase 240V 50Hz  
Outdoor unit 3 phase 415V 50Hz





Item			Service Ref.	PLA-P5AA.UK / PLA-P5AA1.UK		
Function				Cooling	Heating	
Capacity			Btu/h	43,700	50,800	
			W	12,800	14,900	
Total input			k W	5.00	5.34	
Indoor unit	Service Ref.			PLA-P5AA.UK / PLA-P5AA1.UK		
	Power supply (phase, cycle, voltage)			Single phase, 50Hz, 220-230-240V		
	Input			k W	0.30	0.30
	Running current			A	1.43	1.43
	Starting current			A	2.0	2.0
	External finish (Panel)			Munsell 0.70Y 8.59/0.97		
	Heat exchanger			Plate fin coil		
	Fan (drive) × No.			Turbo fan (direct) × 1		
	Fan motor output			kW	0.120	
	Airflow (Low-Medium2-Medium1-High)			m <sup>3</sup> / min (CFM)	22-25-28-30 (775-880-990-1,060)	
	External static pressure			Pa (mmAq)	0 (direct blow)	
	Booster heater			kW	—	
	Operation control & Thermostat			Remote controller & built-in		
	Sound level (Low-Medium2-Medium1-High)			dB	35-38-41-43	
	Unit drain pipe I.D.			mm (in.)	32 (1-1/4)	
Dimensions			W	UNIT : 840 (33-1/16) PANEL : 950 (37-3/8)		
			D	UNIT : 840 (33-1/16) PANEL : 950 (37-3/8)		
			H	UNIT : 298 (11-3/4) PANEL : 30 (1-3/16)		
Weight			kg (lbs.)	UNIT : 30 (66)	PANEL : 5 (11)	
Outdoor unit	Service Ref.			PUH-P5YGAA.UK		
	Power supply (phase, cycle, voltage)			3 phase, 50Hz, 380-400-415V (4wires)		
	Running current			A	7.60	8.15
	Starting current			A	65.5	
	External finish			Munsell 5Y 7/1		
	Refrigerant control			Linear expansion valve		
	Compressor			Hermetic		
	Model			ZR61KCE-TFD		
	Motor output			kW	3.5	
	Starter type			Line start		
	Protection devices			Internal thermostat, Thermal relay, HP swich, Discharge thermo.		
	Heat exchanger			Plate fin coil		
	Fan (drive) × No.			Propeller (direct) × 2		
	Fan motor output			kW	0.070+0.070	
	Airflow			m <sup>3</sup> / min (CFM)	95 (3,360)	
Crankcase heater			W	38		
Defrost method			Reverse cycle			
Sound level			Cooling	dB		
			Heating	dB		
Dimensions			W	mm (in.)		
			D	mm (in.)		
			H	mm (in.)		
Weight			kg (lbs.)	122 (269)		
Refrigerant piping	Refrigerant			R407C		
	Charge			kg (lbs.)	4.6 (10.1)	
	Oil (Model)			L	1.690 (Ester) MMMA-POE	
	Pipe size O.D.			Liquid	mm (in.)	9.52 (3/8)
				Gas	mm (in.)	19.05 (3/4)
	Connection method			Indoor side	Flared	
				Outdoor side	Flared	
Between the indoor & outdoor units			Height difference	Max. 50m		
			Piping length	Max. 50m		

**NOTE:** 1. Rating conditions (ISO T1)  
Cooling : Indoor: D.B. 27°C (80°F) W.B. 19°C (66°F) Outdoor: D.B. 35°C (95°F) W.B. 24°C (75°F)  
Heating : Indoor: D.B. 20°C (68°F) Outdoor: D.B. 7°C (45°F) W.B. 6°C (43°F)  
Refrigerant piping length (one way) : 5m (16ft.)

2. Guaranteed operating range

		Indoor	Outdoor
Cooling	Upper limit	D.B. 35°C, W.B. 22.5°C	D.B. 46°C
	Lower limit	D.B. 19 °C, W.B. 15°C	D.B. -5°C
Heating	Upper limit	D.B. 28°C	D.B. 24 °C, W.B. 18°C
	Lower limit	D.B. 17°C	D.B. -11°C, W.B. -12°C

3. Above data based on indicated voltage  
Indoor unit Single phase 240V 50Hz  
Outdoor unit 3 phase 415V 50Hz

Item			Service Ref.		PLA-P6AA.UK / PLA-P6AA1.UK	
Function					Cooling	Heating
Capacity			Btu/h		48,000	58,300
			W		14,300	17,100
Total input			k W		5.94	6.36
Indoor unit	Service Ref.			PLA-P6AA.UK / PLA-P6AA1.UK		
	Power supply (phase, cycle, voltage)			Single phase, 50Hz, 220-230-240V		
	Input			k W	0.34	0.34
	Running current			A	1.64	1.64
	Starting current			A	2.0	2.0
	External finish (Panel)			Munsell 0.70Y 8.59/0.97		
	Heat exchanger			Plate fin coil		
	Fan (drive) × No.			Turbo fan (direct) × 1		
	Fan motor output			kW	0.120	
	Airflow (Low-Medium2-Medium1-High)			m <sup>3</sup> / min (CFM)	22-25-28-30 (775-880-990-1,060)	
	External static pressure			Pa (mmAq)	0 (direct blow)	
	Booster heater			kW	—	
	Operation control & Thermostat			Remote controller & built-in		
	Sound level (Low-Medium2-Medium1-High)			dB		
	Unit drain pipe I.D.			mm (in.)	32 (1-1/4)	
Dimensions			W	UNIT : 840 (33-1/16) PANEL : 950 (37-3/8)		
			D	UNIT : 840 (33-1/16) PANEL : 950 (37-3/8)		
			H	UNIT : 298 (11-3/4) PANEL : 30 (1-3/16)		
Weight			kg (lbs.)	UNIT : 32 (71) PANEL : 5 (11)		
Outdoor unit	Service Ref.			PUH-P6YGAA.UK		
	Power supply (phase, cycle, voltage)			3 phase, 50Hz, 380-400-415V (4wires)		
	Running current			A	9.03	9.56
	Starting current			A	74	
	External finish			Munsell 5Y 7/1		
	Refrigerant control			Linear expansion valve		
	Compressor			Hermetic		
	Model			ZR72KCE-TFD		
	Motor output			kW	4.2	
	Starter type			Line start		
	Protection devices			Internal thermostat, Thermal relay, HP switch, Discharge thermo.		
	Heat exchanger			Plate fin coil		
	Fan (drive) × No.			Propeller (direct) × 2		
	Fan motor output			kW	0.070+0.070	
	Airflow			m <sup>3</sup> / min (CFM)	100 (3,530)	
Crankcase heater			W	38		
Defrost method			Reverse cycle			
Sound level			Cooling	dB		
			Heating	dB		
Dimensions			W	mm (in.)		
			D	mm (in.)		
			H	mm (in.)		
Weight			kg (lbs.)	122 (269)		
Refrigerant piping	Refrigerant			R407C		
	Charge			kg (lbs.)	4.9 (10.8)	
	Oil (Model)			L	1.774 (Ester) MMMA-POE	
	Pipe size O.D.			Liquid	mm (in.)	
				Gas	mm (in.)	
	Connection method			Indoor side	Flared	
				Outdoor side	Flared	
Between the indoor & outdoor units			Height difference	Max. 50m		
			Piping length	Max. 50m		

**NOTE:**

- Rating conditions (ISO T1)  
Cooling : Indoor: D.B. 27°C (80°F) W.B. 19°C (66°F) Outdoor: D.B. 35°C (95°F) W.B. 24°C (75°F)  
Heating : Indoor: D.B. 20°C (68°F) Outdoor: D.B. 7°C (45°F) W.B. 6°C (43°F)  
Refrigerant piping length (one way) : 5m (16ft.)

- Guaranteed operating range

		Indoor		Outdoor	
Cooling	Upper limit	D.B. 35°C, W.B. 22.5°C	D.B. 46°C		
	Lower limit	D.B. 19°C, W.B. 15°C	D.B. -5°C		
Heating	Upper limit	D.B. 28°C	D.B. 24°C, W.B. 18°C		
	Lower limit	D.B. 17°C	D.B. -11°C, W.B. -12°C		

- Above data based on indicated voltage  
Indoor unit Single phase 240V 50Hz  
Outdoor unit 3 phase 415V 50Hz

## 2. Cooling only type

Service Ref.			PLA-P3AA.UK	PLA-P4AA.UK		
Item						
Function			Cooling			
Capacity	Btu/h		26,600	33,100		
	W		7,800	9,700		
Total input			kW	3.51		
Service Ref.			PLA-P3AA.UK	PLA-P4AA.UK		
Indoor unit	Power supply (phase, cycle, voltage)			Single phase, 50Hz, 220-230-240V		
	Input		kW	0.17	0.26	
	Running current		A	0.81	1.25	
	Starting current		A	1.0	2.0	
	External finish (Panel)			Munsell 0.70Y 8.59/0.97		
	Heat exchanger			Plate fin coil		
	Fan	Fan (drive) × No.		Turbo fan (direct) × 1		
		Fan motor output		kW	0.070	0.120
		Airflow (Low-Medium2-Medium1-High)		m <sup>3</sup> / min (CFM)	15-16-18-20 (530-565-635-705)	20-23-26-28 (705-810-920-990)
		External static pressure		Pa (mmAq)	0 (direct blow)	
	Booster heater			kW		
	Operation control & Thermostat			Remote controller & built-in		
	Sound level (Low-Medium2-Medium1-High)			dB	28-30-32-34	33-36-39-41
	Unit drain pipe I.D.			mm (in.)	32 (1-1/4)	
	Dimensions	W	mm (in.)	UNIT : 840 (33-1/16), PANEL : 950 (37-3/8)	UNIT : 840 (33-1/16), PANEL : 950 (37-3/8)	
D		mm (in.)	UNIT : 840 (33-1/16), PANEL : 950 (37-3/8)	UNIT : 840 (33-1/16), PANEL : 950 (37-3/8)		
H		mm (in.)	UNIT : 258 (10-1/2), PANEL : 30 (1-3/16)	UNIT : 298 (11-3/4), PANEL : 30 (1-3/16)		
Weight			kg (lbs.)	UNIT : 26 (57), PANEL : 5 (11)	UNIT : 29 (64), PANEL : 5 (11)	
Outdoor unit	Service Ref.			PU-P3VGA / PU-P3YGA	PU-P4YGA	
	Power supply (phase, cycle, voltage)			*1		
	Running current		A	14.64 / 5.46	3 phase, 50Hz, 380-400-415V (4wires)	
	Starting current		A	93 / 41	5.49	
	External finish			Munsell 5Y 8/1		
	Refrigerant control			Linear expansion valve		
	Compressor			Hermetic		
	Model			NE52VNJM / NE52YDJM	NE56YDJM	
	Motor output		kW	2.5	2.7	
	Starter type			Line start		
	Protection devices			Internal thermostat, HP switch, Discharge thermo. / Thermal relay, Discharge thermo, HP switch, Anti-phase protector.	Anti-phase protector, Thermal relay, Discharge thermo, HP switch	
	Heat exchanger			Plate fin coil		
	Fan	Fan (drive) × No.		Propeller (direct) × 1		Propeller (direct) × 2
		Fan motor output		kW	0.070	0.070+0.070
		Airflow		m <sup>3</sup> / min (CFM)	50 (1,770)	85 (3,000)
Crankcase heater			W		38	
Defrost method					—	
Sound level		Cooling	dB	49	51	
Dimensions	W	mm (in.)	900 (35-7/16)			
	D	mm (in.)	330+20 (13+3/4)			
	H	mm (in.)	855 (33-5/8)	1,260 (49-5/8)		
Weight			kg (lbs.)	82 (181)	96 (212)	
Refrigerant piping	Refrigerant			R407C		
	Charge		kg (lbs.)	3.7 (8.2)	4.0 (8.8)	
	Oil (Model)		L	1.6 (MEL56)		
	Pipe size O.D.	Liquid	mm (in.)	9.52 (3/8)		
		Gas	mm (in.)	15.88 (5/8)	19.05 (3/4)	
	Connection method			Indoor side		Flared
				Outdoor side		Flared
Between the indoor & outdoor units			Height difference		Max. 50m	
			Piping length		Max. 50m	

**NOTE:**

- Rating conditions (ISO T1)  
Cooling : Indoor: D.B. 27°C (80°F) W.B. 19°C (66°F) Outdoor : D.B. 35°C (95°F) W.B. 24°C (75°F)  
Refrigerant piping length (one way) : 5m (16ft.)

- Guaranteed operating range

		Indoor	Outdoor
Cooling	Upper limit	D.B. 35°C, W.B. 22.5°C	D.B. 46°C
	Lower limit	D.B. 19°C, W.B. 15°C	D.B. -5°C

- Above data based on indicated voltage

Indoor unit Single phase 240V 50Hz  
Outdoor unit Single phase 240V 50Hz, 3 phase 415V 50Hz

\*1. Single phase, 50Hz, 220-230-240V / 3 phase, 50Hz, 380-400-415V (4wires)

Service Ref.			PLA-P5AA.UK	PLA-P6AA.UK		
Item						
Function			Cooling			
Capacity	Btu/h		43,700	48,000		
	W		12,800	14,300		
Total input	kW		5.55	6.70		
Indoor unit	<b>Service Ref.</b>		<b>PLA-P5AA.UK</b>	<b>PLA-P6AA.UK</b>		
	Power supply (phase, cycle, voltage)		Single phase, 50Hz, 220-230-240V			
	Input		kW	0.30	0.34	
	Running current		A	1.43	1.64	
	Starting current		A	2.0	2.0	
	External finish (Panel)		Munsell 0.70Y 8.59/0.97			
	Heat exchanger		Plate fin coil			
	Fan	Fan (drive) × No.		Turbo fan (direct) × 1		
		Fan motor output		0.120		
		Airflow (Low-Medium2-Medium1-High)	m <sup>3</sup> / min (CFM)	22-25-28-30 (775-880-990-1,060)	22-25-28-30 (775-880-990-1,060)	
		External static pressure		Pa (mmAq)		0 (direct blow)
	Booster heater		kW		—	
	Operation control & Thermostat		Remote controller & built-in			
	Sound level (Low-Medium2-Medium1-High)		dB		35-38-41-43	37-40-43-45
	Unit drain pipe I.D.		mm (in.)		32 (1-1/4)	
	Dimensions	W	mm (in.)	UNIT : 840 (33-1/16), PANEL : 950 (37-3/8)		
		D	mm (in.)	UNIT : 840 (33-1/16), PANEL : 950 (37-3/8)		
H		mm (in.)	UNIT : 298 (11-3/4), PANEL : 30 (1-3/16)			
Weight		kg (lbs.)		UNIT : 30 (66), PANEL : 5 (11)		
Outdoor unit	<b>Service Ref.</b>		<b>PU-P5YGA</b>	<b>PU-P6YGA</b>		
	Power supply (phase, cycle, voltage)		3 phase, 50Hz, 380-400-415V (4wires)			
	Running current		A	8.39	10.17	
	Starting current		A	79	84	
	External finish		Munsell 5Y 8/1			
	Refrigerant control		Linear expansion valve			
	Compressor		Hermetic			
	Model		HE86YAA		HE101YAA	
	Motor output		kW		4.3	5.1
	Starter type		Line start			
	Protection devices		Internal thermostat, Anti-phase protector, Thermal relay, HP switch, LP switch, Discharge thermo.			
	Heat exchanger		Plate fin coil			
	Fan	Fan (drive) × No.		Propeller (direct) × 2		
		Fan motor output		0.075+0.075		
		Airflow	m <sup>3</sup> / min (CFM)	95 (3,360)	100 (3,530)	
	Crankcase heater		W		38	
	Defrost method		—			
Sound level		Cooling		dB	53	57
Dimensions	W	mm (in.)	1,050 (41-5/16)			
	D	mm (in.)	330+20 (13+3/4)			
	H	mm (in.)	1,260 (49-5/8)			
Weight		kg (lbs.)		122 (269)		
Refrigerant piping	Refrigerant		R407C			
	Charge		kg (lbs.)		5.8 (12.8)	
	Oil (Model)		L		2.0 (MEL32)	
	Pipe size O.D.	Liquid	mm (in.)	9.52 (3/8)		
		Gas	mm (in.)	19.05 (3/4)		
	Connection method	Indoor side		Flared		
		Outdoor side		Flared		
Between the indoor & outdoor units	Height difference		Max. 50m			
	Piping length		Max. 50m			

- NOTE:**
- Rating conditions (ISO T1)  
Cooling : Indoor : D.B. 27°C (80°F) W.B. 19°C (66°F) Outdoor: D.B. 35°C (95°F) W.B. 24°C (75°F)  
Refrigerant piping length (one way) : 5m (16ft.)
  - Guaranteed operating range

		Indoor	Outdoor
Cooling	Upper limit	D.B. 35°C, W.B. 22.5°C	D.B. 46°C
	Lower limit	D.B. 19°C, W.B. 15°C	D.B. -5°C

- Above data based on indicated voltage  
Indoor unit Single phase 240V 50Hz  
Outdoor unit 3 phase 415V 50Hz

Service Ref.			PLA-P3AA.UK PLA-P3AA1.UK	PLA-P4AA.UK PLA-P4AA1.UK		
Item						
Function			Cooling			
Capacity	Btu/h		26,600	33,100		
	W		7,800	9,700		
Total input			kW	3.44		
Service Ref.			PLA-P3AA.UK PLA-P3AA1.UK	PLA-P4AA.UK PLA-P4AA1.UK		
Indoor unit	Power supply (phase, cycle, voltage)			Single phase, 50Hz, 220-230-240V		
	Input		kW	0.17	0.26	
	Running current		A	0.81	1.25	
	Starting current		A	1.0	2.0	
	External finish (Panel)			Munsell 0.70Y 8.59/0.97		
	Heat exchanger			Plate fin coil		
	Fan	Fan (drive) × No.		Turbo fan (direct) × 1		
		Fan motor output		kW	0.070	0.120
		Airflow (Low-Medium2-Medium1-High)		m <sup>3</sup> / min (CFM)	15-16-18-20 (530-565-635-705)	20-23-26-28 (705-810-920-990)
		External static pressure		Pa (mmAq)	0 (direct blow)	
	Booster heater			kW		
	Operation control & Thermostat			Remote controller & built-in		
	Sound level (Low-Medium2-Medium1-High)			dB	28-30-32-34	33-36-39-41
	Unit drain pipe I.D.			mm (in.)		
	Dimensions	W	mm (in.)	UNIT : 840 (33-1/16), PANEL : 950 (37-3/8)	UNIT : 840 (33-1/16), PANEL : 950 (37-3/8)	
D		mm (in.)	UNIT : 840 (33-1/16), PANEL : 950 (37-3/8)	UNIT : 840 (33-1/16), PANEL : 950 (37-3/8)		
H		mm (in.)	UNIT : 258 (10-1/2), PANEL : 30 (1-3/16)	UNIT : 298 (11-3/4), PANEL : 30 (1-3/16)		
Weight			kg (lbs.)			
Service Ref.			PU-P3VGAA.UK / PU-P3YGAA.UK	PU-P4VGAA.UK / PU-P4YGAA.UK		
Outdoor unit	Power supply (phase, cycle, voltage)			Single phase, 50Hz, 220-230-240V/ 3 phase, 50Hz, 380-400-415V (4wires)		
	Running current		A	14.81 / 5.29	15.71 / 5.55	
	Starting current		A	93 / 47	99 / 49	
	External finish			Munsell 5Y 7/1		
	Refrigerant control			Linear expansion valve		
	Compressor			Hermetic		
	Model			NE52VNJMT / NE52YDKMT	NE56VNJMT / NE56YDKMT	
	Motor output		kW	2.5	2.7	
	Starter type			Line start		
	Protection devices			Internal thermostat, HP switch, Discharge thermo. / Thermal relay, HP switch, Discharge thermo.		
	Heat exchanger			Plate fin coil		
	Fan	Fan (drive) × No.		Propeller (direct) × 1		
		Fan motor output		kW	0.070	0.070+0.070
		Airflow		m <sup>3</sup> / min (CFM)	50 (1,770)	85 (3,000)
	Crankcase heater			W		
Defrost method			38			
Sound level			dB	49	51	
Dimensions	W	mm (in.)	900 (35-7/16)			
	D	mm (in.)	330+20 (13+3/4)			
	H	mm (in.)	855 (33-5/8)	1,260 (49-5/8)		
Weight			kg (lbs.)			
Refrigerant			R407C			
Charge		kg (lbs.)	3.3 (7.3)	4.0 (8.8)		
Oil (Model)		L	1.3 (Ester)MEL56			
Pipe size O.D.	Liquid	mm (in.)	9.52 (3/8)			
	Gas	mm (in.)	15.88 (5/8)	19.05 (3/4)		
Connection method			Indoor side			
			Outdoor side			
Between the indoor & outdoor units			Height difference			
			Piping length			

**NOTE:** 1. Rating conditions (ISO T1)  
Cooling : Indoor: D.B. 27°C (80°F) W.B. 19°C (66°F) Outdoor : D.B. 35°C (95°F) W.B. 24°C (75°F)  
Refrigerant piping length (one way) : 5m (16ft.)

2. Guaranteed operating range

		Indoor	Outdoor
Cooling	Upper limit	D.B. 35°C, W.B. 22.5°C	D.B. 46°C
	Lower limit	D.B. 19°C, W.B. 15°C	D.B. -5°C

3. Above data based on indicated voltage

Indoor unit Single phase 240V 50Hz

Outdoor unit Single phase 240V 50Hz, 3 phase 415V 50Hz

Item			Service Ref.	PLA-P5AA.UK PLA-P5AA1.UK	PLA-P6AA.UK PLA-P6AA1.UK	
Function				Cooling		
Capacity			Btu/h	43,700	48,000	
			W	12,800	14,300	
Total input			kW	5.00	5.94	
Indoor unit	Service Ref.			PLA-P5AA.UK PLA-P5AA1.UK	PLA-P6AA.UK PLA-P6AA1.UK	
	Power supply (phase, cycle, voltage)			Single phase, 50Hz, 220-230-240V		
	Input			kW	0.30	0.34
	Running current			A	1.43	1.64
	Starting current			A	2.0	2.0
	External finish (Panel)			Munsell 0.70Y 8.59/0.97		
	Heat exchanger			Plate fin coil		
	Fan	Fan (drive) × No.			Turbo fan (direct) × 1	
		Fan motor output			kW	0.120
		Airflow (Low-Medium2-Medium1-High)			m <sup>3</sup> / min (CFM)	22-25-28-30 (775-880-990-1,060)
		External static pressure			Pa (mmAq)	0 (direct blow)
	Booster heater			kW	—	
	Operation control & Thermostat			Remote controller & built-in		
	Sound level (Low-Medium2-Medium1-High)			dB	35-38-41-43	37-40-43-45
	Unit drain pipe I.D.			mm (in.)	32 (1-1/4)	
Dimensions	W		mm (in.)	UNIT : 840 (33-1/16), PANEL : 950 (37-3/8)		
	D		mm (in.)	UNIT : 840 (33-1/16), PANEL : 950 (37-3/8)		
	H		mm (in.)	UNIT : 298 (11-3/4), PANEL : 30 (1-3/16)		
Weight			kg (lbs.)	UNIT : 30 (66), PANEL : 5 (11)	UNIT : 32 (71), PANEL : 5 (11)	
Outdoor unit	Service Ref.			PU-P5YGAA.UK	PU-P6YGAA.UK	
	Power supply (phase, cycle, voltage)			3 phase, 50Hz, 380-400-415V (4wires)		
	Running current			A	7.60	9.03
	Starting current			A	65.5	74
	External finish			Munsell 5Y 7/1		
	Refrigerant control			Linear expansion valve		
	Compressor			Hermetic		
	Model			ZR61KCE-TFD	ZR72KCE-TFD	
	Motor output			kW	3.5	4.2
	Starter type			Line start		
	Protection devices			Internal thermostat, Thermal relay, HP switch, Discharge thermo.		
	Heat exchanger			Plate fin coil		
	Fan	Fan (drive) × No.			Propeller (direct) × 2	
		Fan motor output			kW	0.070+0.070
		Airflow			m <sup>3</sup> / min (CFM)	95 (3,360)
Crankcase heater			W	38		
Defrost method			—			
Sound level			Cooling	dB	55	57
Dimensions	W		mm (in.)	1,050 (41-5/16)		
	D		mm (in.)	330+20 (13+3/4)		
	H		mm (in.)	1,260 (49-5/8)		
Weight			kg (lbs.)	122 (269)		
Refrigerant piping	Refrigerant			R407C		
	Charge			kg (lbs.)	4.6 (10.1)	4.9 (10.8)
	Oil (Model)			L	1.690 (Ester)MMM-POE	1.774 (Ester)MMM-POE
	Pipe size O.D.	Liquid		mm (in.)	9.52 (3/8)	
		Gas		mm (in.)	19.05 (3/4)	
	Connection method	Indoor side			Flared	
		Outdoor side			Flared	
Between the indoor & outdoor units	Height difference			Max. 50m		
	Piping length			Max. 50m		

**NOTE:** 1. Rating conditions (ISO T1)  
Cooling : Indoor : D.B. 27°C (80°F) W.B. 19°C (66°F) Outdoor: D.B. 35°C (95°F) W.B. 24°C (75°F)  
Refrigerant piping length (one way) : 5m (16ft.)

2. Guaranteed operating range

		Indoor	Outdoor
Cooling	Upper limit	D.B. 35°C, W.B. 22.5°C	D.B. 46°C
	Lower limit	D.B. 19°C, W.B. 15°C	D.B. -5°C

3. Above data based on indicated voltage  
Indoor unit Single phase 240V 50Hz  
Outdoor unit 3 phase 415V 50Hz

## 1. PERFORMANCE DATA

## 1.1 COOLING CAPACITY (1)

## PLA-P3AA.UK / PU(H)-P3VGA, PU(H)-P3YGA

(240V)

Indoor intake air DB (°C)	Indoor intake air WB (°C)	Outdoor intake air DB (°C)											
		20				25				30			
		CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.
20	16	7,722	4,942	0.64	2.81	7,488	4,792	0.64	2.97	7,254	4,643	0.64	3.14
20	18	8,268	4,299	0.52	2.86	8,034	4,178	0.52	3.02	7,761	4,036	0.52	3.23
20	20	8,892	3,557	0.40	2.95	8,697	3,479	0.40	3.09	8,463	3,385	0.40	3.30
22	16	7,722	5,560	0.72	2.81	7,488	5,391	0.72	2.97	7,254	5,223	0.72	3.14
22	18	8,268	4,961	0.60	2.86	8,034	4,820	0.60	3.02	7,761	4,657	0.60	3.23
22	20	8,892	4,268	0.48	2.95	8,697	4,175	0.48	3.09	8,463	4,062	0.48	3.30
24	16	7,722	6,178	0.80	2.81	7,488	5,990	0.80	2.97	7,254	5,803	0.80	3.14
24	18	8,268	5,622	0.68	2.86	8,034	5,463	0.68	3.02	7,761	5,277	0.68	3.23
24	20	8,892	4,980	0.56	2.95	8,697	4,870	0.56	3.09	8,463	4,739	0.56	3.30
24	22	9,477	4,170	0.44	3.02	9,282	4,084	0.44	3.19	9,048	3,981	0.44	3.40
26	16	7,722	6,795	0.88	2.81	7,488	6,589	0.88	2.97	7,254	6,384	0.88	3.14
26	18	8,268	6,284	0.76	2.86	8,034	6,106	0.76	3.02	7,761	5,898	0.76	3.23
26	20	8,892	5,691	0.64	2.95	8,697	5,566	0.64	3.09	8,463	5,416	0.64	3.30
26	22	9,477	4,928	0.52	3.02	9,282	4,827	0.52	3.19	9,048	4,705	0.52	3.40
28	16	7,722	7,413	0.96	2.81	7,488	7,188	0.96	2.97	7,254	6,964	0.96	3.14
28	18	8,268	6,945	0.84	2.86	8,034	6,749	0.84	3.02	7,761	6,519	0.84	3.23
28	20	8,892	6,402	0.72	2.95	8,697	6,262	0.72	3.09	8,463	6,093	0.72	3.30
28	22	9,477	5,686	0.60	3.02	9,282	5,569	0.60	3.19	9,048	5,429	0.60	3.40
30	16	7,722	7,722	1.00	2.81	7,488	7,488	1.00	2.97	7,254	7,254	1.00	3.14
30	18	8,268	7,607	0.92	2.86	8,034	7,391	0.92	3.02	7,761	7,140	0.92	3.23
30	20	8,892	7,114	0.80	2.95	8,697	6,958	0.80	3.09	8,463	6,770	0.80	3.30
30	22	9,477	6,444	0.68	3.02	9,282	6,312	0.68	3.19	9,048	6,153	0.68	3.40
32	16	7,722	7,722	1.00	2.81	7,488	7,488	1.00	2.97	7,254	7,254	1.00	3.14
32	18	8,268	8,268	1.00	2.86	8,034	8,034	1.00	3.02	7,761	7,761	1.00	3.23
32	20	8,892	7,825	0.88	2.95	8,697	7,653	0.88	3.09	8,463	7,447	0.88	3.30
32	22	9,477	7,203	0.76	3.02	9,282	7,054	0.76	3.19	9,048	6,876	0.76	3.40
34	16	7,722	7,722	1.00	2.81	7,488	7,488	1.00	2.97	7,254	7,254	1.00	3.14
34	18	8,268	8,268	1.00	2.86	8,034	8,034	1.00	3.02	7,761	7,761	1.00	3.23
34	20	8,892	8,536	0.96	2.95	8,697	8,349	0.96	3.09	8,463	8,124	0.96	3.30
34	22	9,477	7,961	0.84	3.02	9,282	7,797	0.84	3.19	9,048	7,600	0.84	3.40

**NOTE:** CA: Capacity (W)  
P.C.: Power consumption (kW)

SHC: Sensible heat capacity (W)  
SHF: Sensible heat factor

**COOLING CAPACITY (2)**

**PLA-P3AA.UK / PU(H)-P3VGA, PU(H)-P3YGA**

(240V)

Indoor intake air DB (°C)	Indoor intake air WB (°C)	Outdoor intake air DB (°C)											
		35				40				45			
		CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.
20	16	6,942	4,443	0.64	3.37	6,630	4,243	0.64	3.62	6,318	4,044	0.64	3.91
20	18	7,488	3,894	0.52	3.46	7,254	3,772	0.52	3.72	6,786	3,529	0.52	4.00
20	20	8,112	3,245	0.40	3.55	7,800	3,120	0.40	3.79	7,332	2,933	0.40	4.07
22	16	6,942	4,998	0.72	3.37	6,630	4,774	0.72	3.62	6,318	4,549	0.72	3.91
22	18	7,488	4,493	0.60	3.46	7,254	4,352	0.60	3.72	6,786	4,072	0.60	4.00
22	20	8,112	3,894	0.48	3.55	7,800	3,744	0.48	3.79	7,332	3,519	0.48	4.07
24	16	6,942	5,554	0.80	3.37	6,630	5,304	0.80	3.62	6,318	5,054	0.80	3.91
24	18	7,488	5,092	0.68	3.46	7,254	4,933	0.68	3.72	6,786	4,614	0.68	4.00
24	20	8,112	4,543	0.56	3.55	7,800	4,368	0.56	3.79	7,332	4,106	0.56	4.07
24	22	8,736	3,844	0.44	3.62	8,424	3,707	0.44	3.90	7,956	3,501	0.44	4.14
26	16	6,942	6,109	0.88	3.37	6,630	5,834	0.88	3.62	6,318	5,560	0.88	3.91
26	18	7,488	5,691	0.76	3.46	7,254	5,513	0.76	3.72	6,786	5,157	0.76	4.00
26	20	8,112	5,192	0.64	3.55	7,800	4,992	0.64	3.79	7,332	4,692	0.64	4.07
26	22	8,736	4,543	0.52	3.62	8,424	4,380	0.52	3.90	7,956	4,137	0.52	4.14
28	16	6,942	6,664	0.96	3.37	6,630	6,365	0.96	3.62	6,318	6,065	0.96	3.91
28	18	7,488	6,290	0.84	3.46	7,254	6,093	0.84	3.72	6,786	5,700	0.84	4.00
28	20	8,112	5,841	0.72	3.55	7,800	5,616	0.72	3.79	7,332	5,279	0.72	4.07
28	22	8,736	5,242	0.60	3.62	8,424	5,054	0.60	3.90	7,956	4,774	0.60	4.14
30	16	6,942	6,942	1.00	3.37	6,630	6,630	1.00	3.62	6,318	6,318	1.00	3.91
30	18	7,488	6,889	0.92	3.46	7,254	6,674	0.92	3.72	6,786	6,243	0.92	4.00
30	20	8,112	6,490	0.80	3.55	7,800	6,240	0.80	3.79	7,332	5,866	0.80	4.07
30	22	8,736	5,940	0.68	3.62	8,424	5,728	0.68	3.90	7,956	5,410	0.68	4.14
32	16	6,942	6,942	1.00	3.37	6,630	6,630	1.00	3.62	6,318	6,318	1.00	3.91
32	18	7,488	7,488	1.00	3.46	7,254	7,254	1.00	3.72	6,786	6,786	1.00	4.00
32	20	8,112	7,139	0.88	3.55	7,800	6,864	0.88	3.79	7,332	6,452	0.88	4.07
32	22	8,736	6,639	0.76	3.62	8,424	6,402	0.76	3.90	7,956	6,047	0.76	4.14
34	16	6,942	6,942	1.00	3.37	6,630	6,630	1.00	3.62	6,318	6,318	1.00	3.91
34	18	7,488	7,488	1.00	3.46	7,254	7,254	1.00	3.72	6,786	6,786	1.00	4.00
34	20	8,112	7,788	0.96	3.55	7,800	7,488	0.96	3.79	7,332	7,039	0.96	4.07
34	22	8,736	7,338	0.84	3.62	8,424	7,076	0.84	3.90	7,956	6,683	0.84	4.14

**NOTE:** CA: Capacity (W)  
P.C.: Power consumption (kW)

SHC: Sensible heat capacity (W)  
SHF: Sensible heat factor



**COOLING CAPACITY (3)  
PLA-P4AA.UK / PU(H)-P4YGA**

(240V)

Indoor intake air DB (°C)	Indoor intake air WB (°C)	Outdoor intake air DB (°C)											
		20				25				30			
		CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.
20	16	9,603	6,530	0.68	2.90	9,312	6,332	0.68	3.06	9,021	6,134	0.68	3.24
20	18	10,282	5,758	0.56	2.95	9,991	5,595	0.56	3.11	9,652	5,405	0.56	3.33
20	20	11,058	4,866	0.44	3.04	10,816	4,759	0.44	3.19	10,525	4,631	0.44	3.40
22	16	9,603	7,298	0.76	2.90	9,312	7,077	0.76	3.06	9,021	6,856	0.76	3.24
22	18	10,282	6,580	0.64	2.95	9,991	6,394	0.64	3.11	9,652	6,177	0.64	3.33
22	20	11,058	5,750	0.52	3.04	10,816	5,624	0.52	3.19	10,525	5,473	0.52	3.40
24	16	9,603	8,067	0.84	2.90	9,312	7,822	0.84	3.06	9,021	7,578	0.84	3.24
24	18	10,282	7,403	0.72	2.95	9,991	7,194	0.72	3.11	9,652	6,949	0.72	3.33
24	20	11,058	6,635	0.60	3.04	10,816	6,489	0.60	3.19	10,525	6,315	0.60	3.40
24	22	11,786	5,657	0.48	3.11	11,543	5,541	0.48	3.29	11,252	5,401	0.48	3.51
26	16	9,603	8,835	0.92	2.90	9,312	8,567	0.92	3.06	9,021	8,299	0.92	3.24
26	18	10,282	8,226	0.80	2.95	9,991	7,993	0.80	3.11	9,652	7,721	0.80	3.33
26	20	11,058	7,519	0.68	3.04	10,816	7,355	0.68	3.19	10,525	7,157	0.68	3.40
26	22	11,786	6,600	0.56	3.11	11,543	6,464	0.56	3.29	11,252	6,301	0.56	3.51
28	16	9,603	9,603	1.00	2.90	9,312	9,312	1.00	3.06	9,021	9,021	1.00	3.24
28	18	10,282	9,048	0.88	2.95	9,991	8,792	0.88	3.11	9,652	8,493	0.88	3.33
28	20	11,058	8,404	0.76	3.04	10,816	8,220	0.76	3.19	10,525	7,999	0.76	3.40
28	22	11,786	7,543	0.64	3.11	11,543	7,388	0.64	3.29	11,252	7,201	0.64	3.51
30	16	9,603	9,603	1.00	2.90	9,312	9,312	1.00	3.06	9,021	9,021	1.00	3.24
30	18	10,282	9,871	0.96	2.95	9,991	9,591	0.96	3.11	9,652	9,265	0.96	3.33
30	20	11,058	9,289	0.84	3.04	10,816	9,085	0.84	3.19	10,525	8,841	0.84	3.40
30	22	11,786	8,486	0.72	3.11	11,543	8,311	0.72	3.29	11,252	8,101	0.72	3.51
32	16	9,603	9,603	1.00	2.90	9,312	9,312	1.00	3.06	9,021	9,021	1.00	3.24
32	18	10,282	10,282	1.00	2.95	9,991	9,991	1.00	3.11	9,652	9,652	1.00	3.33
32	20	11,058	10,173	0.92	3.04	10,816	9,950	0.92	3.19	10,525	9,683	0.92	3.40
32	22	11,786	9,428	0.80	3.11	11,543	9,234	0.80	3.29	11,252	9,002	0.80	3.51
34	16	9,603	9,603	1.00	2.90	9,312	9,312	1.00	3.06	9,021	9,021	1.00	3.24
34	18	10,282	10,282	1.00	2.95	9,991	9,991	1.00	3.11	9,652	9,652	1.00	3.33
34	20	11,058	11,058	1.00	3.04	10,816	10,816	1.00	3.19	10,525	10,525	1.00	3.40
34	22	11,786	10,371	0.88	3.11	11,543	10,158	0.88	3.29	11,252	9,902	0.88	3.51

**NOTE:** CA: Capacity (W)

SHC: Sensible heat capacity (W)

P.C.: Power consumption (kW)

SHF: Sensible heat factor

**COOLING CAPACITY (4)  
PLA-P4AA.UK / PU(H)-P4YGA**

(240V)

Indoor intake air DB (°C)	Indoor intake air WB (°C)	Outdoor intake air DB (°C)											
		35				40				45			
		CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.
20	16	8,633	5,870	0.68	3.48	8,245	5,607	0.68	3.73	7,857	5,343	0.68	4.04
20	18	9,312	5,215	0.56	3.57	9,021	5,052	0.56	3.84	8,439	4,726	0.56	4.13
20	20	10,088	4,439	0.44	3.66	9,700	4,268	0.44	3.91	9,118	4,012	0.44	4.20
22	16	8,633	6,561	0.76	3.48	8,245	6,266	0.76	3.73	7,857	5,971	0.76	4.04
22	18	9,312	5,960	0.64	3.57	9,021	5,773	0.64	3.84	8,439	5,401	0.64	4.13
22	20	10,088	5,246	0.52	3.66	9,700	5,044	0.52	3.91	9,118	4,741	0.52	4.20
24	16	8,633	7,252	0.84	3.48	8,245	6,926	0.84	3.73	7,857	6,600	0.84	4.04
24	18	9,312	6,705	0.72	3.57	9,021	6,495	0.72	3.84	8,439	6,076	0.72	4.13
24	20	10,088	6,053	0.60	3.66	9,700	5,820	0.60	3.91	9,118	5,471	0.60	4.20
24	22	10,864	5,215	0.48	3.73	10,476	5,028	0.48	4.02	9,894	4,749	0.48	4.27
26	16	8,633	7,942	0.92	3.48	8,245	7,585	0.92	3.73	7,857	7,228	0.92	4.04
26	18	9,312	7,450	0.80	3.57	9,021	7,217	0.80	3.84	8,439	6,751	0.80	4.13
26	20	10,088	6,860	0.68	3.66	9,700	6,596	0.68	3.91	9,118	6,200	0.68	4.20
26	22	10,864	6,084	0.56	3.73	10,476	5,867	0.56	4.02	9,894	5,541	0.56	4.27
28	16	8,633	8,633	1.00	3.48	8,245	8,245	1.00	3.73	7,857	7,857	1.00	4.04
28	18	9,312	8,195	0.88	3.57	9,021	7,938	0.88	3.84	8,439	7,426	0.88	4.13
28	20	10,088	7,667	0.76	3.66	9,700	7,372	0.76	3.91	9,118	6,930	0.76	4.20
28	22	10,864	6,953	0.64	3.73	10,476	6,705	0.64	4.02	9,894	6,332	0.64	4.27
30	16	8,633	8,633	1.00	3.48	8,245	8,245	1.00	3.73	7,857	7,857	1.00	4.04
30	18	9,312	8,940	0.96	3.57	9,021	8,660	0.96	3.84	8,439	8,101	0.96	4.13
30	20	10,088	8,474	0.84	3.66	9,700	8,148	0.84	3.91	9,118	7,659	0.84	4.20
30	22	10,864	7,822	0.72	3.73	10,476	7,543	0.72	4.02	9,894	7,124	0.72	4.27
32	16	8,633	8,633	1.00	3.48	8,245	8,245	1.00	3.73	7,857	7,857	1.00	4.04
32	18	9,312	9,312	1.00	3.57	9,021	9,021	1.00	3.84	8,439	8,439	1.00	4.13
32	20	10,088	9,281	0.92	3.66	9,700	8,924	0.92	3.91	9,118	8,389	0.92	4.20
32	22	10,864	8,691	0.80	3.73	10,476	8,381	0.80	4.02	9,894	7,915	0.80	4.27
34	16	8,633	8,633	1.00	3.48	8,245	8,245	1.00	3.73	7,857	7,857	1.00	4.04
34	18	9,312	9,312	1.00	3.57	9,021	9,021	1.00	3.84	8,439	8,439	1.00	4.13
34	20	10,088	10,088	1.00	3.66	9,700	9,700	1.00	3.91	9,118	9,118	1.00	4.20
34	22	10,864	9,560	0.88	3.73	10,476	9,219	0.88	4.02	9,894	8,707	0.88	4.27

**NOTE:** CA: Capacity (W)  
P.C.: Power consumption (kW)

SHC: Sensible heat capacity (W)  
SHF: Sensible heat factor

**COOLING CAPACITY (5)  
PLA-P5AA.UK / PU(H)-P5YGA**

(240V)

Indoor intake air DB (°C)	Indoor intake air WB (°C)	Outdoor intake air DB (°C)											
		20				25				30			
		CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.
20	16	12,672	7,857	0.62	4.44	12,288	7,619	0.62	4.69	11,904	7,380	0.62	4.97
20	18	13,568	6,784	0.50	4.52	13,184	6,592	0.50	4.77	12,736	6,368	0.50	5.11
20	20	14,592	5,545	0.38	4.66	14,272	5,423	0.38	4.88	13,888	5,277	0.38	5.22
22	16	12,672	8,870	0.70	4.44	12,288	8,602	0.70	4.69	11,904	8,333	0.70	4.97
22	18	13,568	7,869	0.58	4.52	13,184	7,647	0.58	4.77	12,736	7,387	0.58	5.11
22	20	14,592	6,712	0.46	4.66	14,272	6,565	0.46	4.88	13,888	6,388	0.46	5.22
24	16	12,672	9,884	0.78	4.44	12,288	9,585	0.78	4.69	11,904	9,285	0.78	4.97
24	18	13,568	8,955	0.66	4.52	13,184	8,701	0.66	4.77	12,736	8,406	0.66	5.11
24	20	14,592	7,880	0.54	4.66	14,272	7,707	0.54	4.88	13,888	7,500	0.54	5.22
24	22	15,552	6,532	0.42	4.77	15,232	6,397	0.42	5.05	14,848	6,236	0.42	5.38
26	16	12,672	10,898	0.86	4.44	12,288	10,568	0.86	4.69	11,904	10,237	0.86	4.97
26	18	13,568	10,040	0.74	4.52	13,184	9,756	0.74	4.77	12,736	9,425	0.74	5.11
26	20	14,592	9,047	0.62	4.66	14,272	8,849	0.62	4.88	13,888	8,611	0.62	5.22
26	22	15,552	7,776	0.50	4.77	15,232	7,616	0.50	5.05	14,848	7,424	0.50	5.38
28	16	12,672	11,912	0.94	4.44	12,288	11,551	0.94	4.69	11,904	11,190	0.94	4.97
28	18	13,568	11,126	0.82	4.52	13,184	10,811	0.82	4.77	12,736	10,444	0.82	5.11
28	20	14,592	10,214	0.70	4.66	14,272	9,990	0.70	4.88	13,888	9,722	0.70	5.22
28	22	15,552	9,020	0.58	4.77	15,232	8,835	0.58	5.05	14,848	8,612	0.58	5.38
30	16	12,672	12,672	1.00	4.44	12,288	12,288	1.00	4.69	11,904	11,904	1.00	4.97
30	18	13,568	12,211	0.90	4.52	13,184	11,866	0.90	4.77	12,736	11,462	0.90	5.11
30	20	14,592	11,382	0.78	4.66	14,272	11,132	0.78	4.88	13,888	10,833	0.78	5.22
30	22	15,552	10,264	0.66	4.77	15,232	10,053	0.66	5.05	14,848	9,800	0.66	5.38
32	16	12,672	12,672	1.00	4.44	12,288	12,288	1.00	4.69	11,904	11,904	1.00	4.97
32	18	13,568	13,297	0.98	4.52	13,184	12,920	0.98	4.77	12,736	12,481	0.98	5.11
32	20	14,592	12,549	0.86	4.66	14,272	12,274	0.86	4.88	13,888	11,944	0.86	5.22
32	22	15,552	11,508	0.74	4.77	15,232	11,272	0.74	5.05	14,848	10,988	0.74	5.38
34	16	12,672	12,672	1.00	4.44	12,288	12,288	1.00	4.69	11,904	11,904	1.00	4.97
34	18	13,568	13,568	1.00	4.52	13,184	13,184	1.00	4.77	12,736	12,736	1.00	5.11
34	20	14,592	13,716	0.94	4.66	14,272	13,416	0.94	4.88	13,888	13,055	0.94	5.22
34	22	15,552	12,753	0.82	4.77	15,232	12,490	0.82	5.05	14,848	12,175	0.82	5.38

**NOTE:** CA: Capacity (W) SHC: Sensible heat capacity (W)  
P.C.: Power consumption (kW) SHF: Sensible heat factor

**COOLING CAPACITY (6)  
PLA-P5AA.UK / PU(H)-P5YGA**

(240V)

Indoor intake air DB (°C)	Indoor intake air WB (°C)	Outdoor intake air DB (°C)											
		35				40				45			
		CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.
20	16	11,392	7,063	0.62	5.33	10,880	6,746	0.62	5.72	10,368	6,428	0.62	6.19
20	18	12,288	6,144	0.50	5.47	11,904	5,952	0.50	5.88	11,136	5,568	0.50	6.33
20	20	13,312	5,059	0.38	5.61	12,800	4,864	0.38	5.99	12,032	4,572	0.38	6.44
22	16	11,392	7,974	0.70	5.33	10,880	7,616	0.70	5.72	10,368	7,258	0.70	6.19
22	18	12,288	7,127	0.58	5.47	11,904	6,904	0.58	5.88	11,136	6,459	0.58	6.33
22	20	13,312	6,124	0.46	5.61	12,800	5,888	0.46	5.99	12,032	5,535	0.46	6.44
24	16	11,392	8,886	0.78	5.33	10,880	8,486	0.78	5.72	10,368	8,087	0.78	6.19
24	18	12,288	8,110	0.66	5.47	11,904	7,857	0.66	5.88	11,136	7,350	0.66	6.33
24	20	13,312	7,188	0.54	5.61	12,800	6,912	0.54	5.99	12,032	6,497	0.54	6.44
24	22	14,336	6,021	0.42	5.72	13,824	5,806	0.42	6.16	13,056	5,484	0.42	6.55
26	16	11,392	9,797	0.86	5.33	10,880	9,357	0.86	5.72	10,368	8,916	0.86	6.19
26	18	12,288	9,093	0.74	5.47	11,904	8,809	0.74	5.88	11,136	8,241	0.74	6.33
26	20	13,312	8,253	0.62	5.61	12,800	7,936	0.62	5.99	12,032	7,460	0.62	6.44
26	22	14,336	7,168	0.50	5.72	13,824	6,912	0.50	6.16	13,056	6,528	0.50	6.55
28	16	11,392	10,708	0.94	5.33	10,880	10,227	0.94	5.72	10,368	9,746	0.94	6.19
28	18	12,288	10,076	0.82	5.47	11,904	9,761	0.82	5.88	11,136	9,132	0.82	6.33
28	20	13,312	9,318	0.70	5.61	12,800	8,960	0.70	5.99	12,032	8,422	0.70	6.44
28	22	14,336	8,315	0.58	5.72	13,824	8,018	0.58	6.16	13,056	7,572	0.58	6.55
30	16	11,392	11,392	1.00	5.33	10,880	10,880	1.00	5.72	10,368	10,368	1.00	6.19
30	18	12,288	11,059	0.90	5.47	11,904	10,714	0.90	5.88	11,136	10,022	0.90	6.33
30	20	13,312	10,383	0.78	5.61	12,800	9,984	0.78	5.99	12,032	9,385	0.78	6.44
30	22	14,336	9,462	0.66	5.72	13,824	9,124	0.66	6.16	13,056	8,617	0.66	6.55
32	16	11,392	11,392	1.00	5.33	10,880	10,880	1.00	5.72	10,368	10,368	1.00	6.19
32	18	12,288	12,042	0.98	5.47	11,904	11,666	0.98	5.88	11,136	10,913	0.98	6.33
32	20	13,312	11,448	0.86	5.61	12,800	11,008	0.86	5.99	12,032	10,348	0.86	6.44
32	22	14,336	10,609	0.74	5.72	13,824	10,230	0.74	6.16	13,056	9,661	0.74	6.55
34	16	11,392	11,392	1.00	5.33	10,880	10,880	1.00	5.72	10,368	10,368	1.00	6.19
34	18	12,288	12,288	1.00	5.47	11,904	11,904	1.00	5.88	11,136	11,136	1.00	6.33
34	20	13,312	12,513	0.94	5.61	12,800	12,032	0.94	5.99	12,032	11,310	0.94	6.44
34	22	14,336	11,756	0.82	5.72	13,824	11,336	0.82	6.16	13,056	10,706	0.82	6.55

**NOTE:** CA: Capacity (W) SHC: Sensible heat capacity (W)  
P.C.: Power consumption (kW) SHF: Sensible heat factor

**COOLING CAPACITY (7)  
PLA-P6AA.UK / PU(H)-P6YGA**

(240V)

Indoor intake air DB (°C)	Indoor intake air WB (°C)	Outdoor intake air DB (°C)											
		20				25				30			
		CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.
20	16	14,157	8,353	0.59	5.36	13,728	8,100	0.59	5.66	13,299	7,846	0.59	6.00
20	18	15,158	7,124	0.47	5.46	14,729	6,923	0.47	5.76	14,229	6,687	0.47	6.16
20	20	16,302	5,706	0.35	5.63	15,945	5,581	0.35	5.90	15,516	5,430	0.35	6.30
22	16	14,157	9,485	0.67	5.36	13,728	9,198	0.67	5.66	13,299	8,910	0.67	6.00
22	18	15,158	8,337	0.55	5.46	14,729	8,101	0.55	5.76	14,229	7,826	0.55	6.16
22	20	16,302	7,010	0.43	5.63	15,945	6,856	0.43	5.90	15,516	6,672	0.43	6.30
24	16	14,157	10,618	0.75	5.36	13,728	10,296	0.75	5.66	13,299	9,974	0.75	6.00
24	18	15,158	9,550	0.63	5.46	14,729	9,279	0.63	5.76	14,229	8,964	0.63	6.16
24	20	16,302	8,314	0.51	5.63	15,945	8,132	0.51	5.90	15,516	7,913	0.51	6.30
24	22	17,375	6,776	0.39	5.76	17,017	6,637	0.39	6.10	16,588	6,469	0.39	6.50
26	16	14,157	11,750	0.83	5.36	13,728	11,394	0.83	5.66	13,299	11,038	0.83	6.00
26	18	15,158	10,762	0.71	5.46	14,729	10,458	0.71	5.76	14,229	10,102	0.71	6.16
26	20	16,302	9,618	0.59	5.63	15,945	9,407	0.59	5.90	15,516	9,154	0.59	6.30
26	22	17,375	8,166	0.47	5.76	17,017	7,998	0.47	6.10	16,588	7,796	0.47	6.50
28	16	14,157	12,883	0.91	5.36	13,728	12,492	0.91	5.66	13,299	12,102	0.91	6.00
28	18	15,158	11,975	0.79	5.46	14,729	11,636	0.79	5.76	14,229	11,241	0.79	6.16
28	20	16,302	10,922	0.67	5.63	15,945	10,683	0.67	5.90	15,516	10,395	0.67	6.30
28	22	17,375	9,556	0.55	5.76	17,017	9,359	0.55	6.10	16,588	9,123	0.55	6.50
30	16	14,157	14,015	0.99	5.36	13,728	13,591	0.99	5.66	13,299	13,166	0.99	6.00
30	18	15,158	13,187	0.87	5.46	14,729	12,814	0.87	5.76	14,229	12,379	0.87	6.16
30	20	16,302	12,227	0.75	5.63	15,945	11,958	0.75	5.90	15,516	11,637	0.75	6.30
30	22	17,375	10,946	0.63	5.76	17,017	10,721	0.63	6.10	16,588	10,450	0.63	6.50
32	16	14,157	14,157	1.00	5.36	13,728	13,728	1.00	5.66	13,299	13,299	1.00	6.00
32	18	15,158	14,400	0.95	5.46	14,729	13,993	0.95	5.76	14,229	13,517	0.95	6.16
32	20	16,302	13,531	0.83	5.63	15,945	13,234	0.83	5.90	15,516	12,878	0.83	6.30
32	22	17,375	12,336	0.71	5.76	17,017	12,082	0.71	6.10	16,588	11,777	0.71	6.50
34	16	14,157	14,157	1.00	5.36	13,728	13,728	1.00	5.66	13,299	13,299	1.00	6.00
34	18	15,158	15,158	1.00	5.46	14,729	14,729	1.00	5.76	14,229	14,229	1.00	6.16
34	20	16,302	14,835	0.91	5.63	15,945	14,509	0.91	5.90	15,516	14,119	0.91	6.30
34	22	17,375	13,726	0.79	5.76	17,017	13,443	0.79	6.10	16,588	13,105	0.79	6.50

**NOTE:** CA: Capacity (W) SHC: Sensible heat capacity (W)  
P.C.: Power consumption (kW) SHF: Sensible heat factor

**COOLING CAPACITY (8)**  
**PLA-P6AA.UK / PU(H)-P6YGA**

(240V)

Indoor intake air DB (°C)	Indoor intake air WB (°C)	Outdoor intake air DB (°C)											
		35				40				45			
		CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.
20	16	12,727	7,509	0.59	6.43	12,155	7,171	0.59	6.90	11,583	6,834	0.59	7.47
20	18	13,728	6,452	0.47	6.60	13,299	6,251	0.47	7.10	12,441	5,847	0.47	7.64
20	20	14,872	5,205	0.35	6.77	14,300	5,005	0.35	7.24	13,442	4,705	0.35	7.77
22	16	12,727	8,527	0.67	6.43	12,155	8,144	0.67	6.90	11,583	7,761	0.67	7.47
22	18	13,728	7,550	0.55	6.60	13,299	7,314	0.55	7.10	12,441	6,843	0.55	7.64
22	20	14,872	6,395	0.43	6.77	14,300	6,149	0.43	7.24	13,442	5,780	0.43	7.77
24	16	12,727	9,545	0.75	6.43	12,155	9,116	0.75	6.90	11,583	8,687	0.75	7.47
24	18	13,728	8,649	0.63	6.60	13,299	8,378	0.63	7.10	12,441	7,838	0.63	7.64
24	20	14,872	7,585	0.51	6.77	14,300	7,293	0.51	7.24	13,442	6,855	0.51	7.77
24	22	16,016	6,246	0.39	6.90	15,444	6,023	0.39	7.44	14,586	5,689	0.39	7.91
26	16	12,727	10,563	0.83	6.43	12,155	10,089	0.83	6.90	11,583	9,614	0.83	7.47
26	18	13,728	9,747	0.71	6.60	13,299	9,442	0.71	7.10	12,441	8,833	0.71	7.64
26	20	14,872	8,774	0.59	6.77	14,300	8,437	0.59	7.24	13,442	7,931	0.59	7.77
26	22	16,016	7,528	0.47	6.90	15,444	7,259	0.47	7.44	14,586	6,855	0.47	7.91
28	16	12,727	11,582	0.91	6.43	12,155	11,061	0.91	6.90	11,583	10,541	0.91	7.47
28	18	13,728	10,845	0.79	6.60	13,299	10,506	0.79	7.10	12,441	9,828	0.79	7.64
28	20	14,872	9,964	0.67	6.77	14,300	9,581	0.67	7.24	13,442	9,006	0.67	7.77
28	22	16,016	8,809	0.55	6.90	15,444	8,494	0.55	7.44	14,586	8,022	0.55	7.91
30	16	12,727	12,600	0.99	6.43	12,155	12,033	0.99	6.90	11,583	11,467	0.99	7.47
30	18	13,728	11,943	0.87	6.60	13,299	11,570	0.87	7.10	12,441	10,824	0.87	7.64
30	20	14,872	11,154	0.75	6.77	14,300	10,725	0.75	7.24	13,442	10,082	0.75	7.77
30	22	16,016	10,090	0.63	6.90	15,444	9,730	0.63	7.44	14,586	9,189	0.63	7.91
32	16	12,727	12,727	1.00	6.43	12,155	12,155	1.00	6.90	11,583	11,583	1.00	7.47
32	18	13,728	13,042	0.95	6.60	13,299	12,634	0.95	7.10	12,441	11,819	0.95	7.64
32	20	14,872	12,344	0.83	6.77	14,300	11,869	0.83	7.24	13,442	11,157	0.83	7.77
32	22	16,016	11,371	0.71	6.90	15,444	10,965	0.71	7.44	14,586	10,356	0.71	7.91
34	16	12,727	12,727	1.00	6.43	12,155	12,155	1.00	6.90	11,583	11,583	1.00	7.47
34	18	13,728	13,728	1.00	6.60	13,299	13,299	1.00	7.10	12,441	12,441	1.00	7.64
34	20	14,872	13,534	0.91	6.77	14,300	13,013	0.91	7.24	13,442	12,232	0.91	7.77
34	22	16,016	12,653	0.79	6.90	15,444	12,201	0.79	7.44	14,586	11,523	0.79	7.91

**NOTE:** CA: Capacity (W)                      SHC: Sensible heat capacity (W)  
P.C.: Power consumption (kW)              SHF: Sensible heat factor

**COOLING CAPACITY (9)**

**PLA-P3AA.UK, PLA-P3AA1.UK / PU(H)-P3VGAA.UK, PU(H)-P3YGAA.UK**

(240V)

Indoor intake air DB (°C)	Indoor intake air WB (°C)	Outdoor intake air DB (°C)											
		20				25				30			
		CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.
20	16	7,722	4,942	0.64	2.75	7,488	4,792	0.64	2.91	7,254	4,643	0.64	3.08
20	18	8,268	4,299	0.52	2.80	8,034	4,178	0.52	2.96	7,761	4,036	0.52	3.16
20	20	8,892	3,557	0.40	2.89	8,697	3,479	0.40	3.03	8,463	3,385	0.40	3.23
22	16	7,722	5,560	0.72	2.75	7,488	5,391	0.72	2.91	7,254	5,223	0.72	3.08
22	18	8,268	4,961	0.60	2.80	8,034	4,820	0.60	2.96	7,761	4,657	0.60	3.16
22	20	8,892	4,268	0.48	2.89	8,697	4,175	0.48	3.03	8,463	4,062	0.48	3.23
24	16	7,722	6,178	0.80	2.75	7,488	5,990	0.80	2.91	7,254	5,803	0.80	3.08
24	18	8,268	5,622	0.68	2.80	8,034	5,463	0.68	2.96	7,761	5,277	0.68	3.16
24	20	8,892	4,980	0.56	2.89	8,697	4,870	0.56	3.03	8,463	4,739	0.56	3.23
26	16	7,722	6,795	0.88	2.75	7,488	6,589	0.88	2.91	7,254	6,384	0.88	3.08
26	18	8,268	6,284	0.76	2.80	8,034	6,106	0.76	2.96	7,761	5,898	0.76	3.16
26	20	8,892	5,691	0.64	2.89	8,697	5,566	0.64	3.03	8,463	5,416	0.64	3.23
28	16	7,722	7,413	0.96	2.75	7,488	7,188	0.96	2.91	7,254	6,964	0.96	3.08
28	18	8,268	6,945	0.84	2.80	8,034	6,749	0.84	2.96	7,761	6,519	0.84	3.16
28	20	8,892	6,402	0.72	2.89	8,697	6,262	0.72	3.03	8,463	6,093	0.72	3.23
30	16	7,722	7,722	1.00	2.75	7,488	7,488	1.00	2.91	7,254	7,254	1.00	3.08
30	18	8,268	7,607	0.92	2.80	8,034	7,391	0.92	2.96	7,761	7,140	0.92	3.16
30	20	8,892	7,114	0.80	2.89	8,697	6,958	0.80	3.03	8,463	6,770	0.80	3.23
32	16	7,722	7,722	1.00	2.75	7,488	7,488	1.00	2.91	7,254	7,254	1.00	3.08
32	18	8,268	8,268	1.00	2.80	8,034	8,034	1.00	2.96	7,761	7,761	1.00	3.16
32	20	8,892	7,825	0.88	2.89	8,697	7,653	0.88	3.03	8,463	7,447	0.88	3.23
34	16	7,722	7,722	1.00	2.75	7,488	7,488	1.00	2.91	7,254	7,254	1.00	3.08
34	18	8,268	8,268	1.00	2.80	8,034	8,034	1.00	2.96	7,761	7,761	1.00	3.16
34	20	8,892	8,536	0.96	2.89	8,697	8,349	0.96	3.03	8,463	8,124	0.96	3.23

**NOTE:** CA: Capacity (W) SHC: Sensible heat capacity (W)  
P.C.: Power consumption (kW) SHF: Sensible heat factor

**COOLING CAPACITY (10)**

**PLA-P3AA.UK, PLA-P3AA<sub>1</sub>.UK / PU(H)-P3VGAA.UK, PU(H)-P3YGAA.UK**

(240V)

Indoor intake air DB (°C)	Indoor intake air WB (°C)	Outdoor intake air DB (°C)											
		35				40				45			
		CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.
20	16	6,942	4,443	0.64	3.30	6,630	4,243	0.64	3.54	6,318	4,044	0.64	3.84
20	18	7,488	3,894	0.52	3.39	7,254	3,772	0.52	3.65	6,786	3,529	0.52	3.92
20	20	8,112	3,245	0.40	3.47	7,800	3,120	0.40	3.72	7,332	2,933	0.40	3.99
22	16	6,942	4,998	0.72	3.30	6,630	4,774	0.72	3.54	6,318	4,549	0.72	3.84
22	18	7,488	4,493	0.60	3.39	7,254	4,352	0.60	3.65	6,786	4,072	0.60	3.92
22	20	8,112	3,894	0.48	3.47	7,800	3,744	0.48	3.72	7,332	3,519	0.48	3.99
24	16	6,942	5,554	0.80	3.30	6,630	5,304	0.80	3.54	6,318	5,054	0.80	3.84
24	18	7,488	5,092	0.68	3.39	7,254	4,933	0.68	3.65	6,786	4,614	0.68	3.92
24	20	8,112	4,543	0.56	3.47	7,800	4,368	0.56	3.72	7,332	4,106	0.56	3.99
26	16	6,942	6,109	0.88	3.30	6,630	5,834	0.88	3.54	6,318	5,560	0.88	3.84
26	18	7,488	5,691	0.76	3.39	7,254	5,513	0.76	3.65	6,786	5,157	0.76	3.92
26	20	8,112	5,192	0.64	3.47	7,800	4,992	0.64	3.72	7,332	4,692	0.64	3.99
28	16	6,942	6,664	0.96	3.30	6,630	6,365	0.96	3.54	6,318	6,065	0.96	3.84
28	18	7,488	6,290	0.84	3.39	7,254	6,093	0.84	3.65	6,786	5,700	0.84	3.92
28	20	8,112	5,841	0.72	3.47	7,800	5,616	0.72	3.72	7,332	5,279	0.72	3.99
30	16	6,942	6,942	1.00	3.30	6,630	6,630	1.00	3.54	6,318	6,318	1.00	3.84
30	18	7,488	6,889	0.92	3.39	7,254	6,674	0.92	3.65	6,786	6,243	0.92	3.92
30	20	8,112	6,490	0.80	3.47	7,800	6,240	0.80	3.72	7,332	5,866	0.80	3.99
32	16	6,942	6,942	1.00	3.30	6,630	6,630	1.00	3.54	6,318	6,318	1.00	3.84
32	18	7,488	7,488	1.00	3.39	7,254	7,254	1.00	3.65	6,786	6,786	1.00	3.92
32	20	8,112	7,139	0.88	3.47	7,800	6,864	0.88	3.72	7,332	6,452	0.88	3.99
34	16	6,942	6,942	1.00	3.30	6,630	6,630	1.00	3.54	6,318	6,318	1.00	3.84
34	18	7,488	7,488	1.00	3.39	7,254	7,254	1.00	3.65	6,786	6,786	1.00	3.92
34	20	8,112	7,788	0.96	3.47	7,800	7,488	0.96	3.72	7,332	7,039	0.96	3.99

**NOTE:** CA: Capacity (W) SHC: Sensible heat capacity (W)  
P.C.: Power consumption (kW) SHF: Sensible heat factor



**COOLING CAPACITY (11)**

**PLA-P4AA.UK, PLA-P4AA1.UK / PU(H)-P4VGAA.UK, PU(H)-P4YGAA.UK**

(240V)

Indoor intake air DB (°C)	Indoor intake air WB (°C)	Outdoor intake air DB (°C)											
		20				25				30			
		CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.
20	16	9,603	6,530	0.68	2.95	9,312	6,332	0.68	3.12	9,021	6,134	0.68	3.30
20	18	10,282	5,758	0.56	3.01	9,991	5,595	0.56	3.17	9,652	5,405	0.56	3.39
20	20	11,058	4,866	0.44	3.10	10,816	4,759	0.44	3.25	10,525	4,631	0.44	3.47
22	16	9,603	7,298	0.76	2.95	9,312	7,077	0.76	3.12	9,021	6,856	0.76	3.30
22	18	10,282	6,580	0.64	3.01	9,991	6,394	0.64	3.17	9,652	6,177	0.64	3.39
22	20	11,058	5,750	0.52	3.10	10,816	5,624	0.52	3.25	10,525	5,473	0.52	3.47
24	16	9,603	8,067	0.84	2.95	9,312	7,822	0.84	3.12	9,021	7,578	0.84	3.30
24	18	10,282	7,403	0.72	3.01	9,991	7,194	0.72	3.17	9,652	6,949	0.72	3.39
24	20	11,058	6,635	0.60	3.10	10,816	6,489	0.60	3.25	10,525	6,315	0.60	3.47
26	16	9,603	8,835	0.92	2.95	9,312	8,567	0.92	3.12	9,021	8,299	0.92	3.30
26	18	10,282	8,226	0.80	3.01	9,991	7,993	0.80	3.17	9,652	7,721	0.80	3.39
26	20	11,058	7,519	0.68	3.10	10,816	7,355	0.68	3.25	10,525	7,157	0.68	3.47
28	16	9,603	9,603	1.00	2.95	9,312	9,312	1.00	3.12	9,021	9,021	1.00	3.30
28	18	10,282	9,048	0.88	3.01	9,991	8,792	0.88	3.17	9,652	8,493	0.88	3.39
28	20	11,058	8,404	0.76	3.10	10,816	8,220	0.76	3.25	10,525	7,999	0.76	3.47
30	16	9,603	9,603	1.00	2.95	9,312	9,312	1.00	3.12	9,021	9,021	1.00	3.30
30	18	10,282	9,871	0.96	3.01	9,991	9,591	0.96	3.17	9,652	9,265	0.96	3.39
30	20	11,058	9,289	0.84	3.10	10,816	9,085	0.84	3.25	10,525	8,841	0.84	3.47
32	16	9,603	9,603	1.00	2.95	9,312	9,312	1.00	3.12	9,021	9,021	1.00	3.30
32	18	10,282	10,282	1.00	3.01	9,991	9,991	1.00	3.17	9,652	9,652	1.00	3.39
32	20	11,058	10,173	0.92	3.10	10,816	9,950	0.92	3.25	10,525	9,683	0.92	3.47
34	16	9,603	9,603	1.00	2.95	9,312	9,312	1.00	3.12	9,021	9,021	1.00	3.30
34	18	10,282	10,282	1.00	3.01	9,991	9,991	1.00	3.17	9,652	9,652	1.00	3.39
34	20	11,058	11,058	1.00	3.10	10,816	10,816	1.00	3.25	10,525	10,525	1.00	3.47

**NOTE:** CA: Capacity (W)

SHC: Sensible heat capacity (W)

P.C.: Power consumption (kW)

SHF: Sensible heat factor

**COOLING CAPACITY (12)**

**PLA-P4AA.UK, PLA-P4AA1.UK / PU(H)-P4VGAA.UK, PU(H)-P4YGAA.UK**

(240V)

Indoor intake air DB (°C)	Indoor intake air WB (°C)	Outdoor intake air DB (°C)											
		35				40				45			
		CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.
20	16	8,633	5,870	0.68	3.54	8,245	5,607	0.68	3.80	7,857	5,343	0.68	4.11
20	18	9,312	5,215	0.56	3.63	9,021	5,052	0.56	3.91	8,439	4,726	0.56	4.21
20	20	10,088	4,439	0.44	3.73	9,700	4,268	0.44	3.99	9,118	4,012	0.44	4.28
22	16	8,633	6,561	0.76	3.54	8,245	6,266	0.76	3.80	7,857	5,971	0.76	4.11
22	18	9,312	5,960	0.64	3.63	9,021	5,773	0.64	3.91	8,439	5,401	0.64	4.21
22	20	10,088	5,246	0.52	3.73	9,700	5,044	0.52	3.99	9,118	4,741	0.52	4.28
24	16	8,633	7,252	0.84	3.54	8,245	6,926	0.84	3.80	7,857	6,600	0.84	4.11
24	18	9,312	6,705	0.72	3.63	9,021	6,495	0.72	3.91	8,439	6,076	0.72	4.21
24	20	10,088	6,053	0.60	3.73	9,700	5,820	0.60	3.99	9,118	5,471	0.60	4.28
26	16	8,633	7,942	0.92	3.54	8,245	7,585	0.92	3.80	7,857	7,228	0.92	4.11
26	18	9,312	7,450	0.80	3.63	9,021	7,217	0.80	3.91	8,439	6,751	0.80	4.21
26	20	10,088	6,860	0.68	3.73	9,700	6,596	0.68	3.99	9,118	6,200	0.68	4.28
28	16	8,633	8,633	1.00	3.54	8,245	8,245	1.00	3.80	7,857	7,857	1.00	4.11
28	18	9,312	8,195	0.88	3.63	9,021	7,938	0.88	3.91	8,439	7,426	0.88	4.21
28	20	10,088	7,667	0.76	3.73	9,700	7,372	0.76	3.99	9,118	6,930	0.76	4.28
30	16	8,633	8,633	1.00	3.54	8,245	8,245	1.00	3.80	7,857	7,857	1.00	4.11
30	18	9,312	8,940	0.96	3.63	9,021	8,660	0.96	3.91	8,439	8,101	0.96	4.21
30	20	10,088	8,474	0.84	3.73	9,700	8,148	0.84	3.99	9,118	7,659	0.84	4.28
32	16	8,633	8,633	1.00	3.54	8,245	8,245	1.00	3.80	7,857	7,857	1.00	4.11
32	18	9,312	9,312	1.00	3.63	9,021	9,021	1.00	3.91	8,439	8,439	1.00	4.21
32	20	10,088	9,281	0.92	3.73	9,700	8,924	0.92	3.99	9,118	8,389	0.92	4.28
34	16	8,633	8,633	1.00	3.54	8,245	8,245	1.00	3.80	7,857	7,857	1.00	4.11
34	18	9,312	9,312	1.00	3.63	9,021	9,021	1.00	3.91	8,439	8,439	1.00	4.21
34	20	10,088	10,088	1.00	3.73	9,700	9,700	1.00	3.99	9,118	9,118	1.00	4.28

**NOTE:** CA: Capacity (W) SHC: Sensible heat capacity (W)  
P.C.: Power consumption (kW) SHF: Sensible heat factor

**COOLING CAPACITY (13)**  
**PLA-P5AA.UK, PLA-P5AA1.UK / PU(H)-P5YGAA.UK**

(240V)

Indoor intake air DB (°C)	Indoor intake air WB (°C)	Outdoor intake air DB (°C)											
		20				25				30			
		CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.
20	16	12,672	7,857	0.62	4.00	12,288	7,619	0.62	4.23	11,904	7,380	0.62	4.48
20	18	13,568	6,784	0.50	4.08	13,184	6,592	0.50	4.30	12,736	6,368	0.50	4.60
20	20	14,592	5,545	0.38	4.20	14,272	5,423	0.38	4.40	13,888	5,277	0.38	4.70
22	16	12,672	8,870	0.70	4.00	12,288	8,602	0.70	4.23	11,904	8,333	0.70	4.48
22	18	13,568	7,869	0.58	4.08	13,184	7,647	0.58	4.30	12,736	7,387	0.58	4.60
22	20	14,592	6,712	0.46	4.20	14,272	6,565	0.46	4.40	13,888	6,388	0.46	4.70
24	16	12,672	9,884	0.78	4.00	12,288	9,585	0.78	4.23	11,904	9,285	0.78	4.48
24	18	13,568	8,955	0.66	4.08	13,184	8,701	0.66	4.30	12,736	8,406	0.66	4.60
24	20	14,592	7,880	0.54	4.20	14,272	7,707	0.54	4.40	13,888	7,500	0.54	4.70
26	16	12,672	10,898	0.86	4.00	12,288	10,568	0.86	4.23	11,904	10,237	0.86	4.48
26	18	13,568	10,040	0.74	4.08	13,184	9,756	0.74	4.30	12,736	9,425	0.74	4.60
26	20	14,592	9,047	0.62	4.20	14,272	8,849	0.62	4.40	13,888	8,611	0.62	4.70
28	16	12,672	11,912	0.94	4.00	12,288	11,551	0.94	4.23	11,904	11,190	0.94	4.48
28	18	13,568	11,126	0.82	4.08	13,184	10,811	0.82	4.30	12,736	10,444	0.82	4.60
28	20	14,592	10,214	0.70	4.20	14,272	9,990	0.70	4.40	13,888	9,722	0.70	4.70
30	16	12,672	12,672	1.00	4.00	12,288	12,288	1.00	4.23	11,904	11,904	1.00	4.48
30	18	13,568	12,211	0.90	4.08	13,184	11,866	0.90	4.30	12,736	11,462	0.90	4.60
30	20	14,592	11,382	0.78	4.20	14,272	11,132	0.78	4.40	13,888	10,833	0.78	4.70
32	16	12,672	12,672	1.00	4.00	12,288	12,288	1.00	4.23	11,904	11,904	1.00	4.48
32	18	13,568	13,297	0.98	4.08	13,184	12,920	0.98	4.30	12,736	12,481	0.98	4.60
32	20	14,592	12,549	0.86	4.20	14,272	12,274	0.86	4.40	13,888	11,944	0.86	4.70
34	16	12,672	12,672	1.00	4.00	12,288	12,288	1.00	4.23	11,904	11,904	1.00	4.48
34	18	13,568	13,568	1.00	4.08	13,184	13,184	1.00	4.30	12,736	12,736	1.00	4.60
34	20	14,592	13,716	0.94	4.20	14,272	13,416	0.94	4.40	13,888	13,055	0.94	4.70

**NOTE:** CA: Capacity (W)

SHC: Sensible heat capacity (W)

P.C.: Power consumption (kW)

SHF: Sensible heat factor

**COOLING CAPACITY (14)  
PLA-P5AA.UK, PLA-P5AA1.UK / PU(H)-P5YGAA.UK**

(240V)

Indoor intake air DB (°C)	Indoor intake air WB (°C)	Outdoor intake air DB (°C)											
		35				40				45			
		CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.
20	16	11,392	7,063	0.62	4.80	10,880	6,746	0.62	5.15	10,368	6,428	0.62	5.58
20	18	12,288	6,144	0.50	4.93	11,904	5,952	0.50	5.30	11,136	5,568	0.50	5.70
20	20	13,312	5,059	0.38	5.05	12,800	4,864	0.38	5.40	12,032	4,572	0.38	5.80
22	16	11,392	7,974	0.70	4.80	10,880	7,616	0.70	5.15	10,368	7,258	0.70	5.58
22	18	12,288	7,127	0.58	4.93	11,904	6,904	0.58	5.30	11,136	6,459	0.58	5.70
22	20	13,312	6,124	0.46	5.05	12,800	5,888	0.46	5.40	12,032	5,535	0.46	5.80
24	16	11,392	8,886	0.78	4.80	10,880	8,486	0.78	5.15	10,368	8,087	0.78	5.58
24	18	12,288	8,110	0.66	4.93	11,904	7,857	0.66	5.30	11,136	7,350	0.66	5.70
24	20	13,312	7,188	0.54	5.05	12,800	6,912	0.54	5.40	12,032	6,497	0.54	5.80
26	16	11,392	9,797	0.86	4.80	10,880	9,357	0.86	5.15	10,368	8,916	0.86	5.58
26	18	12,288	9,093	0.74	4.93	11,904	8,809	0.74	5.30	11,136	8,241	0.74	5.70
26	20	13,312	8,253	0.62	5.05	12,800	7,936	0.62	5.40	12,032	7,460	0.62	5.80
28	16	11,392	10,708	0.94	4.80	10,880	10,227	0.94	5.15	10,368	9,746	0.94	5.58
28	18	12,288	10,076	0.82	4.93	11,904	9,761	0.82	5.30	11,136	9,132	0.82	5.70
28	20	13,312	9,318	0.70	5.05	12,800	8,960	0.70	5.40	12,032	8,422	0.70	5.80
30	16	11,392	11,392	1.00	4.80	10,880	10,880	1.00	5.15	10,368	10,368	1.00	5.58
30	18	12,288	11,059	0.90	4.93	11,904	10,714	0.90	5.30	11,136	10,022	0.90	5.70
30	20	13,312	10,383	0.78	5.05	12,800	9,984	0.78	5.40	12,032	9,385	0.78	5.80
32	16	11,392	11,392	1.00	4.80	10,880	10,880	1.00	5.15	10,368	10,368	1.00	5.58
32	18	12,288	12,042	0.98	4.93	11,904	11,666	0.98	5.30	11,136	10,913	0.98	5.70
32	20	13,312	11,448	0.86	5.05	12,800	11,008	0.86	5.40	12,032	10,348	0.86	5.80
34	16	11,392	11,392	1.00	4.80	10,880	10,880	1.00	5.15	10,368	10,368	1.00	5.58
34	18	12,288	12,288	1.00	4.93	11,904	11,904	1.00	5.30	11,136	11,136	1.00	5.70
34	20	13,312	12,513	0.94	5.05	12,800	12,032	0.94	5.40	12,032	11,310	0.94	5.80

**NOTE:** CA: Capacity (W) SHC: Sensible heat capacity (W)  
P.C.: Power consumption (kW) SHF: Sensible heat factor

**COOLING CAPACITY (15)**  
**PLA-P6AA.UK, PLA-P6AA1.UK / PU(H)-P6YGAA.UK**

(240V)

Indoor intake air DB (°C)	Indoor intake air WB (°C)	Outdoor intake air DB (°C)											
		20				25				30			
		CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.
20	16	14,157	8,353	0.59	4.82	13,728	8,100	0.59	5.10	13,299	7,846	0.59	5.40
20	18	15,158	7,124	0.47	4.91	14,729	6,923	0.47	5.19	14,229	6,687	0.47	5.55
20	20	16,302	5,706	0.35	5.07	15,945	5,581	0.35	5.31	15,516	5,430	0.35	5.67
22	16	14,157	9,485	0.67	4.82	13,728	9,198	0.67	5.10	13,299	8,910	0.67	5.40
22	18	15,158	8,337	0.55	4.91	14,729	8,101	0.55	5.19	14,229	7,826	0.55	5.55
22	20	16,302	7,010	0.43	5.07	15,945	6,856	0.43	5.31	15,516	6,672	0.43	5.67
24	16	14,157	10,618	0.75	4.82	13,728	10,296	0.75	5.10	13,299	9,974	0.75	5.40
24	18	15,158	9,550	0.63	4.91	14,729	9,279	0.63	5.19	14,229	8,964	0.63	5.55
24	20	16,302	8,314	0.51	5.07	15,945	8,132	0.51	5.31	15,516	7,913	0.51	5.67
26	16	14,157	11,750	0.83	4.82	13,728	11,394	0.83	5.10	13,299	11,038	0.83	5.40
26	18	15,158	10,762	0.71	4.91	14,729	10,458	0.71	5.19	14,229	10,102	0.71	5.55
26	20	16,302	9,618	0.59	5.07	15,945	9,407	0.59	5.31	15,516	9,154	0.59	5.67
28	16	14,157	12,883	0.91	4.82	13,728	12,492	0.91	5.10	13,299	12,102	0.91	5.40
28	18	15,158	11,975	0.79	4.91	14,729	11,636	0.79	5.19	14,229	11,241	0.79	5.55
28	20	16,302	10,922	0.67	5.07	15,945	10,683	0.67	5.31	15,516	10,395	0.67	5.67
30	16	14,157	14,015	0.99	4.82	13,728	13,591	0.99	5.10	13,299	13,166	0.99	5.40
30	18	15,158	13,187	0.87	4.91	14,729	12,814	0.87	5.19	14,229	12,379	0.87	5.55
30	20	16,302	12,227	0.75	5.07	15,945	11,958	0.75	5.31	15,516	11,637	0.75	5.67
32	16	14,157	14,157	1.00	4.82	13,728	13,728	1.00	5.10	13,299	13,299	1.00	5.40
32	18	15,158	14,400	0.95	4.91	14,729	13,993	0.95	5.19	14,229	13,517	0.95	5.55
32	20	16,302	13,531	0.83	5.07	15,945	13,234	0.83	5.31	15,516	12,878	0.83	5.67
34	16	14,157	14,157	1.00	4.82	13,728	13,728	1.00	5.10	13,299	13,299	1.00	5.40
34	18	15,158	15,158	1.00	4.91	14,729	14,729	1.00	5.19	14,229	14,229	1.00	5.55
34	20	16,302	14,835	0.91	5.07	15,945	14,509	0.91	5.31	15,516	14,119	0.91	5.67

**NOTE:** CA: Capacity (W) SHC: Sensible heat capacity (W)  
P.C.: Power consumption (kW) SHF: Sensible heat factor

**COOLING CAPACITY (16)  
 PLA-P6AA.UK, PLA-P6AA1.UK / PU(H)-P6YGAA.UK**

(240V)

Indoor intake air DB (°C)	Indoor intake air WB (°C)	Outdoor intake air DB (°C)											
		35				40				45			
		CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.	CA	SHC	SHF	P.C.
20	16	12,727	7,509	0.59	5.79	12,155	7,171	0.59	6.21	11,583	6,834	0.59	6.72
20	18	13,728	6,452	0.47	5.94	13,299	6,251	0.47	6.39	12,441	5,847	0.47	6.87
20	20	14,872	5,205	0.35	6.09	14,300	5,005	0.35	6.51	13,442	4,705	0.35	6.99
22	16	12,727	8,527	0.67	5.79	12,155	8,144	0.67	6.21	11,583	7,761	0.67	6.72
22	18	13,728	7,550	0.55	5.94	13,299	7,314	0.55	6.39	12,441	6,843	0.55	6.87
22	20	14,872	6,395	0.43	6.09	14,300	6,149	0.43	6.51	13,442	5,780	0.43	6.99
24	16	12,727	9,545	0.75	5.79	12,155	9,116	0.75	6.21	11,583	8,687	0.75	6.72
24	18	13,728	8,649	0.63	5.94	13,299	8,378	0.63	6.39	12,441	7,838	0.63	6.87
24	20	14,872	7,585	0.51	6.09	14,300	7,293	0.51	6.51	13,442	6,855	0.51	6.99
26	16	12,727	10,563	0.83	5.79	12,155	10,089	0.83	6.21	11,583	9,614	0.83	6.72
26	18	13,728	9,747	0.71	5.94	13,299	9,442	0.71	6.39	12,441	8,833	0.71	6.87
26	20	14,872	8,774	0.59	6.09	14,300	8,437	0.59	6.51	13,442	7,931	0.59	6.99
28	16	12,727	11,582	0.91	5.79	12,155	11,061	0.91	6.21	11,583	10,541	0.91	6.72
28	18	13,728	10,845	0.79	5.94	13,299	10,506	0.79	6.39	12,441	9,828	0.79	6.87
28	20	14,872	9,964	0.67	6.09	14,300	9,581	0.67	6.51	13,442	9,006	0.67	6.99
30	16	12,727	12,600	0.99	5.79	12,155	12,033	0.99	6.21	11,583	11,467	0.99	6.72
30	18	13,728	11,943	0.87	5.94	13,299	11,570	0.87	6.39	12,441	10,824	0.87	6.87
30	20	14,872	11,154	0.75	6.09	14,300	10,725	0.75	6.51	13,442	10,082	0.75	6.99
32	16	12,727	12,727	1.00	5.79	12,155	12,155	1.00	6.21	11,583	11,583	1.00	6.72
32	18	13,728	13,042	0.95	5.94	13,299	12,634	0.95	6.39	12,441	11,819	0.95	6.87
32	20	14,872	12,344	0.83	6.09	14,300	11,869	0.83	6.51	13,442	11,157	0.83	6.99
34	16	12,727	12,727	1.00	5.79	12,155	12,155	1.00	6.21	11,583	11,583	1.00	6.72
34	18	13,728	13,728	1.00	5.94	13,299	13,299	1.00	6.39	12,441	12,441	1.00	6.87
34	20	14,872	13,534	0.91	6.09	14,300	13,013	0.91	6.51	13,442	12,232	0.91	6.99

**NOTE:** CA: Capacity (W) SHC: Sensible heat capacity (W)  
 P.C.: Power consumption (kW) SHF: Sensible heat factor

## 1.2 HEATING CAPACITY

### PUH-P3VGA / PUH-P3YGA, PUH-P4YGA, PUH-P5YGA, PUH-P6YGA

(240V)

Service Ref.	Indoor intake air DB(°C)	Outdoor intake air WB (°C)											
		-10		-5		0		5		10		15	
		CA	P.C.	CA	P.C.	CA	P.C.	CA	P.C.	CA	P.C.	CA	P.C.
PLA-P3AA.UK	15	5,906	2.15	6,417	2.37	7,161	2.74	9,393	3.29	10,602	3.65	11,811	3.94
	20	5,673	2.34	6,138	2.56	6,789	2.96	9,068	3.54	10,230	3.94	11,393	4.23
	25	5,487	2.48	5,952	2.77	6,510	3.21	8,556	3.76	9,858	4.22	10,974	4.54
PLA-P4AA.UK	15	6,731	2.24	7,314	2.47	8,162	2.85	10,706	3.42	12,084	3.80	13,462	4.10
	20	6,466	2.43	6,996	2.66	7,738	3.08	10,335	3.69	1,660	4.10	12,985	4.41
	25	6,254	2.58	6,784	2.89	7,420	3.34	9,752	3.91	1,236	4.39	12,508	4.73
PLA-P5AA.UK	15	10,160	3.50	1,040	3.85	12,320	4.45	16,160	5.34	18,240	5.93	20,320	6.40
	20	9,760	3.80	10,560	4.15	1,680	4.80	15,600	5.75	17,600	6.40	19,600	6.88
	25	9,440	4.03	10,240	4.51	1,200	5.22	14,720	6.11	16,960	6.85	18,880	7.38
PLA-P6AA.UK	15	10,668	3.99	1,592	4.40	12,936	5.08	16,968	6.09	19,152	6.77	21,336	7.31
	20	10,248	4.38	1,088	4.74	12,264	5.48	16,380	6.57	18,480	7.31	20,580	7.85
	25	9,912	4.60	10,752	5.15	1,760	5.96	15,456	6.97	17,808	7.82	19,824	8.43

### PUH-P3VGAA.UK / PUH-P3YGAA.UK, PUH-P4VGAA.UK / PUH-P4YGAA.UK

### PUH-P5YGAA.UK, PUH-P6YGAA.UK

(240V)

Service Ref.	Indoor intake air DB (°C)	Outdoor intake air WB (°C)											
		-10		-5		0		5		10		15	
		CA	P.C.	CA	P.C.	CA	P.C.	CA	P.C.	CA	P.C.	CA	P.C.
PLA-P3AA.UK	15	5,906	2.07	6,417	2.28	7,161	2.63	9,393	3.15	10,602	3.50	11,811	3.78
PLA-P3AA <sub>1</sub> .UK	20	5,673	2.24	6,138	2.45	6,789	2.84	9,068	3.40	10,230	3.78	11,393	4.06
	25	5,487	2.38	5,952	2.66	6,510	3.08	8,556	3.61	9,858	4.04	10,974	4.36
PLA-P4AA.UK	15	6,731	2.32	7,314	2.55	8,162	2.95	10,706	3.54	12,084	3.93	13,462	4.24
PLA-P4AA <sub>1</sub> .UK	20	6,466	2.52	6,996	2.75	7,738	3.18	10,335	3.81	11,660	4.24	12,985	4.56
	25	6,254	2.67	6,784	2.99	7,420	3.46	9,752	4.05	11,236	4.54	12,508	4.89
PLA-P5AA.UK	15	9,462	3.15	10,281	3.47	11,473	4.01	15,049	4.81	16,986	5.34	18,923	5.77
PLA-P5AA <sub>1</sub> .UK	20	9,089	3.42	9,834	3.74	10,877	4.33	14,528	5.18	16,390	5.77	18,253	6.19
	25	8,791	3.63	9,536	4.06	10,430	4.70	13,708	5.50	15,794	6.17	17,582	6.65
PLA-P6AA.UK	15	10,859	3.75	11,799	4.13	13,167	4.77	17,271	5.72	19,494	6.36	21,717	6.87
PLA-P6AA <sub>1</sub> .UK	20	10,431	4.07	11,286	4.45	12,483	5.15	16,673	6.17	18,810	6.87	20,948	7.38
	25	10,089	4.32	10,944	4.83	11,970	5.60	15,732	6.55	18,126	7.35	20,178	7.92

**NOTE:** CA: Capacity (W) P.C.: Power consumption (kW)

## 1.3 Correction factors

### Cooling capacity correction factors


Service Ref.	Refrigerant piping length (one way)									
	5m	10m	15m	20m	25m	30m	35m	40m	45m	50m
PLA-P3AA.UK PLA-P3AA1.UK	1.00	0.981	0.968	0.952	0.940	0.925	0.913	0.900	0.886	0.874
PLA-P4AA.UK PLA-P4AA1.UK	1.00	0.989	0.980	0.970	0.960	0.950	0.940	0.930	0.920	0.910
PLA-P5AA.UK PLA-P5AA1.UK	1.00	0.981	0.968	0.952	0.940	0.925	0.913	0.900	0.886	0.874
PLA-P6AA.UK PLA-P6AA1.UK	1.00	0.975	0.955	0.935	0.918	0.900	0.884	0.869	0.855	0.840

### Heating capacity correction factors


Service Ref.	Refrigerant piping length (one way)									
	5m	10m	15m	20m	25m	30m	35m	40m	45m	50m
PLA-P3AA.UK PLA-P3AA1.UK	1.00	0.998	0.995	0.993	0.990	0.988	0.985	0.983	0.980	0.978
PLA-P4AA.UK PLA-P4AA1.UK	1.00	0.998	0.995	0.993	0.990	0.988	0.985	0.983	0.980	0.978
PLA-P5AA.UK PLA-P5AA1.UK	1.00	0.998	0.995	0.993	0.990	0.988	0.985	0.983	0.980	0.978
PLA-P6AA.UK PLA-P6AA1.UK	1.00	0.998	0.955	0.993	0.990	0.988	0.985	0.983	0.980	0.978

## 2. PERFORMANCE CURVE

### Cooling performance curve(50Hz)

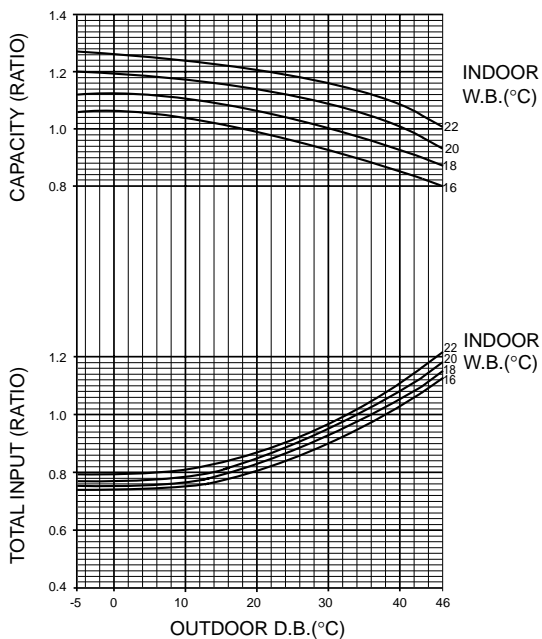

### Heating performance curve(50Hz)

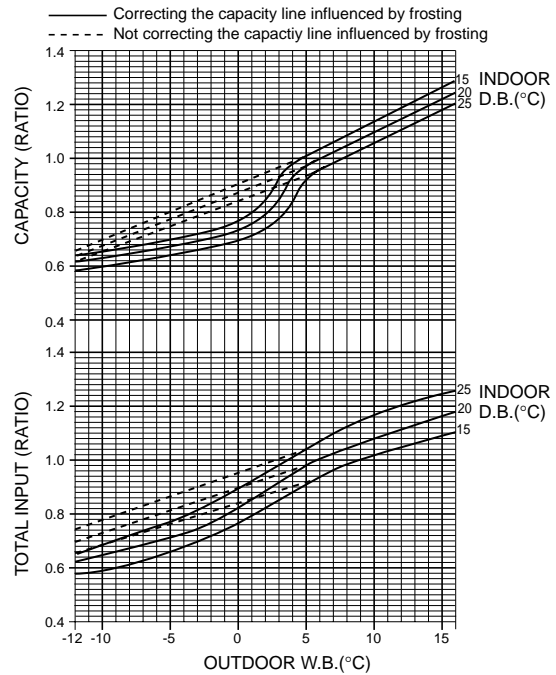



### 3. ELECTRICAL DATA

#### 3.1. Heat pump type

Indoor unit ..... 220V 50Hz Single phase

Outdoor unit .... 220V 50Hz Single phase / 380V 50Hz 3 phase

Model	Indoor unit	PLA-P3AA.UK				PLA-P4AA.UK	
	Outdoor unit	PUH-P3VGA		PUH-P3YGA		PUH-P4YGA	
Mode		Cool	Heat	Cool	Heat	Cool	Heat
Capacity (W)		7,600	9,100	7,600	9,100	9,500	10,400
Total Input (kW) (In+Out)		3.47	3.61	3.47	3.61	3.57	3.75
Indoor unit	Input (kW)	0.15	0.15	0.15	0.15	0.24	0.24
	Current (A)	0.78	0.78	0.78	0.78	1.25	1.25
Outdoor unit	Starting current (A)	84	84	38	38	41	41
	Current (A)	15.55	16.4	5.54	5.84	5.55	5.86

Indoor unit ..... 230V 50Hz Single phase

Outdoor unit .... 230V 50Hz Single phase / 400V 50Hz 3 phase

Model	Indoor unit	PLA-P3AA.UK				PLA-P4AA.UK	
	Outdoor unit	PUH-P3VGA		PUH-P3YGA		PUH-P4YGA	
Mode		Cool	Heat	Cool	Heat	Cool	Heat
Capacity (W)		7,700	9,200	7,700	9,200	9,600	10,500
Total Input (kW) (In+Out)		3.49	3.63	3.49	3.63	3.60	3.78
Indoor unit	Input (kW)	0.16	0.16	0.16	0.16	0.25	0.25
	Current (A)	0.79	0.79	0.79	0.79	1.25	1.25
Outdoor unit	Starting current (A)	89	89	40	40	43	43
	Current (A)	15.08	15.89	5.46	5.75	5.48	5.78

Indoor unit ..... 240V 50Hz Single phase

Outdoor unit .... 240V 50Hz Single phase / 415V 50Hz 3 phase

Model	Indoor unit	PLA-P3AA.UK				PLA-P4AA.UK	
	Outdoor unit	PUH-P3VGA		PUH-P3YGA		PUH-P4YGA	
Mode		Cool	Heat	Cool	Heat	Cool	Heat
Capacity (W)		7,800	9,300	7,800	9,300	9,700	10,600
Total Input (kW) (In+out)		3.51	3.65	3.51	3.65	3.62	3.80
Indoor unit	Input (kW)	0.17	0.17	0.17	0.17	0.26	0.26
	Current (A)	0.81	0.81	0.81	0.81	1.25	1.25
Outdoor unit	Starting current (A)	93	93	41	41	45	45
	Current (A)	14.64	15.43	5.46	5.76	5.49	5.79

Indoor unit ..... 220V 50Hz Single phase

Outdoor unit .... 380V 50Hz 3 phase

Model	Indoor unit	PLA-P5AA.UK		PLA-P6AA.UK	
	Outdoor unit	PUH-P5YGA		PUH-P6YGA	
Mode		Cool	Heat	Cool	Heat
Capacity (W)		12,600	15,800	14,100	16,400
Total Input (kW) (In+Out)		5.51	5.89	6.60	6.73
Indoor unit	Input (kW)	0.28	0.28	0.32	0.32
	Current (A)	1.43	1.43	1.64	1.64
Outdoor unit	Starting current (A)	72	72	77	77
	Current (A)	8.92	9.29	10.72	10.94

Indoor unit ..... 230V 50Hz Single phase

Outdoor unit .... 400V 50Hz 3 phase

Model	Indoor unit	PLA-P5AA.UK		PLA-P6AA.UK	
	Outdoor unit	PUH-P5YGA		PUH-P6YGA	
Mode		Cool	Heat	Cool	Heat
Capacity (W)		12,700	15,900	14,200	16,600
Total Input (kW) (In+out)		5.53	5.91	6.65	6.75
Indoor unit	Input (kW)	0.29	0.29	0.33	0.33
	Current (A)	1.43	1.43	1.64	1.64
Outdoor unit	Starting current (A)	76	76	81	81
	Current (A)	8.59	8.95	10.36	10.53

Indoor unit ..... 240V 50Hz Single phase

Outdoor unit .... 415V 50Hz 3 phase

Model	Indoor unit	PLA-P5AA.UK		PLA-P6AA.UK	
	Outdoor unit	PUH-P5YGA		PUH-P6YGA	
Mode		Cool	Heat	Cool	Heat
Capacity (W)		12,800	16,000	14,300	16,800
Total Input (kW) (In+Out)		5.55	5.93	6.70	6.77
Indoor unit	Input (kW)	0.30	0.30	0.34	0.34
	Current (A)	1.43	1.43	1.64	1.64
Outdoor unit	Starting current (A)	79	79	84	84
	Current (A)	8.39	8.74	10.17	10.28

Indoor unit ..... 220V 50Hz Single phase

Outdoor unit .... 220V 50Hz Single phase / 380V 50Hz 3 phase

Service Ref.	Indoor unit	PLA-P3AA.UK PLA-P3AA1.UK				PLA-P4AA.UK PLA-P4AA1.UK			
	Outdoor unit	PUH-P-GAA.UK							
		3V		3Y		4V		4Y	
Mode		Cool	Heat	Cool	Heat	Cool	Heat	Cool	Heat
Capacity (W)		7,600	9,100	7,600	9,100	9,500	10,400	9,500	10,400
Total Input (kW) (In+Out)		3.40	3.47	3.40	3.47	3.66	3.88	3.66	3.88
Indoor unit	Input (kW)	0.15	0.15	0.15	0.15	0.24	0.24	0.24	0.24
	Current (A)	0.78	0.78	0.78	0.78	1.25	1.25	1.25	1.25
Outdoor unit	Starting current (A)	85	85	43	43	91	91	44	44
	Current (A)	16.16	17.19	5.78	6.15	17.13	18.08	6.06	6.40

Indoor unit ..... 230V 50Hz Single phase

Outdoor unit .... 230V 50Hz Single phase / 400V 50Hz 3 phase

Service Ref.	Indoor unit	PLA-P3AA.UK PLA-P3AA1.UK				PLA-P4AA.UK PLA-P4AA1.UK			
	Outdoor unit	PUH-P-GAA.UK							
		3V		3Y		4V		4Y	
Mode		Cool	Heat	Cool	Heat	Cool	Heat	Cool	Heat
Capacity (W)		7,700	9,200	7,700	9,200	9,600	10,500	9,600	10,500
Total Input (kW) (In+Out)		3.42	3.48	3.42	3.48	3.68	3.91	3.68	3.91
Indoor unit	Input (kW)	0.16	0.16	0.16	0.16	0.25	0.25	0.25	0.25
	Current (A)	0.79	0.79	0.79	0.79	1.25	1.25	1.25	1.25
Outdoor unit	Starting current (A)	89	89	45	45	95	95	47	47
	Current (A)	15.45	16.45	5.49	5.84	16.39	17.30	5.76	6.08

Indoor unit ..... 240V 50Hz Single phase

Outdoor unit .... 240V 50Hz Single phase / 415V 50Hz 3 phase

Service Ref.	Indoor unit	PLA-P3AA.UK PLA-P3AA1.UK				PLA-P4AA.UK PLA-P4AA1.UK			
	Outdoor unit	PUH-P-GAA.UK							
		3V		3Y		4V		4Y	
Mode		Cool	Heat	Cool	Heat	Cool	Heat	Cool	Heat
Capacity (W)		7,800	9,300	7,800	9,300	9,700	10,600	9,700	10,600
Total Input (kW) (In+Out)		3.44	3.50	3.44	3.50	3.69	3.93	3.69	3.93
Indoor unit	Input (kW)	0.17	0.17	0.17	0.17	0.26	0.26	0.26	0.26
	Current (A)	0.81	0.81	0.81	0.81	1.25	1.25	1.25	1.25
Outdoor unit	Starting current (A)	93	93	47	47	99	99	49	49
	Current (A)	14.81	15.76	5.29	5.63	15.71	16.58	5.55	5.86

Indoor unit ..... 220V 50Hz Single phase      Outdoor unit .... 380V 50Hz 3 phase

Service Ref.	Indoor unit	PLA-P5AA.UK PLA-P5AA1.UK		PLA-P6AA.UK PLA-P6AA1.UK	
	Outdoor unit	PUH-P-GAA.UK			
		5Y		6Y	
Mode		Cool	Heat	Cool	Heat
Capacity (W)		12,600	14,700	14,100	16,900
Total Input (kW) (In+Out)		4.96	5.30	5.85	6.33
Indoor unit	Input (kW)	0.28	0.28	0.32	0.32
	Current (A)	1.43	1.43	1.64	1.64
Outdoor unit	Starting current (A)	65.5	65.5	74	74
	Current (A)	8.30	8.90	9.86	10.44

Indoor unit ..... 230V 50Hz Single phase      Outdoor unit .... 400V 50Hz 3 phase

Service Ref.	Indoor unit	PLA-P5AA.UK PLA-P3AA1.UK		PLA-P6AA.UK PLA-P6AA1.UK	
	Outdoor unit	PUH-P-GAA.UK			
		5Y		6Y	
Mode		Cool	Heat	Cool	Heat
Capacity (W)		12,700	14,800	14,200	17,000
Total Input (kW) (In+Out)		4.98	5.32	5.90	6.35
Indoor unit	Input (kW)	0.29	0.29	0.33	0.33
	Current (A)	1.43	1.43	1.64	1.64
Outdoor unit	Starting current (A)	65.5	65.5	74	74
	Current (A)	7.89	8.46	9.37	9.92

Indoor unit ..... 240V 50Hz Single phase      Outdoor unit .... 415V 50Hz 3 phase

Service Ref.	Indoor unit	PLA-P5AA.UK PLA-P5AA1.UK		PLA-P6AA.UK PLA-P6AA1.UK	
	Outdoor unit	PUH-P-GAA.UK			
		5Y		6Y	
Mode		Cool	Heat	Cool	Heat
Capacity (W)		12,800	14,900	14,300	17,100
Total Input (kW) (In+Out)		5.00	5.34	5.94	6.36
Indoor unit	Input (kW)	0.30	0.30	0.34	0.34
	Current (A)	1.43	1.43	1.64	1.64
Outdoor unit	Starting current (A)	65.5	65.5	74	74
	Current (A)	7.60	8.15	9.03	9.56

### 3.2. Cooling only type

Indoor unit ..... 220V 50Hz Single phase

Outdoor unit .... 220V 50Hz Single phase / 380V 50Hz 3 phase

Model		Indoor unit	PLA-P3AA.UK		PLA-P4AA.UK	PLA-P5AA.UK	PLA-P6AA.UK
		Outdoor unit	PU-P3VGA	PU-P3YGA	PU-P4YGA	PU-P5YGA	PU-P6YGA
Mode		Cool		Cool	Cool	Cool	Cool
Capacity (W)		7,600		7,600	9,500	12,600	14,100
Total Input (kW) (In+Out)		3.47		3.47	3.57	5.51	6.60
Indoor unit	Input (kW)	0.15		0.15	0.24	0.28	0.32
	Current (A)	0.78		0.78	1.25	1.43	1.64
Outdoor unit	Starting current (A)	84		38	41	72	77
	Current (A)	15.55		5.54	5.55	8.92	10.72

Indoor unit ..... 230V 50Hz Single phase

Outdoor unit .... 230V 50Hz Single phase / 400V 50Hz 3 phase

Model		Indoor unit	PLA-P3AA.UK		PLA-P4AA.UK	PLA-P5AA.UK	PLA-P6AA.UK
		Outdoor unit	PU-P3VGA	PU-P3YGA	PU-P4YGA	PU-P5YGA	PU-P6YGA
Mode		Cool		Cool	Cool	Cool	Cool
Capacity (W)		7,700		7,700	9,600	12,700	14,200
Total Input (kW) (In+Out)		3.49		3.49	3.60	5.53	6.65
Indoor unit	Input (kW)	0.16		0.16	0.25	0.29	0.33
	Current (A)	0.79		0.79	1.25	1.43	1.64
Outdoor unit	Starting current (A)	89		40	43	76	81
	Current (A)	15.08		5.56	5.48	8.59	10.36

Indoor unit ..... 240V 50Hz Single phase

Outdoor unit .... 240V 50Hz Single phase / 415V 50Hz 3 phase

Model		Indoor unit	PLA-P3AA.UK		PLA-P4AA.UK	PLA-P5AA.UK	PLA-P6AA.UK
		Outdoor unit	PU-P3VGA	PU-P3YGA	PU-P4YGA	PU-P5YGA	PU-P6YGA
Mode		Cool		Cool	Cool	Cool	Cool
Capacity (W)		7,800		7,800	9,700	12,800	14,300
Total Input (kW) (In+Out)		3.51		3.51	3.62	5.55	6.70
Indoor unit	Input (kW)	0.17		0.17	0.26	0.30	0.34
	Current (A)	0.81		0.81	1.25	1.43	1.64
Outdoor unit	Starting current (A)	93		41	45	79	84
	Current (A)	14.64		5.46	5.49	8.39	10.17

Indoor unit ..... 220V 50Hz Single phase

Outdoor unit .... 220V 50Hz Single phase / 380V 50Hz 3 phase

Service Ref.	Indoor unit	PLA-P3AA.UK PLA-P3AA <sub>1</sub> .UK		PLA-P4AA.UK PLA-P4AA <sub>1</sub> .UK		PLA-P5AA.UK PLA-P5AA <sub>1</sub> .UK	PLA-P6AA.UK PLA-P6AA <sub>1</sub> .UK
	Outdoor unit	PUH-P-GAA.UK					
		3V	3Y	4V	4Y	5Y	6Y
Mode		Cool	Cool	Cool	Cool	Cool	Cool
Capacity (W)		7,600	7,600	9,500	9,500	12,600	14,100
Total Input (kW) (In+out)		3.40	3.40	3.66	3.66	4.96	5.85
Indoor unit	Input (kW)	0.15	0.15	0.24	0.24	0.28	0.32
	Current (A)	0.78	0.78	1.25	1.25	1.43	1.64
Outdoor unit	Starting current (A)	85	43	91	44	65.5	74
	Current (A)	16.16	5.78	17.13	6.06	8.30	9.86

Indoor unit ..... 230V 50Hz Single phase

Outdoor unit .... 230V 50Hz Single phase / 400V 50Hz 3 phase

Service Ref.	Indoor unit	PLA-P3AA.UK PLA-P3AA <sub>1</sub> .UK		PLA-P4AA.UK PLA-P4AA <sub>1</sub> .UK		PLA-P5AA.UK PLA-P5AA <sub>1</sub> .UK	PLA-P6AA.UK PLA-P6AA <sub>1</sub> .UK
	Outdoor unit	PUH-P-GAA.UK					
		3V	3Y	4V	4Y	5Y	6Y
Mode		Cool	Cool	Cool	Cool	Cool	Cool
Capacity (W)		7,700	7,700	9,600	9,600	12,700	14,200
Total Input (kW) (In+out)		3.42	3.42	3.68	3.68	4.98	5.90
Indoor unit	Input (kW)	0.16	0.16	0.25	0.25	0.29	0.33
	Current (A)	0.79	0.79	1.25	1.25	1.43	1.64
Outdoor unit	Starting current (A)	89	45	95	47	65.5	74
	Current (A)	15.45	5.49	16.39	5.76	7.89	9.37

Indoor unit ..... 240V 50Hz Single phase

Outdoor unit .... 240V 50Hz Single phase / 415V 50Hz 3 phase

Service Ref.	Indoor unit	PLA-P3AA.UK PLA-P3AA <sub>1</sub> .UK		PLA-P4AA.UK PLA-P4AA <sub>1</sub> .UK		PLA-P5AA.UK PLA-P5AA <sub>1</sub> .UK	PLA-P6AA.UK PLA-P6AA <sub>1</sub> .UK
	Outdoor unit	PUH-P-GAA.UK					
		3V	3Y	4V	4Y	5Y	6Y
Mode		Cool	Cool	Cool	Cool	Cool	Cool
Capacity (W)		7,800	7,800	9,700	9,700	12,800	14,300
Total Input (kW) (In+out)		3.44	3.44	3.69	3.69	5.00	5.94
Indoor unit	Input (kW)	0.17	0.17	0.26	0.26	0.30	0.34
	Current (A)	0.81	0.81	1.25	1.25	1.43	1.64
Outdoor unit	Starting current (A)	93	47	99	49	65.5	74
	Current (A)	14.81	5.29	15.71	5.55	7.60	9.03

## 4. STANDARD OPERATION DATA

### 4.1. Heat pump type (1)

Service Ref.			PLA-P3AA.UK		PLA-P4AA.UK		PLA-P5AA.UK		PLA-P6AA.UK		
Mode			Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating	
Total	Capacity	W	7,800	9,300	9,700	10,600	12,800	16,000	14,300	16,800	
	Input	kW	3.51	3.65	3.62	3.80	5.55	5.93	6.70	6.77	
Electrical circuit	Indoor unit Service Ref.		PLA-P3AA.UK		PLA-P4AA.UK		PLA-P5AA.UK		PLA-P6AA.UK		
	Phase,Hz		1,50		1,50		1,50		1,50		
	Volts	V	240		240		240		240		
	Amperes	A	0.81		1.25		1.43		1.64		
	Outdoor unit Service Ref.		PUH-P3VGA PUH-P3YGA		PUH-P4YGA		PUH-P5YGA		PUH-P6YGA		
	Phase,Hz		1/3 , 50		3, 50		3, 50		3, 50		
	Volts	V	240/415		415		415		415		
	Amperes	A	14.64/5.46	15.43/5.76	5.49	5.79	8.39	8.74	10.17	10.28	
Refrigerant circuit	Discharge pressure	Mpa (kgf/cm <sup>2</sup> )	2.30 (23.4)	2.38 (24.3)	1.98 (20.2)	2.12 (21.6)	2.27 (23.2)	2.59 (26.4)	2.27 (23.2)	2.36 (24.1)	
	Suction pressure	Mpa (kgf/cm <sup>2</sup> )	0.47 (4.8)	0.39 (4.0)	0.54 (5.5)	0.42 (4.3)	0.46 (4.7)	0.41 (4.21)	0.45 (4.6)	0.41 (4.2)	
	Discharge temperature	°C	81.0	88.0	71.0	75.0	78.6	86.6	80.6	83.5	
	Condensing temperature	°C	44.0	45.0	42.0	47.0	41.0	44.0	45.0	46.0	
	Suction temperature	°C	4.8	0	7.5	0.6	4.4	4.2	2.4	-1.0	
	Ref. pipe length	m	5	5	5	5	5	5	5	5	
Indoor side	Intake air temperature	D.B.	°C	27	20	27	20	27	20	27	20
		W.B.	°C	19	15	19	15	19	15	19	15
	Discharge air temperature	D.B.	°C	13.4	45.1	14.0	40.1	12.3	49.3	11.3	50.7
Outdoor side	Intake air temperature	D.B.	°C	35	7	35	7	35	7	35	7
		W.B.	°C	24	6	24	6	24	6	24	6
SHF			0.74	—	0.78	—	0.72	—	0.69	—	
BF			0.13	—	0.12	—	0.10	—	0.09	—	

The unit of pressure has been changed to MPa based on international SI system.  
The conversion factor is : 1(MPa)=10.2(kgf/cm<sup>2</sup>)

## 4.1. Heat pump type (2)

Service Ref.			PLA-P3AA.UK		PLA-P4AA.UK		PLA-P5AA.UK		PLA-P6AA.UK		
Mode			Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating	
Total	Capacity	W	7,800	9,300	9,700	10,600	12,800	14,900	14,300	17,100	
	Input	kW	3.44	3.50	3.69	3.93	5.00	5.34	5.94	6.36	
Electrical circuit	<b>Indoor unit Service Ref.</b>		<b>PLA-P3AA.UK PLA-P3AA1.UK</b>		<b>PLA-P4AA.UK PLA-P4AA1.UK</b>		<b>PLA-P5AA.UK PLA-P5AA1.UK</b>		<b>PLA-P6AA.UK PLA-P6AA1.UK</b>		
	Phase,Hz		1,50		1,50		1,50		1,50		
	Volts		240		240		240		240		
	Amperes		0.81		1.25		1.43		1.64		
	<b>Outdoor unit Service Ref.</b>		<b>PUH-P3VGAA.UK PUH-P3YGAA.UK</b>		<b>PUH-P4VGAA.UK PUH-P4YGAA.UK</b>		<b>PUH-P5YGAA.UK</b>		<b>PUH-P6YGAA.UK</b>		
	Phase,Hz		1/3 , 50		1/3 , 50		3, 50		3, 50		
	Volts		240/415		240/415		415		415		
	Amperes		14.81/5.29		15.76/5.63		15.71/5.55		16.58/5.86		7.60 8.15 9.03 9.56
Refrigerant circuit	Discharge pressure	Mpa (kgf/cm <sup>2</sup> )	2.30 (23.4)	2.38 (24.3)	1.98 (20.2)	2.12 (21.6)	2.27 (23.2)	2.59 (26.4)	2.27 (23.2)	2.36 (24.1)	
	Suction pressure	Mpa (kgf/cm <sup>2</sup> )	0.47 (4.8)	0.39 (4.0)	0.54 (5.5)	0.42 (4.3)	0.46 (4.7)	0.41 (4.21)	0.45 (4.6)	0.41 (4.2)	
	Discharge temperature	°C	81.0	88.0	71.0	75.0	78.6	86.6	80.6	83.5	
	Condensing temperature	°C	44.0	45.0	42.0	47.0	41.0	44.0	45.0	46.0	
	Suction temperature	°C	4.8	0	7.5	0.6	4.4	4.2	2.4	-1.0	
	Ref. pipe length	m	5	5	5	5	5	5	5	5	
Indoor side	Intake air temperature	D.B.	°C	27	20	27	20	27	20	27	20
		W.B.	°C	19	15	19	15	19	15	19	15
	Discharge air temperature	D.B.	°C	13.4	45.1	14.0	40.1	12.3	49.3	11.3	51.2
Outdoor side	Intake air temperature	D.B.	°C	35	7	35	7	35	7	35	7
		W.B.	°C	24	6	24	6	24	6	24	6
SHF			0.74	—	0.78	—	0.72	—	0.69	—	
BF			0.13	—	0.12	—	0.10	—	0.09	—	

The unit of pressure has been changed to MPa based on international SI system.  
The conversion factor is : 1(MPa)=10.2(kgf/cm<sup>2</sup>)



## 4.2 Cooling only type (1)

Service Ref.			PLA-P3AA.UK	PLA-P4AA.UK	PLA-P5AA.UK	PLA-P6AA.UK	
Mode			Cooling	Cooling	Cooling	Cooling	
Total	Capacity	W	7,800	9,700	12,800	14,300	
	Input	kW	3.51	3.62	5.55	6.70	
Electrical circuit	Indoor unit Service Ref.		PLA-P3AA.UK	PLA-P4AA.UK	PLA-P5AA.UK	PLA-P6AA.UK	
	Phase,Hz		1,50	1,50	1,50	1,50	
	Volts	V	240	240	240	240	
	Amperes	A	0.81	1.25	1.43	1.64	
	Outdoor unit Service Ref.		PU-P3VGA PU-P3YGA	PU-P4YGA	PU-P5YGA	PU-P6YGA	
	Phase,Hz		1/3 , 50	3,50	3,50	3,50	
	Volts	V	240/415	415	415	415	
	Amperes	A	14.64/5.46	5.49	8.39	10.17	
Refrigerant circuit	Discharge pressure	Mpa (kgf/cm <sup>2</sup> )	2.30 (23.4)	1.98 (20.2)	2.27 (23.2)	22.7 (23.2)	
	Suction pressure	Mpa (kgf/cm <sup>2</sup> )	0.47 (4.8)	0.54 (5.4)	0.46 (4.3)	0.45 (4.6)	
	Discharge temperature	°C	81.0	71.0	78.6	80.6	
	Condensing temperature	°C	44.0	42.0	41.0	45.0	
	Suction temperature	°C	4.8	7.5	4.4	2.4	
	Ref. pipe length	m	5	5	5	5	
Indoor side	Intake air temperature	D.B.	°C	27	27	27	27
		W.B.	°C	19	19	19	19
	Discharge air temperature	D.B.	°C	13.1	13.3	12.1	12.0
Outdoor side	Intake air temperature	D.B.	°C	35	35	35	35
		W.B.	°C	24	24	24	24
SHF			0.74	0.78	0.72	0.69	
BF			0.13	0.12	0.10	0.09	

The unit of pressure has been changed to MPa based on international SI system.  
The conversion factor is : 1(MPa)=10.2(kgf/cm<sup>2</sup>)

## 4.2 Cooling only type (2)

Service Ref.			PLA-P3AA.UK	PLA-P4AA.UK	PLA-P5AA.UK	PLA-P6AA.UK
Mode			Cooling	Cooling	Cooling	Cooling
Total	Capacity	W	7,800	9,700	12,800	14,300
	Input	kW	3.44	3.69	5.00	5.94
Electrical circuit	Indoor unit Service Ref.		PLA-P3AA.UK PLA-P3AA <sub>1</sub> .UK	PLA-P4AA.UK PLA-P4AA <sub>1</sub> .UK	PLA-P5AA.UK PLA-P5AA <sub>1</sub> .UK	PLA-P6AA.UK PLA-P6AA <sub>1</sub> .UK
	Phase,Hz		1,50	1,50	1,50	1,50
	Volts	V	240	240	240	240
	Amperes	A	0.81	1.25	1.43	1.64
	Outdoor unit Service Ref.		PU-P3VGAAUK PU-P3YGAA.UK	PU-P4VGAA.UK PU-P4YGAA.UK	PU-P5YGAA.UK	PU-P6YGAA.UK
	Phase,Hz		1/3 , 50	1/3 , 50	3,50	3,50
	Volts	V	240/415	240/415	415	415
	Amperes	A	14.81/5.29	15.71/5.55	7.60	9.03
Refrigerant circuit	Discharge pressure	Mpa (kgf/cm <sup>2</sup> )	2.30 (23.4)	1.98 (20.2)	2.27 (23.2)	22.7 (23.2)
	Suction pressure	Mpa (kgf/cm <sup>2</sup> )	0.47 (4.8)	0.54 (5.4)	0.46 (4.3)	0.45 (4.6)
	Discharge temperature	°C	81.0	71.0	78.6	80.6
	Condensing temperature	°C	44.0	42.0	41.0	45.0
	Suction temperature	°C	4.8	7.5	4.4	2.4
	Ref. pipe length	m	5	5	5	5
Indoor side	Intake air temperature	D.B.	°C	27	27	27
		W.B.	°C	19	19	19
	Discharge air temperature	D.B.	°C	13.1	13.3	12.1
Outdoor side	Intake air temperature	D.B.	°C	35	35	35
		W.B.	°C	24	24	24
SHF			0.74	0.78	0.72	0.69
BF			0.13	0.12	0.10	0.09

The unit of pressure has been changed to MPa based on international SI system.

The conversion factor is : 1(MPa)=10.2(kgf/cm<sup>2</sup>)

## 5. OUTLET AIR SPEED AND COVERAGE RANGE

		PLA-P3AA.UK PLA-P3AA <sub>1</sub> .UK	PLA-P4AA.UK PLA-P4AA <sub>1</sub> .UK	PLA-P5AA.UK PLA-P5AA <sub>1</sub> .UK	PLA-P6AA.UK PLA-P6AA <sub>1</sub> .UK
Air flow	m <sup>3</sup> /min.	20	28	30	30
Air speed	m/sec.	4.0	4.9	5.2	6.6
Coverage range	m	5.7	7.4	7.9	8.9

※ The air coverage range is the value up to the position where the air speed is 0.25m/sec.


When air is blown out horizontally from the unit at the Hi notch position.

The coverage range should be used only as a general guideline since it varies according to the size of the room and the furniture inside the room.

## 6. NOISE CRITERION CURVES


PLA-P3AA.UK  
PLA-P3AA1.UK

NOTCH	SPL(dB)	LINE
High	34	○—○
Medium1	32	△—△
Medium2	30	●—●
Low	28	▲—▲

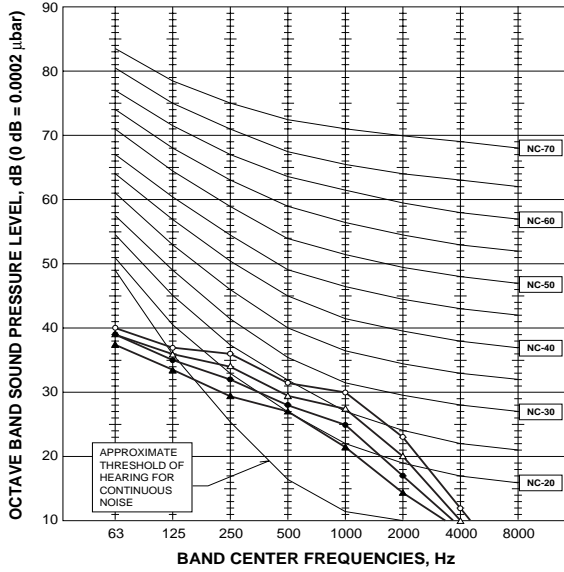


PLA-P4AA.UK  
PLA-P4AA1.UK

NOTCH	SPL(dB)	LINE
High	41	○—○
Medium1	39	△—△
Medium2	36	●—●
Low	33	▲—▲

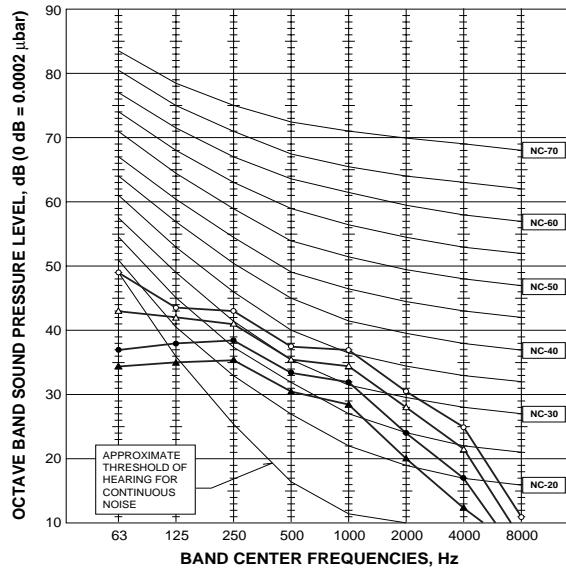



PLA-P5AA.UK  
PLA-P5AA1.UK

NOTCH	SPL(dB)	LINE
High	43	○—○
Medium1	41	△—△
Medium2	38	●—●
Low	35	▲—▲

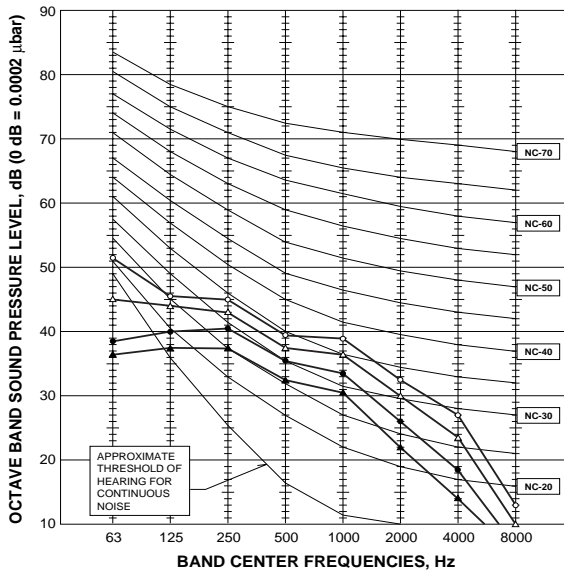

PLA-P6AA.UK  
PLA-P6AA1.UK

NOTCH	SPL(dB)	LINE
High	45	○—○
Medium1	43	△—△
Medium2	40	●—●
Low	37	▲—▲





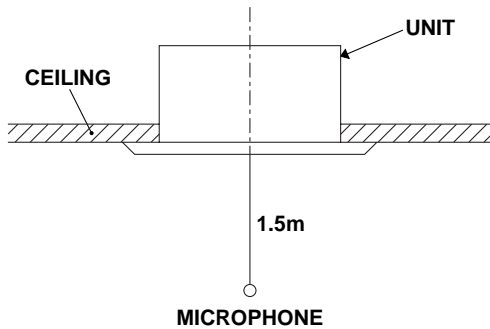
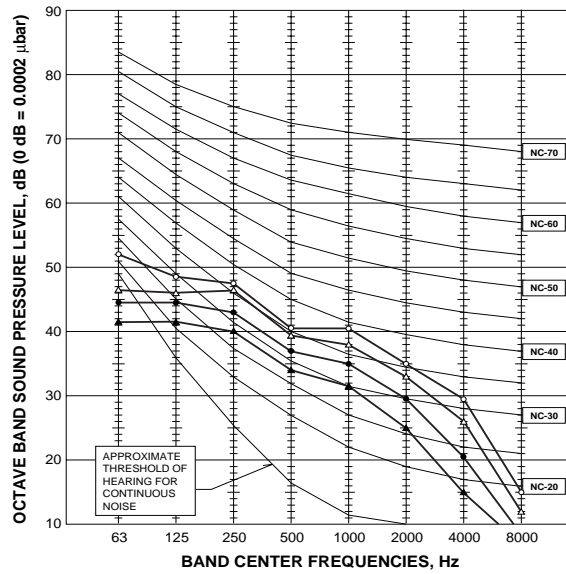


Ambient temperature 27°C

Test conditions are based on JIS Z8731

PLA-P3AA.UK, PLA-P4AA.UK, PLA-P5AA.UK, PLA-P6AA.UK  
 PLA-P3AA<sub>1</sub>.UK, PLA-P4AA<sub>1</sub>.UK, PLA-P5AA<sub>1</sub>.UK, PLA-P6AA<sub>1</sub>.UK

Unit: mm

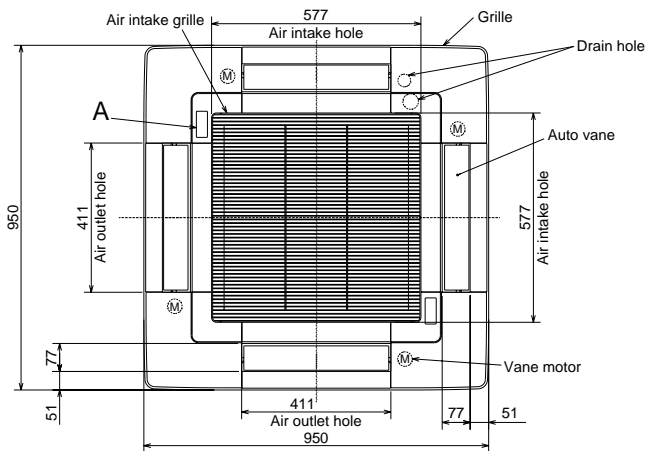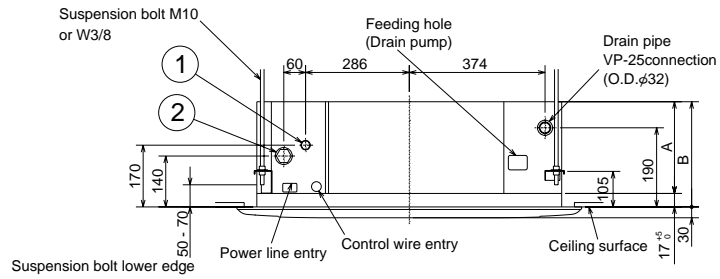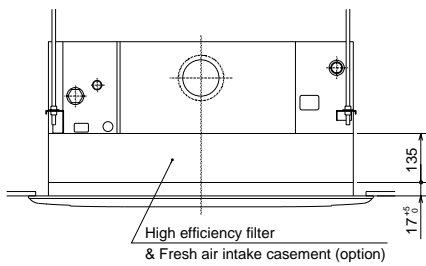
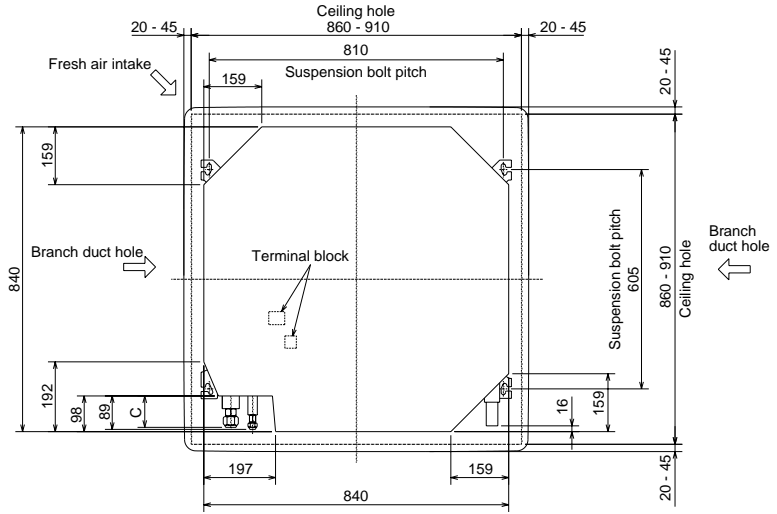
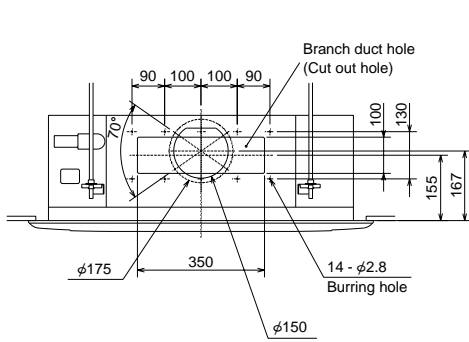


Models	①	②	A	B	C
PLA-P3AA.UK PLA-P3AA <sub>1</sub> .UK	Refrigerant pipe (9.52mm dia.) flared connection 3/8F	Refrigerant pipe (15.88mm dia.) flared connection 5/8F	241	258	80
PLA-P4/P5/P6AA.UK PLA-P4/P5/P6AA <sub>1</sub> .UK	Refrigerant pipe (9.52mm dia.) flared connection 3/8F	Refrigerant pipe (19.05mm dia.) flared connection 3/4F	281	298	84

PLA-P3AA.UK, PLA-P4AA.UK, PLA-P5AA.UK, PLA-P6AA.UK  
 PLA-P3AA1.UK, PLA-P4AA1.UK, PLA-P5AA1.UK, PLA-P6AA1.UK

※ The part name of symbol "I.B" is "SPCB".

SYMBOL	NAME	SYMBOL	NAME	SYMBOL	NAME
P.B	INDOOR POWER BOARD	MV	VANE MOTOR	W.B	WIRELESS REMOTE CONTROLLER BOARD
F1	FUSE(4A)	DP	DRAIN-UP MACHINE	RU	RECEIVING UNIT
ZNR	VARISTOR	DS	DRAIN SENSOR	BZ	BUZZER
I.B	INDOOR CONTROLLER BOARD	H2	DEW PREVENTION HEATER	LED1	LED(RUN INDICATOR)
CN2L	CONNECTOR(LOSSNAY)	TB4	TERMINAL BLOCK(INDOOR/OUTDOOR CONNECTING LINE)	LED2	LED(HOT ADJUST)
CN32	CONNECTOR(REMOTE SWITCH)	TB5	TERMINAL BLOCK(REMOTE CONTROLLER TRANSMISSION LINE)	SW1	SWITCH(HEATING ON/OFF)
CN41	CONNECTOR(HA TERMINAL-A)	TH1	ROOM TEMP.THERMISTOR (0°C/15kΩ,25°C/5.4kΩ DETECT)	SW2	SWITCH(COOLING ON/OFF)
SW1	JUMPER WIRE(MODEL SELECTION)	TH2	PIPE TEMP.THERMISTOR/LIQUID (0°C/15kΩ,25°C/5.4kΩ DETECT)		
SW2	JUMPER WIRE(CAPACITY CODE)	TH5	COND./EVA.TEMP.THERMISTOR (0°C/15kΩ,25°C/5.4kΩ DETECT)		
SWE	SWITCH(EMERGENCY OPERATION)	R.B	REMOTE CONTROLLER BOARD		
X1	RELAY(DRAIN PUMP)	CN2	CONNECTOR(PROGRAM TIMER)		
X4	RELAY(FAN MOTOR)	TB6	TERMINAL BLOCK(REMOTE CONTROLLER TRANSMISSION LINE)		
FC	FAN PHASE CONTROL				
LED1	POWER SUPPLY(I.B)				
LED2	POWER SUPPLY(I.B)				
LED3	TRANSMISSION(INDOOR-OUTDOOR)				
C	CAPACITOR(FAN MOTOR)				
MF	FAN MOTOR				

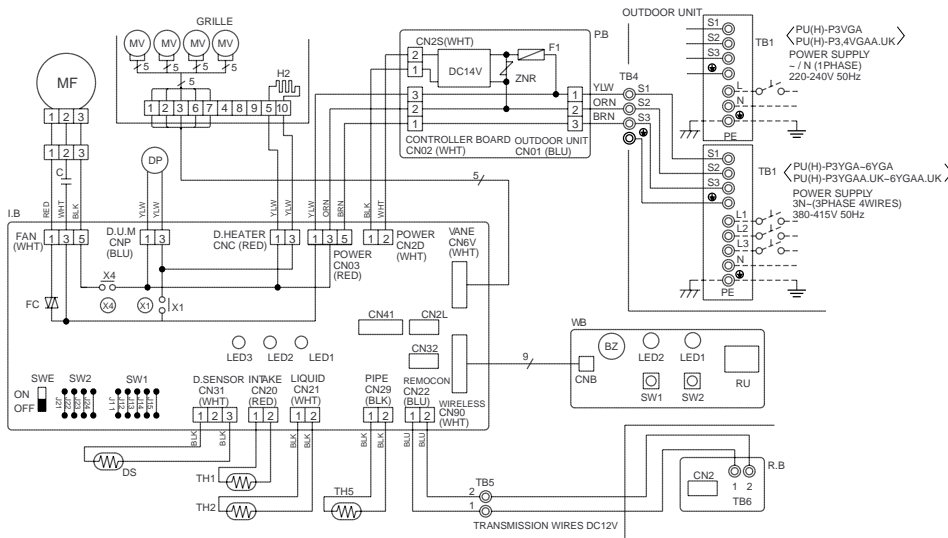


Please set the voltage using the remote controller. For the setting method, please refer to the indoor unit Installation Manual.

NOTE:


1. Since the outdoor side electric wiring may change be sure to check the outdoor unit electric wiring for servicing.
2. Indoor and outdoor connecting wires are made with polarities,make wiring matching terminal numbers (S1,S2,S3).
3. Symbols used in wiring diagram above are,  
 ○ : Terminal , □ : Connector.

## PLA-P3AA.UK / PUH-P3VGA, PUH-P3YGA


Unit : mm(inch)

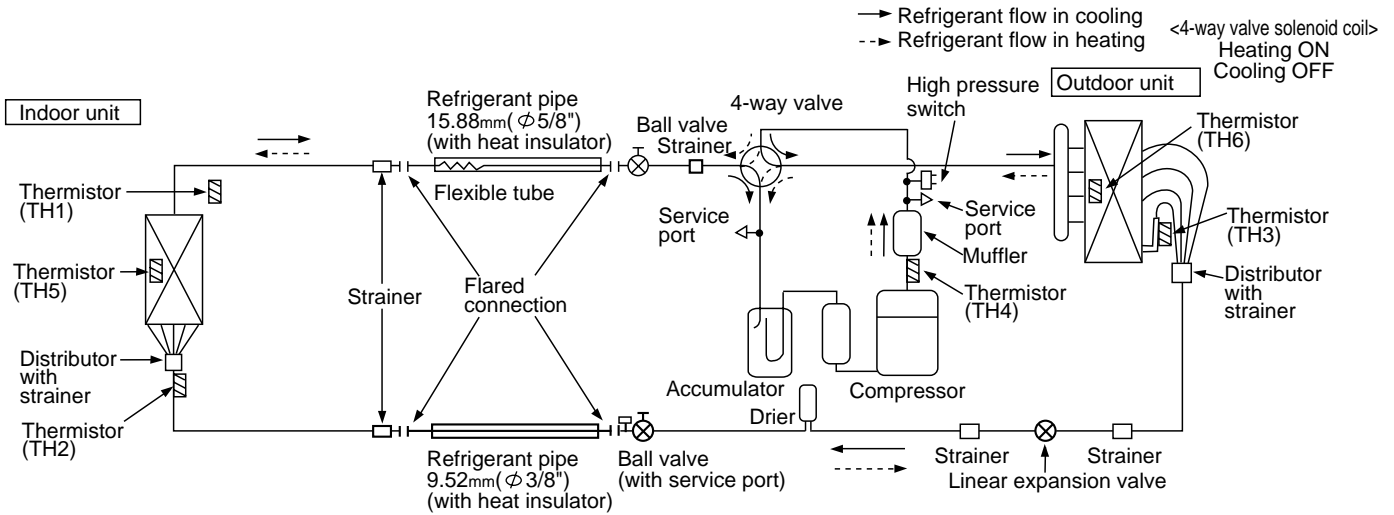

## PLA-P4AA.UK / PUH-P4YGA

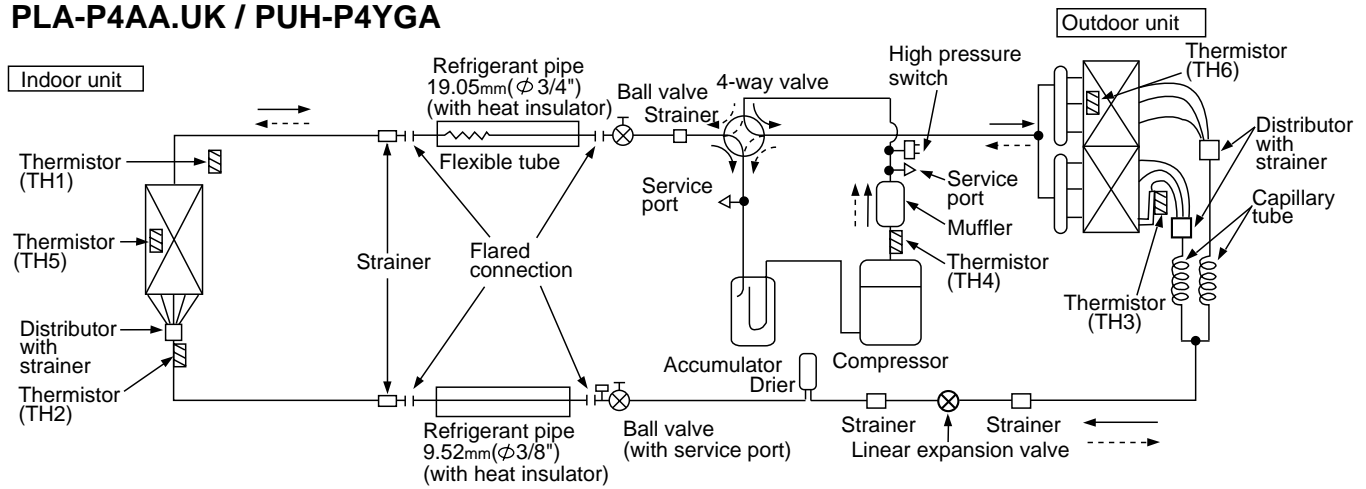


## PLA-P5AA.UK / PUH-P5YGA PLA-P6AA.UK / PUH-P6YGA

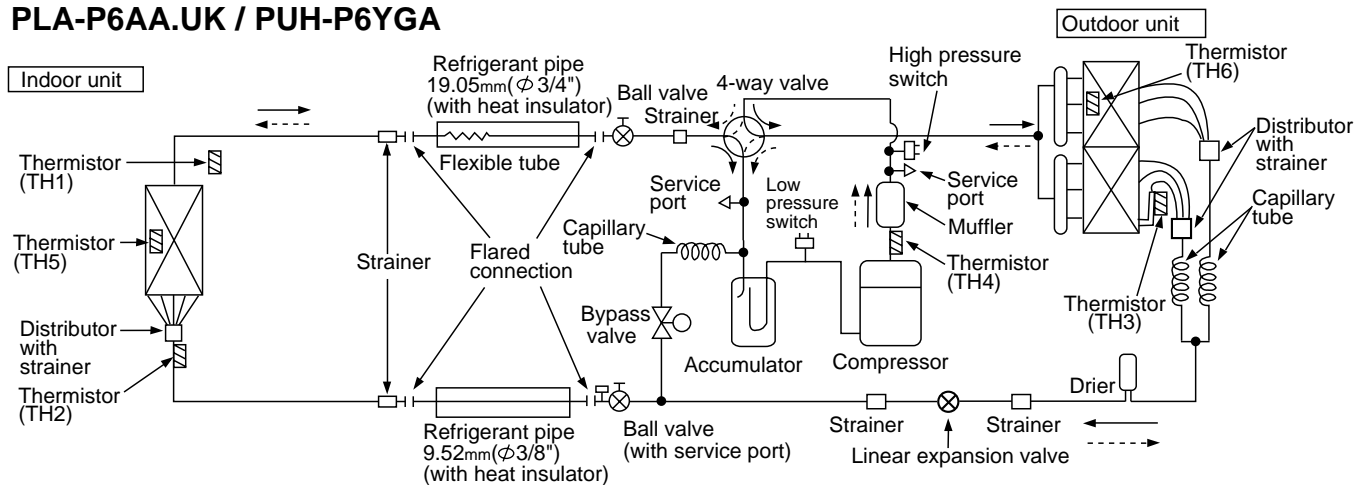


**PLA-P3AA.UK / PU-P3VGA, PUH-P3YGA**

Unit : mm(inch)


→ Refrigerant flow in cooling

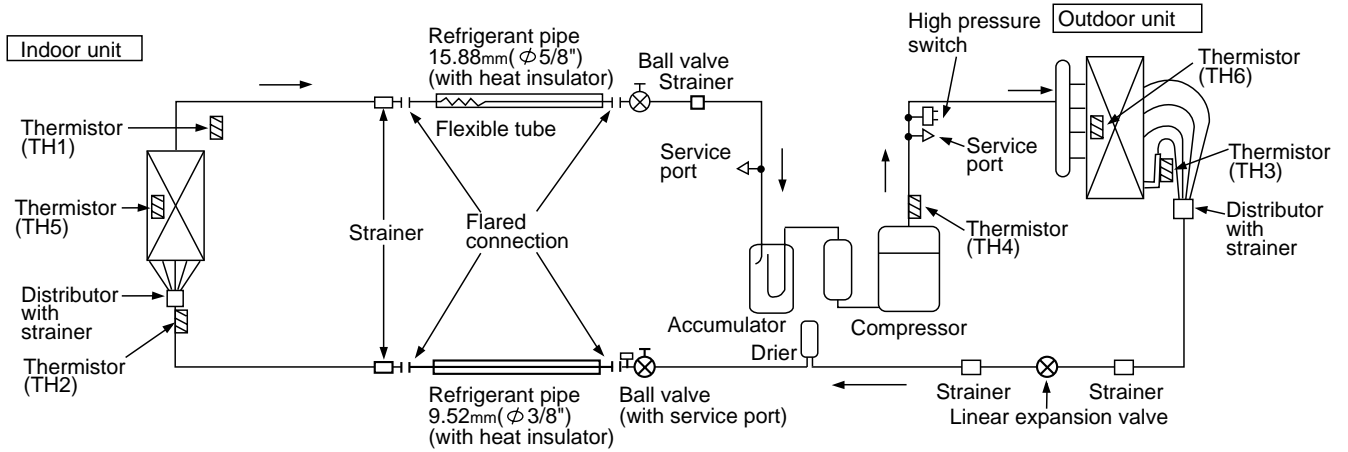

**PLA-P4AA.UK / PU-P4YGA**

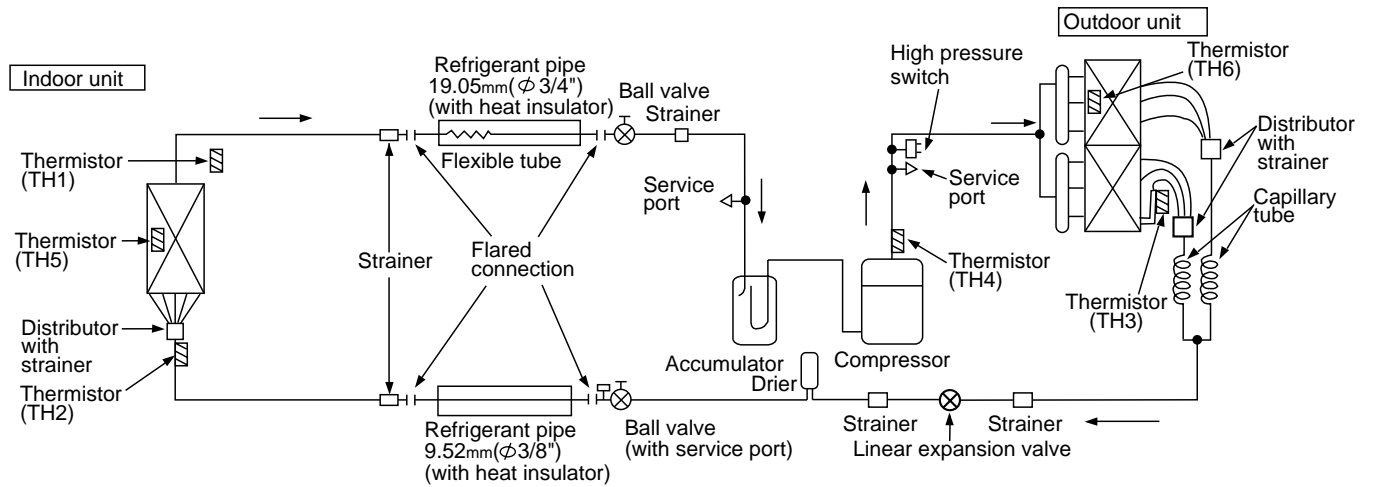


**PLA-P5AA.UK / PU-P5YGA  
PLA-P6AA.UK / PU-P6YGA**

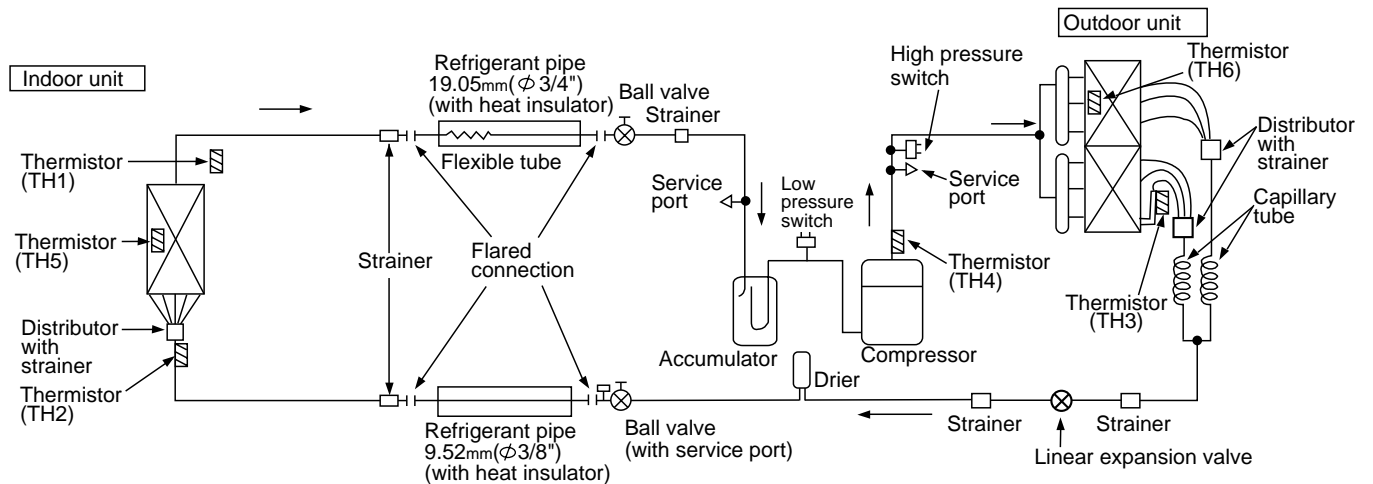


Unit : mm(inch)


**PLA-P3AA.UK, PLA-P3AA1.UK / PUH-P3VGAA.UK, PUH-P3YGAA.UK**

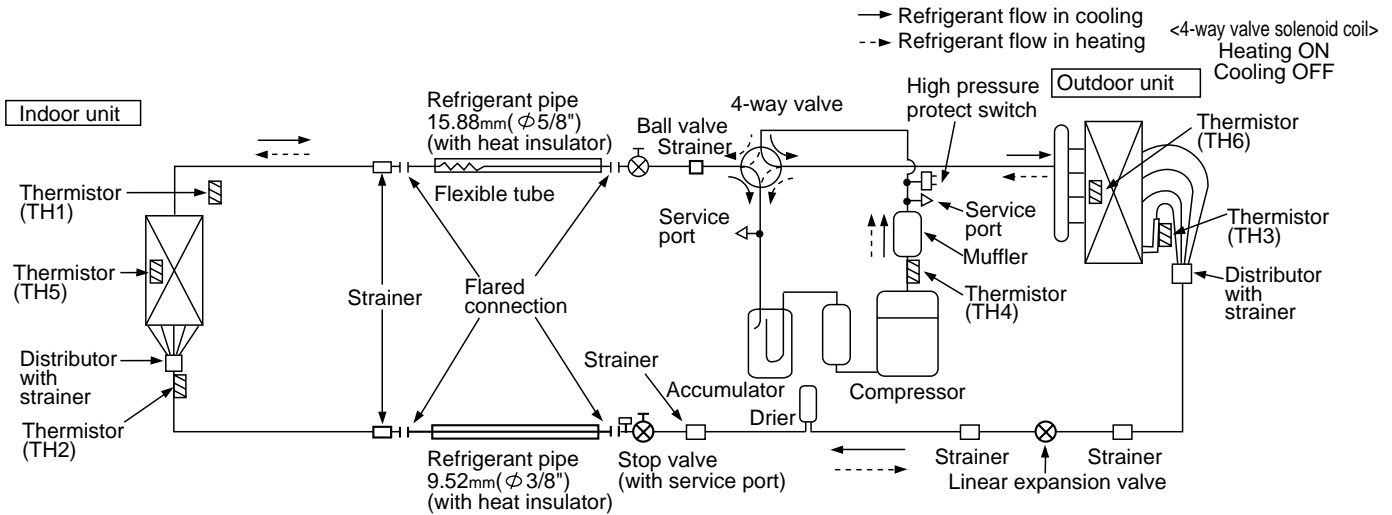

**PLA-P4AA.UK, PLA-P4AA1.UK / PUH-P4VGAA.UK, PUH-P4YGAA.UK**

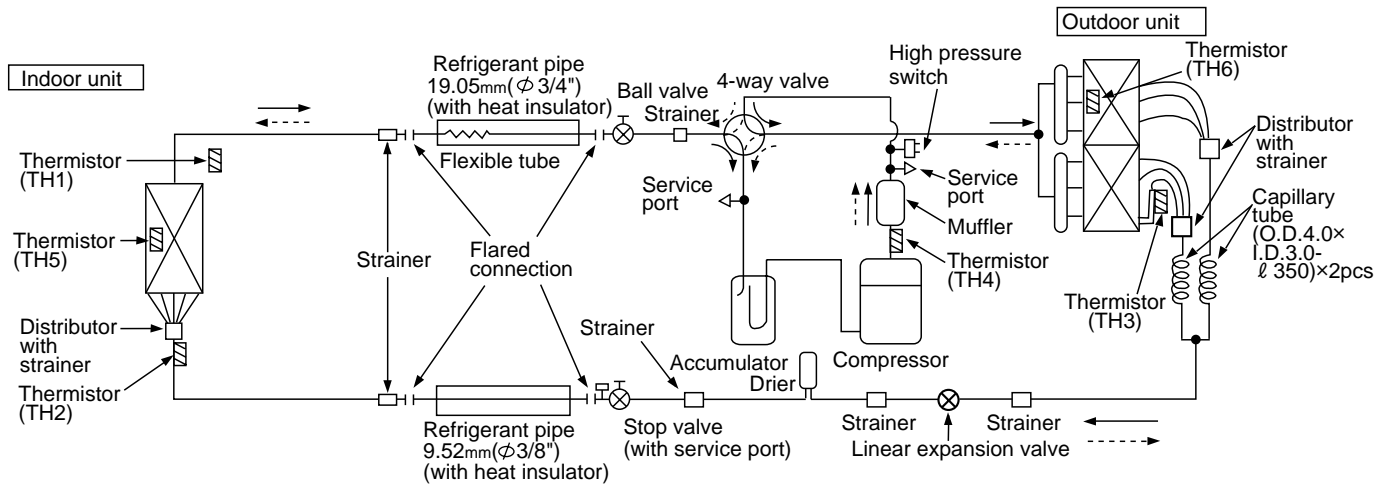

**PLA-P5AA.UK, PLA-P5AA1.UK / PUH-P5YGAA.UK  
 PLA-P6AA.UK, PLA-P6AA1.UK / PUH-P6YGAA.UK**

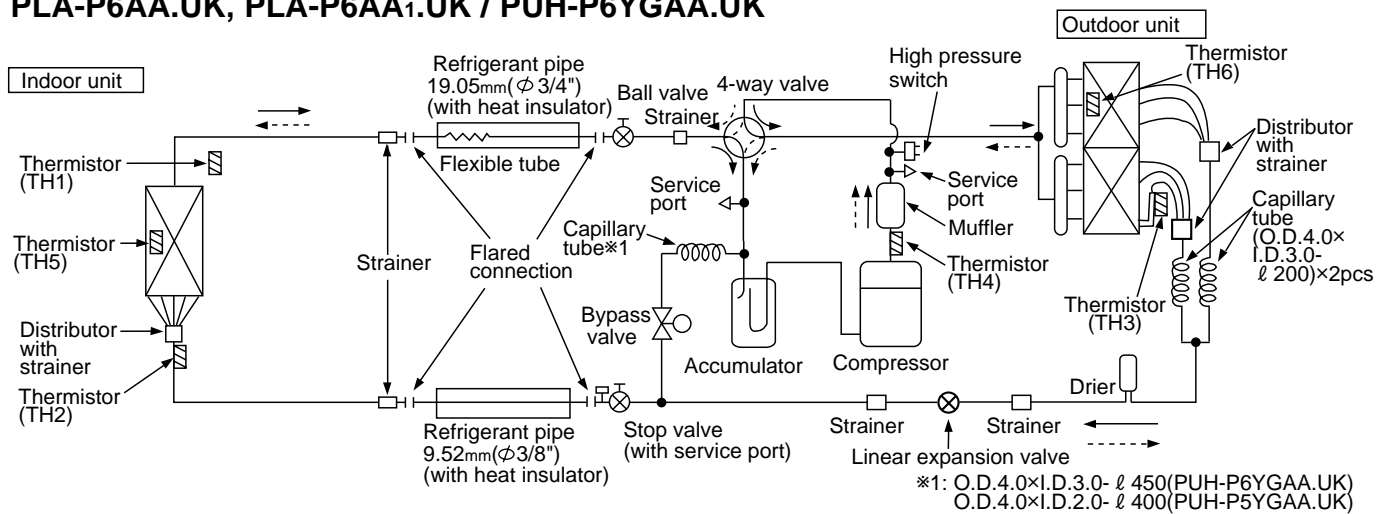





Unit : mm(inch)

### PLA-P3AA.UK, PLA-P3AA1.UK / PU-P3VGAA.UK, PUH-P3YGAA.UK


→ Refrigerant flow in cooling

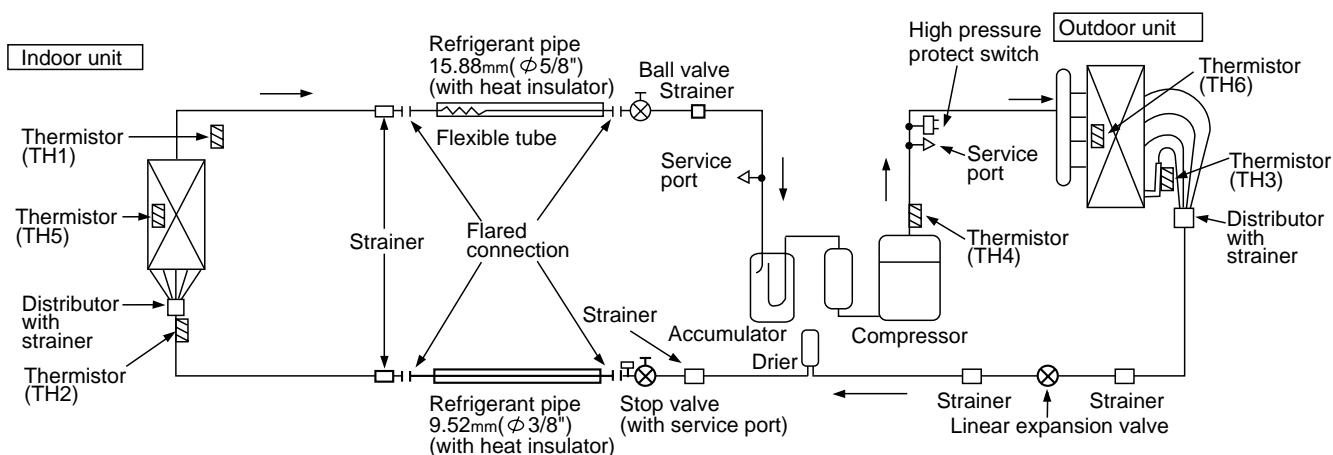

### PLA-P4AA.UK, PLA-P4AA1.UK / PU-P4VGAA.UK, PUH-P4YGAA.UK



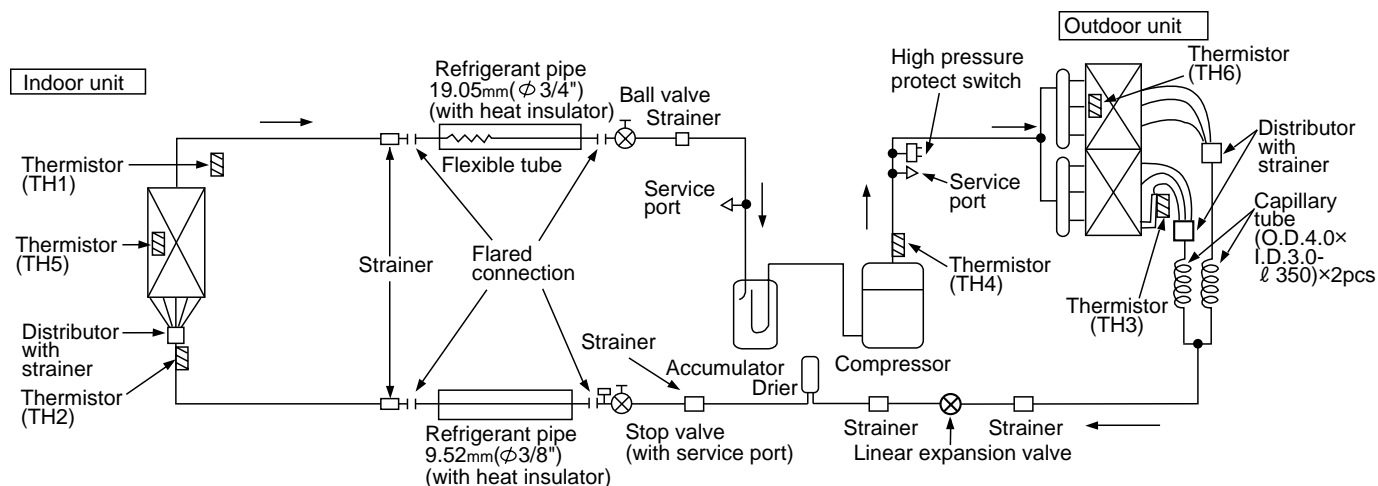


### PLA-P5AA.UK, PLA-P5AA1.UK / PU-P5YGAA.UK PLA-P6AA.UK, PLA-P6AA1.UK / PU-P6YGAA.UK

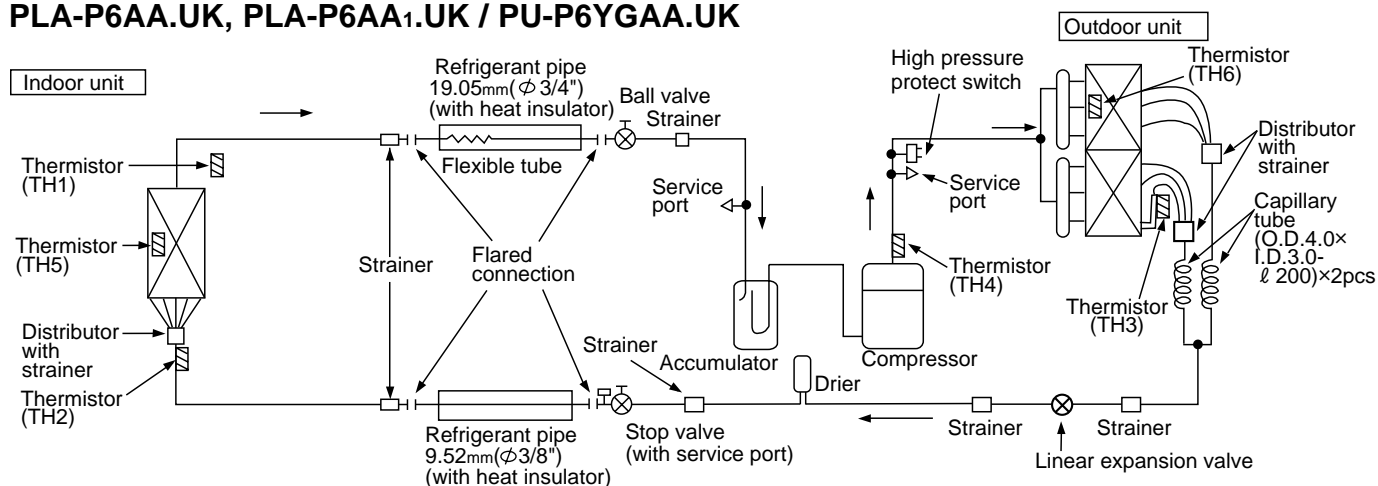

**HOW TO CHECK THE PARTS**

**PLA-P3AA.UK, PLA-P4AA.UK, PLA-P5AA.UK, PLA-P6AA.UK  
 PLA-P3AA<sub>1</sub>.UK, PLA-P4AA<sub>1</sub>.UK, PLA-P5AA<sub>1</sub>.UK, PLA-P6AA<sub>1</sub>.UK**

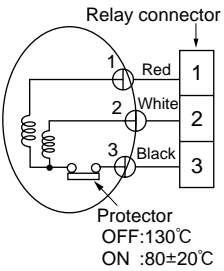Parts name	Check points														
Room temperature thermistor (TH1) Pipe temperature thermistor (TH2) Condenser/Evaporator temperature thermistor (TH5)	Disconnect the connector then measure the resistance using a tester. (Surrounding temperature 10°C ~30°C) <table border="1" data-bbox="347 568 858 645" style="margin-left: 20px;"> <tr> <td>Normal</td> <td>Abnormal</td> </tr> <tr> <td>4.3kΩ~9.6kΩ</td> <td>Open or short</td> </tr> </table> (Refer to the thermistor)		Normal	Abnormal	4.3kΩ~9.6kΩ	Open or short									
Normal	Abnormal														
4.3kΩ~9.6kΩ	Open or short														
Vane motor	Measure the resistance between the terminals using a tester. (Surrounding temperature 20°C) <table border="1" data-bbox="347 801 858 878" style="margin-left: 20px;"> <tr> <td>Normal</td> <td>Abnormal</td> </tr> <tr> <td>15kΩ</td> <td>Open or short</td> </tr> </table>		Normal	Abnormal	15kΩ	Open or short									
Normal	Abnormal														
15kΩ	Open or short														
Fan motor 	Measure the resistance between the terminals using a tester. (Surrounding temperature 20°C) <table border="1" data-bbox="347 987 1390 1182" style="margin-left: 20px;"> <thead> <tr> <th rowspan="2">Motor terminal or Relay connector</th> <th colspan="2">Normal</th> <th rowspan="2">Abnormal</th> </tr> <tr> <th>PLA-P3AA.UK PLA-P3AA<sub>1</sub>.UK</th> <th>PLA-P4/5/6AA.UK PLA-P4/5/6AA<sub>1</sub>.UK</th> </tr> </thead> <tbody> <tr> <td>Red-Black</td> <td>87.2Ω</td> <td>28.7Ω</td> <td rowspan="2">Open or short</td> </tr> <tr> <td>White-Black</td> <td>104.1Ω</td> <td>41.6Ω</td> </tr> </tbody> </table>		Motor terminal or Relay connector	Normal		Abnormal	PLA-P3AA.UK PLA-P3AA <sub>1</sub> .UK	PLA-P4/5/6AA.UK PLA-P4/5/6AA <sub>1</sub> .UK	Red-Black	87.2Ω	28.7Ω	Open or short	White-Black	104.1Ω	41.6Ω
Motor terminal or Relay connector	Normal			Abnormal											
	PLA-P3AA.UK PLA-P3AA <sub>1</sub> .UK	PLA-P4/5/6AA.UK PLA-P4/5/6AA <sub>1</sub> .UK													
Red-Black	87.2Ω	28.7Ω	Open or short												
White-Black	104.1Ω	41.6Ω													
Drain pump 	Measure the resistance between the terminals using a tester. (Surrounding temperature 20°C) <table border="1" data-bbox="347 1350 858 1426" style="margin-left: 20px;"> <tr> <td>Normal</td> <td>Abnormal</td> </tr> <tr> <td>290Ω</td> <td>Open or short</td> </tr> </table>		Normal	Abnormal	290Ω	Open or short									
Normal	Abnormal														
290Ω	Open or short														
Drain sensor 	Measure the resistance between the terminals using a tester. Measure the resistance after 3 minutes have passed since the power supply was intercepted. (Surrounding temperature 0°C ~60°C) <table border="1" data-bbox="347 1574 858 1650" style="margin-left: 20px;"> <tr> <td>Normal</td> <td>Abnormal</td> </tr> <tr> <td>0.6kΩ~6.0kΩ</td> <td>Open or short</td> </tr> </table> (Refer to the thermistor)		Normal	Abnormal	0.6kΩ~6.0kΩ	Open or short									
Normal	Abnormal														
0.6kΩ~6.0kΩ	Open or short														

<Thermistor Characteristic graph>

Thermistor for lower temperature

Room temperature thermistor (TH1)  
 Pipe temperature thermistor (TH2)  
 Condenser/evaporator temperature thermistor (TH5)

Thermistor  $R_0=15k\Omega \pm 3\%$   
 Fixed number of  $B=3480K \pm 2\%$

$$R_t = 15 \exp \left\{ 3480 \left( \frac{1}{273+t} - \frac{1}{273} \right) \right\}$$



0°C	15kΩ
10°C	9.6kΩ
20°C	6.3kΩ
25°C	5.2kΩ
30°C	4.3kΩ
40°C	3.0kΩ

Thermistor for drain sensor

Thermistor  $R_0=6.0k\Omega \pm 5\%$   
 Fixed number of  $B=3390K \pm 2\%$





$$R_t = 6 \exp \left\{ 3390 \left( \frac{1}{273+t} - \frac{1}{273} \right) \right\}$$

0°C	6.0kΩ
10°C	3.9kΩ
20°C	2.6kΩ
25°C	2.2kΩ
30°C	1.8kΩ
40°C	1.3kΩ
60°C	0.3kΩ

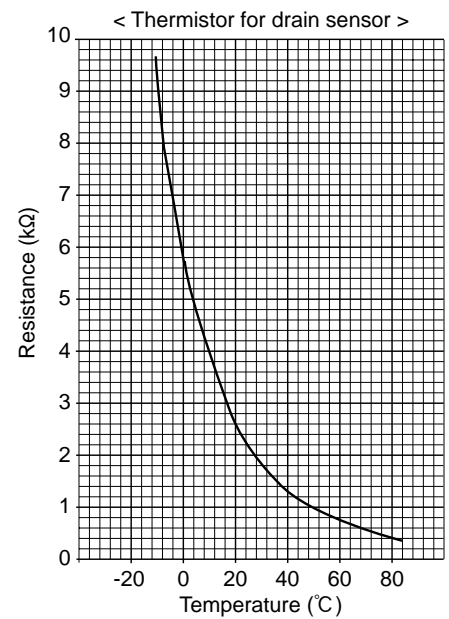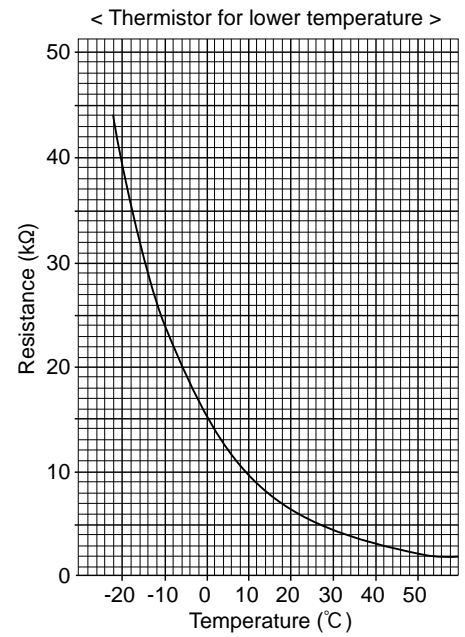

PLA-P3AA.UK, PLA-P3AA1.UK

Be careful on removing heavy parts.

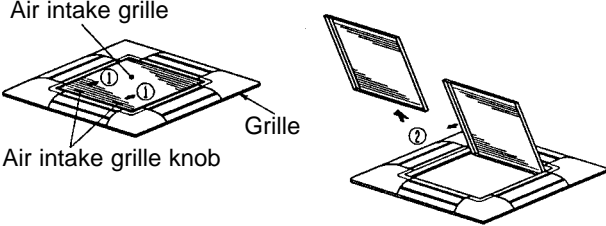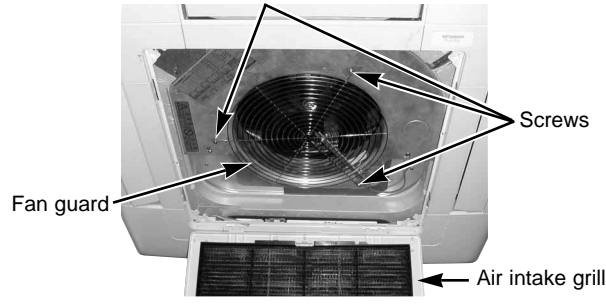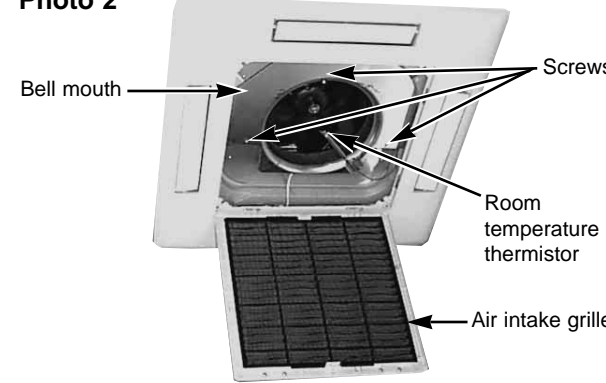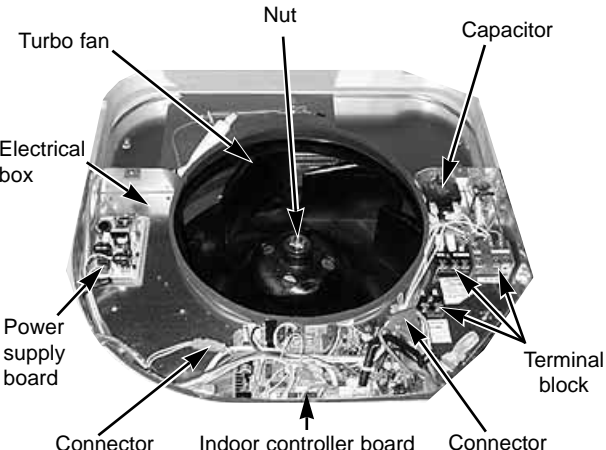OPERATING PROCEDURE	PHOTOS & ILLUSTRATIONS
<p><b>1. Removing the air intake grille</b></p> <p>(1) Slide the knob of air intake grille toward the arrow ① to open the air intake grille.</p> <p>(2) Remove drop prevention hook from the panel.</p> <p>(3) Slide the shaft in the hinge to the direction of the arrow ② and remove the air intake grille.</p>	<p><b>Figure 1</b></p>  <p>Air intake grille Air intake grille knob Grille</p>
<p><b>2. Removing the fan guard</b></p> <p>(1) Open the air intake grille.</p> <p>(2) Remove the 3 screws of fan guard.</p>	<p><b>Photo 1</b></p>  <p>Fan guard Screws Air intake grille</p>
<p><b>3. Removing the room temperature thermistor</b></p> <p>(1) Remove the fan guard. (See photo 1)</p> <p>(2) Remove the screw in the room temperature thermistor holder to remove the holder and the room temperature thermistor.</p> <p>(3) Remove the 1 screw from the bell mouth, and unscrew the other 2 screws (fix to the oval hole which has a different diameter) to remove the bell mouth.</p> <p>(4) Remove the holder claw, and remove the room temperature thermistor and holder.</p> <p>(5) Disconnect the connector (red) from the indoor control board.</p>	<p><b>Photo 2</b></p>  <p>Bell mouth Screws Room temperature thermistor Air intake grille</p>
<p><b>4. Removing the electrical box</b></p> <p>(1) Remove the fan guard. (See photo 1)</p> <p>(2) Disconnect the lead wire of the vane motor from the clamp, and disconnect the white connector (10P).</p> <p>(3) Remove the room temperature thermistor with the holder.</p> <p>(4) Remove the bell mouth. (See photo 2)</p> <p>(5) Disconnect the relay connector in the electrical box. Red (3P) for ran motor power supply White (2P) for pipe temperature detecting thermistor Blue (2P) for drain pump White (3P) for drain sensor</p> <p>(6) Remove the 3 screws of the electrical box and loosen the other 2 screws to remove the box.</p> <p>&lt;Electrical parts in the electrical box&gt; Indoor controller board Power supply board Terminal block Capacitor</p>	<p><b>Photo 3</b></p>  <p>Turbo fan Nut Capacitor Electrical box Power supply board Terminal block Connector Indoor controller board Connector</p>




**OPERATING PROCEDURE**

**PHOTOS & ILLUSTRATIONS**

**5. Remove the fan motor**

- (1) Remove the fan guard.(See photo 1)
- (2) Remove the bell mouth.(See photo 2)
- (3) Remove the electrical box.(See photo 3)
- (4) Remove the turbo fan nut.
- (5) Pull out the turbo fan.
- (6) Disconnect the connector of the fan motor lead wire.
- (7) Remove the 4 nuts of the fan motor.


**Photo 4**

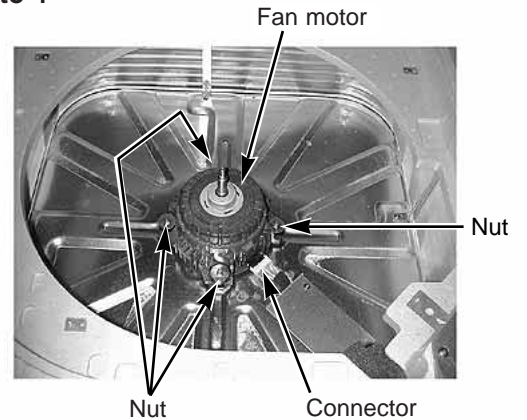

**6. Removing the pipe temperature thermistor and condenser evaporator temperature thermistor**

- (1) Remove the fan guard.(See photo 1)
- (2) Remove the bell mouth.(See photo 2)
- (3) Remove the electrical box.(See photo 3)
- (4) Remove the turbo fan.
- (5) Remove the screw of the service panel.
- (6) Remove the service panel.
- (7) Remove the pipe temperature thermistor which is inserted into the holder installed to the thin copper pipe.
- (8) Disconnect the 2-pin white connector.

**Photo 5**

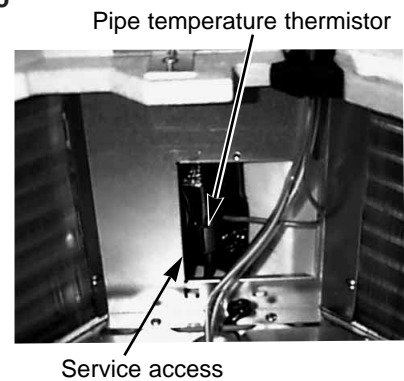

**7. Removing the panel**

- (1) Remove the air intake grille.(See figure 1)


**Corner panel (See figure 2)**

- (1) Remove the corner screw.
- (2) Slide the corner panel to the direction of the arrow③, and remove the corner panel.


**Panel (See photo 6)**

- (1) Disconnect the connector that connects with the unit.
- (2) Remove the 2 screws from the panel and loosen another 2 screws, which fix to the oval holes, have different diameters.
- (3) Rotate the panel a little to remove the panel.

**Figure 2**

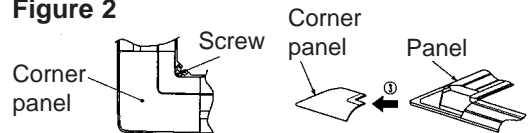


**Photo 6**

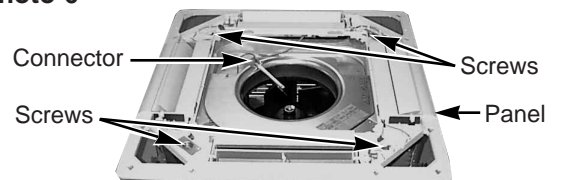




**8. Removing the drain pan**

- (1) Remove the panel. (See photo 6)
- (2) Remove the drain plug (Larger one), drain the remaining water in the drain pan.
- (3) Remove the corner cover. (2 screws)
- (4) Remove the bell mouth (See photo 2)
- (5) Remove the electrical box. (See photo 3)
- (6) Remove the lead wire holder. (1 screw)
- (7) Remove the 4 screws and pull out the drain pan.
  - \* Pull out the left and right of the pan gradually.
  - Be careful not to crack or damage the pan.

**Photo 7**

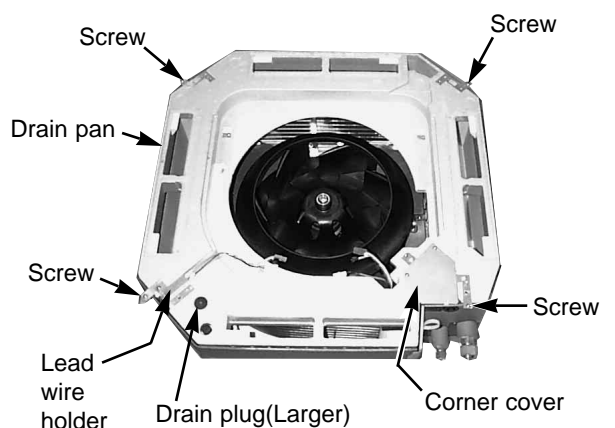


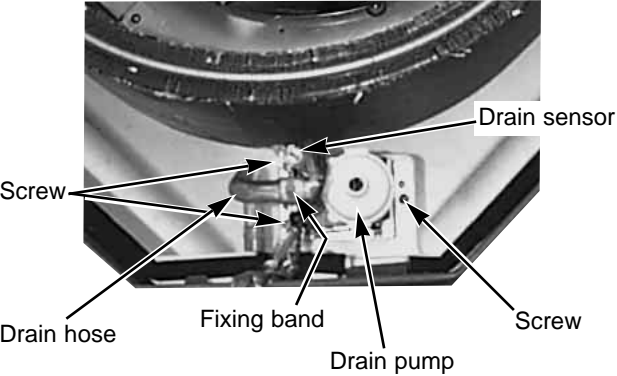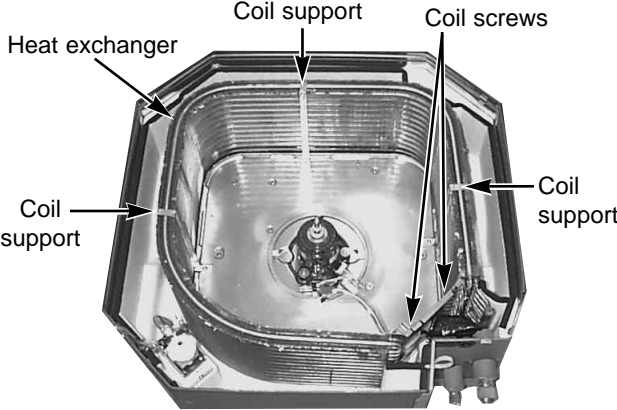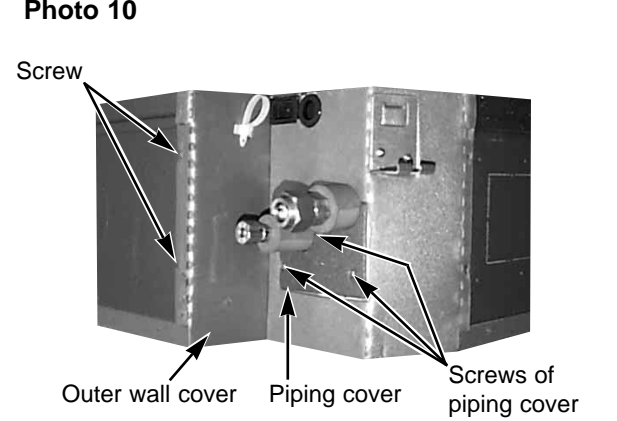

OPERATING PROCEDURE	PHOTOS & ILLUSTRATIONS
<p><b>9. Removing the drain pump and drain sensor</b></p> <ol style="list-style-type: none"><li>(1) Remove the panel. (See photo 6)</li><li>(2) Remove the fan guard. (See photo 1)</li><li>(3) Remove the bell mouth. (See photo 2)</li><li>(4) Remove the electrical box. (See photo 3)</li><li>(5) Remove the drain pan. (See photo 7)</li><li>(6) Remove the 3 screws of the drain pump.</li><li>(7) Cut the drain hose band, pull out the drain hose from the drain pump.</li><li>(8) Pull out the drain pump.</li><li>(9) Remove the drain sensor and the holder.</li></ol>	<p><b>Photo 8</b></p>  <p>Drain sensor</p> <p>Screw</p> <p>Drain hose</p> <p>Fixing band</p> <p>Drain pump</p> <p>Screw</p>
<p><b>10. Removing the heat exchanger</b></p> <ol style="list-style-type: none"><li>(1) Remove the panel. (See photo 6)</li><li>(2) Remove the fan guard. (See photo 1)</li><li>(3) Remove the bell mouth. (See photo 2)</li><li>(4) Remove the electrical box. (See photo 3)</li><li>(5) Remove the drain pan. (See photo 7)</li><li>(6) Remove the turbo fan. (See photo 4)</li><li>(7) Remove the 3 screws of the piping cover, and pull out piping cover.</li><li>(8) Remove the 4 screws of the outer wall cover, and pull out the outer wall cover.</li><li>(9) Remove the screw of the coil support.</li><li>(10) Remove the 2 screws of the coil.</li><li>(11) Pull out the heat exchanger.</li></ol>	<p><b>Photo 9</b></p>  <p>Heat exchanger</p> <p>Coil support</p> <p>Coil screws</p> <p>Coil</p> <p>Coil support</p> <p><b>Photo 10</b></p>  <p>Screw</p> <p>Outer wall cover</p> <p>Piping cover</p> <p>Screws of piping cover</p>

PANEL PARTS


PLA-P3AA.UK, PLA-P4AA.UK, PLA-P5AA.UK, PLA-P6AA.UK  
 PLA-P3AA1.UK, PLA-P4AA1.UK, PLA-P5AA1.UK, PLA-P6AA1.UK

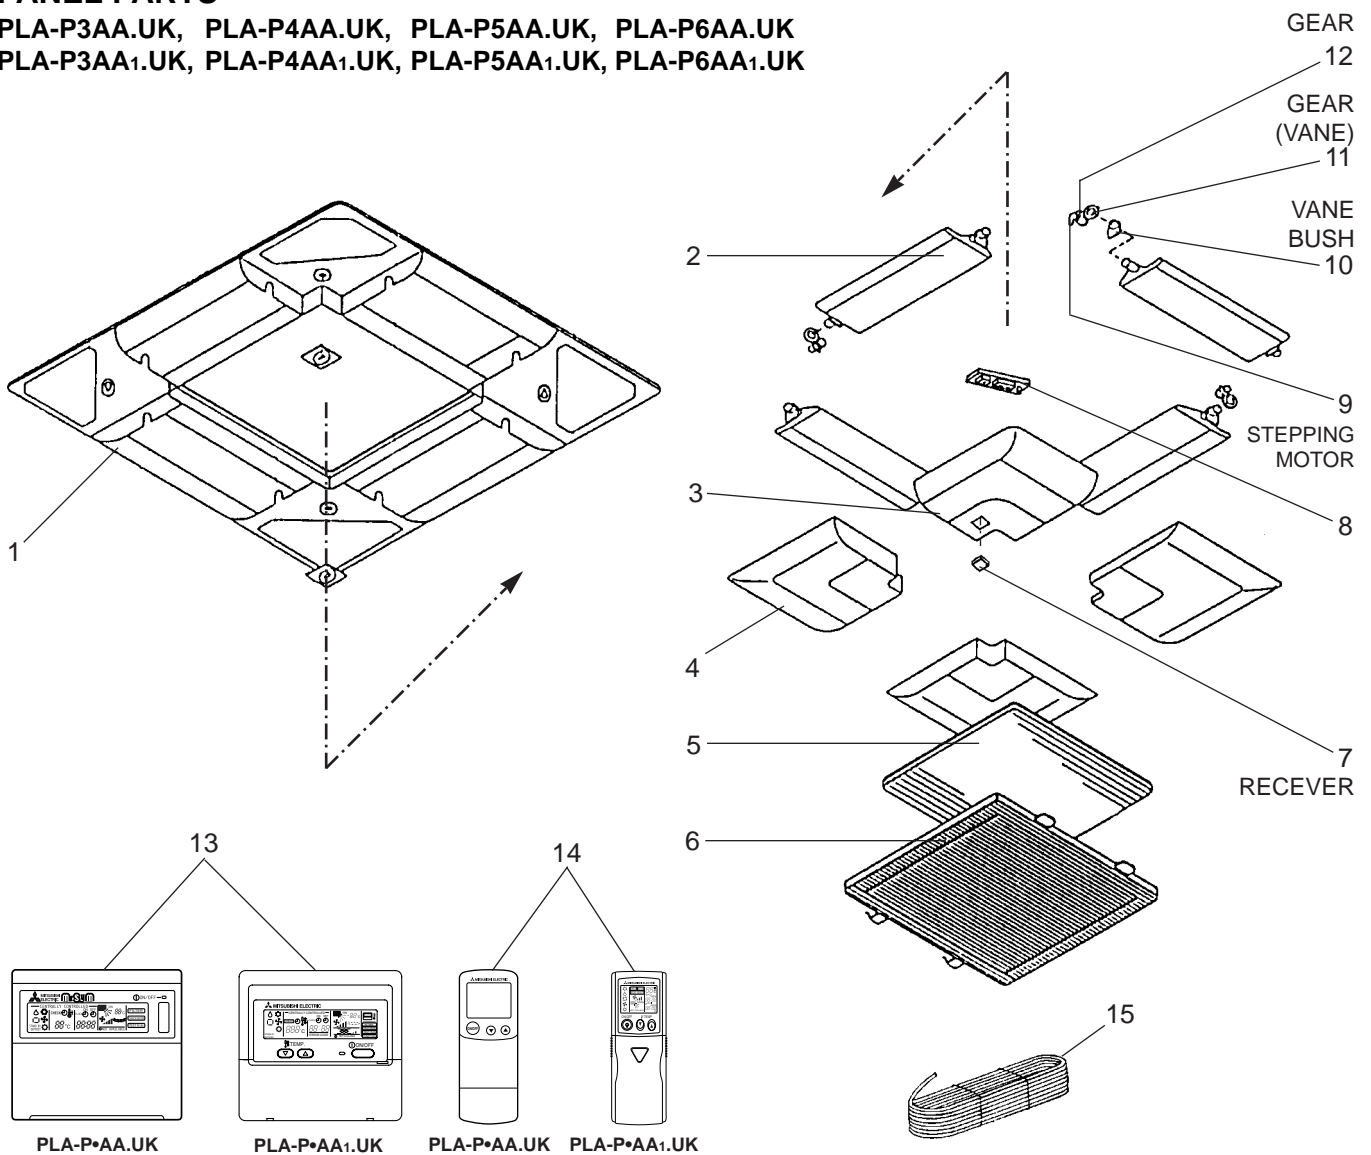

No.	Parts No.	Parts Name	Specifi- cation	Q'ty / set				Remarks (Drawing No.)	Wiring Diagram Symbol	Recom- mended Q'ty	Price	
				PLA -P3/4/5/6							Unit	Amount
				AA.UK		AA1.UK						
WIRED	WIRELESS	WIRED	WIRELESS									
1	S70 E10 003	AIR OUTLET GRILLE		1	1	1	1					
2	S70 E01 002	VANE ASSY		4	4	4	4					
3	S70 E01 638	CORNER PANEL		1	2	1	2					
4	S70 E00 638	CORNER PANEL		3	2	3	2					
5	S70 E00 500	L.L FILTER-A		1	1	1	1					
6	S70 E00 691	GRILLE ASSY		1	1	1	1					
7	S70 24K 658	RECEIVER					1	RU				
8	S70 E00 317	WIRELESS ADAPTER					1	W.B				
9	S70 E00 223	STEPPING MOTOR		4	4	4	4	MV				
10	S70 E00 063	VANE BUSH		8	8	8	8					
11	S70 E00 040	GEAR (VANE)		4	4	4	4					
12	S70 E01 040	GEAR		4	4	4	4					
13	S70 E03 713	REMOTE CONTROLLER ASSY	PAR-S27A-E	1				R.B				
	S70 E13 713	REMOTE CONTROLLER ASSY	PAR-20MAA-E			1		R.B				
14	S70 E05 714	WIRELESS REMOTE CONTROLLER ASSY	PAR-SL95A-E		1							
	S70 E15 714	WIRELESS REMOTE CONTROLLER ASSY	PAR-SL97A-E				1					
15	S70 58A 246	CORD		1	1	1	1					

## FUNCTIONAL PARTS

PLA-P3AA.UK, PLA-P4AA.UK  
 PLA-P3AA1.UK, PLA-P4AA1.UK

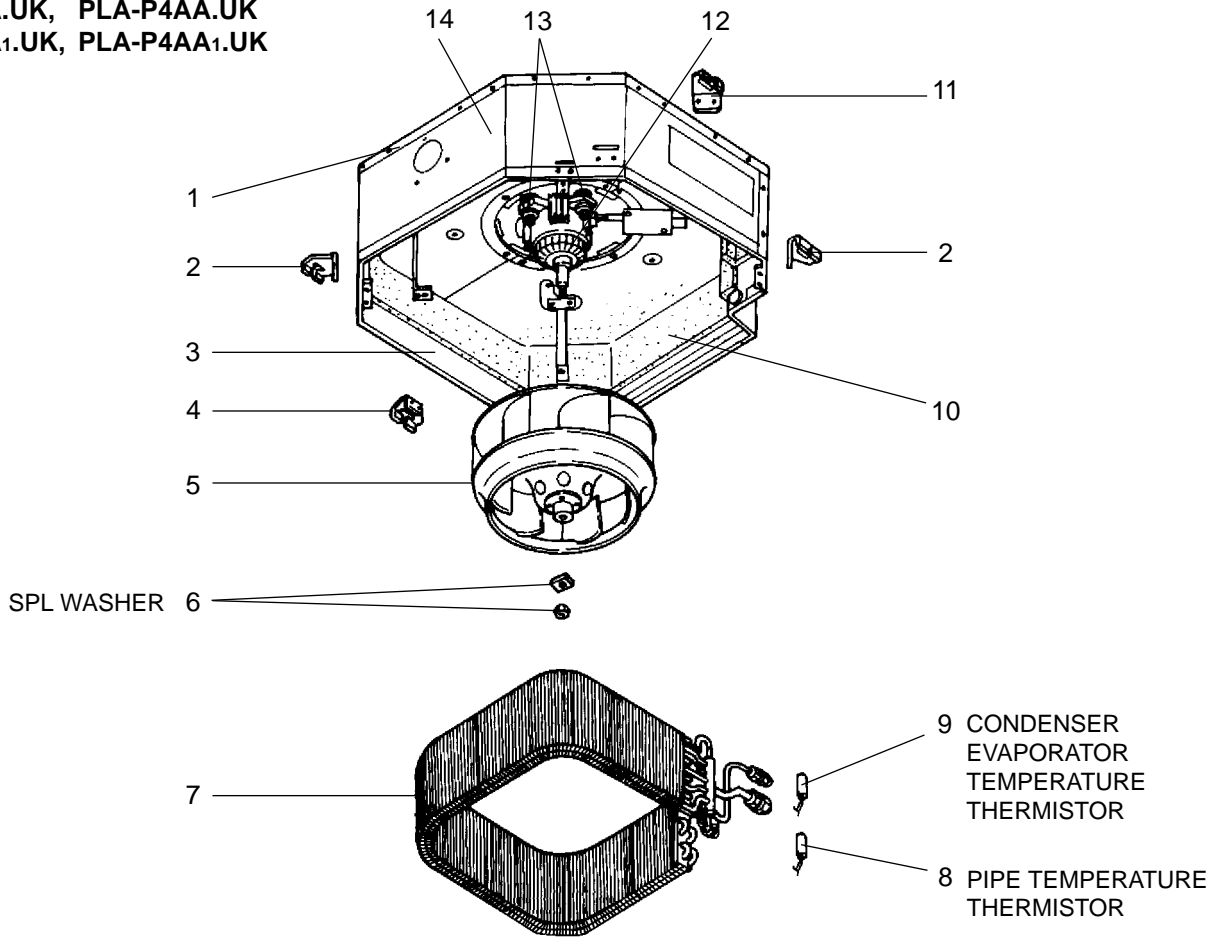


No.	Parts No.	Parts Name	Specifi- cation	Q'ty / set				Remarks (Drawing No.)	Wiring Diagram Symbol	Recom- mended Q'ty	Price	
				PLA-P3		PLA-P4					Unit	Amount
				AA.UK	AA1.UK	AA.UK	AA1.UK					
1	S70 003 687	BASE		1	1	1	1					
2	S70 E01 130	LEG		2	2	2	2					
3	S70 005 688	DRUM 1 ASSY		1	1							
	S70 007 688	DRUM 1 ASSY				1	1					
4	S70 E00 130	LEG		1	1	1	1					
5	S70 E00 114	TURBO FAN		1	1							
	S70 E01 114	TURBO FAN				1	1					
6	S70 08K 097	SPL WASHER		1	1	1	1					
7	S70 E20 480	HEAT EXCHANGER		1	1							
	S70 E21 480	HEAT EXCHANGER				1	1					
8	S70 17J 202	PIPE TEMPERATURE THERMISTOR		1	1	1	1		TH2			
9	S70 E20 202	CONDENSER EVAPORATOR TEMPERATURE THERMISTOR		1	1	1	1		TH5			
10	S70 E01 659	INNER COVER		1	1							
	S70 E02 659	INNER COVER				1	1					
11	S70 E02 130	LEG		1	1	1	1					
12	S70 E06 762	FAN MOTOR	D17B6P70MS	1	1				MF			
	S70 E07 762	FAN MOTOR	D176P120MS			1	1		MF			
13	S70 A41 105	MOTOR MOUNT		4	4	4	4					
14	S70 006 688	DRUM 2 ASSY		1	1							
	S70 008 688	DRUM 2 ASSY				1	1					



## FUNCTIONAL PARTS

PLA-P5AA.UK, PLA-P6AA.UK  
 PLA-P5AA1.UK, PLA-P6AA1.UK

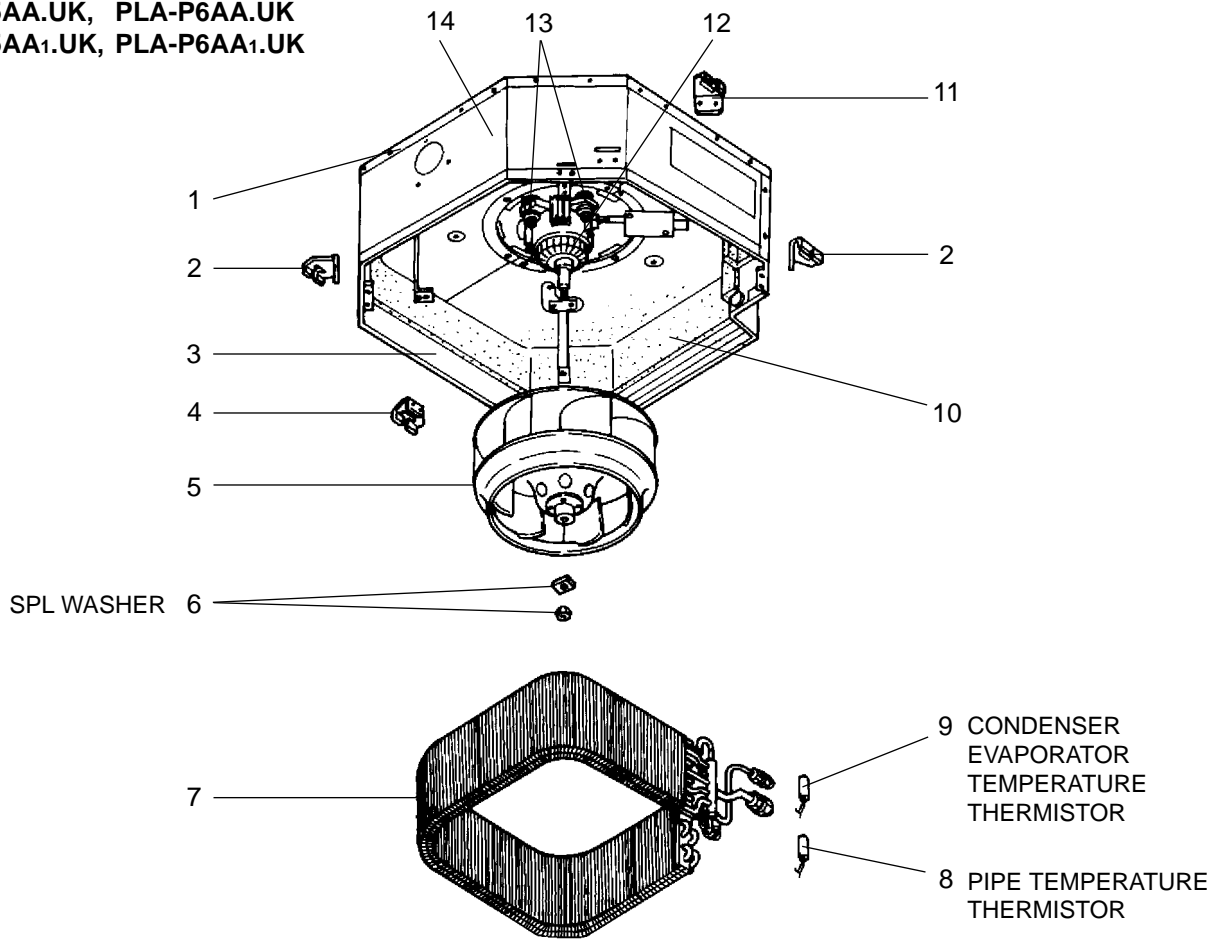


No.	Parts No.	Parts Name	Specifi- cation	Q'ty / set				Remarks (Drawing No.)	Wiring Diagram Symbol	Recom- mended Q'ty	Price	
				PLA-P5		PLA-P6					Unit	Amount
				AA.UK	AA1.UK	AA.UK	AA1.UK					
1	S70 003 687	BASE		1	1	1	1					
2	S70 E01 130	LEG		2	2	2	2					
3	S70 007 688	DRUM 1 ASSY		1	1	1	1					
4	S70 E00 130	LEG		1	1	1	1					
5	S70 E01 114	TURBO FAN		1	1	1	1					
6	S70 08K 097	SPL WASHER		1	1	1	1					
7	S70 E24 480	HEAT EXCHANGER		1	1							
	S70 E25 480	HEAT EXCHANGER				1	1					
8	S70 17J 202	PIPE TEMPERATURE THERMISTOR		1	1	1	1		TH2			
9	S70 E20 202	CONDENSER EVAPORATOR TEMPERATURE THERMISTOR		1	1	1	1		TH5			
10	S70 E02 659	INNER COVER		1	1	1	1					
11	S70 E02 130	LEG		1	1	1	1					
12	S70 E07 762	FAN MOTOR	D176P120MS	1	1	1	1		MF			
13	S70 A41 105	MOTOR MOUNT		4	4	4	4					
14	S70 008 688	DRUM 2 ASSY		1	1	1	1					

## FUNCTIONAL PARTS

PLA-P3AA.UK, PLA-P4AA.UK

PLA-P3AA1.UK, PLA-P4AA1.UK

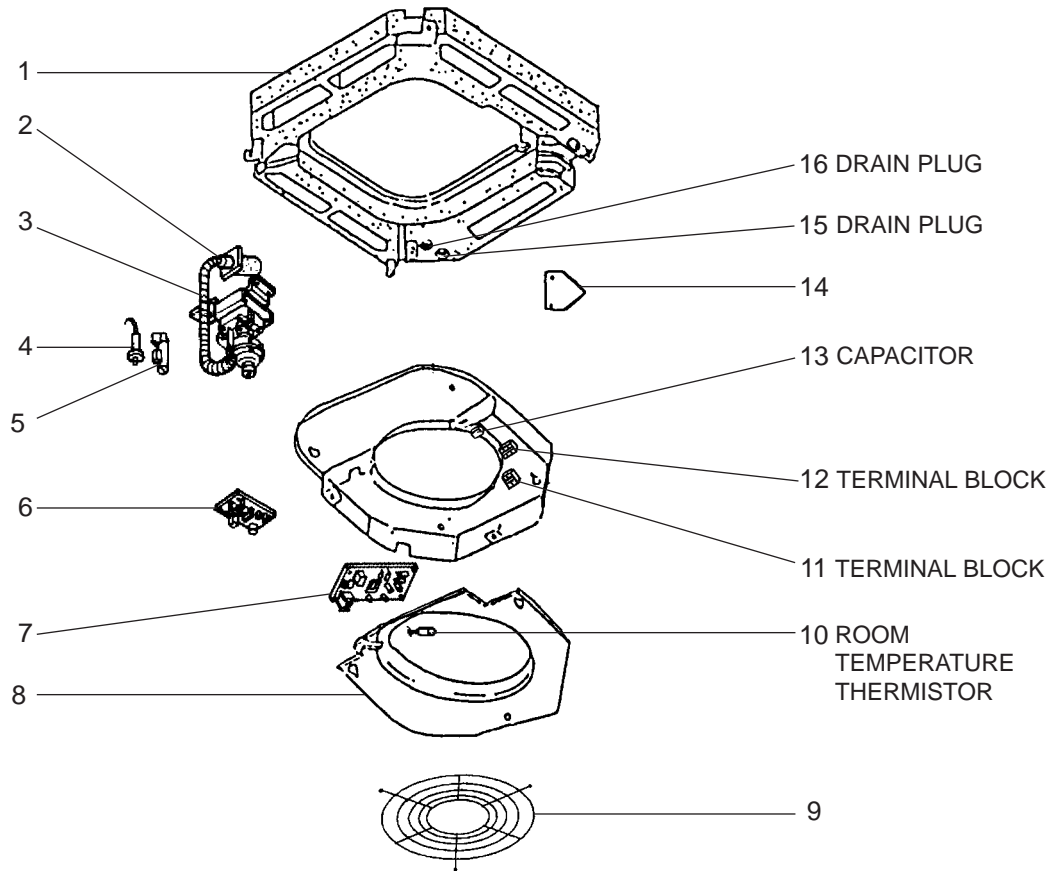


Part numbers that is circled is not shown in the figure.

No.	Parts No.	Parts Name	Specifi- cation	Q'ty / set				Remarks (Drawing No.)	Wiring Diagram Symbol	Recom- mended Q'ty	Price	
				PLA-P3		PLA-P4					Unit	Amount
				AA.UK	AA1.UK	AA.UK	AA1.UK					
1	S70 E02 529	DRAIN PAN		1	1							
	S70 E00 529	DRAIN PAN				1	1					
2	S70 29H 523	DRAIN SOCKET		1	1	1	1					
3	S70 E02 355	DRAIN PUMP		1	1	1	1		DP			
4	S70 E00 266	DRAIN SENSOR		1	1	1	1		DS			
5	S70 31K 241	DRAIN SENSOR HOLDER		1	1	1	1					
6	S70 E02 313	POWER BOARD		1	1	1	1		P.B			
7	S70 E20 310*	INDOOR CONTROLLER BOARD		1	1	1	1		I.B ※			
8	S70 003 503	CONTROL COVER ASSY		1	1	1	1					
9	S70 E10 675	FAN GUARD		1	1	1	1					
10	S70 E00 202	ROOM TEMPERATURE THERMISTOR		1	1	1	1		TH1			
11	S70 512 716	TERMINAL BLOCK	2P (1, 2)	1	1	1	1		TB5			
12	S70 E01 716	TERMINAL BLOCK	3P (S1, S2, S3)	1	1	1	1		TB4			
13	S70 17T 255	CAPACITOR	3.5μF 440V	1	1				C			
	S70 E02 255	CAPACITOR	7.0μF 440V			1	1		C			
14	S70 001 663	CORNER COVER		1	1	1	1					
15	S70 A48 524	DRAIN PLUG		1	1	1	1					
16	S70 A41 524	DRAIN PLUG		1	1	1	1					
17	S70 W29 527	DRAIN HOSE		1	1	1	1					

※ The part name of symbol "I.B" is "SPCB".

## FUNCTIONAL PARTS

PLA-P5AA.UK, PLA-P6AA.UK  
 PLA-P5AA1.UK, PLA-P6AA1.UK

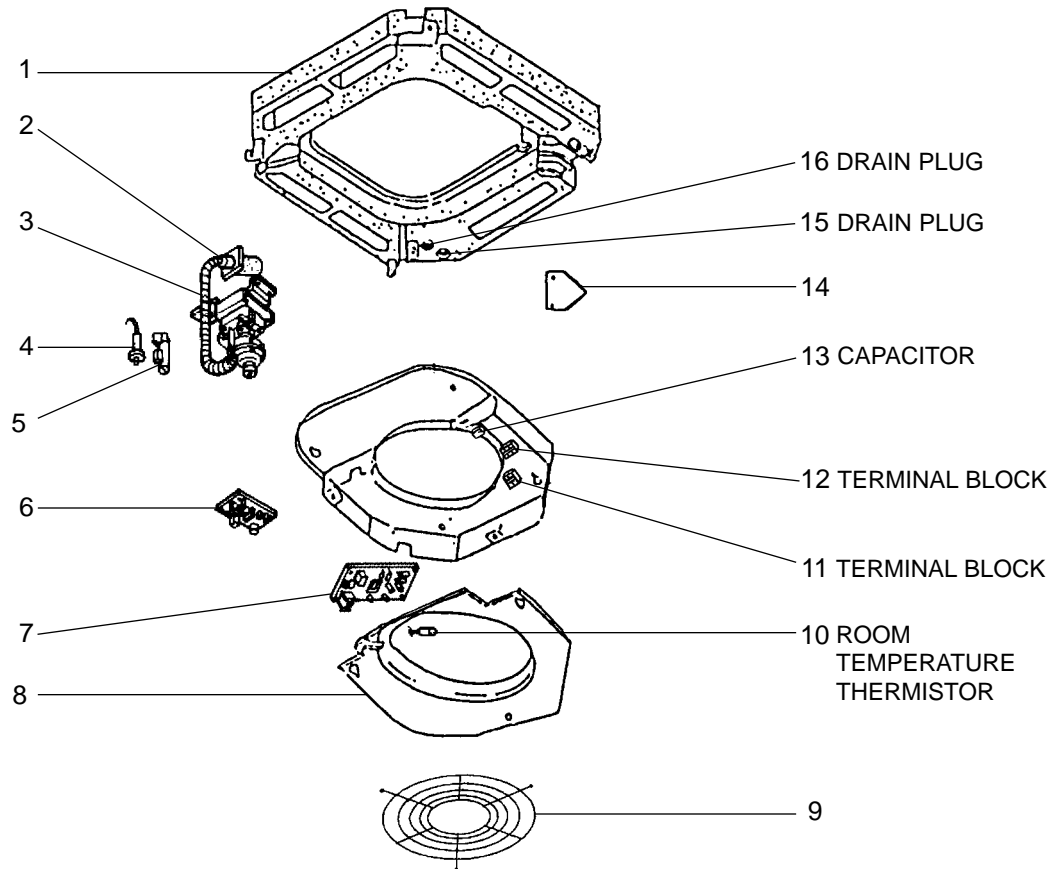

Part numbers that is circled is not shown in the figure.

No.	Parts No.	Parts Name	Specifi- cation	Q'ty / set				Remarks (Drawing No.)	Wiring Diagram Symbol	Recom- mended Q'ty	Price	
				PLA-P5		PLA-P6					Unit	Amount
				AA.UK	AA1.UK	AA.UK	AA1.UK					
1	S70 E00 529	DRAIN PAN		1	1							
	S70 E01 529	DRAIN PAN				1	1					
2	S70 29H 523	DRAIN SOCKET		1	1	1	1					
3	S70 E02 355	DRAIN PUMP		1	1	1	1		DP			
4	S70 E00 266	DRAIN SENSOR		1	1	1	1		DS			
5	S70 31K 241	DRAIN SENSOR HOLDER		1	1	1	1					
6	S70 E20 313	POWER BOARD		1	1	1	1		P.B			
7	S70 E20 310*	INDOOR CONTROLLER BOARD		1	1	1	1		I.B ※			
8	S70 003 503	CONTROL COVER ASSY		1	1	1	1					
9	S70 E10 675	FAN GUARD		1	1	1	1					
10	S70 E00 202	ROOM TEMPERATURE THERMISTOR		1	1	1	1		TH1			
11	S70 512 716	TERMINAL BLOCK	2P (1, 2)	1	1	1	1		TB5			
12	S70 E01 716	TERMINAL BLOCK	3P (S1,S2, S3)	1	1	1	1		TB4			
13	S70 E02 255	CAPACITOR	7.0μF 440V	1	1	1	1		C			
14	S70 001 663	CORNER COVER		1	1	1	1					
15	S70 A48 524	DRAIN PLUG		1	1	1	1					
16	S70 A41 524	DRAIN PLUG		1	1	1	1					
17	S70 W29 527	DRAIN HOSE		1	1	1	1					

※ The part name of symbol "I.B" is "SPCB".

**1. Program timer (PLA-P3 / 4 / 5 / 6AA.UK)**

Part No.	PAC-SC32PTA (with set back function)
Applied Service Ref.	PLA-P3 / 4 / 5 / 6AA.UK

**1-1 Program timer specifications**

Part name	Program timer
Parts No.	PAC-SC32PTA
Exterior dimensions (inch)	5-4/32X4-23/32X23/32 (130X120X18mm)
Installation	Wall mount
Type of clock	Quartz
Clock accuracy	±50 second / month at 25°C
Display-Time	Liquid crystal display
-Week	Liquid crystal display
-Timer setting unit	Liquid crystal display
Program cycle	24 hours
Timer setting unit	30 minutes
No. of set points	48 / day
Power rating	5V DC ±5% (Supplied by Remote Controller)

**1-2 Feature of program timer**

(1) Daily timer function

Daily timer can be set in 30 minutes units for up to 24 hours.  
Each unit can be set for unit ON, unit OFF, or setback operation.

(2) Setback operation


Set back operation is useful for reducing running costs  
e.g. At a hotel with a 24-hour system

8:00~23:00 Cooling operation with set temperature at 26°C  
23:00~8:00 Setback operation with 2 degrees of setback

As shown in the chart on the right, the set temperature rises 2 degrees automatically during the setback operation. When the setback operation ends, normal operation will begin.


(3) Weekly timer function

Daily timer function can apply to each day of the week.

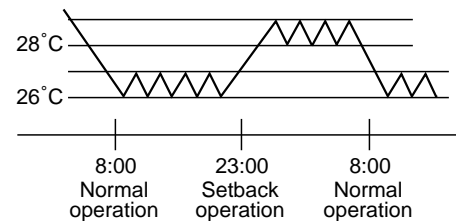

### 1-3. How to connect program timer


- (1) Install the program timer next to the remote controller the same way as the remote controller is installed.
- (2) Connect the program timer and the remote controller with a 5-wire cable as shown in the figure below

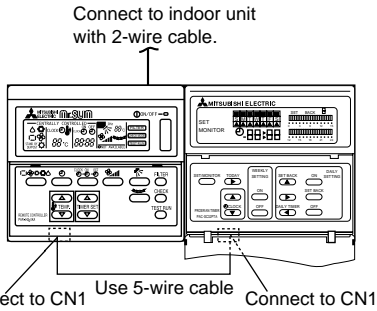

NOTE: While the program timer is connected to the remote controller, the 24hour ON/OFF timer on the remote controller will not operate.

### 1-4. Names and functions

<PAC-SC32PTA>

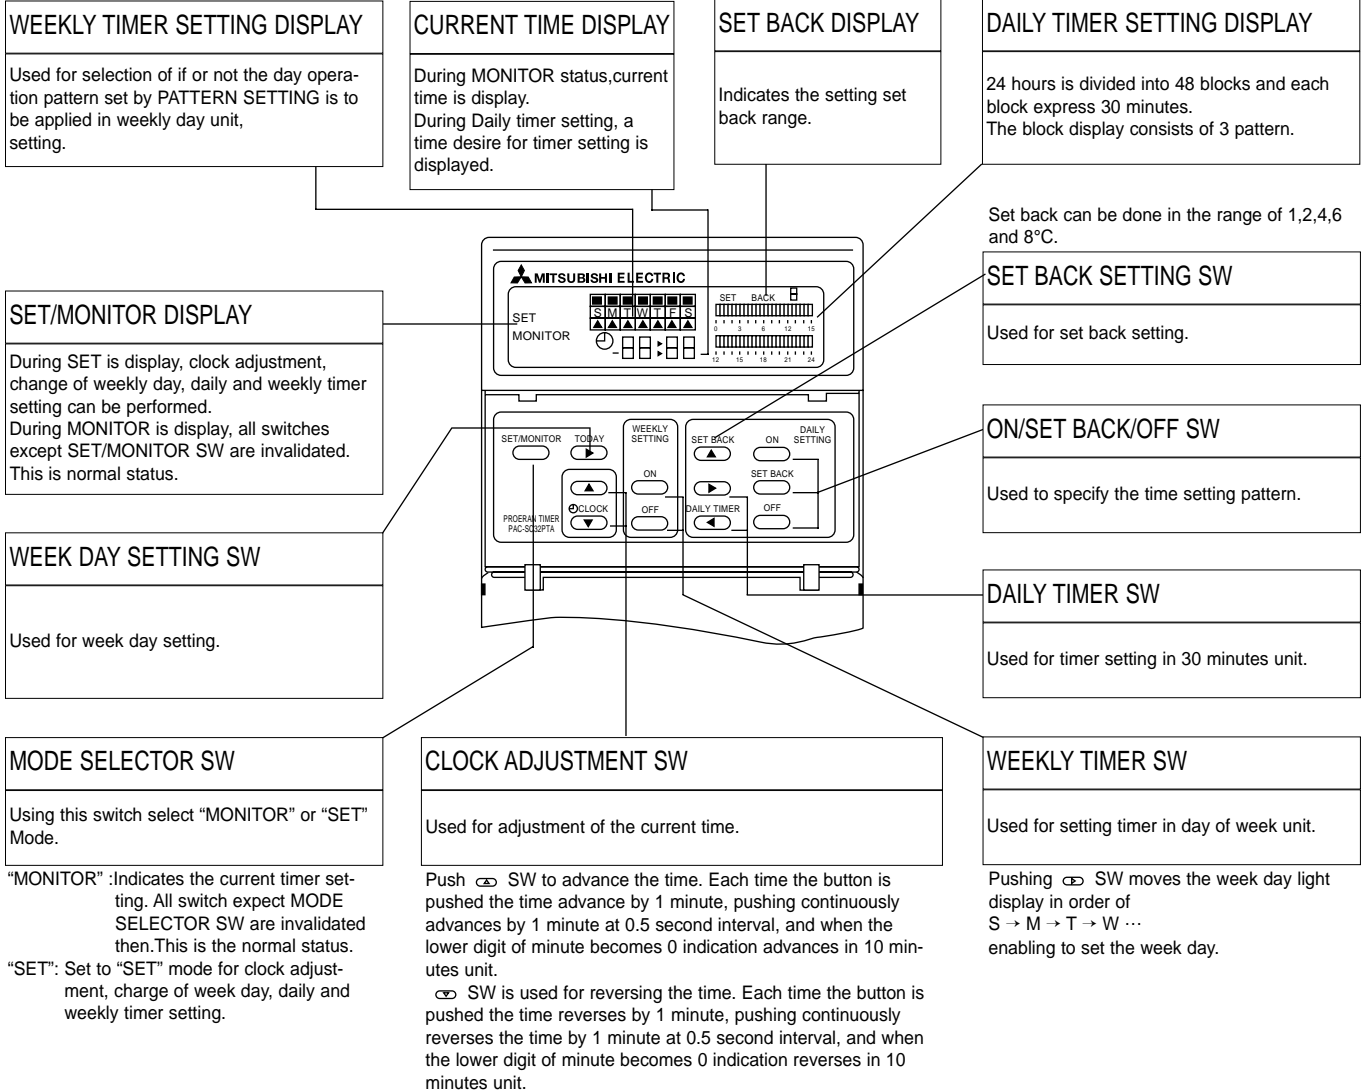


## 2. Program timer (PLA-P3 / 4 / 5 / 6AA<sub>1</sub>.UK)

Part No.	PAC-YT32PTA
Applied Service Ref.	PLA-P3 / 4 / 5 / 6AA <sub>1</sub> .UK

### 2-1 Names and functions

<PAC-YT32PTA>

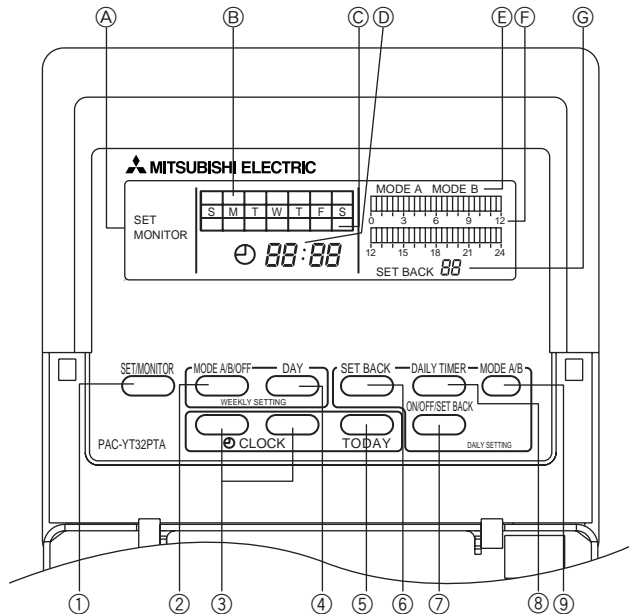

- |  |   |
|--|---|
| <p><b>A</b> SET/MONITOR DISPLAY:<br/>When SET is displayed, clock adjustment, change of day, and daily and weekly timer settings can be performed. When MONITOR is displayed, all switches except SET/MONITOR SW are invalidated. This is normal status.</p> <p><b>B</b> WEEKLY TIMER SETTING DISPLAY:<br/>Used to select whether the operation pattern set using the PATTERN SETTING can be applied to different days of the week.</p> <p><b>C</b> CURRENT DAY DISPLAY:<br/>Indicates the current day.</p> <p><b>D</b> CURRENT TIMEDISPLAY:<br/>During MONITOR status, current time is displayed.<br/>During daily timer setting, a time desire for timer setting is displayed.</p> <p><b>E</b> OPERATION MODE DISPLAY:<br/>Indicates the operation mode.</p> <p><b>F</b> DAILY TIMER SETTING DISPLAY:<br/>24 hours is divided into 48 blocks and each block is expressed in 30 minutes.<br/>The block display consists of 3 patterns.</p> <p><b>G</b> SET BACK DISPLAY<br/>Indicates the set back value.</p> | <p><b>1</b> SET/MONITOR Button<br/>Using this switch, select "MONITOR" or "SET" Mode.<br/>"MONITOR": Indicates the current timer setting. All switches except MODE SELECTOR SW are invalidated then. This is the normal status.<br/>"SET": Set to "SET" mode for clock adjustment, change of day and daily and weekly timer settings.</p> <p><b>2</b> MODE A/B/OFF Button<br/>Used for setting timer in day of week unit.</p> <p><b>3</b> CLOCK ADJUSTMENT Button<br/>Used for adjustment of the current time.<br/>Push [▲] SW to advance the time. Each time the button is pushed the time advances by 1 minute, pushing continuously advances by 1 minute at 0.5 second intervals, and when the lower digit of the minute becomes "0" the time advances in 10 minute units.<br/>[▼] SW is used for reversing the time. Each time the button is pushed the time reverses by 1 minute, pushing continuously reverses the time by 1 minute at 0.5 second intervals, and when the lower digit of the minute becomes "0" the time reverses in 10 minute units.</p> <p><b>4</b> DAY SETTING Button<br/>Used when setting the day.</p> <p><b>5</b> WEEK DAY SETTING Button<br/>Used for week day setting.<br/>Pushing [▶] SW moves the week day light display in order of S→M→T→W→... enabling to set the week day.</p> <p><b>6</b> SET BACK SETTING Button<br/>Used for set back setting.<br/>Set back can be done in the range of 1, 2, 4, 6 and 8°C (2, 4, 8, 12 and 16°F).</p> <p><b>7</b> ON/OFF/SET BACK Button<br/>Used to specify the time setting pattern.</p> <p><b>8</b> DAILY TIMER Button<br/>Used for timer setting in 30 minute units.</p> <p><b>9</b> MODE A/B Button<br/>Used to set A Mode or B Mode when specifying the operation time.</p> |
|--|---|



### 3. Multi-Functional Casement

Part No.	PAC-SG03TM-E
Applied Service Ref.	PLA-P3/4/5/6AA.UK, PLA-P3/4/5/6AA1.UK

### 4. High-Efficiency Filter Element (2. Multi-Functional Casement is needed.)

Part No.	PAC-SG01KF
Applied Service Ref.	PLA-P3/4/5/6/AA.UK, PLA-P3/4/5/6AA1.UK

### 5. Grill + Wireless Remote Controller

Part No.	PLP-6AALA	PLP-6AALM
Applied Service Ref.	PLA-P3/4/5/6/AA.UK	PLA-P3/4/5/6/AA1.UK

### 6. Grill + Wired Remote Controller

Part No.	PLP-6AAA	PLP-6AAM
Applied Service Ref.	PLA-P3/4/5/6/AA.UK	PLA-P3/4/5/6/AA1.UK

### 7. Remote Sensor

Part No.	PAC-SE41TS-E
Applied Service Ref.	PLA-P3/4/5/6/AA.UK, PLA-P3/4/5/6AA1.UK

### 8. Remote Operation Adapter

Part No.	PAC-SF40RM-E
Applied Service Ref.	PLA-P3/4/5/6/AA.UK, PLA-P3/4/5/6AA1.UK

### 9. Remote ON/OFF Adapter

Part No.	PAC-SE55RA-E
Applied Service Ref.	PLA-P3/4/5/6/AA.UK, PLA-P3/4/5/6AA1.UK

### 10. Air Outlet Shutter Plate (20set , 2pcs/set)

Part No.	PAC-SG06SP-E
Applied Service Ref.	PLA-P3/4/5/6/AA.UK, PLA-P3/4/5/6AA1.UK

Mr. SLIM™

 **mitsubishi electric corporation**  
HEAD OFFICE : MITSUBISHI DENKI BLDG., 2-2-3 MARUNOUCHI CHIYODA-KU , TOKYO 100-8310 , JAPAN

©Copyright 2001 MITSUBISHI ELECTRIC ENGINEERING CO., LTD.  
Distributed in Sep. 2004 No.OC241 REVISED EDITION-B PDF  
Distributed in Sep. 2001 No.OC241 REVISED EDITION-A 350  
Reprinted in Jul. 2001 No.OC241 50  
Distributed in Apr. 2001 NO. OC241 225  
Made in Japan

New publication, effective Sep. 2004  
Specifications subject to change without notice